




Alpha Audio

Quick Start Manual

MX-5S

Front

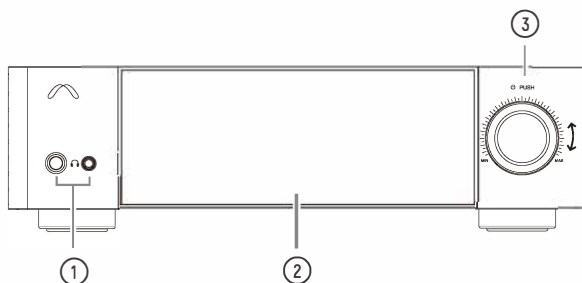

1. Headphone Output

6.35mm jack: Connect SE headphones.

4.4mm jack: Connect balanced headphones.

Both outputs support headphones with an impedance higher than 16 ohms.

2. Touch Screen Display

High-definition display screen.


3. Multifunctional Knob

Press and hold the knob for 2 seconds to turn on/off the device.

Short press: Turn off/on the screen.

Rotate: Adjust the volume level.

Rear

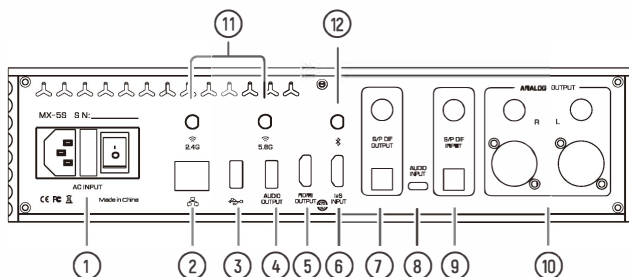


1. Power Socket / Switch. Was it changed? Check drawing
2. Gigabit Ethernet
3. USB13.0 OTG: USB storage / USB CD Player / PC transmission.
4. USB Audio Output
5. HDMI Video Output.
6. I2S Audio Input
7. S/PDIF Coaxial / Optical Output
8. USB Audio Input
9. S/PDIF Coaxial / Optical Input
10. Analog Outputs
11. 2.4G/5G WiFi Antenna Socket
12. Bluetooth Antenna Socket.

Hard Disk Installation


This device does not come with a hard disk when shipped from the factory. The SSD hard disk is installed at the bottom of the machine.

The supported hard disk specifications are as follows: M.2 (NVMe PCIe3.0) 2280 interface protocol, with a maximum supported capacity of 4TB.

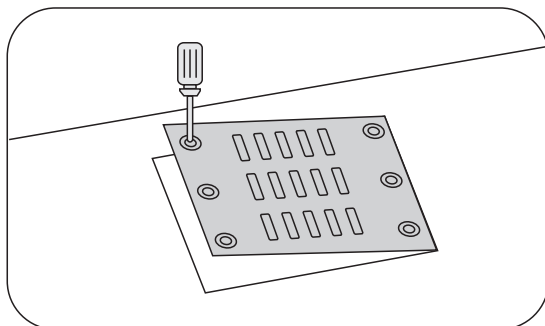

1. Lift The Cover Plate

Be sure to install or remove the hard disk when the power is off.

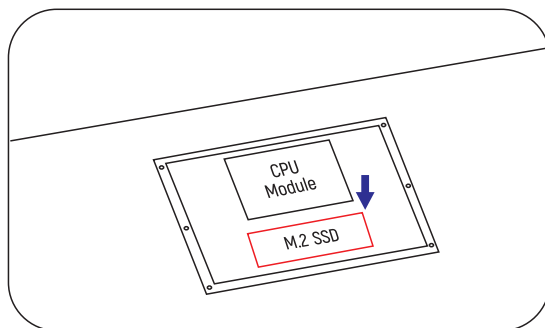


2. Insert The Hard Disk

Please use special screws to fix it.

Precautions


1. Plugging or unplugging the SSD while the machine is powered on may damage the hard disk and the machine. It is strictly prohibited to replace the SSD when the machine is powered on.
2. It is recommended to use an SSD with the exFAT file system format.

Remote control

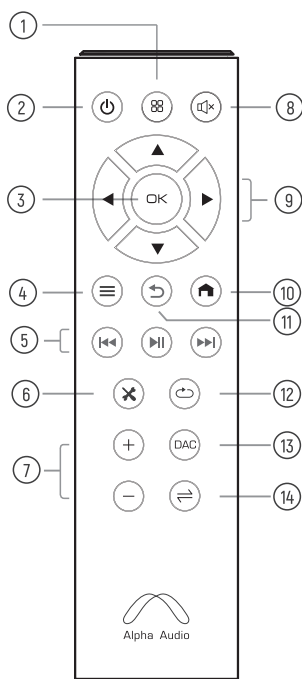

- | | |
|----------------------|------------------------|
| ① Screen on/off | ⑧ Mute |
| ② Power | ⑨ Arrow keys |
| ③ Confirm | ⑩ Home |
| ④ Playing / playlist | ⑪ Back |
| ⑤ Previous | ⑫ Play mode selector |
| Play/Pause | ⑬ Select input source |
| Next | ⑭ Select output source |
| ⑥ Setting | |
| ⑦ Volume+ | |
| Volume- | |


Battery Installation Method:

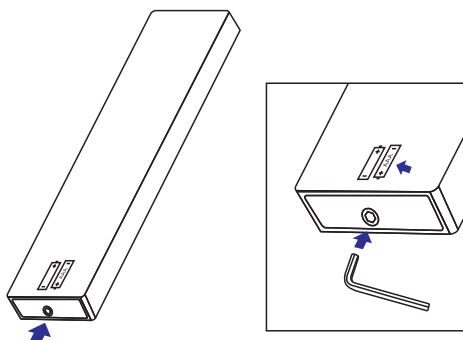

1. Use an Allen wrench to open the battery cover at the bottom.
2. Install two AAA batteries in accordance with the direction indicated by the silk-screen printing on the back.

For the download of USB audio drivers, firmware and more resources, please visit: www.alphaudiocanada.com


Main Interface

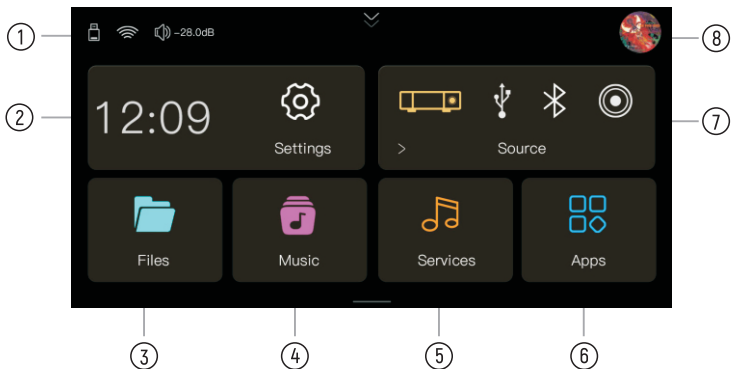

Introduction To The Main Interface


1. Current Status: Connection status of WIFI connection status and volume level.
 2. Display the current time and enter the settings interface for various parameter settings.
 3. File Management: File lists of local storage and local area network storage devices.
 4. Music Library: It includes playlists, songs, artists, albums, and genre classification items.
 5. Music Services: Third-party music applications, such as Apple Music, Tidal, Qobuz, etc.
 6. Apps: Download all APP applications.
 7. Signal Source: Selection of input and output interfaces.
 8. Currently Playing interface icon - floating control.
- Hold down and drag to reposition the icon on the screen. Tap it to enter the playback interface where additional controls are available: play/ pause/ skip/ repeat modes, etc.

Touch Screen Sliding Operation

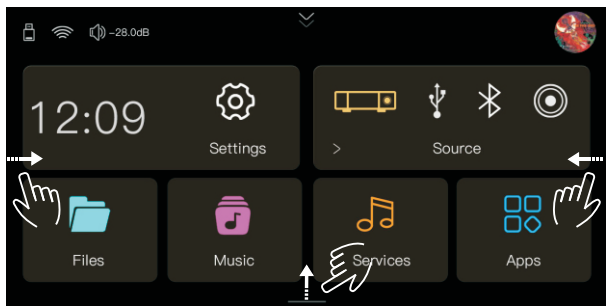

1. Swipe left or right from the side to return to the previous menu.
2. Swipe upwards from the bottom to return to the main menu.

Network Connection

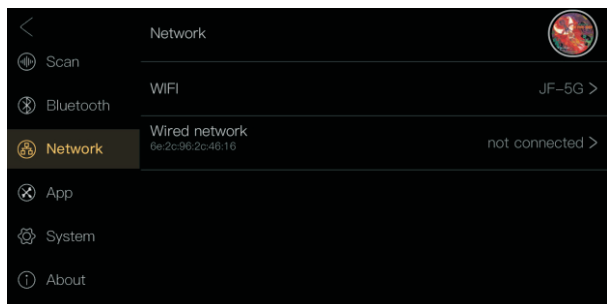


Connect to WiFi and wired network: Enter the settings - network page.

WiFi Connection: Click on WiFi to enter, search for WiFi hotspots enter the password, and then you can connect.

Wired Connection: Insert the network cable and you can connect.

Streaming Services

Streaming services such as TIDAL, Qobuz, and HIGHRESAUDIO can be operated on the smartphone APP. You can log in by entering your account number and password. More streaming services will be integrated in the future.

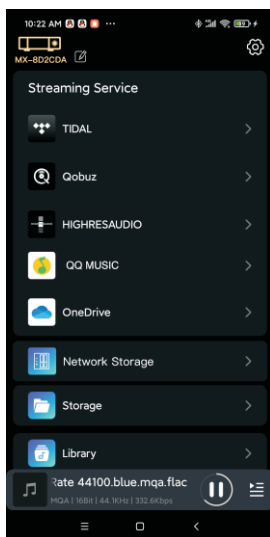

MX Remote

Android/iOS APP

Install MX Remote App for
iPhone or Android

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure