


## Product specification

### Quick Reference Data

|                            |                                    |  |
|----------------------------|------------------------------------|--|
|                            | Antenna module on the system board |  |
| Frequency                  | 2.45GHz*1                          |  |
| Ant. Port Input Pwr. (dBm) | 0 (Typ. BT class 2 output power)   |  |
| Tot. Rad. Pwr. (dBm)       | -2.3 (Input pwr - loss pwr)        |  |
| Peak EIRP(dBm)             | 1.3                                |  |
| Directivity (dBi)          | 1 (all direction antenna)          |  |
| Efficiency (dB)            | -2.3 (58.5%)                       |  |
| Gain (dBi)                 | 1.3 (Peak Gain XY-plane)           |  |
| Maximum Power (dBm)        | 1.3 (XY-plane)                     |  |
| Minimum Power (dBm)        | -4(XY-plane)                       |  |
| Avg. Power (dBm)           | -0.5(XY-plane)                     |  |
| Max/Min Ratio (dB)         | 5.3(XY-plane)                      |  |
| Max/Avg Ratio (dB)         | 1.8(XY-plane)                      |  |
| Min/Avg Ratio (dB)         | -3.5(XY-plane)                     |  |
| Average Gain (dB)          | -0.5 (Avg Gain XY-plane)           |  |

All the technical data and information contained herein are subject to change without prior notice

### Antenna Layout & module on the system board

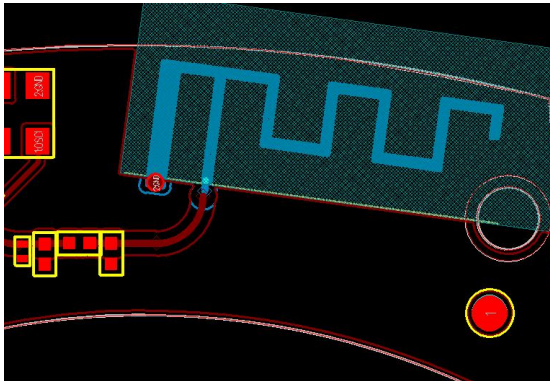

### Antenna Gain



#### Gain Table


|                            |                                    |  |
|----------------------------|------------------------------------|--|
|                            | Antenna module on the system board |  |
| Frequency                  | 2.45GHz*1                          |  |
| Ant. Port Input Pwr. (dBm) | 0 (Typ. BT class 2 output power)   |  |
| Tot. Rad. Pwr. (dBm)       | -2.3 (Input pwr - loss pwr)        |  |
| Peak EIRP(dBm)             | 1.3                                |  |
| Directivity (dBi)          | 1 (all direction antenna)          |  |
| Efficiency (dB)            | -2.3 (58.5%)                       |  |






Return Loss

## The Environment of Antenna Radiation Pattern

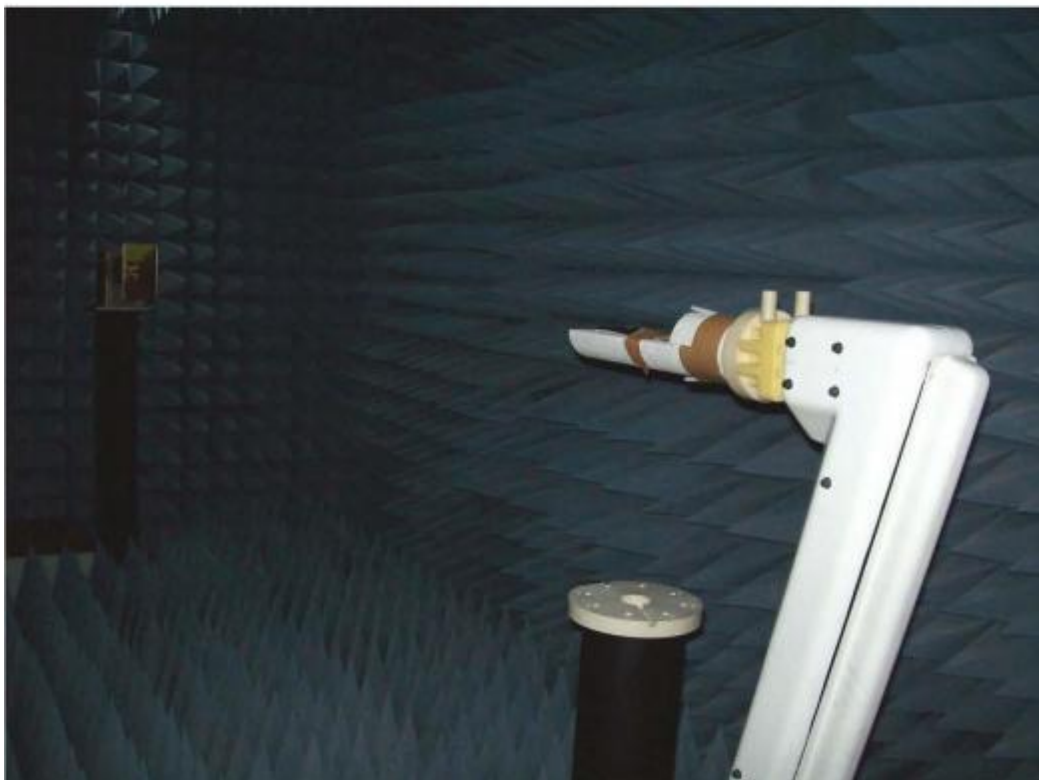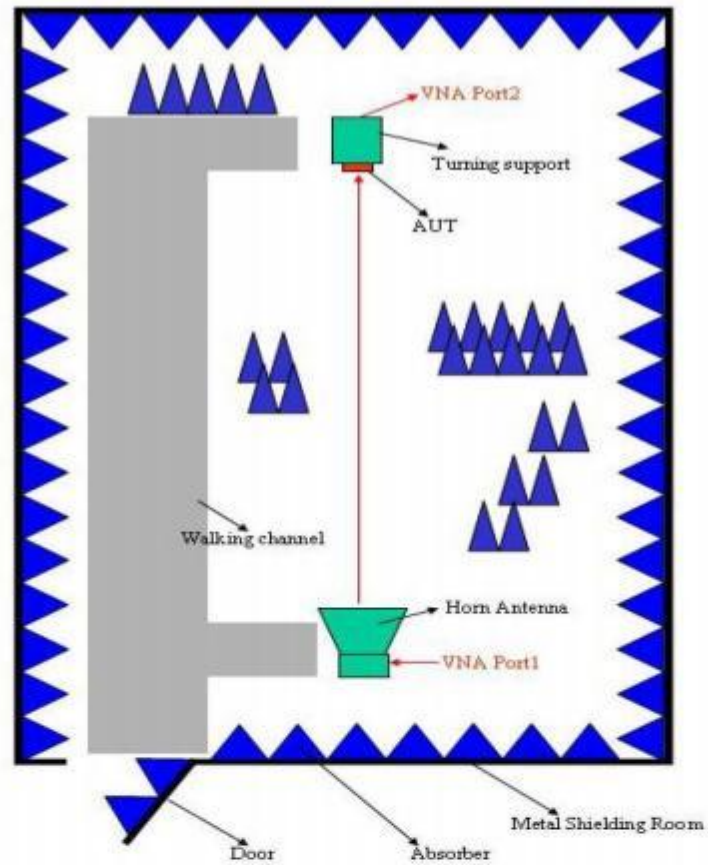

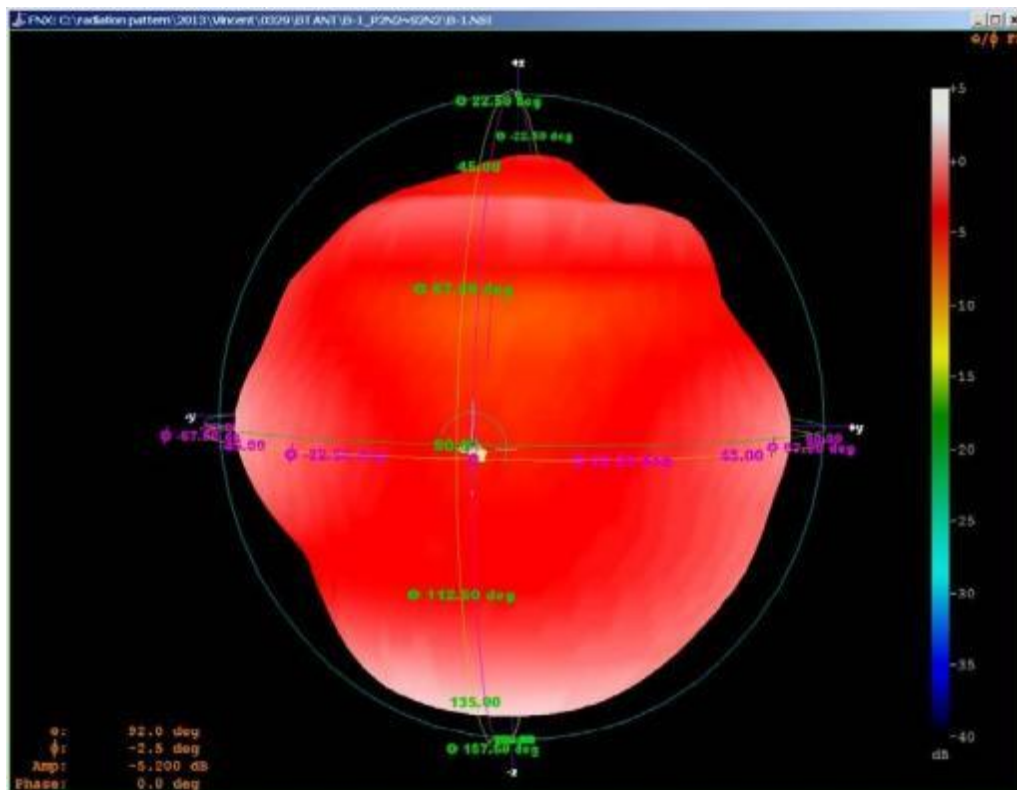

3D radiation pattern diagram

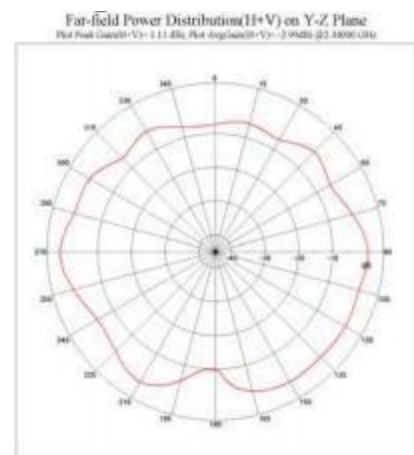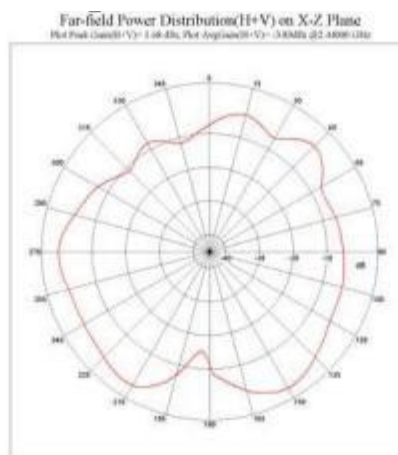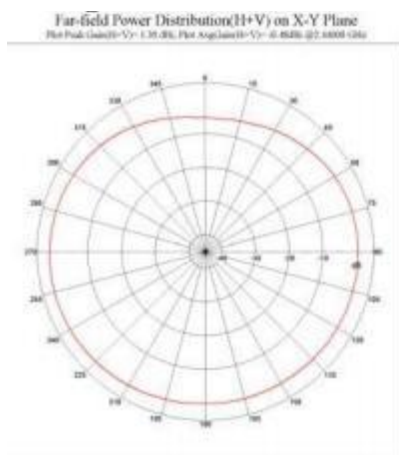

XY-plane XZ-plane YZ-plane

Manufacturer: Huizhou Aikexun Intelligent Acoustic Technology Co., Ltd

Address: No. 15 of Technology Park 1st Road, Shiwan Town, Boluo County, Huizhou City