Global Eagle

全球鷹

機車行車記錄器
Dash Cam

使用者手冊
APP User Manual

SONY STARVIS

TS 140° microSD

NCC警語

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

記錄器描述

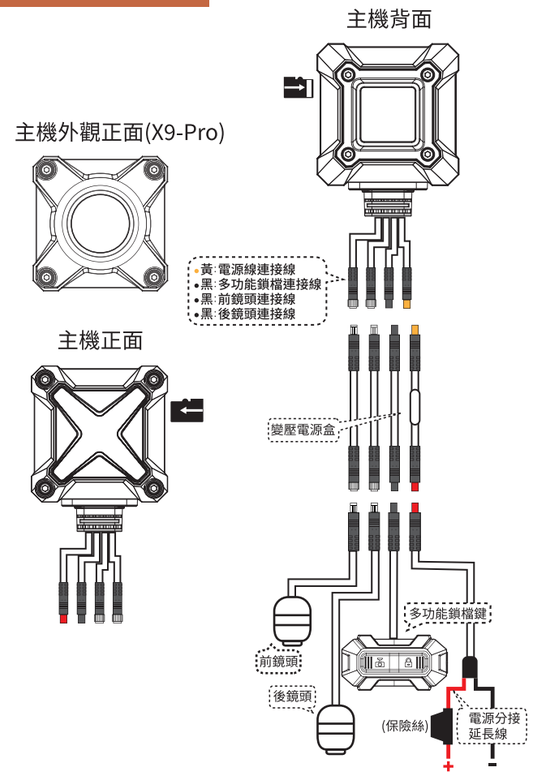

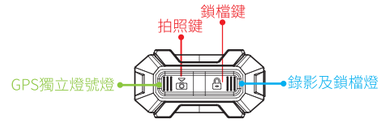

多功能 GPS 按鈕 燈號標示:

1. 正常錄影模式下,GPS未接收到衛星訊號下 :
   GPS獨立燈號燈 : 慢閃3秒 (恆亮3秒、熄滅3秒)
   錄影及鎖檔燈 : 慢閃1秒(恆亮1秒、熄滅1秒)
2. 正常錄影模式下,GPS有接收到衛星訊號下 :
   GPS獨立燈號燈 : 慢閃1秒 (恆亮1秒、熄滅1秒)
   錄影及鎖檔燈 : 慢閃1秒(恆亮1秒、熄滅1秒)
3. 短按 鍵， 錄影及鎖檔燈與GPS獨立燈號燈同時快速閃爍2次
4. 短按 鍵， 錄影及鎖檔燈快速閃爍
   (鎖檔時間會依照循環錄影設定鎖該段影片檔案,該段影片結束會恢復正常錄影狀態)
5. 長按 鍵10秒以上，會進入格式化模式， 錄影及鎖檔燈與GPS獨立燈號燈快速閃爍至結束
6. 未錄影狀態下， 錄影及鎖檔燈恆亮

*溫馨提醒	
電源線紅線建議接ACC12V正電(鎖頭正電或全時點燈12V正電)黑線建負(牌燈負電、電瓶負極),不建議接車台負電以免干擾電源線正常供電	佈線時請優先避開高壓線圈、火星塞、Keyless...等，並注意車體活動件作動範圍有無拉扯擠壓線材

*說明書內容配件僅供參考，請以實際產品為主

鏡頭方向

APP 軟體介紹

步驟1 : 請透過 QR code /APP商店 下載 "Global Eagle" APP

iOS　　Android

步驟2 : 透過手機設定/Wi-Fi搜尋你的行車記錄器

★ 預設帳號 : GlobalEagle **X9** _ x x x x (溫馨提醒 : 每台行車記錄器有專屬的號碼)
★ 預設密碼 : 12345678

步驟3 : 開啟APP

步驟4 : APP使用介紹
按"下一步"或右上角的 直接進入首頁

步驟5 : 按右上角 或"即時錄影"按鈕和
搜尋行車記錄器。連接成功後，即可透過App操作行車記錄器

用戶端相簿
已儲存影片、照片在用戶端相簿中。也可以透過手機相簿直接閱覽已存取的影音與照片

*注意　因系統緣故，安卓用戶如需在APP內觀看回放軌跡影片，需先關閉記錄器Wi-Fi，並開啟4G/5G行動數據，即可閱覽影片中軌跡位置

產品保固延長
在Global Eagle 會員專區頁面，提供使用者訂閱其產品資訊與延長產品保固.....等服務

APP 軟體功能介紹

即時錄像
*注意： 按 返回上一頁

1. 開啟即時錄像
當成功連接應用程式，按下「開啟即時錄影」進入錄製模式。

2. 裝置相簿 (讀取記錄器SD卡)
影片 = 可查看「影片和緊急鎖定的檔案」
按下您想查看的檔案，等待它上傳到您的手機
照片 = 可查看「照片」檔案
按下您想查看的檔案，等待它上傳到您的手機
*注意:
要將檔案保存到手機上，請長按您想保存的檔案，會彈出訊息提示，允許您選擇保存/刪除/返回所選的檔案。

影片下載
保存成功　正在儲存
如果存檔失敗，請檢查Wi-Fi連接或重新啓動應用程序

*注意
"即時錄影"建議僅緊急時觀看。使用Wi-Fi觀看檔案可能會不穩定且速度較慢，檔案大小越大，上傳至您的手機所需時間越長。為確保穩定且最佳的觀看體驗，建議將檔案下載至您的手機中。

設定
1.主機設定

- 主機錄影品質 1080P 30fps
- 修改WIFI密碼 更改密碼:僅限8位數字
- 單段影片時間 錄製時間長度
- 保護靈敏度 關閉 / 高 / 中 / 低
- 主機按鍵音 僅適用於"顯示"版本
- 主機播放音量
- 主機錄音功能 開啟/關閉 (含聲音錄製)
- 螢幕閃爍頻率 50Hz / 60Hz
- 螢幕休眠時間 僅適用於"顯示"版本
- 速度浮水印 開啟 / 關閉 (顯示當前速度)
- 時速單位
- 時區選擇
- 格式化記憶卡 按下確認格式化
- 重置主機設定 恢復出廠設定
- 裝置軟體資訊 行車記錄器資訊

2.主機狀況診斷

產品規格

型號	X9　X9 PRO　X9 PLUS　S5
鏡頭廣角	140°
影像解析度	1920*1080
鏡頭光圈	F2.0
WIFI	支援
鏡頭防水防塵	IP67
記憶卡	最大支援128GB(C10以上)
影片格式	TS 碼流 (H.264)
傳輸規格	AHD
影片幀數	30 fps
電池	水銀電池(記憶時間日期)
工作溫度	-20°C ~ 70°C
語言	中文繁體/中文簡體/英語/日語
產地	台灣

注意事項

01、記憶卡在使用前必須格式化；64G以上需在主機上格式化。
02、保固內送修需附上保固卡或購買之發票證本,保固卡上須寫「購買日期」和「經銷商店章」。
03、不當使用造成損壞、自行拆機...等人為造成因素,不在保固範圍。
04、請使用本公司所配專用電源線,使用不合格或他廠牌電源線會對產品產生毀損,甚至造成產品燒毀。
05、記憶卡有讀寫次數壽命,請每月定期在主機操作格式化,每年更換新卡,確保記憶卡正常寫入影像。
06、行車記錄器於錄影中請勿取出記憶卡,以免造成影像檔案損毀。
07、有螢幕主機安裝於車箱內,應避免車廂內物品將主機顯示螢幕壓碎,螢幕碎裂屬人為因素,更換須的收費用。
08、行車記錄器開關機觸發時請勿重複啟動電源避免造成主機動作異常。
09、請嚴格遵守國家相關法律,不得將此產品用於非法用途,否則後果自負。
10、為了保障您的合法權益 請勿擅自拆卸本產品。
11、請保持鏡頭的潔淨,以免影響錄影效果。
12、播放影片建議使用GOM、KMP、POT等播放軟體。

Global Eagle
官方LINE@

Main Unit Diagram

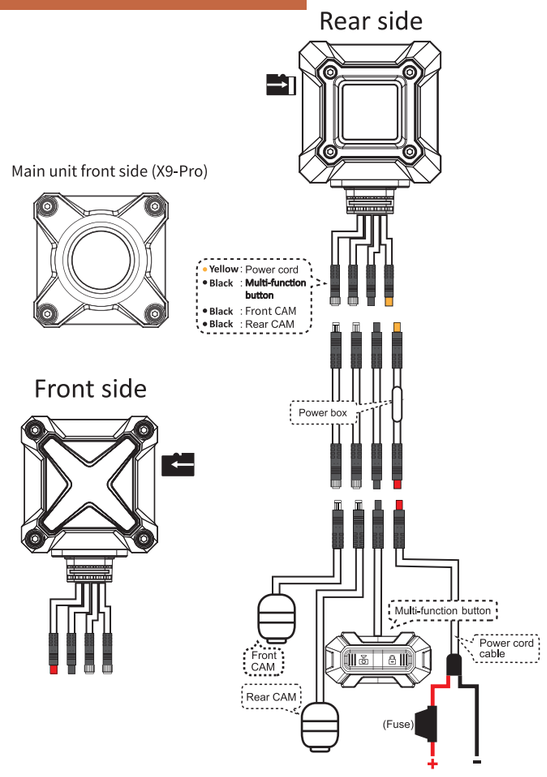

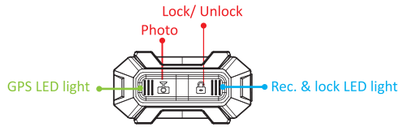

Multi-function GPS button explained:

1. During recording status / GPS no signal detected:
   GPS LED light: Slow flash 3sec. (On 3sec. /dim 3sec.)
   Recording & lock LED light: Slow flash 1sec. (On 1sec. /dim 1sec.)
2. During recording status / GPS signal detected:
   GPS LED light: Slow flash 1sec. (On 1sec. / dim 1sec.)
   Recording & lock LED light: Slow flash 1sec. (On 1sec. / dim 1sec.)
3. Short press = Recording & lock LED light will quick flash twice
4. Short press = Recording & lock LED light will quick flash
5. Long press for 10sec. & above = Enters SD card format, recording & lock LED will quick flash until format finishes
6. Not recording status = Recording & lock LED light will stay On

***Please Note:**

Power cord cable
When connecting the camera to either an ignition switched Accessory connection or accessory controller.
Please connect the red and black to the – terminals

During installation, please avoid high voltage, spark plugs, keyless etc. and make sure cables are flexible during turning cycles of bike

*User manual and accessories for reference only. Please refer to actual product

Lens/multi-function mounting suggestions

Mount lenses where they will give a clear view of the front and rear of the the bike

Using either "L" bracket or bolting directly to the lens mounting base

Mount Switch where it can be easily operated whilst riding & where it has clear line of sight to the sky as it has a built-in GPS in the Switch!

Camera Direction
Round Mark = Face Upward

APP Introduction

Step 1: Please download Global Eagle App using QR code

iOS Android

Step 2: Open the App

Step 3: App start-up info.
Either press "Next" or top right corner "home" icon to exit

Step 4: Go to your mobile and under settings/Wi-Fi search for your dash camera

- ID: GlobalEagle X9 _ x x x x (Unique number for each dash camera)
  GlobalEagle X9pro _ x x x x
- Default password: 12345678

Step 5: App main page, press top right corner or "Live Video" button and search for driving recorder.
Once searched and connected successfully, you may now operate your dash camera with the App

*Note:

Memory card: For first time either new or used, please format before using otherwise your files cannot be saved or activated with App.
"Live video" are for emergency viewing as using Wi-Fi to view the files may be unstable and slow, bigger the file size the longer it will take to upload onto your mobile. For stable and best viewing, we suggest to download the files into your mobile.

APP Function Explained

Live Video

1.Open Live video

*Note: Press to return to previous page

Once App connection successfully, press "Open Live Video" to enter live video recording.

2.Device Album

Video = "Video and emergency locked files" can be viewed

*Press the file you want to view and wait for it to be uploaded onto your mobile

Photo = "Photo" files can be viewed

*Press the file you want to view and wait for it to be uploaded onto your mobile

*Note :

To save files onto mobile, please long press the files you want to save and a pop-up information will allow you to either save/ delete/ return the selected files

Setting

1.Device settings

01.Device video quality = X9 :1080P 30fps / 720P 30fps
X9 Pro : 2K 30fps/1080P 30fps
02.Modify Wi-Fi password = Change password: 8 numeric numbers only
03.Single video time = recording time duration
04.G-Sensor = Off/ High/ Mid/ Low
05.Device key tone = Only with "display" ver.
06.Device volume = Only with "display" ver.
07.Device recording function = On/ Off (recording with sound)
08.Frequency = 50Hz/ 60Hz
09.Screen sleep time = Only with "display" ver.
10.Video speed display = On/ Off (display current speed)
11.Format SD card = Press to confirm format
12.Reset device setting = factory reset
13.Device info. = Dash camera information

2.Device diagnose

Press to diagnose device

Local Album

Your saved files can be accessed under local albums: Video, Photo
It can also be accessed directly through mobile photo album

Product Warranty Extension

Global Eagle member areas page, for users to subscribe their products for warranty

Specifications

Model	X9
Frame rate	30 fps
Lens aperture	F2.0
View angle	140°
Lens IP rating	IP67
Resolution	1920*1080
Memory card	Max. **128** GB (C10)
WIFI	Support
Battery type	Button cell for time memory only
Video format	TS code (H.264)
Operating temp	-20°C ~ 70°C
Transmission	AHD
G-Sensor	Support : OFF / High / Medium / Low
Language	Simplified/Traditional Chinese, English,Japanese
Manufactured	Taiwan

FCC Information

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference
(2) This device must accept any interference received, including interference that may cause undesired operation.

RF EXPOSURE WARNING
The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other transmitter, except in accordance with FCC multi-transmitter product procedures.

Remarks

01. All new memory card must be formatted before using DVR, especially 64GB and above.
02. Please include warranty card with date of purchase and receipt when returning for warranty repair
03. Improper use or trying to disassemble the dash cam will void warranty.
04. Use only factory provided accessories such as cables/power cords.
Use of non-factory accessories will void the warranty.
05. Please avoid high pressure washers directly on dash camera.
06. Memory cards have limited read and write life cycle. Please format every month for best performance and it is recommended to replace memory card every year to ensure files are 100% accessible.
07. Do not remove memory card while recording, otherwise file will be damaged.
08. Please make sure display no pressure is applied to DVR by other objects once installed.
09. Do not instantly power ON/OFF again, allow camera time to start up before turning off as this may cause the system to malfunction.
10. Do not use the dash camera in contravention to local law regulations for cameras.
11. Do not under any circumstances disassemble your dash cam otherwise warranty will be void.
12. Please keep camera lens clean for best image quality.
13. It is recommended to use GOM, KMP, POT, and MP4 to play recorded files.

WARNING
Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

Global Eagle/響尾蛇 YouTube

Global Eagle/響尾蛇 Facebook

Global Eagle

5F-5, No. 16, Ln.609, Sec. 5, Chongxin Rd.,
Sanchong Dist., New Taipei City 241
Taiwan

極佳電通股份有限公司 臺灣總公司
新北市三重區重新路五段609巷16號5樓之5

GlobalEagle Website