Surveillance Camera
TV-XMC-630-5G-3MP-BL
Quick Operation Guide

Scan the QR code to view
the video tutorial
(Browser / QR Code Scanner)

Step 1 Download and install the App

Tips one：Scan the QR code below to download the APP.

Tris Home

Download on the
App Store

Download on the
Google play

Tips two: Search"Tris Home" in the App store and download.

Step 2 Turn on the power

Power on the camera, it will send voice prompt "System starting up, waiting to be configured, waiting for connection, please configure the network according to the instructions" after several seconds.
If the camera does not have a voice prompt for a long time, you can press and hold the camera reset button until you heard the voice prompt "Restore factory settings, please do not power off" and release it to restore factory settings and then configure the network.
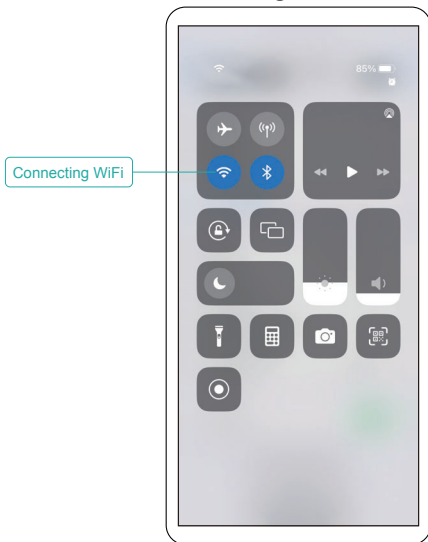
Note:
If you need local storage, please install the memory card firstly, and then power on the device (the memory card does not support hot swapping, please plug and unplug the memory card when the device is powered off). Cloud storage is recommended, which is safe and convenient.

Step 3 Configure the network for the camera

1. Connect your phone to WiFi network.

Figure 1

Connecting WiFi

2. Open the Tris Home app，register an account and login (Figure 2).

3. After successful login，click the "+" button in the center or upper right corner of the screen (Figure 3).
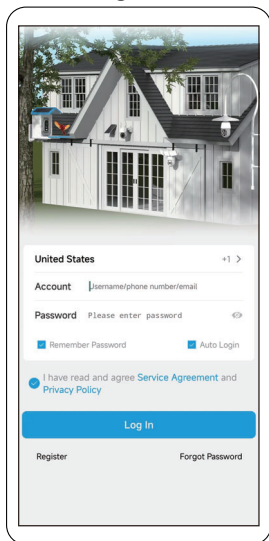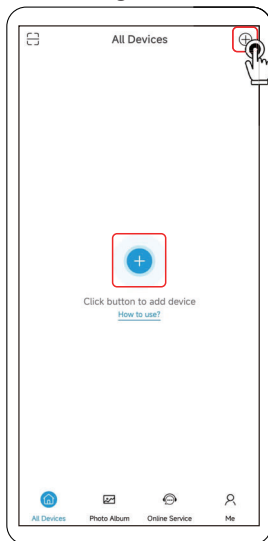
Figure 2

Figure 3

United States   +1 >

Account   Username/phone number/email

Password   Please enter password

☑ Remember Password   ☑ Auto Login

☑ I have read and agree Service Agreement and Privacy Policy

Log In

Register   Forgot Password

All Devices

Click button to add device
How to use?

All Devices   Photo Album   Online Service   Me

Method 1: Add The Device Via WIFI

① When the APP discovers the WIFI of the device, there will
  be a pop-up window. Click on the right "OK" to go to the next
  step (Figure 4).
  （Note: Make sure your phone is connected to WiFi turned on）

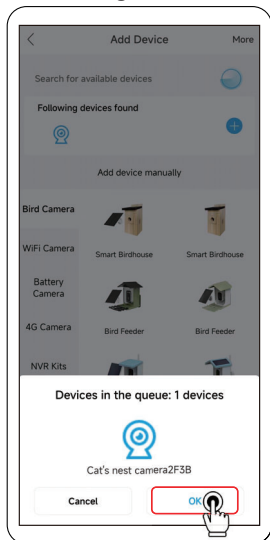② Input the wifi password and confirm (Figure 5).

Figure 4

Figure 5

③ Wait for device configuration to complete (Figure 6 and 7).
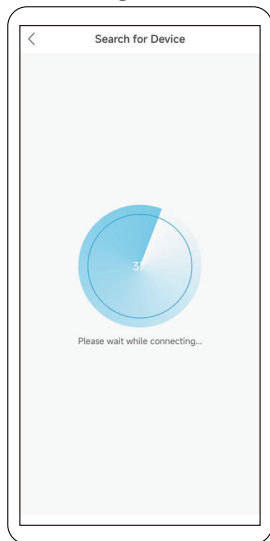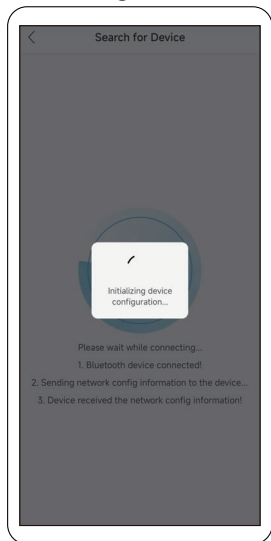（Note: If adding device fails, please try method 2）

Figure 6

Figure 7

Search for Device

Please wait while connecting...

Search for Device

Initializing device configuration...

Please wait while connecting...
1. Bluetooth device connected!
2. Sending network config information to the device...
3. Device received the network config information!

④ Name your device and select the recording mode (Figure 8).

⑤ After configuration is successful, jump to device list page.
Click the device to open real-time live view or device setting
(Figure 9).

If you have any other questions, you can get help through online
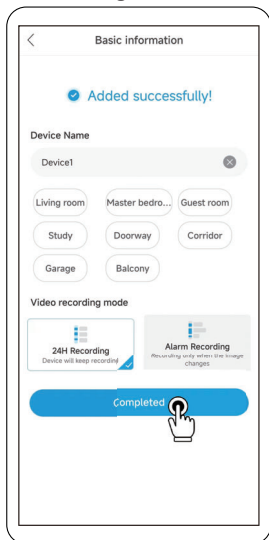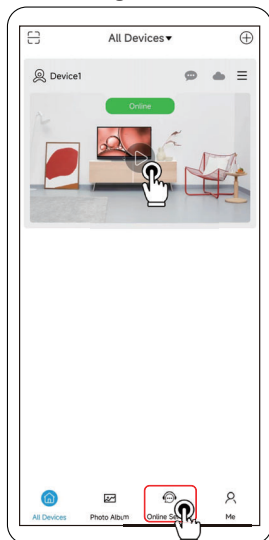customer service.

Figure 8

Figure 9

Method 2: Add The Device Via QR Code

① Select "2.4G WiFi Camera". Click on the camera icon which you have purchased(Figure 10).

② Follow the picture and text instructions to power on and reset the camera, enter the WiFi password to confirm (Figure 11).

Figure 10

Figure 11

③ The phone will generate a QR code (Figure 14). Place the QR code in front of the camera about 25-35 cm (about 10in-14in) to scan the code to add it (Figure 13).
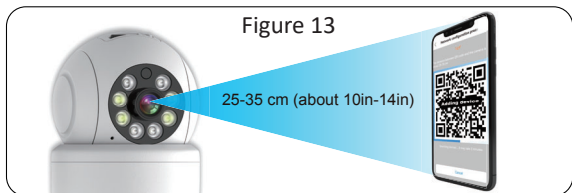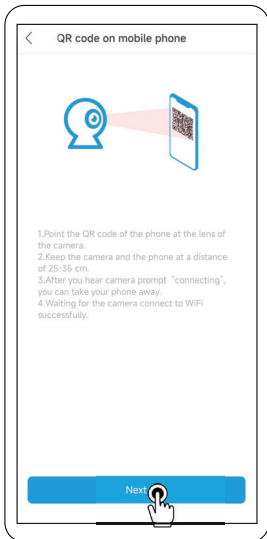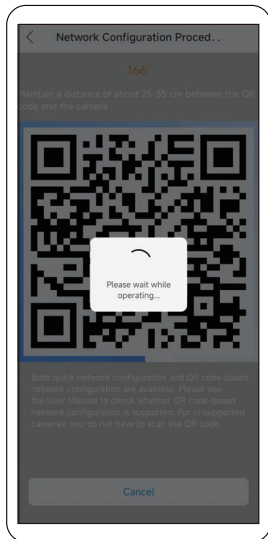
Figure 13

25-35 cm (about 10in-14in)

Figure 12

QR code on mobile phone

1.Point the QR code of the phone at the lens of the camera.
2.Keep the camera and the phone at a distance of 25-35 cm.
3.After you hear camera prompt "connecting", you can take your phone away.
4.Waiting for the camera connect to WiFi successfully.

Next

Figure 14

Network Configuration Proced..

166'

Maintain a distance of about 25-35 cm between the QR code and the camera

Please wait while operating...

Both quick network configuration and QR code-based network configuration are available. Please see the User Manual to check whether QR code-based network configuration is supported. For unsupported cameras, you do not have to scan the QR code.

Cancel

④ Once successfully added, name your device and select the recording mode (Figure 15).

⑤ After configuration is successful, jump to device list page. Click the device to open real-time live view or device setting (Figure 16).

If you have any other questions, You can get help through online customer service.
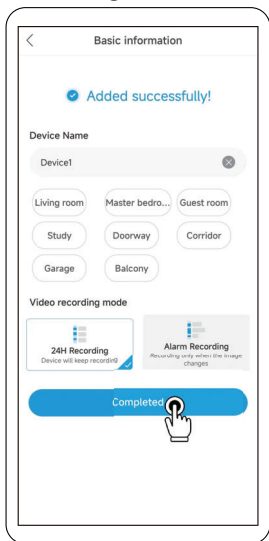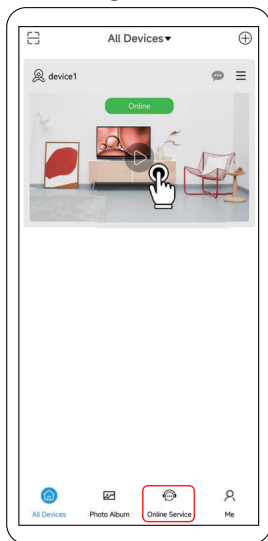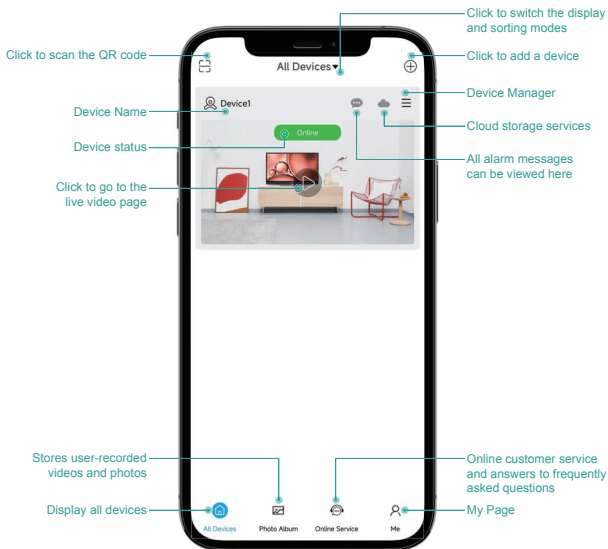
Figure 15

Figure 16

Functional Description

Click to scan the QR code

Click to switch the display and sorting modes

Click to add a device

Device Manager

Device Name

Device status

Cloud storage services

All alarm messages can be viewed here

Click to go to the live video page

All Devices

Device1

Online

Stores user-recorded videos and photos

Display all devices

Online customer service and answers to frequently asked questions

My Page

All Devices

Photo Album

Online Service

Me

⚠ **Notice**

1. Please change the user password while using this product to avoid being misappropriated by criminals.

2. Do not install the device in a place that is damp, dusty, or accessible to children.

3. Please use and store within the allowable temperature and humidity range, and do not disassemble the equipment at will.