

# Owner's Manual

T58

## Safety Instructions

- Please read this manual carefully before using
- Keep these instructions
- Do not disassemble
- Do not expose directly to sunlight or open flame
- Pay attention to the road and do not operate this product while driving

## Introduction

### Features:

- Input 12-24V
- FM transmitter : 88.1-107.9 MHz frequency range
- Bluetooth hands-free calling
- Stream music from smartphone to car system via FM transmission
- USB1: QC 18W 5V/3A, 9V/2A, 12V/1.5A
- Type-C: PD 30W 5V/3A, 9V/3A, 12V/2.5 A
- Support USB flash drive playing
- Car battery voltage monitor




1.LED display  
2. Type-C charging port  
3. QC3.0 charging port  
4. USB flash drive playing  
5. Multifunction button:  
Change frequency;  
Volume+/-; Call answer &  
hang up

6.Microphone  
7.Next song  
8.Previous song  
9.Bass button

LED Indicator	Status
13.5	Car battery voltage
Bt	Bluetooth ready to pair
107.9	FM transmission frequency

## Get it Ready for Playing

1. Plug T58 into your car cigarette lighter socket.

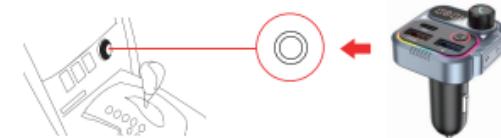

2. LED display light will turn

3. Connecting Bluetooth: When LED display reads "bt," it is in pairing mode, and voice prompt will say "Waiting for connection."

On your smartphone, enable Bluetooth function, search for available devices, select "T58," and pair with it. Once connected, listen for voice prompt "Bluetooth connection success." You are now paired.



4. Turn on your car's FM radio and find an empty (only static) channel. Then, adjust the frequency on T58 to match the frequency of your car radio.



5. FM transmitter frequency setting: Press until the frequency display flickering, rotate button to adjust the transmitter's frequency to be the same as the frequency on the car radio.

## Play Music

### Playing music from your phone:

After steps 1-5, you can start playing audio using your smartphone. The music will stream via the Bluetooth

A2DP function; your phone's FM transmission will travel to your car radio and through your car's speakers.

Play/Pause	Press
Previous/Next track	Press
Volume (000-100)	Rotate

### Playing music from USB flash drive:

Plug USB flash drive into the USB port on the side with the icon. T58 will start playing automatically.



Play/Pause	Press
Previous/Next track	Press
USB	USB flash drive ready to play (when you plug in a USB flash drive)
001	Song 001 playing
Volume (000-100)	Rotate

## Hands-Free Call

After you set up playing, you can also use the hands-free function.

Answer an incoming call	Press
Reject an incoming call	Press and hold
Hang up a call	Press
Recall last incoming/outgoing call	Quickly press twice

**Under music playing status (BT/USB flash drive), if there is a call coming in, it will switch to call mode automatically. After hanging up, it will switch back to playing mode automatically.**

## Charge Your Device

Bluetooth FM transmitter has one Type-C port and two USB ports, with a total max 54W.

- Type-C PD 30W
- USB1: QC 18W charging port
- USB 2: 5V/1A Max  
Mainly used for USB flash drive playing.

## Specifications

DC input: 12V-24V  
Bluetooth V5.4  
Output: Type-C: PD 30W  
(5V/3A, 9V/3A, 12V/2.5A)

USB1: QC 18W (5V/3A, 9V/2A, 12V/1.5A)  
Bluetooth connect distance: 10m  
Audio format: MP3, WMA, APE, WAV  
FM transmitting distance: ≥2m  
USB capacity support: ≤64Gb  
Working temperature range: -20°C to 40°C  
Storage temperature range: -40°C to 75°C

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### FCC Radiation Exposure statement

The device has been evaluatec to mee general RF exposure requirement. The device can be used in portable exposure condition without restriction.