

E11BT

蓝牙运动耳机

Bluetooth Earphone

— User manual

— 使用说明书

**SoundMAGIC Group
Marketing**

Hongkong SoundMAGIC Technology Development Co.,LTD
Shenzhen SoundMAGIC Technology Development Co.,LTD





R & D and Manufacture

Dongguan Nianrui Electronic Technology Co.,LTD
Fulong Industry Road 8,Fulong Community Shipai Town,Dongguan,China
Tel: 086-769-81270118/89633128 Fax:086-769-81270128
Email: support@soundmagic.com
www.soundmagic.com

ShenZhen SoundMAGIC Technology Development Co.,LTD
Address: 1613# Building A,Weidonglong Business Building,Meilong Road No 2125,
Qinghua Community,Longhua District,Shenzhen China



I.Packing List

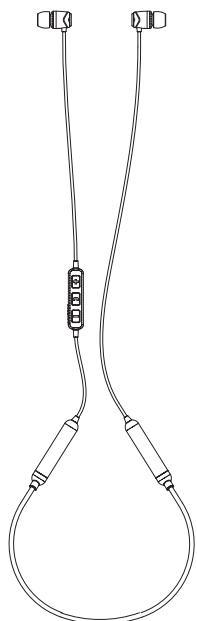


- ① E11BT Bluetooth Earphone
- ② Bowl-shaped silicone eartips S/L
(Middle size on the Headphone)
- ③ USB charging cable
- ④ Carry pouch
- ⑤ User manual

II. Technical specifications

Bluetooth.....	Bluetooth V5.0
Driver.....	Dynamics, 10mm, Neodymium
Transmission Range.....	Up to 13m
Impedance.....	42±10%Ω
MIC Sensitivity.....	-42±3dB
Continuous Playback music.....	48~60H
Continuous Talk Time.....	20~24H
Standby Time.....	280H
Weight.....	24.7g
Ambient Temperature.....	-20°C~60°C

III.Function buttons/USB

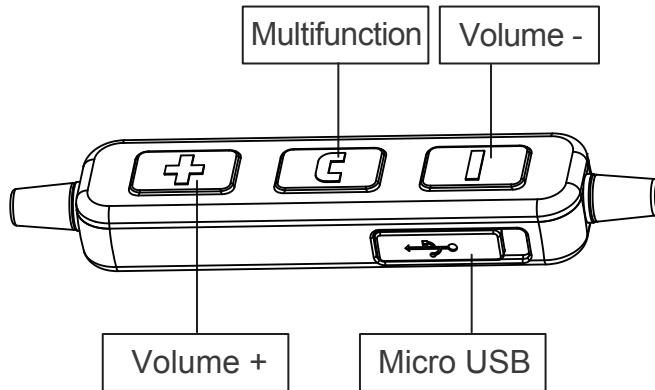

E11BT has a built-in noise cancelling microphone,which can make/reject the phone calls crisply and reliably. And you can stop/start play the music directly via the microphone control.

IV. Basic functions and operations

1. Power on

Press and hold the “Multifunction” button for 3 seconds to power on: “Power on” prompt will be heard when the headset is turned on.

2. Power off

Press and hold the “Multifunction” button for 3 seconds to power off: “Power off” prompt will be heard when the headset is turned off.

3. Pairing

- 1) With your E11BT off, press and hold the “Multifunction” button for about 5 seconds until the red-blue LED is flashing rapidly (keep the button held down for another 2 seconds past the 'power on' prompt).
- 2) Open your smartphone’s Bluetooth connection function to enable Bluetooth mode and search for the Bluetooth device. You should find the E11BT headset. Select the E11BT to finish pairing.

4. Automatic Connection

If your smartphone has been paired successfully with your E11BT, they will connect automatically if they're within the effective distance (10m) and effective time period (5 minutes). If your E11BT is outside the effective distance, it will disconnect. But if it comes back to being within the effective distance again within 5 minutes, it will connect back to your smartphone automatically. After 5 minutes with no connection, your E11BT will automatically power off.

5. Playing music

Press “Multifunction” button to start music. Press again to stop music.

Press “+” twice to play next song.

Press “-” twice to play last song.

Press and hold “+” to fast forward.

6. Incoming call

When receiving an incoming call, press the “Multifunction” button to answer the call.

Press the “Multifunction” button again to hang up. Rapidly press the “Multifunction” button for 2 seconds to reject the call.



7.Call waiting

During a call, press the “Multifunction” button for 3 seconds to put the current call on hold and answer the incoming call. (This function may depend on your network operator).

8.Volume Control

Press “+” to increase the volume.

Press “-” to decrease the volume.

9.Last number redial

Press the “Multifunction” button twice to redial the last number.

10.Charging

Please use a computer or USB outlet with $5V\pm0.2V$ output voltage to charge your E11BT, using the provided USB cable. A red light indicates that your E11BT is being charged. The red light will go out and the blue light will come on once your E11BT is fully charged (charge time is about 2 hours).

V. Maintenance and precautions

1. Any improper use or unauthorized servicing that results in damage to your E11BT will void the warranty.
2. Do not use sharp objects near your E11BT.
3. Do not keep your E11BT in charging mode for long periods.
4. Do not store your E11BT near toxic chemicals.
5. Do not store your E11BT near magnets.
6. Do not leave your E11BT with a fully drained battery for long periods.
7. If your E11BT is out of use for a long time, please charge it periodically to protect the battery.

VI. Common problems and solutions

Problem	Reasons	Solutions
Not turning on	Battery low	Charge battery
Disconnecting	Signal subject to interference	Re-pair the devices in a different placet
No sound after pairing	Mobile Bluetooth media audio is not turned on	Enable mobile Bluetooth media audio
When making a call, voice is still coming from smart -phone	Smartphone call audio is set to smartphone	Set to Bluetooth answer
Noise/stuttering	Smartphone is too far away from E11BT or there is interference in the surrounding environment.	Move closer to smartphone or move to a different place
The audio is still quiet after increasing the volumet	The volume on the smar tphone is too low	Increase the smartphone's volumet
My voice is too quiet when making a call	The microphone aperture is clogged with dust	Clean your E11BT
Unable to hold current call and answer incoming call	Phone operator hasn't enabled this function.	Contact the phone operator to enable this function.

VII.Customer service and support

Please contact us directly for service and support. Our service team is ready to help you.

E-Mail: support@soundmagic.com

Phone: +86 769 81270118

Fax: +86 769 81270128

Factory address: Fulong Industry Road 8, Fulong Community Shipai Town, Dongguan, China

For more information about SoundMAGIC please visit our website:
www.soundmagic.com



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

一、装箱清单

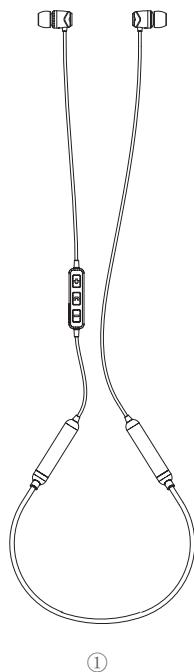


- ① E11BT 蓝牙运动耳机
- ② 大/小号耳塞(中号在耳机上)
- ③ 数据线
- ④ 收纳袋
- ⑤ 说明书



二、技术参数

技术标准.....	Bluetooth V5.0
单元.....	10mm钕铁硼磁动圈
传输距离.....	Up to 13m
阻抗.....	$42\pm10\Omega$
MIC灵敏度.....	$-42\pm3\text{dB}$
连续播放音乐时间.....	48~60H
持续通话时间.....	20~24H
待机时间.....	280H
重量.....	24.7g
环境温度.....	-20°C~60°C

三、功能展示

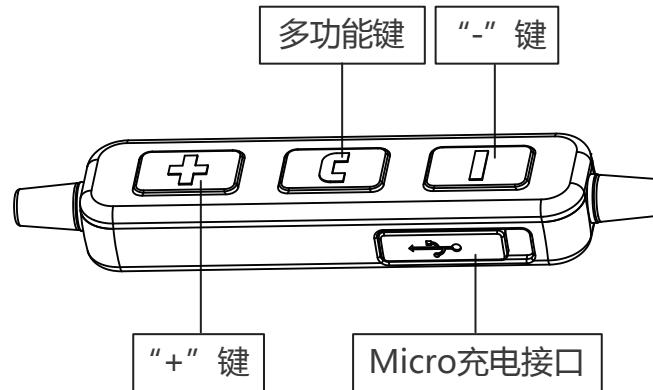

耳机线控内置降噪麦克风，一键接挂电话，通话过程流畅清晰；
在音乐播放模式下，可暂停或播放



四、基本功能与操作

1.开机

长按“多功能”键约3秒：开机，耳机提示音“power on”

2.关机

长按“多功能”键约3秒：关机，耳机提示音“power off”

3.配对

1)关机状态下，长按“多功能”键约5秒（3秒左右会开机，此时不要放开）

LED红蓝指示灯交替快速闪烁，进入自动搜索配对状态

2)打开播放设备蓝牙连接功能搜索蓝牙设备，将会搜索到的蓝牙耳机型号E11BT，

点击即可完成配对



4.自动连接

手机与耳机如果已经配对成功，耳机和手机蓝牙功能都处于开启状态，在有效距离和有效时间内，二者可自动建立连接；在使用的过程中耳机超出有效距离断开连接后，5分钟内回到有效距离，耳机将与手机自动建立连接，超过5分钟耳机将启动省电模式自动关机

5.音乐播放

点按“多功能”键：开始播放音乐；再次点按：暂停播放音乐

双击“+”键：播放下一曲

双击“-”键：播放上一曲

按住“+”键不放：快进

6.来电

来电时点按“多功能”键：接通电话；通话时点按“多功能”键：结束通话；来电时长按“多功能”键2秒：拒接来电





7.第三方通话

通话时有新来电，长按“多功能”键3秒：当前通话保持，接通第三方来电。（此功能需电话运营商开通支持此项功能。）

8.音量调节

点按“+”键：增加音量

点按“-”键：降低音量

9.末号重播

双击“多功能”键：最后一次拨打号码重播

10.充电

请使用电脑或者输出电压为 $5V\pm0.2V$ 的设备和USB数据线充电数据线充电

当红色灯亮时，表示正在充电

充电结束时，红色灯灭蓝色灯亮起（充电时间约为2H）



五、维护和注意事项

- 1.任何由于个人使用不当或者非专业人士的维修对耳机造成的破坏被列入保修范围
- 2.不可使用尖锐的物体接触耳机
- 3.不可使耳机一直处于充电状态
- 4.不可存放在有化学腐蚀性环境中使用
- 5.不可将产品防止于强磁的环境中
- 6.不可让耳机长期处于无电状态
- 7.长时间不使用，请隔一段时间进行充电，保护电池





六、常见问题与解决方案

常见问题	常见原因	解决方案
不能开机	电量不足	进行充电
无法连接	其他电磁波干扰	换个环境重新匹配连接
配对连接后媒体声音外放	手机蓝牙功能媒体音频未打开	打开设置
打电话时声音仍然为听筒	手机接听方式设置为听筒	设置为蓝牙接听
有杂音	手机里耳机太远或周围环境有干扰	拉近距离更换环境
耳机声音调大后声音依然小	手机播放的声音太小	调大手机音量
通话时对方听到声音小	麦克风通话孔被灰尘堵塞	保持耳机清洁及时清洁
无法保持当前通话接听第三方	运营商未开通此功能	联系运营商开通解决



七、服务与支持

在需要提供服务时，请直接联系我们，专业的客服人员第一时间为您服务：

邮箱：support@soundmagic.com

电话：0769-81270118

传真：0769-81270128

厂址：广东省东莞市石排镇福隆工业区8路年瑞电子科技有限公司

您需要了解购买SoundMAGIC更多产品信息请登录

官方网址：www.soundmagic.com

