



9. Headphone reconnection

一、Manual reconnection

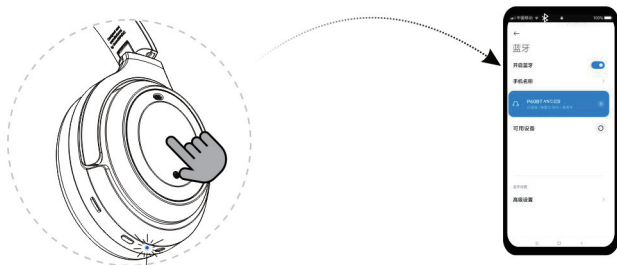

When unable to auto-reconnection, click TCP, the blue light blinks, the headphone will auto connect with the phone


二、Automatic reconnection

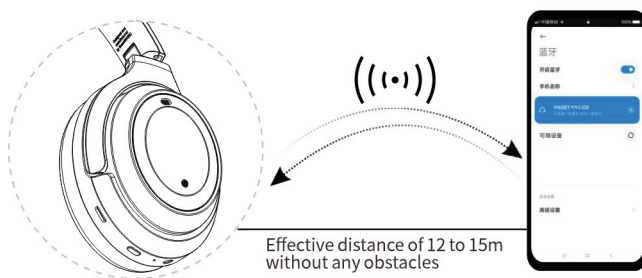

Effective distance of 12 to 15m without any obstacles


Phone and headphone are on

10. Reset headphone

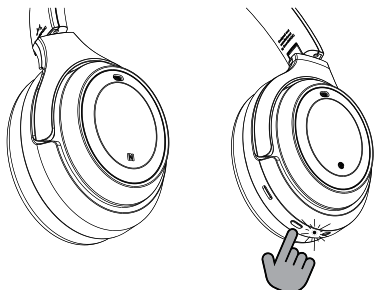

Turn off the headphone, long press the power button for 10 seconds, the red and blue lights 3 times, reset successful. A voice prompts "dududu" and automatically power off

11. Voice function

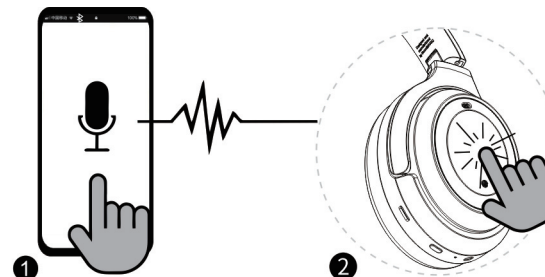

1. Enable the mobile phone voice assistant


2. Activate SIRI, 3-click on TCP, a voice prompts "du"

12. Play/pause music




Double-click on TPC, a voice prompts "du"

13. Wired headphone usage status

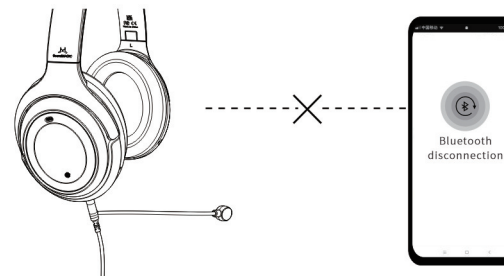

Once the cable with microphone boom is plugged in, the power will be cut off, the Bluetooth function will be disabled


14、Headphone charging

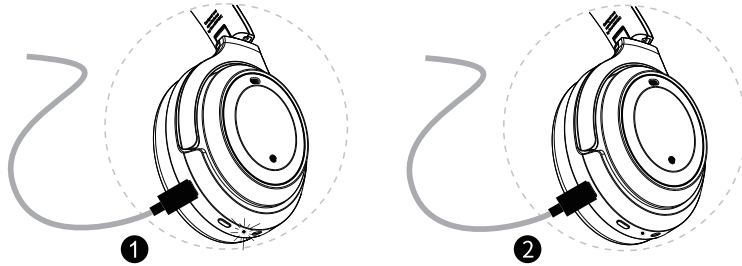

1、Being charged when the headphone is on:
the red and blue lights will flash, and the blue
light will on long bright when fully charged

2、Being charged when the headphone is off:
the red light will on long bright, and the light
will be off when fully charged

15、Three switching modes

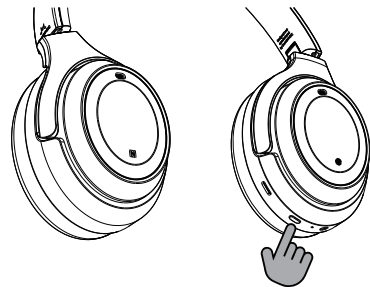

Press the Power button once, voice prompts: Normal mode
ANC mode
Ambient sound

16、

17、

18、

Precautions

- 1、Any improper use or unauthorized servicing that results in damage to your headphone will void the warranty
- 2、Do not use sharp objects near your headphone
- 3、Do not keep your headphone in charging mode for long period
- 4、Do not store your headphone near toxic chemicals
- 5、Do not store your headphone near magnets
- 6、Do not leave your headphone with a fully drained battery for long period
- 7、If your headphone is out of use for a long time, please charge it periodically to protect the battery

Common problems and solutions

Problem	Reasons	Solutions
Cannot turn on	Out of battery	Charge battery
Disconnect	Other electromagnetic interference	Re-pair the devices in a different place
Voice is still coming from phone during calls	Phone call audio is set to phone	Set to Bluetooth answer
Noise	Phone is too far away from headphone or there's interference in the surrounding environment	Move closer to phone or move to a different place
The sound of the headphone is still low after the volume is turned up	The volume on the phone is too low	Increase the phone's volume


Please contact us for service and support.

Our professional service team is ready to help you.

Service hotline: 0769-81270118

Shenzhen SoundMAGIC Technology Development Co.,Ltd
Address:
 1613# Building A, Weidonglong Business Building, Longhua District, Shenzhen, China
 Tel: 0755-88316487


一、装箱清单

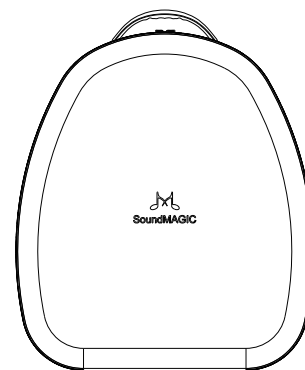

①



②



③




④



⑥



⑤




⑦

- ① 耳机包 ② 耳机 ③ 说明书 ④ 线材收纳包 ⑤ 电脑转换线
 ⑥ 数据线 ⑦ 带麦杆耳机线

二、技术参数


技术标准	5.0蓝牙
单元.....	40mm钕铁硼磁动圈
传输距离	约15m
直流电阻	38±10%Ω
MIC灵敏度	-42±3dB
连续播放音乐时间	50h
持续通话时间	50h
耳机重量	314g
环境温度	-20℃-60℃

功能示意图:

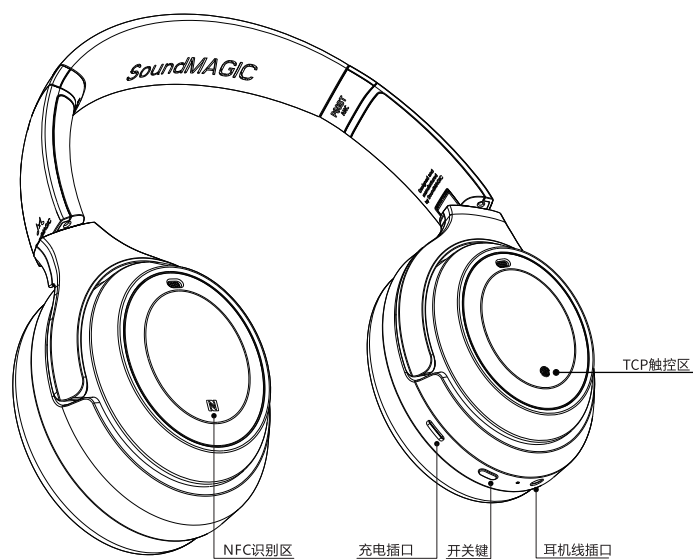

三、操作/功能

1、开机

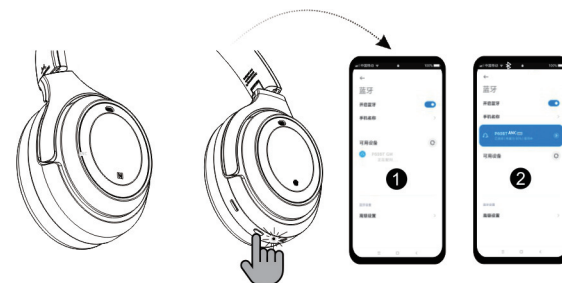

1、长按power键3秒, 蓝灯亮3次, 耳机提示音 power on

2、按键开机: 之前无配对记录, 开机后自动进入配对状态。之前有配对记录开机后自动尝试回连手机和耳机。回连失败10秒后直接进入配对状态


2、关机



1、手动关机: 长按power键5秒关机, 红灯亮3次提示, 来电或通话中屏蔽关机功能, 语音提示 power off

2、自动关机: 无连接设备时五分钟后自动关机, 红灯亮3次提示语音提示 power off

3、来电

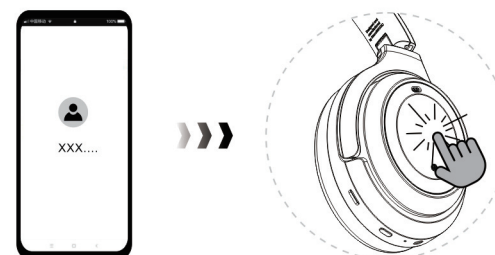

双击TCP: 接听/挂断