

Jabees®


Love Life Love Music

Shield Quick Reference Guide

www.jabees.com

Jabees Shield is a V 4.1 Bluetooth Stereo Sport Earbuds supporting True Wireless Stereo Technology, Voice Prompts in Chinese, English and other features specified in this QRG.

OVERVIEW of Shield

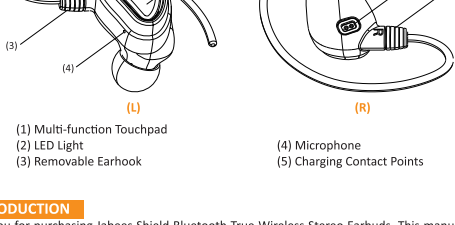

INTRODUCTION

Thank you for purchasing Jabees Shield Bluetooth True Wireless Stereo Earbuds. This manual will help you to accurately operate Shield, but you should familiarize yourself with the Bluetooth function of your mobile phone or other devices before using Shield.

CHARGING THE BATTERY

Shield have charging contact points on the earbuds bodies and the Charging Case for storage and charging.


1. Place the Shield into the charging slots of the Charging Case individually.
2. Press the 'ON/OFF for charging' button on the Charging Case.
3. The LED light of the Charging Case will be in green and the earbuds will be in red when charging.
4. When the battery is fully charged, the red LED lights of two earbuds turn off, the green LED light of the Charging Case will be off at the same time.

WHEN THE BATTERY IS LOW

You will hear the voice prompt "Battery Low". At this point please charge the Shield.

IMPORTANT

- For the first use, please make sure to fully charge the Shield beforehand.
- You must charge Shield if they have not been used for more than 12 months.
- You must use the authorized charger to charge up Shield.

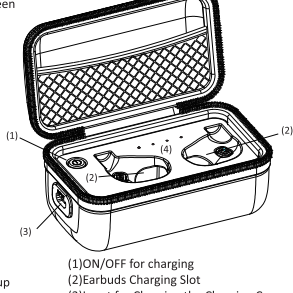

CHARGING THE CHARGING CASE

The Charging Case has a built-in 450mAh battery. It provides approximately 3 additional charges for 2 earbuds. The 4 green LED indicators show remaining battery capacity. Please charge the Charging Case when it is running out of power.

1. Plug one end of the USB charging cable into the charging port of the Charging Case, and put the other end into your computer or AC charger with USB port.
2. When the Charging Case is fully charged, all 4 LED indicators will show in solid green.
3. It takes around 1-2 hours to fully charge the charging case.

LED Indicator of Battery Capacity (During charging the Earbuds & Being Charged)

Battery Capacity	LED 1	LED 2	LED 3	LED 4
0-25%	Flashing	Off	Off	Off
25%-50%	On	Flashing	Off	Off
50%-75%	On	On	Flashing	Off
75%-99%	On	On	On	Flashing
99%-100%	On	On	On	On

MULTIFUNCTION TOUCHPAD

Answering/Ending/Rejecting/Redialing/Transferring calls;
Playing/Pausing the Music; Language Selection; Factory Reset; Pairing.

TURNING THE HEADPHONES ON/OFF

To turn on Shield:

Tap and hold the Touchpad for about 3.5 seconds to turn on Shield.

To turn off Shield:


Tap and hold the Touchpad for about 6 seconds to turn off Shield.

NOTE:

- 1) When the 2 earbuds enter in-sync mode, turning off one eabud will cause the other to switch off automatically along with the voice prompt 'Power Off'.
- 2) If one of the earbud turns off when running out of power, the another earbud will not be turned off automatically.
- 3) The right channel couldn't work if main earbud (left channel) was turned off by running out of power. However, the main earbud (left channel) can still work alone if the battery has run down of right channel.

USE Shield AS A PAIR

STEP 1. In-sync wireless stereo connection with mobile phone.

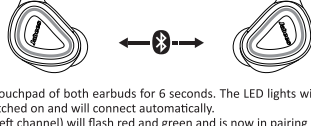

- 1) Tap and hold the Touchpad of both earbuds for 6 seconds. The LED lights will be in solid green, now both earbuds are switched on and will connect automatically.
- 2) The main earbud (left channel) will flash red and green and is now in pairing mode for a mobile phone.

STEP 2. Connecting with Mobile Phone or Other Bluetooth Devices.



- 1) Turn on the Bluetooth function of your mobile phone or other Bluetooth devices, start searching for the Bluetooth devices on your mobile phone. Select 'Shield' to complete the connection.
- 2) If your phone asks for passkey or PIN-code, confirm with '0000'(4-zero).
- 3) When a mobile phone is connected to the left Channel of Shield, the Right Channel will then connect automatically.

USE Shield INDIVIDUALLY:

Please note that only the main earbud (left channel) can be used individually.

1. How To Pair And Connect With Mobile Phone.
- 1) Tap and hold the Touchpad for about 6 seconds, the LED lights turn on in solid green, then go into pairing mode, and the LED lights flash in green after pairing.
- 2) Turn on the Bluetooth function of your mobile phone or other Bluetooth devices, start searching for the Bluetooth devices on your mobile phone. Select 'Shield' and follow the instruction. If your phone asks for passkey or PIN-code, confirm with '0000'(4-zero).
- 3) When Shield and your mobile phone are paired and connected, you will hear the voice prompt.

NOTE:

If no pairing is possible for a period of time (approximately 2 minutes), the earbud will be turned off automatically.

MAKING CALLS

Once Shield are successfully connected to your mobile phone, you can use them to make and receive calls. Please consult your mobile phone's manual for more information.

1. Dial By The Phone Keys

Enter and dial the number on your mobile phone as you normally do. Once the call has been set up, the sound will be transmitted to your Shield automatically.

2. Redial

Double tap the Touchpad to redial the last number you called.

NOTE:

During the phone mode & use the Shield in pair, only the left channel earbud will be activated for handsfree. The right channel only supports music function.

ANSWERING/ENDING/REJECTING CALLS

When Shield are turned on, and there is an incoming call, you will hear a musical tone.

- Single tap the Touchpad to answer the call.
- Single tap the Touchpad to end the call.
- Tap and hold the Touchpad for 3 seconds to reject the call.

TRANSFERRING CALLS

During both incoming and outgoing calls, you can double tap the Touchpad to transfer to the mobile phone. If you want to transfer the call back to Shield, double tap the Touchpad again. More procedures may be involved for some mobile phones.

ADJUSTING THE VOLUME

To make the Shield small and lightweight, we removed the volume control from the earbuds. Increase or decrease volume by using the volume buttons on your mobile phone or other Bluetooth device.

PUT THE CALL ON HOLD

Tap and hold the Touchpad for 2 seconds to put the current call on hold and accept the call waiting. Single tap the Touchpad to resume to the first call.

PLAYING/PAUSING MUSIC

Playing Music: Single tap the Touchpad.

Pausing Music: Single tap the Touchpad.

NOTE:

There are no tracking buttons on the earbuds, please track through songs using the controls on your mobile phone or other Bluetooth device.

LANGUAGE SELECTION

Shield are with 2-language voice prompt: English & Chinese. You can switch between these 2 languages by double tap the Touchpad after the headphones are turned on but not connected with any device.

CONNECTING TO A PC

You can connect Shield to a Bluetooth enabled PC.

FACTORY RESET

To restore Shield to factory settings, turn off both earbuds, tap and hold the Touchpad of each earbud separately for 10 seconds. When the LED lights flash red and green twice the factory reset is successful.

GUARANTEE

Jabees is a registered trademark of FreeTek International Co, Ltd. Other brands and product names are trademarks of their respective owners. Jabees warrants this product against all defects in material and workmanship for a period of twelve (12) months from the date of original purchase of the product. The conditions of this guarantee and the extent of responsibility of Jabees under this guarantee can be read in the Warranty Card.

WARNING

(Prior to using this product)

1. Before putting on the earbuds, turn the volume to its lowest level.
2. Put the earbuds on, and then slowly adjust the volume to a comfortable level.

(During the use of this product)

1. Keep the volume at the lowest level as possible.
2. If it is necessary to increase the volume, adjust the volume control slowly.
3. If you experience discomfort or ringing in your ears, immediately discontinue using the earbuds. With continued use at high volume, your ears may become accustomed to the sound level, which may result in permanent damage to your hearing without any noticeable discomfort.

SAFETY INFORMATION!

1. If you have a cardiac pacemaker or other electronic medical equipment, you should consult your physician before using this product.
2. This product contains small parts that may be hazardous to children. Keep out of the reach of children. The bags themselves or the many small parts they contain may cause choking if ingested.
3. Never attempt to disassemble the product yourself, or push other objects into this product, as this may cause short circuit, which led to the fire or get an electric shock.
4. None of the components can be replaced or repaired by users. Only authorized dealer or service center may open the product.
5. If any parts of your product require replacement for any reason, including normal wear and tear or breakage, please contact your dealer.
6. If the product overheats, has been dropped or damaged or has been dropped in a liquid, discontinue to use.

REMEMBER:

Drive safely, to ensure safe driving, avoid distractions and follow local laws.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: ALE12014

BTSHS170427_V3.0