



Quick Tips

Quick Tips

Read the content thoroughly before using handset to learn about basics and precautions.

Before Using Handset


Accessories

- Battery (SHBEY1)
- AC Charger (SHCEJ1)
- Desktop Holder (SHEEY1)
- microSD Card (complimentary sample)

Battery Installation


1 Remove Battery Cover

Notch

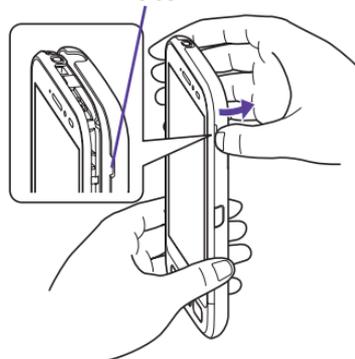

- Use notch to open Battery Cover as shown, then push up Battery Cover along edges to remove it.

2 Insert Battery

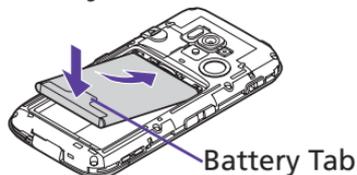

- With Battery tab (printed PULL) facing up, align Battery terminals with charging terminals.

3 Close Battery Cover




- Align Battery Cover with handset, then firmly press down along shaded areas.
- To maintain water/dust resistance, close Battery Cover properly. Debris trapped between gasket and base may expose handset to liquid/dust.


Charging (Desktop Holder)

With Battery installed, use AC Charger (SHCEJ1) and Desktop Holder (SHEEY1).

- AC Charger and Desktop Holder are not water or dust proof. Never charge Battery while handset is wet.
- Do not touch AC Charger or Desktop Holder with wet hands. Electric shock may occur.

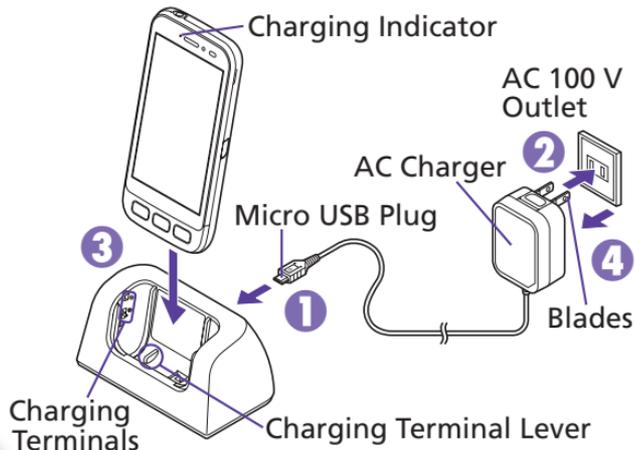

1 Insert Micro USB plug of AC Charger to connector port of Desktop Holder

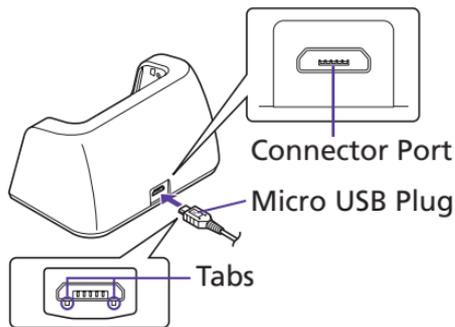


2 Plug AC Charger into AC outlet after rotating blades out

3 Place handset into Desktop Holder Charging Indicator



- Charging Indicator illuminates red while charging.
- Charging Indicator goes out when Battery is full.

4 After charging, remove handset from Desktop Holder and unplug AC Charger

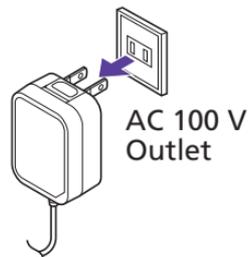


- Hold Desktop Holder when removing handset.
- Pull Micro USB plug straight out from connector port.

Handset Keys

Increase Volume; Long Press to turn on Mobile Light (Press to turn it off)

Activate/cancel Screen Lock; Long Press for power on or phone options

Decrease Volume; Long Press to activate/cancel Manner mode

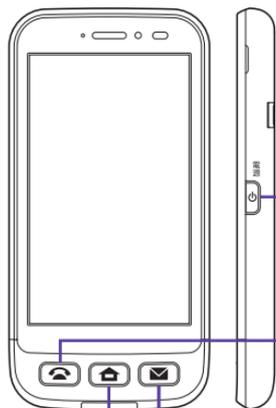


Activate Phone

Activate Mail

Return to Home Screen

Navigation Bar

Zoom in or out

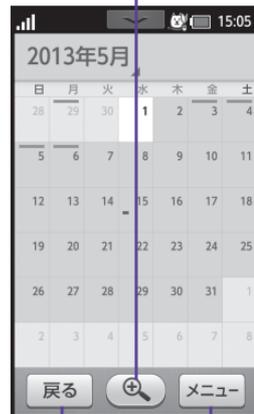

Go back/escape

Open Options menu

Basic Operations

Power On/Off

■ Power On

Ⓞ (Long Press)

After Powering On for the First Time

OK → 戻る → OK

Unlocking Touchscreen

Drag down .

Screen Lock

After a period of inactivity or Pressing Ⓞ, Display goes completely dark and Screen lock activates. To cancel, Press Ⓞ; lock screen appears.

■ Power Off

Ⓞ (Long Press) → 電源を切る → OK

My Phone Number

Drag up Home Screen → 開く on つながる application bar → プロフィール

General Notes

Handset

Do not disassemble or modify handset.

Electromagnetic Safety

For body-worn operation, this mobile phone has been tested and meets RF exposure guidelines when used with an accessory containing no metal and positioning the handset a minimum 15 mm from the body. Use of other accessories may not ensure compliance with RF exposure guidelines.

CE Declaration of Conformity

CE 0168

Hereby, Sharp Telecommunications of Europe Ltd, declares that 204SH is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

A copy of the original declaration of conformity for each model can be found at the following Internet address:

<http://www.sharp.co.jp/k-tai/>

Battery Cautions

Use specified Battery or Charger only.

Non-specified equipment use may cause malfunctions, electric shock or fire due to battery leakage, overheating or bursting.

Do not dispose of an exhausted Battery with ordinary refuse; always tape over Battery terminals before disposal. Take Battery to a SoftBank Shop, or follow the local disposal regulations.

Charge Battery in ambient temperature 5°C - 35°C; Battery may leak/overheat and performance may deteriorate outside this range.

■ Mobile Light

Do not shine Mobile Light in eyes.

May temporarily affect eyesight or startle, leading to accidents.

■ European RF Exposure Information

Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organization ICNIRP and include safety margins designed to assure the protection of all persons, regardless of age and health.

The guidelines use a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit for mobile devices is 2.0 W/kg and the highest

SAR value for this device when tested at the ear was 0.505 W/kg*. As mobile devices offer a range of functions, they can be used in other positions, such as on the body as described in this User Guide**. In this case, the highest tested SAR value is 0.417 W/kg***. As SAR is measured utilizing the device's highest transmitting power the actual SAR of this device while operating is typically below that indicated above. This is due to automatic changes to the power level of the device to ensure it only uses the minimum level required to reach the network.

The World Health Organization has stated that present scientific information does not indicate the need for any special precautions for the use of mobile devices. They note that if you want to reduce your exposure then you can do so by limiting the length of calls or using a hands-free device to keep the mobile phone away from the head and body.

*The tests are carried out in accordance with international guidelines for testing.

Please see "Electromagnetic Safety" on **P.3-58 for important notes regarding body-worn operation.

***A method of measuring SAR when a mobile phone is used at positions other than at the ear was established in March 2010 through an international standard (IEC62209-2). MIC technical regulation was reported in October 2011 by the Information and Communications Council.

World Health Organization

<http://www.who.int/emf>

List of Specific Absorption Rates (SAR) for radio waves by smartphone model

<http://mb.softbank.jp/mb/support/sar/>

(Japanese)

■ Headphone Signal Level

The maximum output voltage for the music player function, measured in accordance with EN 50332-2, is 12.0 mV.

FCC Notice

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

■ FCC Information to User

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the

instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation; if this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient/relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.

■ FCC RF Exposure Information

Your handset is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.

The guidelines are based on standards that were developed by independent scientific organization through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health. The exposure standard for wireless handsets employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. The tests are performed in positions and locations (e.g. at the ear and worn on the body) as required by the FCC for each model.

The highest SAR value for this model handset as reported to the FCC when tested for use at the ear is 0.59 W/kg, and when worn on the body in a holder or carry case, is 0.98 W/kg.

Body-worn Operation; This device was tested for typical body-worn operations with the back of the handset kept 1.0 cm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain a 1.0 cm separation distance between the user's body and the back of the handset. The use of beltclips, holsters and similar accessories should not contain metallic components in its assembly.

The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided. The FCC has granted an Equipment Authorization for this model handset with all reported SAR levels evaluated as in compliance with the FCC RF emission guidelines. SAR information on this

model handset is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/ea/> after searching on FCC ID APYHRO00188.

Additional information on Specific Absorption Rates (SAR) can be found on the FCC website at <http://transition.fcc.gov/oet/rfsafety/>.

Customer Service

For SoftBank handset or service information, call General Information. For repairs, call Customer Assistance.

■ SoftBank Customer Support

General Information	Customer Assistance (Repairs/Lost Handsets)
From a SoftBank handset, dial toll free at 157 From a landline/IP phone, dial toll free at 0800-919-0157	From a SoftBank handset, dial toll free at 113 From a landline/IP phone, dial toll free at 0800-919-0113

If you cannot reach a toll free number, use the number (charges apply) below for your service area:

Hokkaido Area Tohoku Area Hokuriku Area Kanto & Koshinetsu Area	022-380-4380	Tokai Area	052-388-2002
Kansai Area	06-7669-0180	Chugoku & Shikoku Area, Kyushu & Okinawa Area	092-687-0010

■ Smartphone Technical Support Center

From a SoftBank handset, dial toll free at **151**
From a landline/IP phone, dial toll free at **0800-1700-151**

■ SoftBank Mobile Global Call Center

From outside Japan, dial **+81-3-5351-3491** (toll free from SoftBank handsets)
If handset is lost/stolen, call this number immediately (international charges apply)