

**HP iPAQ Voice Messenger**  
**Product Guide**

© Copyright 2008 Hewlett-Packard  
Development Company, L.P.

HP iPAQ products are powered by  
Microsoft® Windows Mobile® 6.1 with  
Messaging and Security Feature Pack.

Microsoft Windows, the Windows logo,  
Outlook, Windows Mobile Device Center,  
and ActiveSync are trademarks of  
Microsoft Corporation in the U.S. and other  
countries.



Java and all Java-based

**Java**

POWERED

trademarks and logos are trademarks or  
registered trademarks of Sun Microsystems,  
Inc. in the U.S. and other countries.

 SD Logo is a trademark of its proprietor.

Bluetooth® is a trademark owned by its  
proprietor and used by Hewlett-Packard  
Development Company, L.P. under license.

Google and Google Maps™ are trademarks  
of Google Inc.

All other product names mentioned herein  
may be trademarks of their respective  
companies.

Hewlett-Packard Company shall not be liable  
for technical or editorial errors or omissions  
contained herein. The information is  
provided 'as is' without warranty of any kind  
and is subject to change without notice. The  
warranties for Hewlett-Packard products are  
set forth in the express limited warranty  
statements accompanying such products.  
Nothing herein should be construed as an  
additional warranty.

This document contains proprietary  
information that is protected by copyright. No  
part of this document may be photocopied,  
reproduced, or translated to another  
language without the prior written consent of  
Hewlett-Packard Development Company,  
L.P.

First Edition September 2008

Document Part Number: 496988-001.

---

# Table of contents

## 1 Welcome to your HP iPAQ and product registration

## 2 Box contents

## 3 Components

Front panel components .....	3
Top panel components .....	4
Left and Right panel components .....	5
Back panel components .....	5

## 4 Set up your HP iPAQ

Step 1: Remove the battery cover and insert the SIM card .....	7
Step 2: Insert the battery and replace the battery cover .....	8
Step 3: Charge the battery .....	9
Step 4: Turn on your HP iPAQ .....	9

## 5 Get started with your HP iPAQ

Home screen .....	11
Getting Started .....	12
Status icons .....	12
Keyboard .....	13
Answer/Send key .....	13
End key .....	13
Home key .....	13
Back key .....	13
Softkeys .....	13
Keyboard layout .....	13
Enter text .....	14
Enter key .....	15
Backspace key .....	15
Shift key .....	16
Options key .....	16
Symbol key .....	16
Center Select button .....	16
Know your HP iPAQ .....	16
Find information about your HP iPAQ .....	17
Access programs .....	17

View the operating system (OS) information .....	17
Check the connection and signal strength .....	18
Customize your HP iPAQ .....	18
Create a device name .....	18
Enter owner information .....	18
Change the regional settings .....	18
Adjust the volume settings .....	19
Adjust the ring tone and notification sounds .....	19
Manage profiles .....	19
Use profiles .....	19
Edit profiles .....	20
Change the power management settings .....	20
Adjust the brightness settings .....	20
Increase the font size .....	21
Install and remove programs .....	21
Set clocks and alarms .....	22
Use Key Guard .....	22
Lock and unlock your HP iPAQ .....	23
Use the SIM PIN to protect information on your HP iPAQ .....	24
Battery saving tips .....	24
HP Power Save Mode .....	25

## 6 Use your HP iPAQ

Call features .....	26
Make calls .....	26
Make calls from the Home screen .....	26
Make calls from Contacts .....	26
Redial a number .....	26
Answer calls .....	26
Mute a call .....	27
Put a call on hold .....	27
Create an appointment during a call .....	27
Use call waiting .....	27
Make emergency calls .....	28
Make calls using speed dial .....	28
Make data calls .....	28
Make a conference call .....	29
Make a call from a hyperlinked phone number .....	29
Make international calls .....	29
Use voice mail .....	29
Use the handsfree function .....	30
Call history .....	30
Manage calls using call history .....	30

Make calls using call history .....	30
View the call details .....	30
Voice commands .....	31
Change the service settings .....	31
Auto Answer .....	31
Band Control .....	31
Call Options .....	32
Forward calls .....	32
Call waiting .....	33
Caller ID .....	33
Block calls .....	33
Configure channels .....	34
Fixed Dialing .....	34
Change the network settings .....	35
View the available phone networks .....	35
Set the preferred networks .....	35
Manually select a phone network .....	36
Select a frequency band .....	36
Voice notes .....	36
Create a voice note .....	36
Listen to voice notes .....	36
Rename voice notes .....	37
Reply to e-mails using voice notes .....	37
Delete voice notes .....	37
Reset your HP iPAQ .....	37
Perform a soft reset .....	37
Perform a hard reset (factory reset) .....	38

## 7 Storage cards

Insert a storage card .....	39
Remove a storage card .....	40
View contents of a storage card .....	41

## 8 Contacts

Create a contact .....	42
Edit the contact information .....	42
Copy a contact .....	42
Create and assign a category for a contact .....	43
Find a contact .....	43
Send an e-mail message to a contact .....	43
Send a text message to a contact .....	43
Add or remove a picture .....	44
Delete a contact .....	44

Use the contact list .....	44
<b>9 Messaging</b>	
Understand messages .....	46
Text messaging .....	46
MMS and its uses .....	47
Set up e-mail accounts .....	48
Set up e-mail using Exchange Server .....	48
Internet e-mail .....	48
Create a new POP3 or IMAP4 account .....	48
Change the e-mail download options .....	50
Delete an account .....	50
Synchronize e-mail .....	51
Use messaging .....	51
Folder types .....	51
Compose and send e-mails .....	52
Reply to or forward a message .....	52
Add an attachment to a message .....	53
Receive attachments .....	53
Receive meeting requests .....	53
Create or change a signature .....	54
Download messages .....	54
Download messages from a server .....	55
Install an online address book .....	55
<b>10 Calendar</b>	
Create a new appointment .....	57
Assign a sensitivity level to an appointment .....	57
Change the display of the work week .....	57
Set a default reminder for all new appointments .....	58
Update an appointment .....	58
Cancel an appointment .....	58
<b>11 Tasks</b>	
Create a new task .....	59
Create and assign a category to a task .....	59
Set the start and due dates for a task .....	59
Show the start and due dates in the task list .....	59
Mark a task as completed .....	60
<b>12 Camera</b>	
Use the camera .....	61
Capture photos .....	61

View photos .....	61
Camera settings .....	61
Basic settings .....	61
Photo settings .....	62
Use the video recorder .....	65
Record videos .....	65
Video settings .....	65
Transfer images .....	66
Use GPRS .....	66
Use Bluetooth .....	66

### 13 Connections

Use Wireless Manager .....	67
HSPA/GPRS/EDGE .....	67
HSPA .....	67
GPRS/EDGE .....	68
Differences between GSM and GPRS/EDGE/WCDMA/3G technology .....	68
Configure GPRS network settings .....	68
Edit an Internet connection .....	68
Edit WAP information settings .....	69
Troubleshoot automatic detection .....	70
Bluetooth .....	70
Bluetooth terms .....	70
Open Bluetooth settings .....	71
Connect to a computer using Bluetooth .....	71
Create, end, and accept a Bluetooth partnership .....	72
Edit a Bluetooth partnership .....	73
Use your HP iPAQ as a wireless modem with Bluetooth .....	73
Bluetooth device profiles .....	74
Set up an incoming or outgoing Bluetooth communications (COM) port .....	74
End a Bluetooth connection .....	74
Wi-Fi .....	75
Wi-Fi terms .....	75
Open Wi-Fi settings .....	76
Automatically connect to a Wi-Fi network .....	76
Manually connect to a Wi-Fi network .....	77
Delete a Wi-Fi network .....	77
End a Wi-Fi connection .....	77
Configuring 802.1x authentication settings .....	78
Advanced settings .....	78
Connect to intranet URLs .....	78
Change an intranet URL .....	78
Set up a WAP gateway .....	79

Configure advanced proxy settings .....	79
Advanced connection settings .....	79
Set up a VPN server connection .....	80
End a connection .....	80

## 14 Synchronization

Synchronization software .....	81
Set up the Synchronization application .....	81
Synchronize data and copy files .....	82
Port data to Microsoft Windows Mobile 6.1 .....	83
Troubleshoot synchronization issues .....	83
Customized links in WMDC .....	85

## 15 Applications

ArcSoft Streaming Player .....	86
Global Positioning System (GPS) .....	86
Use GPS .....	86
Use GPS Connection Utility .....	87
Google Maps™ for mobile .....	87
Google Search .....	88
Launch Google Search .....	88
HP Help and Support .....	88
HP Asset Viewer .....	88
Getting Started .....	89
Customer Support .....	89
HP Enterprise Mobility Suite .....	89
HP iPAQ DataConnect .....	89
HP iPAQ Key Guard .....	90
Internet Explorer® .....	90
Internet Sharing .....	90
To connect to a computer using a USB data connection .....	90
To connect to a computer using Bluetooth data connection .....	91
Java Virtual Machine .....	91
Jetcet PDF .....	92
Jetcet Print .....	92
MSN Messenger .....	93
Office Mobile applications .....	93
Word Mobile .....	93
Excel® Mobile .....	93
PowerPoint® Mobile .....	94
OneNote® Mobile .....	94
Pictures & Videos .....	95
View the pictures stored on your HP iPAQ or on a storage card .....	95

View a slideshow .....	96
E-mail pictures .....	96
Associate a contact with a picture .....	96
Assign a picture to the Home screen background .....	97
HP Snapfish Upload .....	97
HP Enhance Document .....	97
Switch to the camera .....	98
Video support .....	98
Remote Desktop Mobile .....	98
SIM Manager .....	98
Manage certificates .....	99
Task Manager .....	99
Voice Commander .....	100
Windows Live™ .....	101
Windows Media® Player .....	103
Clear the Now Playing List .....	103
Update the Library .....	103
Use Voice Commander to play media files .....	104
Windows Update .....	104

## 16 Product specifications

System specifications .....	105
Physical specifications .....	105
Operating environment .....	106

## 17 Guidelines for care and maintenance

Use your HP iPAQ .....	107
Clean your HP iPAQ .....	107
Carry or store your HP iPAQ .....	107
Use accessories .....	107

## 18 Frequently asked questions

Battery .....	108
Connection .....	110
Synchronization .....	112
Miscellaneous .....	112

## 19 Optional accessories

## 20 Safety information

General precautions .....	114
Safety precautions for power cords and accessories .....	115

Safety precautions for battery packs .....	115
Safety precautions for docking devices .....	116
Safety precautions for products with wireless devices .....	116
Safety precautions for products with modems, telecommunications or local area network accessories .....	116

## 21 Regulatory notices

Federal Communications Commission Notice .....	117
Modifications .....	117
Cables .....	117
Declaration of Conformity for Products Marked with the FCC Logo (United States Only) .....	118
Canadian Notice .....	118
Avis Canadien .....	118
European Union Notice .....	118
Products with 2.4-GHz Wireless LAN Devices .....	120
France .....	120
Italy .....	120
Battery Warning .....	120
Battery Recycling .....	120
Battery Disposal .....	120
Chemical substances .....	120
Disposal of Waste Equipment by Users in Private Household .....	121
Equipment Warning .....	125
Acoustics Warning .....	125
Airline Travel Notice .....	126
Medical Electronic Equipment .....	126
SAR Notice .....	126
Wireless Notices .....	127
U.S. Regulatory Wireless Notice .....	127
Canadian Regulatory Wireless Notice .....	127
Brazilian Notice .....	127
Singaporean Wireless Notice .....	127
Thailand Wireless Notice .....	128
Wireless LAN 802.11b Devices .....	128
Wireless LAN 802.11g Devices .....	128
Bluetooth Devices .....	128

## 22 Quick reference

Acronyms .....	129
Icons used .....	131

<b>Index .....</b>	<b>132</b>
--------------------	------------

---

# 1 Welcome to your HP iPAQ and product registration

Welcome and congratulations on the purchase of your HP iPAQ Voice Messenger!

This Product Guide provides you with instructions necessary to set up, use and enjoy your new HP iPAQ. Please read the user instructions contained in this Product Guide before using your HP iPAQ. This Product Guide will give you a comprehensive understanding of all the features and functionalities available in your HP iPAQ Voice Messenger and enables you to use them to its fullest potential.

---

 **NOTE:** In addition to the instructions contained in this HP iPAQ Product Guide, you can find further product information at [www.hp.com/support](http://www.hp.com/support).

---

We also invite you to register your new HP iPAQ with Hewlett-Packard to perform the following tasks:

- Access support and services, and get the most out of your HP products.
- Sign up for free support alerts, software updates, and personalized newsletters.

Visit <http://www.register.hp.com> to register your HP iPAQ or to update your postal or e-mail address after registration. You are required to enter your user ID and registration password to edit your online profile. After registering your HP iPAQ, you will receive an e-mail message on special offers and promotions.


---

 **NOTE:** Registration is not supported in all countries/regions.

---

## 2 Box contents

This illustration shows the items that are included in the box with your HP iPAQ.

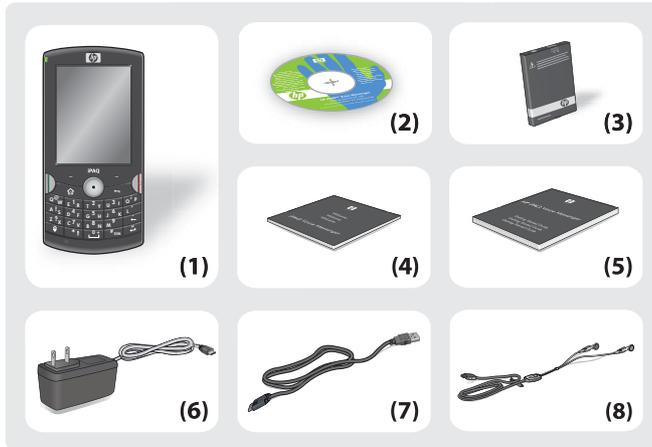


(1)	HP iPAQ Voice Messenger
(2)	Getting Started CD with additional software
(3)	1260 mAh Li-polymer removable/rechargeable battery
(4)	Welcome Guide
(5)	Getting Started Guide
(6)	AC adapter <b>NOTE:</b> The AC adapter shipped with your HP iPAQ might vary depending on the country/region.
(7)	Micro-USB synchronization cable
(8)	2.5 mm wired stereo headset

# 3 Components

Identify the different components of your HP iPAQ, understand its functions, and use your HP iPAQ to its full potential.


## Front panel components

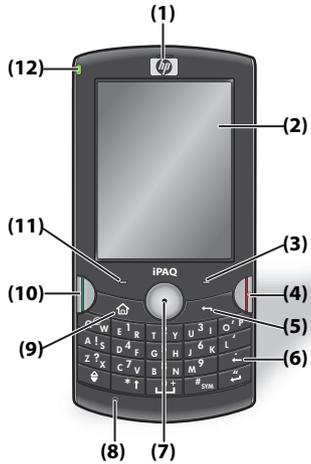

Component	Description	Function
(1)	Receiver	Use to listen to phone calls, sounds, and notifications.
(2)	Display	Use to view the on-screen contents.
(3)	Right Softkey	Press to access the displayed functions and menus.
(4)	End/Power Key	Performs the following functions: <ul style="list-style-type: none"> <li>• Press and hold to turn your HP iPAQ on and off.</li> <li>• Press to end a phone call.</li> <li>• Press to return to the <b>Home</b> screen from any program.</li> <li>• Press to activate the device from sleep mode.</li> </ul>
(5)	Back Key	Press to return to the previous screen or exit a program. Press to activate the device from sleep mode.
(6)	QWERTY Keyboard	Use keys on the keyboard to enter text or dial numbers. Press to activate the device from sleep mode. <b>NOTE:</b> The keyboard layout on your HP iPAQ might vary depending on the country/region.


Component	Description	Function
(7)	5-way Optical Navigation with Center Select Button	Navigate up, down, left, and right on the screen. Slide your thumb or finger in the direction you want to scroll.  Press the <b>Center Select</b> button to select the item highlighted on the screen.
(8)	Microphone	Use the microphone for making phone conversations, recording notes, and providing voice commands to your HP iPAQ.
(9)	Home Key	Press to return to the <b>Home</b> screen from any program.  <b>NOTE:</b> Press and hold to view the <b>Quick List</b> .
(10)	Answer/Send Key	Performs the following functions: <ul style="list-style-type: none"> <li>• Press to answer a call.</li> <li>• Press to make a call from Call or Contacts list.</li> <li>• Press twice to redial the last dialed number.</li> <li>• Press to activate the device from sleep mode.</li> </ul>
(11)	Left Softkey	Press to display the <b>Start</b> menu from the <b>Home</b> screen to access programs and perform the function displayed on the screen.
(12)	LEDs	Indicates battery, network, or device status. <ul style="list-style-type: none"> <li>• Quick 3 Blink Red - Device or charging error</li> <li>• Blinking Orange - Phone on and out of coverage area, or phone on with no SIM card present</li> <li>• Solid Green - Battery fully charged and connected to the power source</li> <li>• Solid Red - Charging when the battery is low</li> <li>• Blinking Red - Low battery warning</li> </ul>

## Top panel components

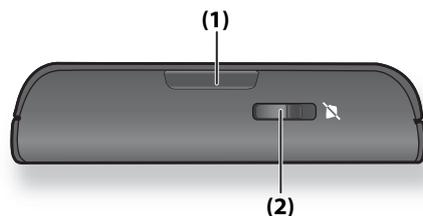


Component	Description	Function
(1)	Back Cover Latch	Press to release the back cover.
(2)	Ringer/Sound Switch	Use to switch off incoming call rings and system notification alert sounds.

## Left and Right panel components

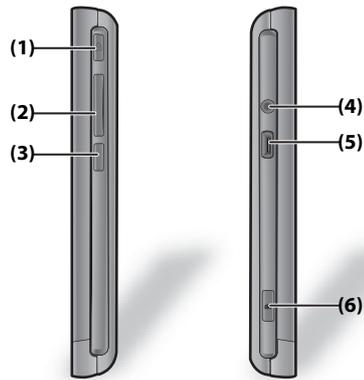

Component	Description	Function
(1)	Key Guard Button	Press to lock the keyboard. Press to activate the device from sleep mode.
(2)	Volume Up/Down Key	Press to increase or decrease the volume. Press once to temporarily mute the ringtone and notification sounds.
(3)	Voice Commander Button	Press and hold to launch <b>Voice Commander</b> .
(4)	Stereo Headphone Jack (2.5mm)	Use to connect the stereo headphones to your HP iPAQ.
(5)	Micro-USB Connector	Use to connect the Micro-USB synchronization cable and the charger.
(6)	Camera Button	Use to launch the camera to capture photos and videos.

## Back panel components

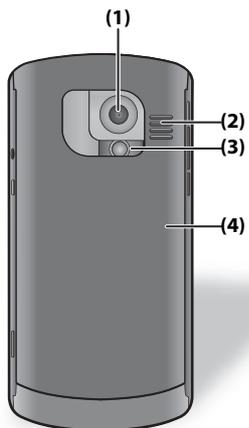

<b>Component</b>	<b>Description</b>	<b>Function</b>
<b>(1)</b>	3.1 Mega Pixel Camera	Auto-focus 5x digital zoom camera, use to capture photos and videos.
<b>(2)</b>	Speaker	Use the speaker to listen to music or as a speakerphone.
<b>(3)</b>	Camera Flash LED	Use the camera flash LED to illuminate your subject while you capture photos.
<b>(4)</b>	Back Cover	Remove to insert or remove the battery, the SIM card, and the microSD card.

---

## 4 Set up your HP iPAQ


Follow these steps to set up and use your HP iPAQ. Carefully remove your HP iPAQ and all the components from the box before beginning to set up your HP iPAQ.

 **NOTE:** Do not place your HP iPAQ on a hard surface with the screen facing down. Placing the screen on hard surface can cause scratches on the screen surface.


---

### Step 1: Remove the battery cover and insert the SIM card

1. Press the back cover release latch (1), and then pull the back cover (2) from your HP iPAQ as shown in the figure.

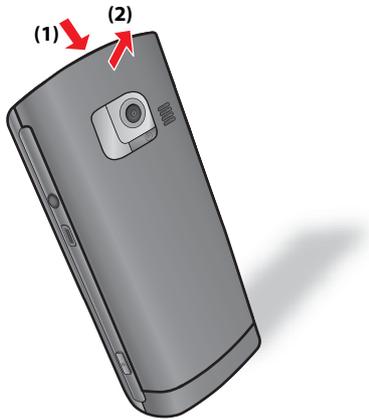

2. Slide the SIM card into the SIM card slot.

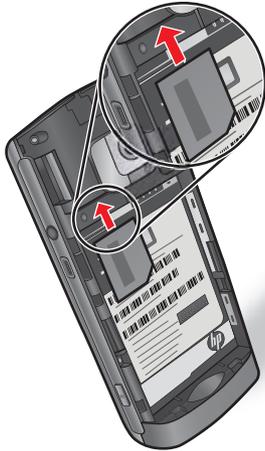

**NOTE:** If the battery is already inserted, remove it before inserting the SIM card. Also, make sure that the metal contacts are facing down and the notched corner is in the correct position. If the SIM card is not properly inserted in the HP iPAQ,  (No SIM card installed icon) will be displayed on the title bar at the top-right corner of the screen after you turn on your HP iPAQ.

The SIM card is provided by a mobile phone service provider.

If your HP iPAQ is SIM-locked, please contact your service provider.

## Step 2: Insert the battery and replace the battery cover

1. Align the battery connectors on the battery with the housing pins in the battery compartment and insert the battery.



2. Replace the battery cover and press at the top and bottom of the cover until it locks into place.



## Step 3: Charge the battery



△ **CAUTION:** To avoid damaging your HP iPAQ or the AC adapter, make sure all the metal connectors are correctly aligned before connecting to the power source.

The battery provides power for your HP iPAQ to operate. Use the AC adapter to charge the battery inside your HP iPAQ.

It takes approximately 2 to 4 hours to fully charge the battery for the first time. Charging might take more time when your HP iPAQ is connected to a powered computer or with non-HP accessories.

To charge the battery:

1. Connect the AC adapter (input: 100-240VAC, 47-63Hz, output: 5VDC, 1A) to an electrical outlet.
2. Connect the other end of the cable to the Micro-USB connector port on your HP iPAQ. The cable connector only fits one way. If the connector does not insert easily, turn it over.

💡 **TIP:** You can also charge the battery by connecting your HP iPAQ to a USB port on your computer through the Micro-USB synchronization cable. The HP iPAQ must be turned on for it to be charged using the USB connection. The LED indicator turns solid red while the battery is charging.

## Step 4: Turn on your HP iPAQ

Press and hold the **Power** key for a few seconds to turn on your HP iPAQ. Follow the instructions on the screen to complete the setup. Use the keyboard to enter information. For more information, see [Keyboard on page 13](#).

---

 **NOTE:** The first time you turn on your HP iPAQ, it will take a few minutes to become fully functional. The keyboard will not be active during this period.

---