



• The Bluetooth connection status at startup

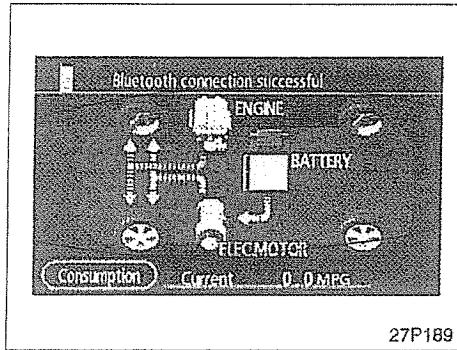


When you turn the "POWER" switch to "ACC" or "IG-ON" and the Bluetooth is automatically connected, the connection check is displayed.

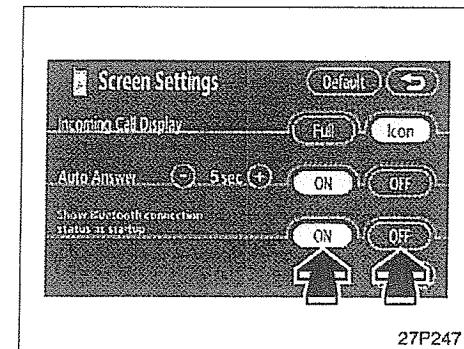

Touch the "ON" or "OFF" switch of Show Bluetooth connection status at startup.


• Initializing the settings
You can initialize the settings.

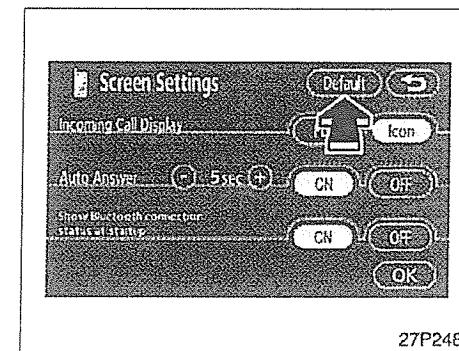


Touch the "Default" switch.

(iv) Setting the phone book


You can register phone numbers in the phone book.

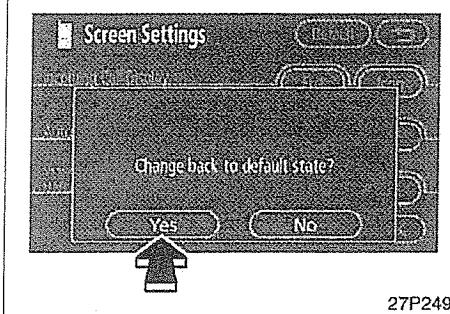

Touch the "Yes" switch.

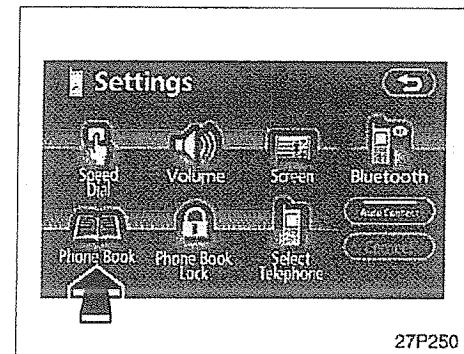

Touch the "Phone Book" to display the "Phone Book Management" screen.

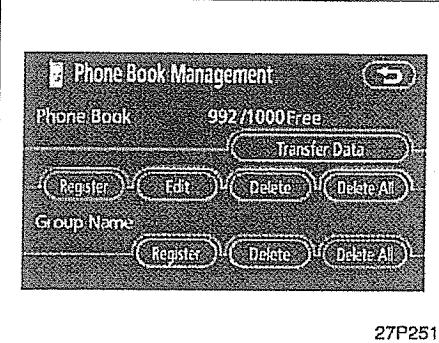


You can do the detailed settings of phone book.

◎ Transferring a telephone number


You can transfer the telephone numbers in your Bluetooth phone to the system. Up to 1000 person's data (up to 2 numbers a person) can be registered in the phone book.

Transfer it while the engine is running.

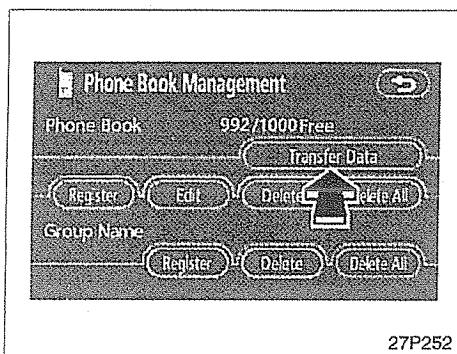


27P252

1. Touch the "Transfer Data" switch to display "Select Group" screen.

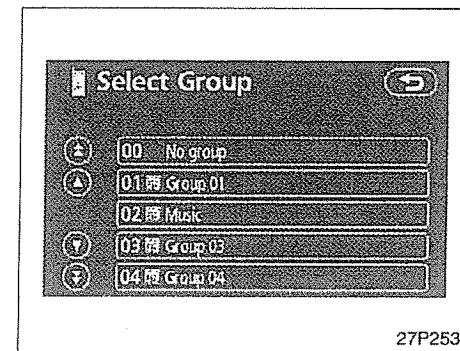


27P253

2. Select the group you want to transfer the data to.

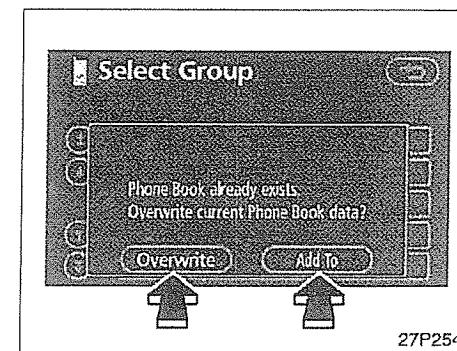


27P254


3. Touch the "Overwrite" or "Add To" switch.

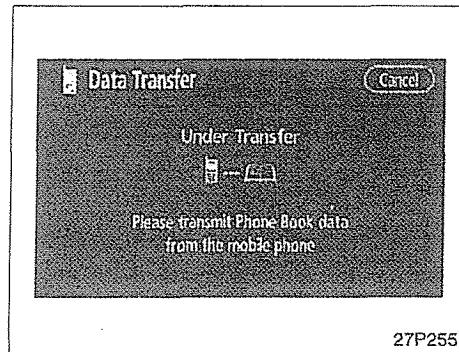

27P255

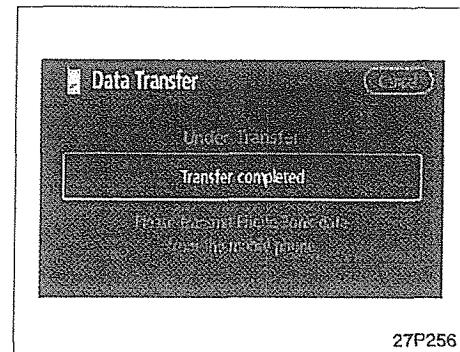

27P256

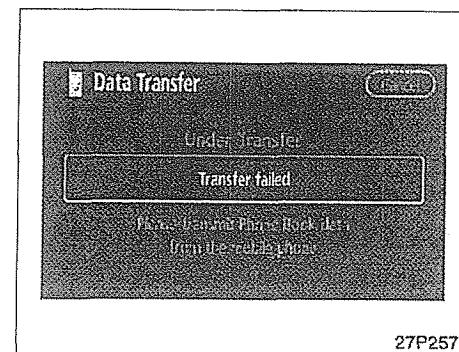

27P257


4. Transfer the phone book data to the system using the Bluetooth phone.

This screen appears while transferring. To cancel it, touch the "Cancel" switch. If the transferring is interrupted on the way, the phone book data transferred until then can be memorized in the system.


5. When this screen is displayed, the transfer is completed.

When this screen is displayed, try the transfer operation again.


◎ Registering the phone book data
You can register the phone book data.

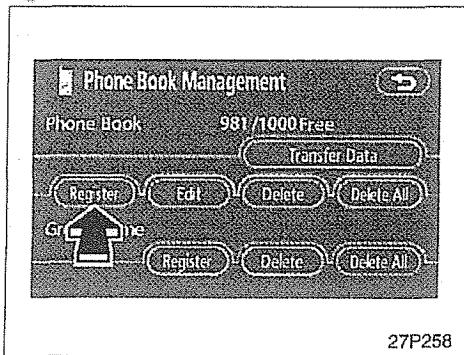

1. Touch the "Register" switch.

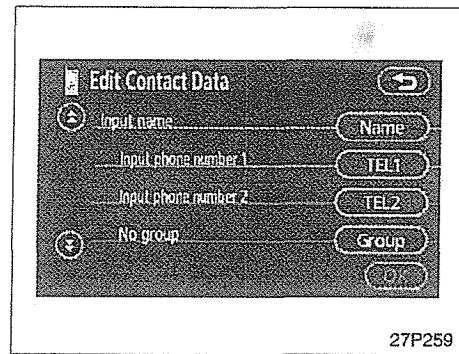


2. Touch the desired switch to edit the phone book.

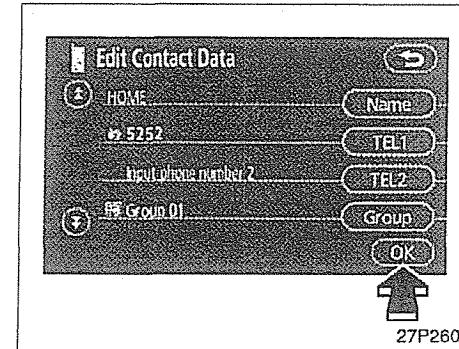


3. When you complete the edit, touch the "OK" switch.

● Editing the name

When you do not input the name, the number is displayed.

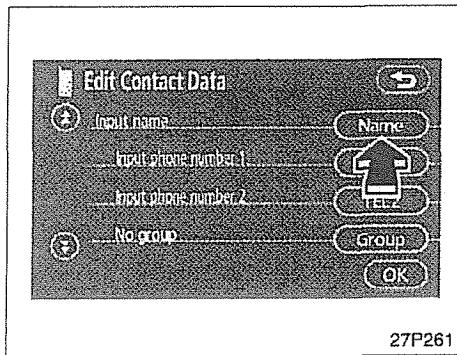


1. Touch the "Name" switch.

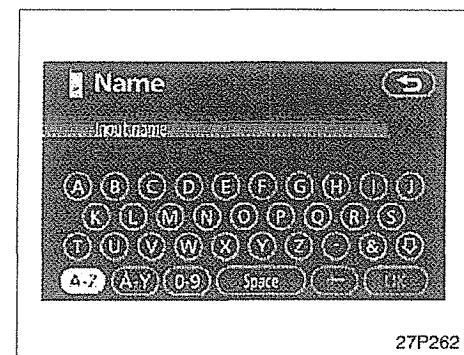


2. Use the software keyboard to input the name.

● Editing the phone number


You can register a phone number in "TEL1" and "TEL 2" separately. Up to 2 numbers a person can be registered.

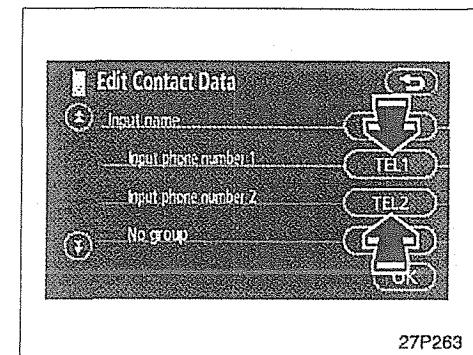

1. Touch the "TEL 1" or "TEL 2" switch.

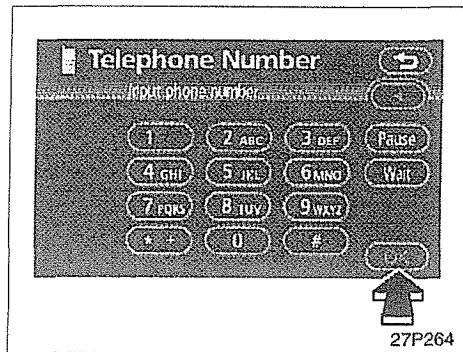

2. Input the number and touch "OK".

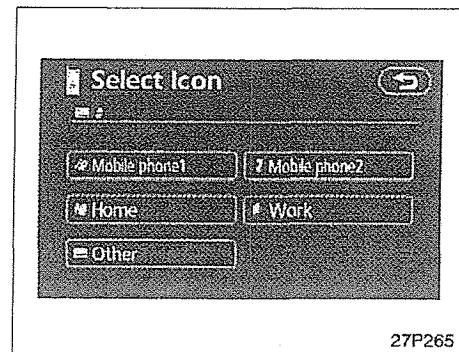


3. Select the desired icon.

● Selecting the group


You can set a group for a contact (for example: "Family", "Friends", "Office"...). It will then be easier for you to find this contact when needed, by using the group display.

You can select "No group" or "Group 01" to "Group 19".

"No group" is displayed if you do not set the group.

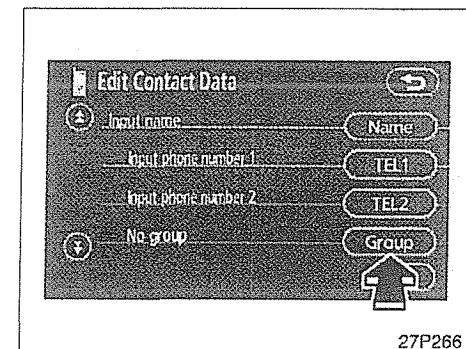


1. Touch the "Group" switch.

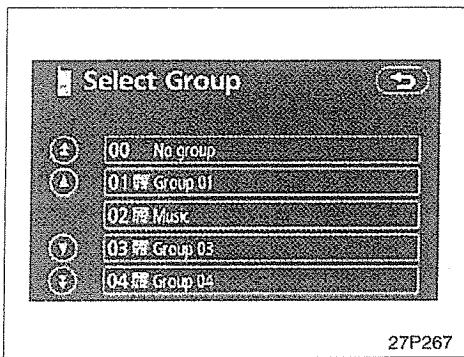


2. Select the desired group.


• Setting the voice recognition
You can set the voice recognition. Up to 20 numbers can be registered for the voice recognition.

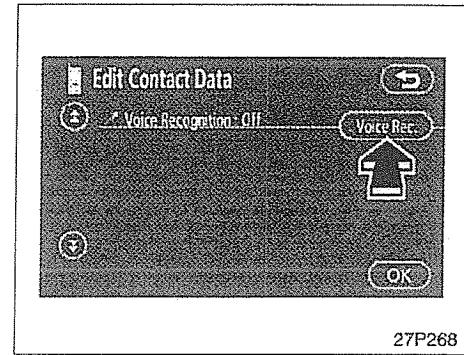

1. Touch the "Voice Rec." switch.

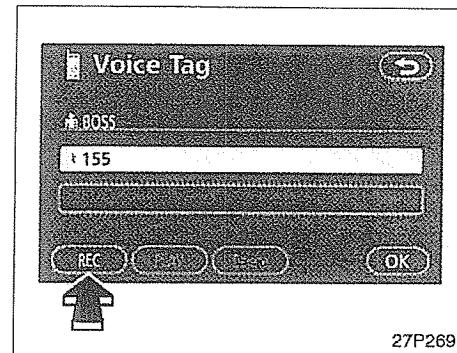

2. Select the phone number and touch the "REC" switch to record a voice-tag.

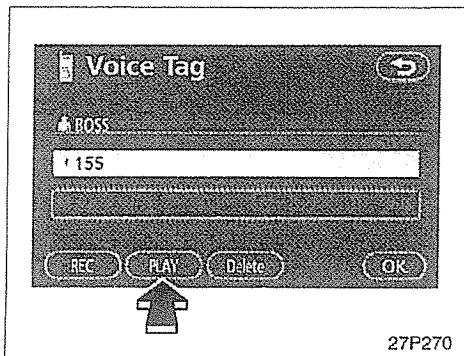


27P270

3. Touch the "PLAY" switch to play the voicetag.


If you want to delete it, touch the "Delete" switch and "OK".

● Adding data to the phone book
You can add data to the phone book.

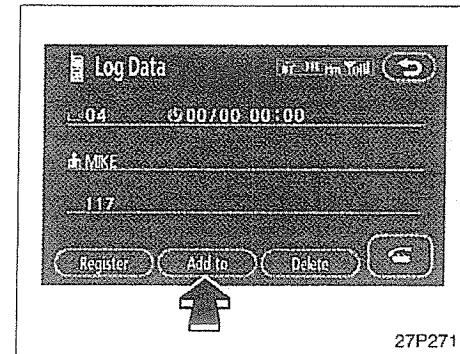


27P271

1. Touch the "Add to" switch.

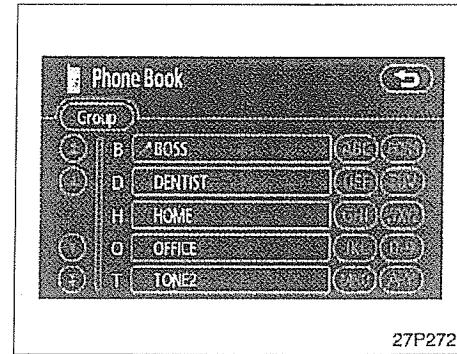


27P272

2. Select the data you want to add log data to.

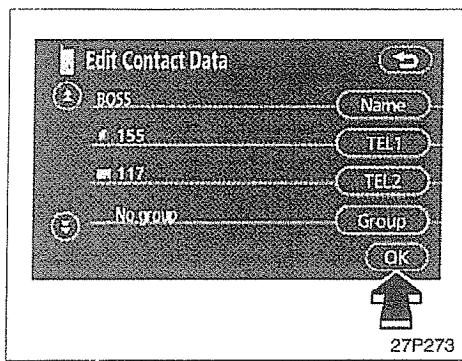


3. Confirm the added data on the screen and touch "OK".

● Editing the data
You can edit the registered data.

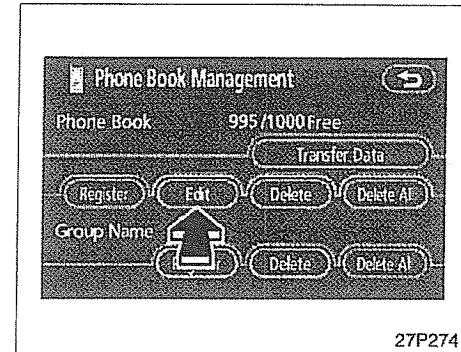


27P274

1. Touch the "Edit" switch.

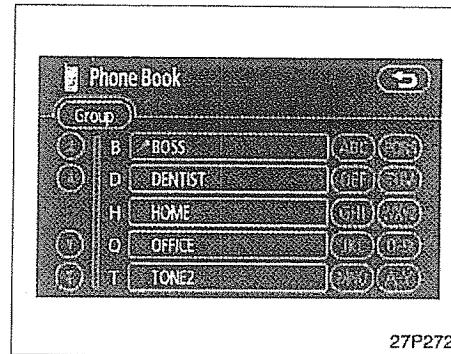


27P272

2. Select the data you want to edit.

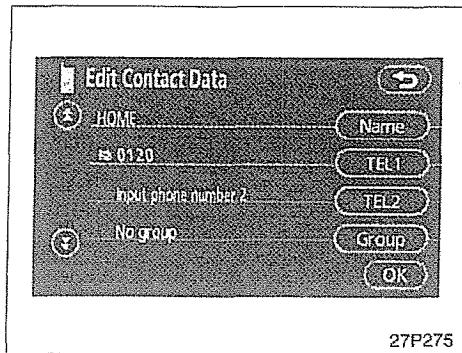

3. Touch the desired switch.

When you edit the data, touch "OK".

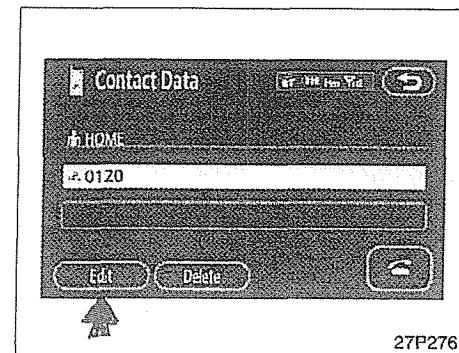


When you also touch the "Edit" switch on this screen, you can edit it.


• Deleting the data

You can delete the data.


When you release your vehicle, delete all your data on the system.

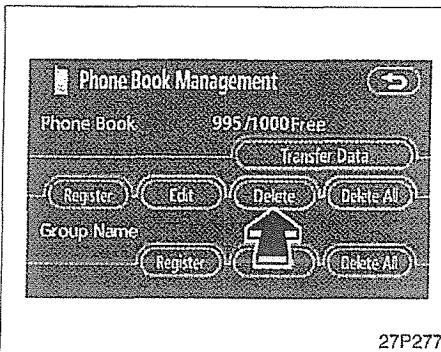

1. Touch the "Delete" switch of "Phone Book".

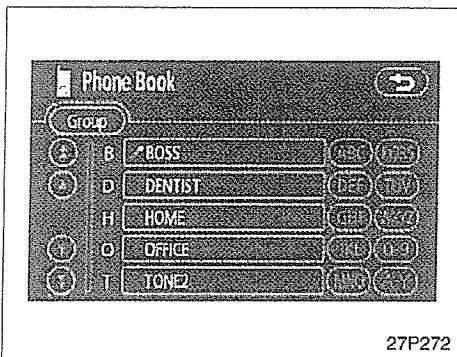


27P272

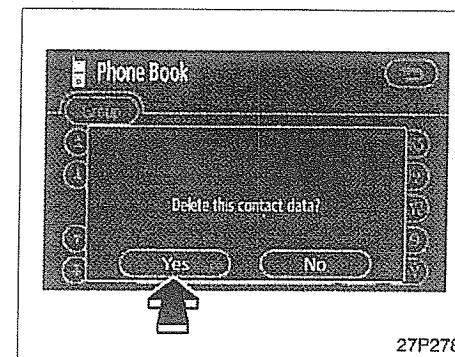

27P278

You can also delete it in the following way.

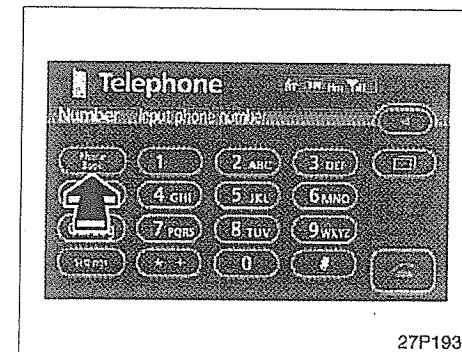


27P193


2. Touch the desired switch.

3. Touch the "Yes" switch.


1. Touch the "Phone Book" switch.

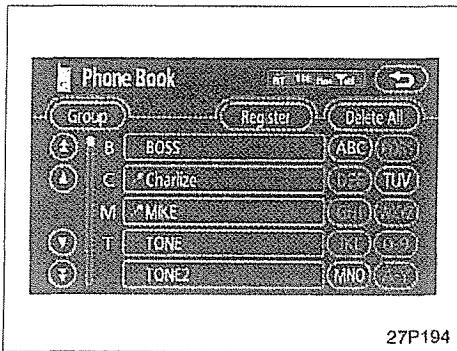

2. Select the desired data.

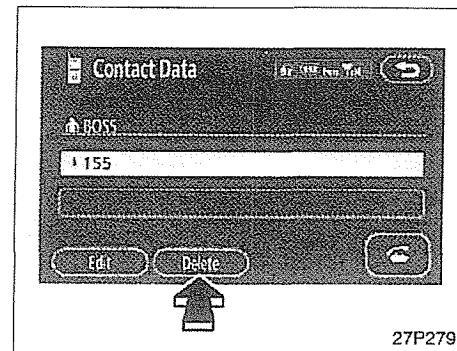


3. Touch the "Delete" switch.

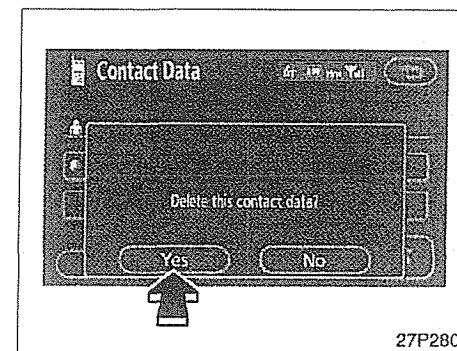


4. Touch the "Yes" switch.

④ Deleting all the phone data

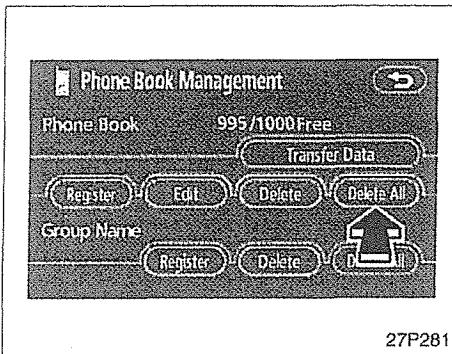

1. Touch the "Delete All" switch of "Phone book".

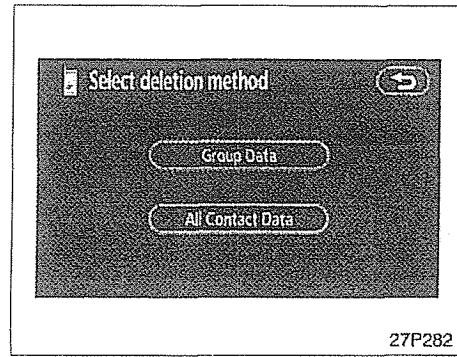


2. Select the deleting method.


Group Data deleting all the phone data in group

All Contact Data .. deleting all the phone data

3. When you select "Group Data", the "Select Group" screen is displayed.

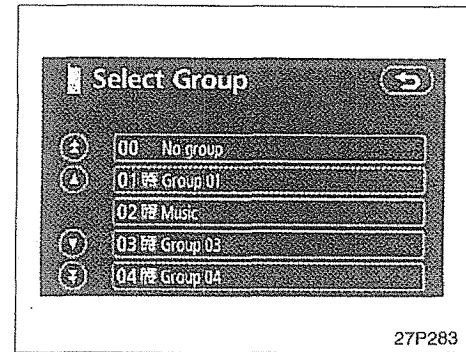


4. Select the desired group.

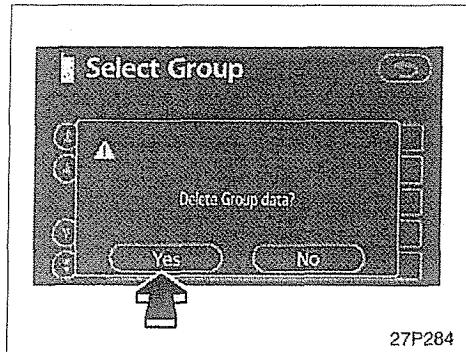

27P284


5. Touch the "Yes" switch.

You can also delete it in the following way.

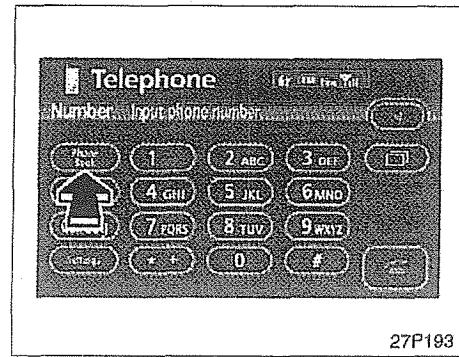


27P193

1. Touch the "Phone Book" switch.

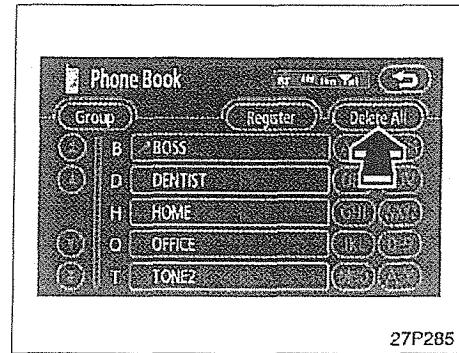

27P285

2. Touch the "Delete All" switch.

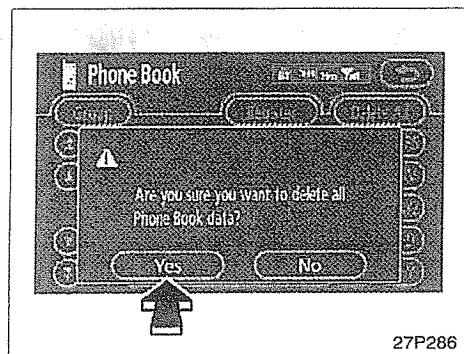


3. Touch the "Yes" switch.


● Registering a group name

You can register 20 groups. "No Group", "Group 01" - "Group 19" are registered by default.

You can change "Group 01" - "Group 19" into desired names.

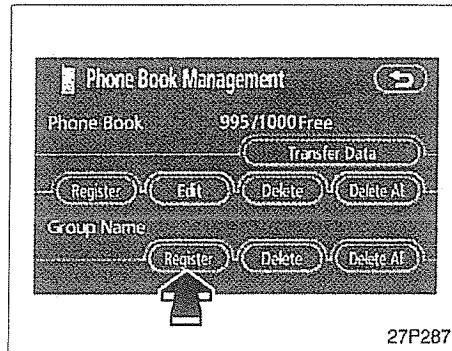

1. Touch the "Register" switch of "Group name".

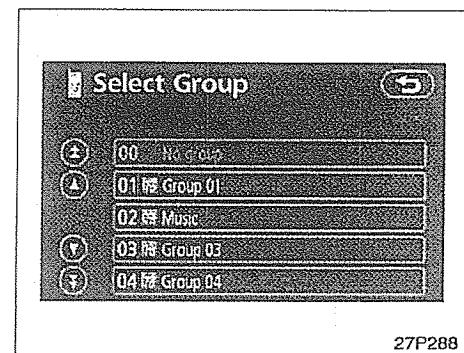

2. Select the group you want to register.