



Attachment D – Ferrite Locations


Evolve E10 2.0 ANT RF, Master

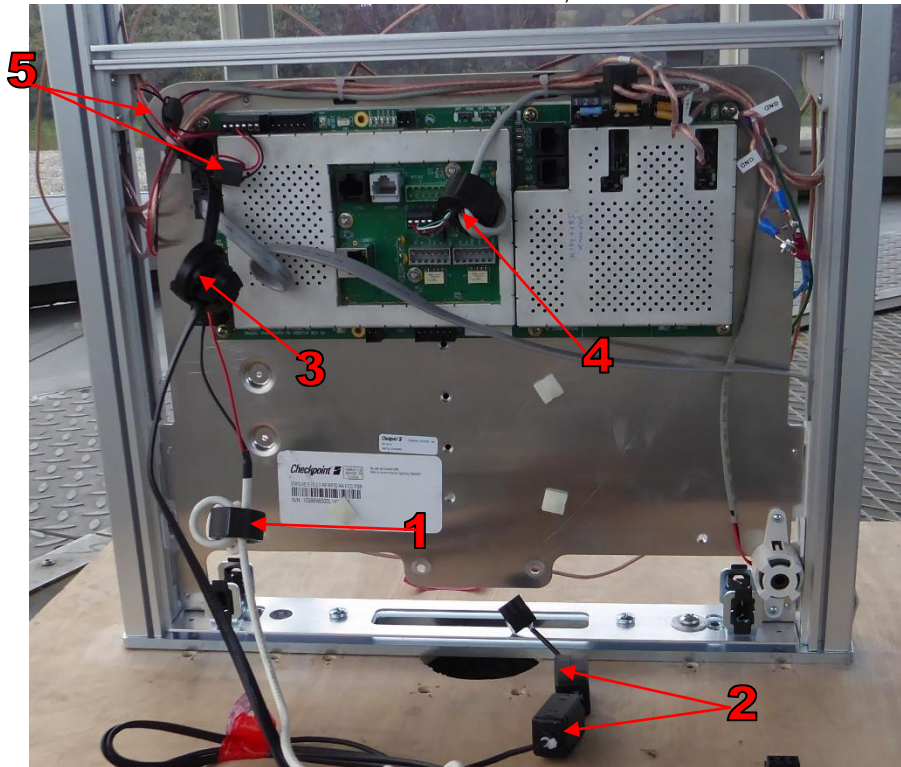


Evolve E10 2.0 ANT RF, Submaster

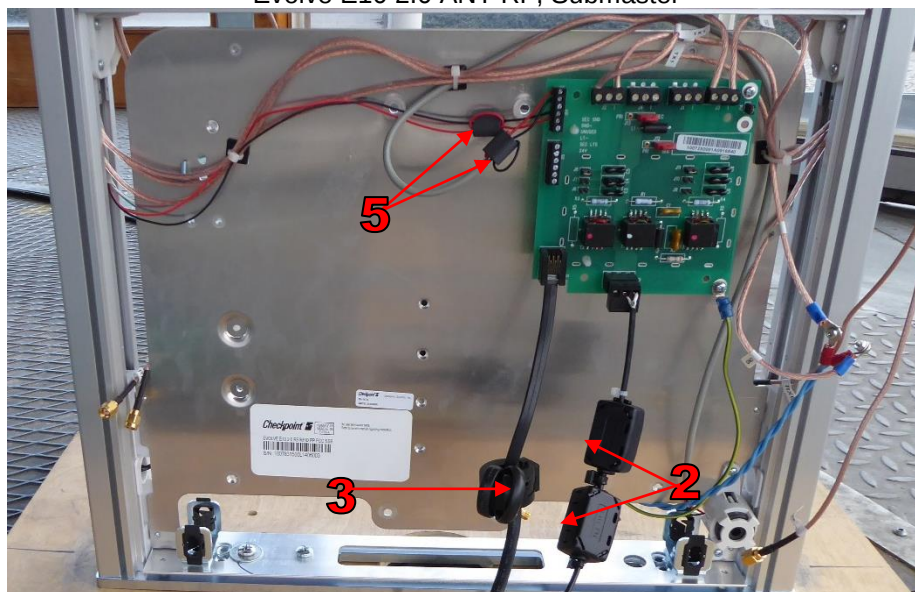

Evolve E10 2.0 ANT RF w/RFID upgrade kit – Master

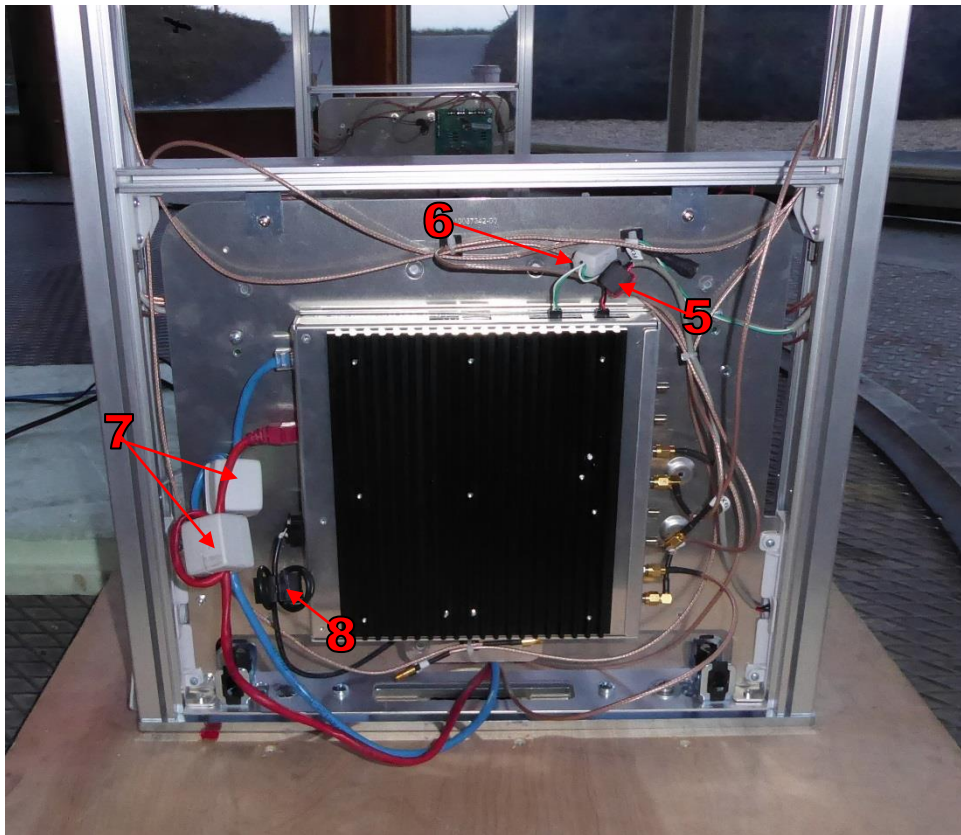


Evolve E10 2.0 ANT RF w/RFID upgrade kit - Master

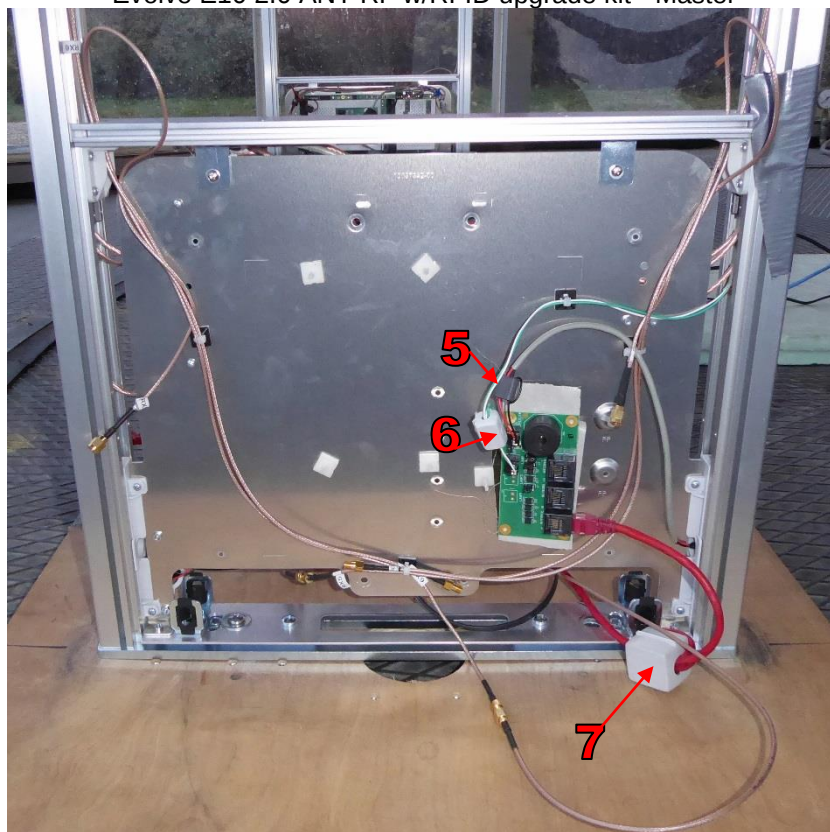


Ferrite Locations – E10 2.0 ANT RF & E10 2.0 ANT RF w/RFID upgrade kit:

1. Fair Rite P/N 0443806406 (Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the 24V DC cable.
2. Wurth P/N 742711111 (Order No 7784420) or JSF L45 NUS15/28.5Y-GK-XTP – Add two ferrites on the Coax cable.
3. Fair Rite P/N 0443806406 (Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the inter pedestal Lights and Sounder cable.
4. Fair Rite P/N 0443806406 (CKP Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the VisiPlus cable.
5. Fair Rite P/N 2861-000-202 (Order No 7221412) – Add one binocular core with 1 turn through the core on the Lights cable, Sounder cable, and RFID Key Switch cable.
6. Wurth P/N 7427114 (Order No 10058880) or Kitagawa P/N GRFC-4 – Add one ferrite with 1 turn through the ferrite on the RFID Lights cable.
7. Wurth P/N 7422122 (Order No 7288828) or Kitagawa P/N SFC-10 or Kitagawa P/N GRFC-10 – Add one ferrite with 1 turns through the ferrite on the RFID Ethernet cable, RFID Interped IN cable, and RFID Interped OUT cable.
8. Fair Rite P/N 0443806406 (CKP Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the 12V DC cable.

EVOLVE G10 iRange - Master

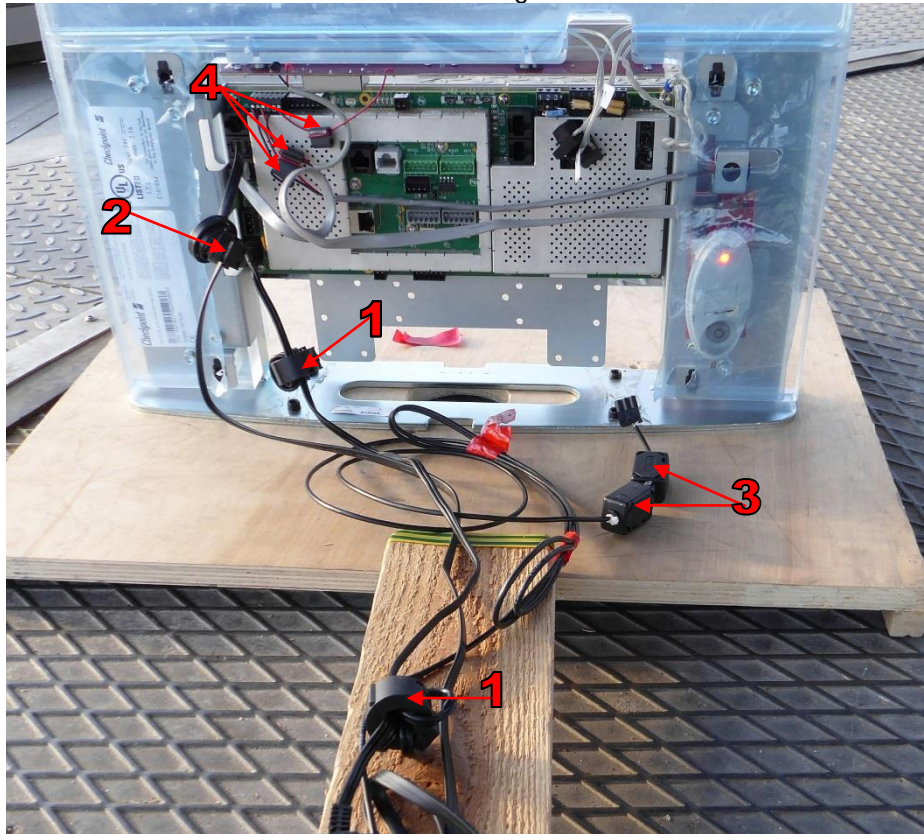


EVOLVE G10 iRange - Submaster

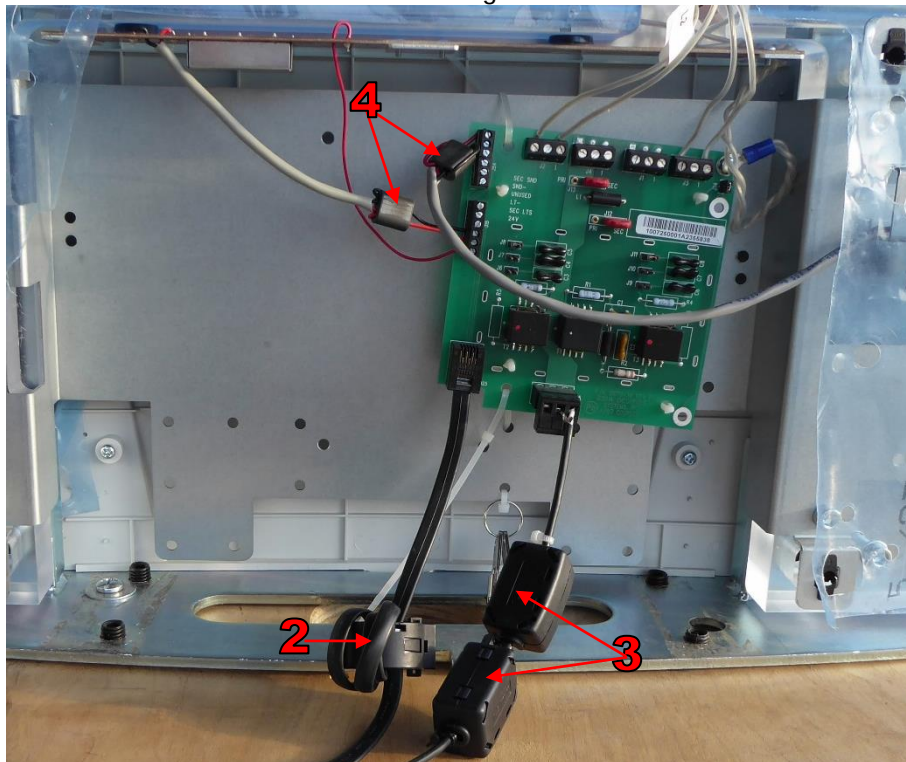

Ferrite Locations – G10 iRange:

1. Fair Rite P/N 0443806406 (Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the 24V DC cable.
2. Fair Rite P/N 0443806406 (Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the inter pedestal Lights and Sounder cable.
3. Wurth P/N 742711111 (Order No 7784420) or JSF L45 NUS15/28.5Y-GK-XTP – Add two ferrites on the Coax cable.
4. Fair Rite P/N 2861-000-202 (Order No 7221412) – Add one binocular core with 1 turn through the core on the Lights cable and Sounder cable.


Evolve iRange Remote Electronic Controller:

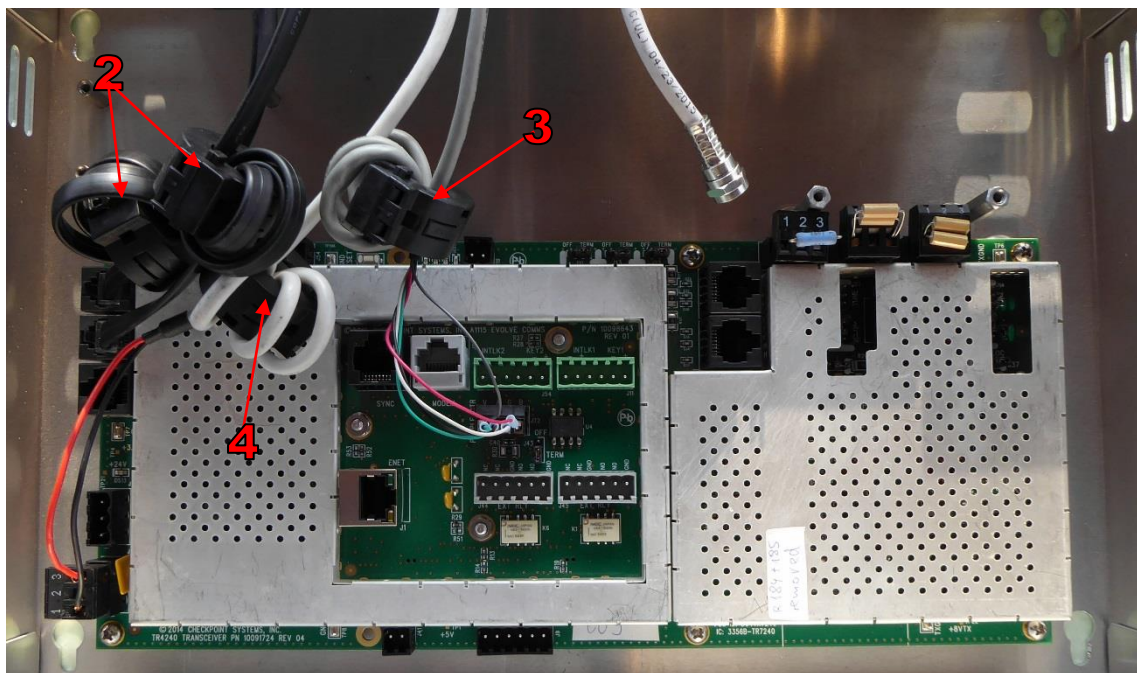


Ferrite Locations – EVOLVE G30:

1. Wurth P/N 742711111 (Order No 7784420) or JSF L45 NUS15/28.5Y-GK-XTP – Add one ferrite on the Coax cable.
2. Fair Rite P/N 0443806406 (Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the inter pedestal Lights and Sounder cable.
3. Fair Rite P/N 0443806406 (Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the VisiPlus cable.
4. Fair Rite P/N 0443806406 (Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the 24V DC cable.

EVOLVE G35 iRange – Master

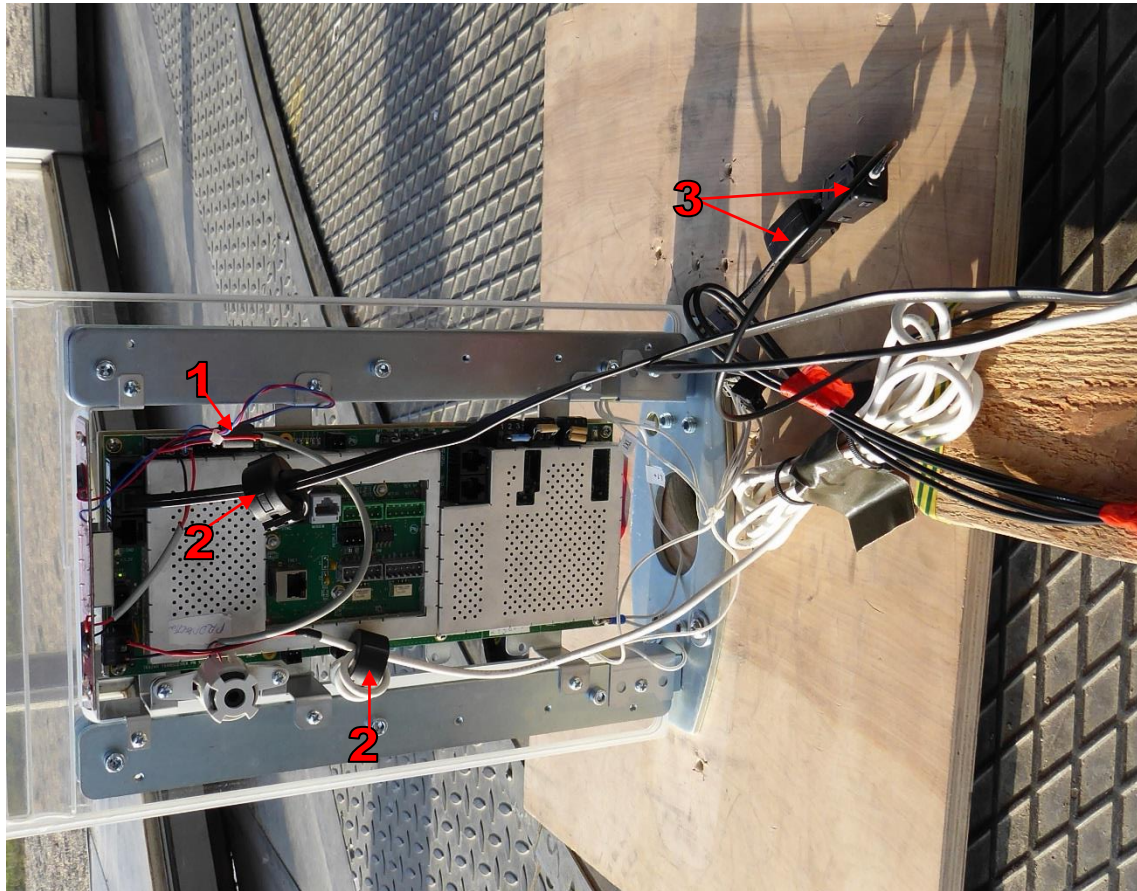


EVOLVE G35 iRange – Submaster

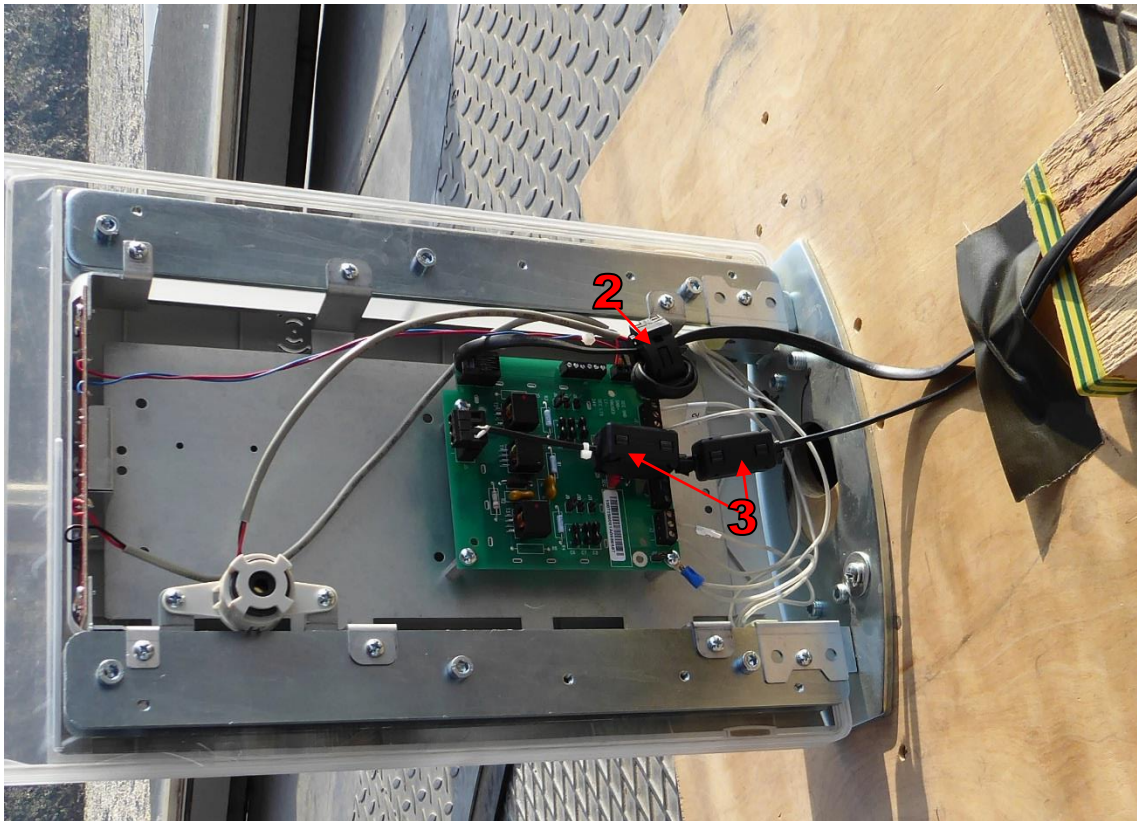

Ferrite Locations – EVOLVE G35 iRange:

1. Fair Rite P/N 2861-000-202 (Order No 7221412) – Add one binocular core with 1 turn through the core on the Lights cable and Sounder cable.
2. Fair Rite P/N 0443806406 (Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the inter pedestal Lights and Sounder cable and 24 V DC cable.
3. Wurth P/N 742711111 (Order No 7784420) or JSF L45 NUS15/28.5Y-GK-XTP – Add two ferrites on the Coax cable.


Evolve P10 iRange, Master
and Evolve P10 iRange w/RFID upgrade kit

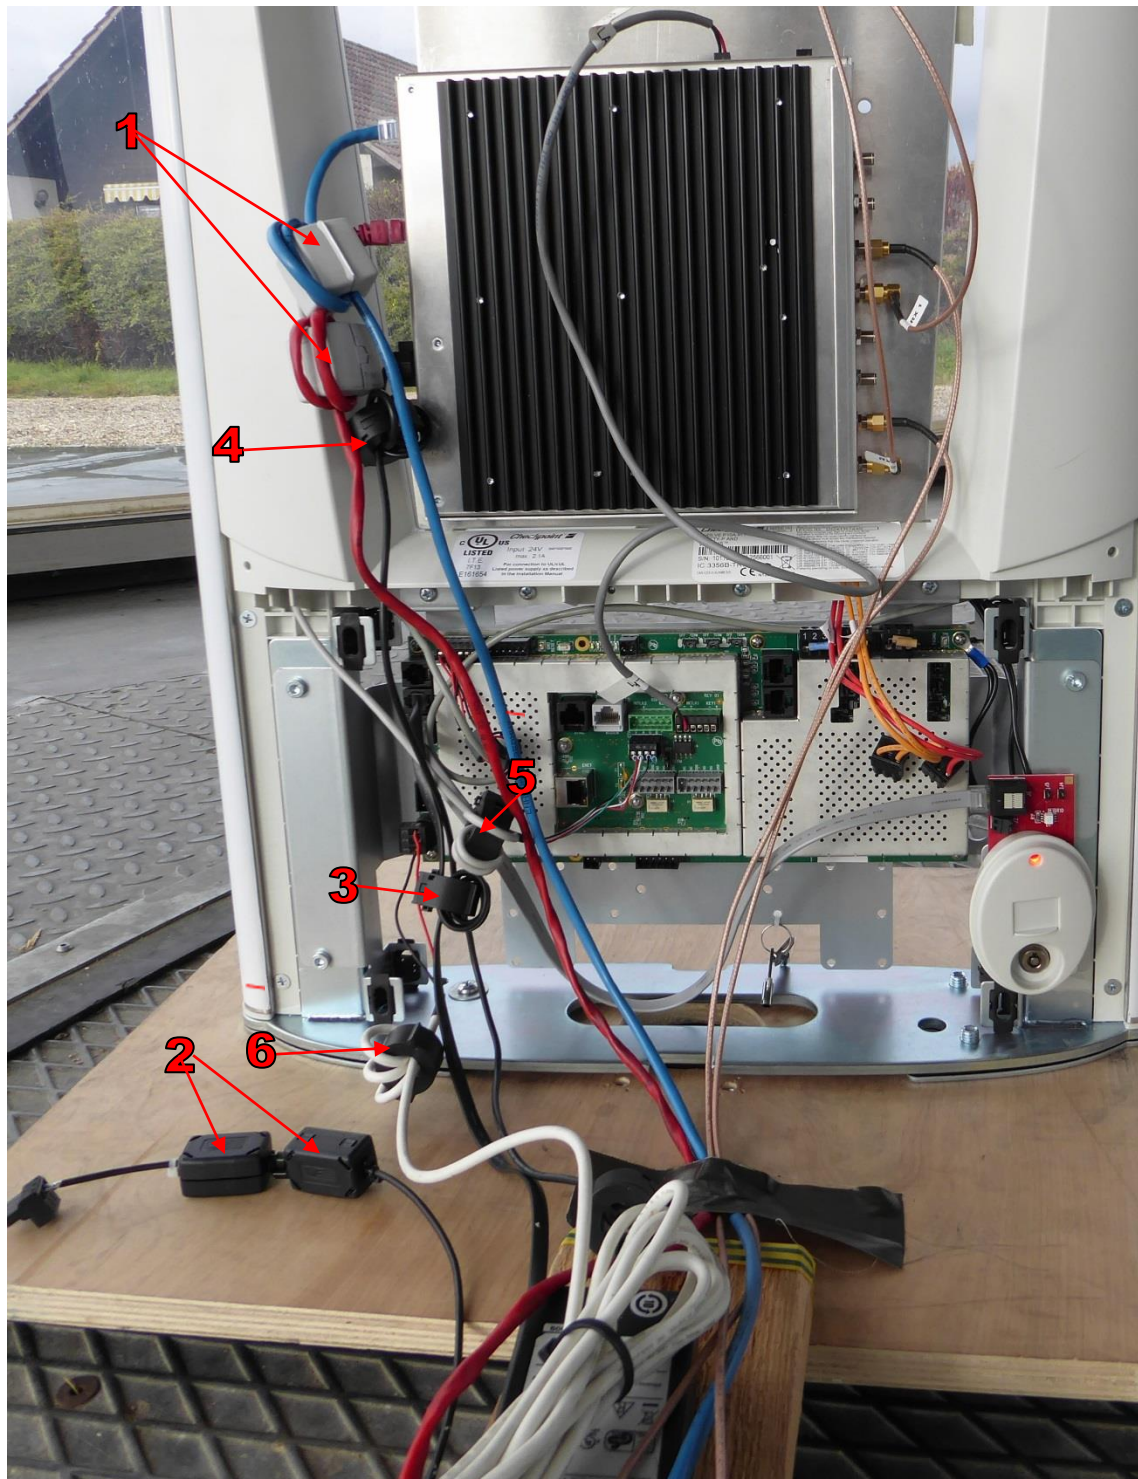


Ferrite Locations – P10 iRange & P10 iRange w/RFID upgrade kit:

1. Wurth P/N 7422122 (Order No 7288828) or Kitagawa P/N SFC-10 or Kitagawa P/N GRFC-10 – Add one ferrite with 1 turns through the ferrite on the RFID Ethernet cable, RFID Interped IN cable, and RFID Interped OUT cable.
2. Wurth P/N 742711111 (Order No 7784420) or JSF L45 NUS15/28.5Y-GK-XTP – Add two ferrites on the Coax cable.
3. Fair Rite P/N 0443806406 (Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the inter pedestal Lights and Sounder cable.
4. Fair Rite P/N 0443806406 (CKP Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the 12V DC cable.
5. Fair Rite P/N 0443806406 (Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the VisiPlus cable.
6. Fair Rite P/N 0443806406 (CKP Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the 24V DC cable.
7. Fair Rite P/N 2861-000-202 (Order No 7221412) – Add one binocular core with 1 turn through the core on the Lights cable and Sounder cable.


GlobTek power supply (Evolve electronic):

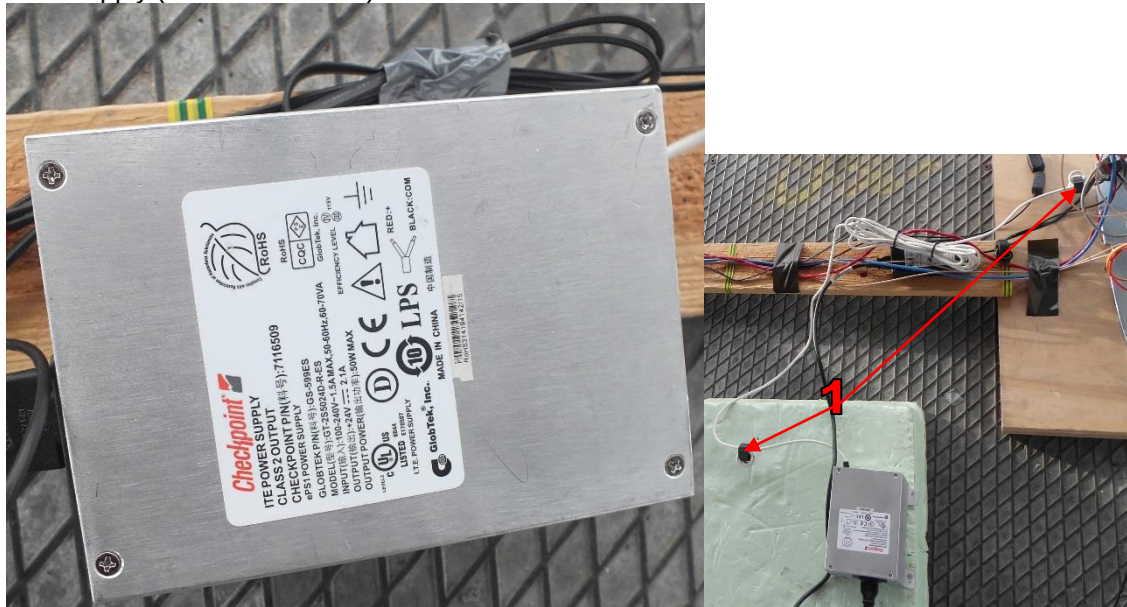

EOS power supply (Evolve electronic):

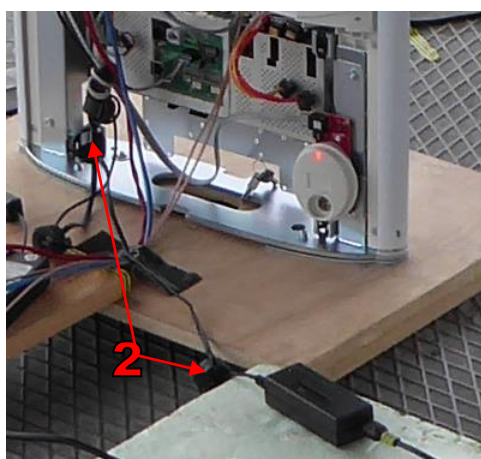

XP Power supply (RFID upgrade kit):

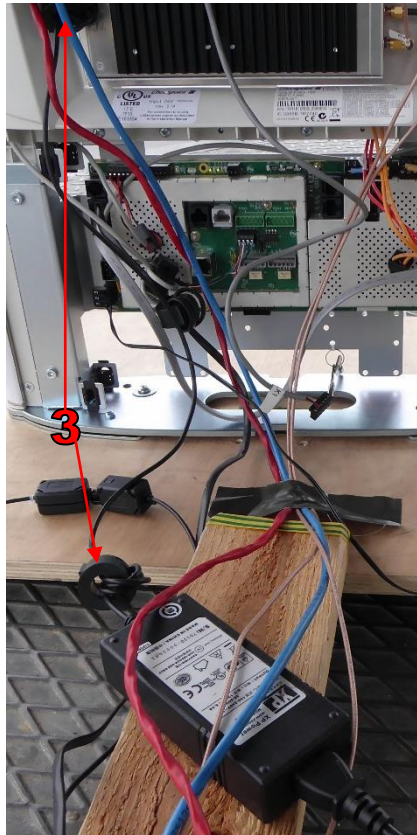

Ferrite Locations – Power supplies:

1. Fair Rite P/N 0443806406 (CKP Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the 24V DC cable.
2. Fair Rite P/N 0443806406 (CKP Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the 24V DC cable.
3. Fair Rite P/N 0443806406 (CKP Order No 7284760) or Delevan P/N BF3121 or IM-Lec TFC-25-15-12 or JSF L45 FRC25/15/12-XTP or Wurth 7427154/S – Add one ferrite with 3 turns through the ferrite on the 12V DC cable.