

Troubleshooting

Unit doesn't respond

- Make sure unit is completely charged.
- Check that all charging connections are correct and properly plugged in when charging.
- Make sure your device is properly paired with the iBT682.
- Make sure the unit is on.

Unit doesn't respond (locked up/ "frozen")

If the unit does not respond, try resetting the unit. Press and hold the **Bluetooth Button** for about 10 seconds. Note that doing so will clear settings, and any Bluetooth devices will need to be re-paired.

Trouble pairing device with iBT682

Bluetooth implementation varies depending on your device's hardware and operating system. Please see our website for updates on pairing.

- When you power ON the speaker, it will automatically link with the last previously paired Bluetooth device if the device is still within range (about 33 feet).
- If your device does not auto-link when within range, you may need to re-connect the device in your Bluetooth menu.
- Make sure your device is working properly. Check your device's manual for details on Bluetooth pairing and linking.

For further information and to see the latest instructions, visit www.ihome.com/support

Limited 1 Year Warranty
Please visit www.ihome.com for warranty terms

© 2016 SDI Technologies, Inc. All rights reserved.
Questions? Visit www.ihome.com
or call 1-800-288-2792 Toll Free

iBT682-3092016A [EN]

Printed in China

iHome



Model: iBT682
True Wireless Stereo
Color Changing
Rechargeable
Bluetooth Speakers
with Speakerphone



CHARGE
BEFORE
USE

instruction manual

Questions? Visit www.ihome.com or call 1-800-288-2792 Toll Free



Consumer Product Safety Guide IMPORTANT SAFETY INSTRUCTIONS

When used in the directed manner, this unit has been designed and manufactured to ensure personal safety. However, improper use can result in potential electrical shock or fire hazards. Please read all safety and operating instructions carefully before installation and use, and keep these instructions handy for future reference. Take special note of all warnings listed in these instructions and on the unit.

1. **Water and Moisture** – DO NOT use near water. Keep away from wash basins, showers, sinks, etc.
2. **Ventilation** – The unit should be situated so that its location or position does not interfere with its proper ventilation. For example, it should not be situated on a bed, sofa, rug or similar surface that may block ventilation openings.
3. **Heat** – The unit should be situated away from heat sources such as radiators, heat registers, stoves or other appliances (including amplifiers) that produce heat.
4. **Power Sources** – The unit should be connected to a power supply only of the type described in the operating instructions or as marked on the appliance.
5. **Cleaning** – The unit should be cleaned only using a warm damp cloth. Do not use solvents, etc.
6. **Objects and Liquid Entry** – Care should be taken so that objects do not fall and liquids are not spilled into any openings or vents located on the product.
7. **Attachments** – Do not use attachments not recommended by the product manufacturer.
8. **Lightning and Power Surge Protection** – Unplug the unit from the wall socket and disconnect the antenna or cable system during a lightning storm or when it is left unattended and unused for long periods of time. This will prevent damage to the product due to lightning and power-line surges.
9. **Overloading** – Do not overload wall sockets, extension cords, or integral convenience receptacles as this can result in a risk of fire or electric shock.
10. **Damage Requiring Service** – The unit should be serviced by qualified service personnel when:
 - A. the power supply cable or plug has been damaged.
 - B. objects have fallen into or liquid has been spilled into the enclosure.
 - C. the unit has been exposed to rain.
 - D. the unit has been dropped or the enclosure damaged.
 - E. the unit exhibits a marked change in performance or does not operate normally.
12. **Periods of Non-use** – If the unit is to be left unused for an extended period of time, such as a month or longer, fully charge the unit before storing.
13. **Servicing** – The user should not attempt to service the unit beyond those methods described in the user's operating instructions. Service methods not covered in the operating instructions should be referred to qualified service personnel.

Questions? Visit www.ihome.com
or call 1-800-288-2792 Toll Free

Internal Rechargeable Lithium-ion Battery

This device uses an internal rechargeable lithium-ion battery that should last the lifetime of the device. If you suspect your battery may be dead, try charging it several times. If the battery does not recharge, please contact Customer Service at 1-800-288-2792.

WARNING/DISPOSAL OF UNIT

Please do NOT attempt to change the battery yourself. Doing so may damage the unit and will void your warranty.

- Never dispose of used batteries/electronics with ordinary solid wastes, since they contain toxic substances.
- Always dispose of used batteries/electronics in accordance with the prevailing community regulations that apply to the disposal of batteries/electronics. If there are no local regulations concerning battery/electronics disposal, please dispose of the device in a waste bin for electronic devices.
- Many electronics retailers now recycle batteries and other electronic components at no charge. Check to see which ones in your area do so.

CAUTION

The battery used in this device may present a risk of fire, explosion or chemical burn if mistreated

- Never use or charge the battery if it appears to be leaking, discolored, deformed, or in any way abnormal.
- Never disassemble the unit or attempt to remove battery as that could cause leakage of alkaline solution or other electrolytic substance.
- Always confirm that the temperature is 5°C – 35°C (41° – 95° Fahrenheit) before you charge the battery. Leakage or deterioration of the battery may occur if this warning is not heeded.
- Never expose the battery to any liquid.
- Never expose the battery to excessive heat such as direct sunlight or fire. Never use the battery pack in an unventilated vehicle where excessive internal temperatures may be encountered.
- Always keep the battery out of the reach of infants and small children.

FCC Information

FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

This device complies with Part 15 of the FCC Rules, operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAN ICES-3 (B)/NMB-3(B)

IC Statement

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité à l'exposition de RSS-102 rf, utilisateurs peuvent obtenir l'information canadienne sur l'exposition et la conformité de rf.

3/09/2016

Introduction

iBT682


Thank you for purchasing the iHome iBT682. This product is designed to provide True Wireless stereo sound for your Bluetooth audio device. Each speaker can also be used separately. This instruction booklet explains the basic operation and care of the unit. Please read them carefully and keep for future reference.

Maintenance


- Place the unit on a level surface away from sources of direct sunlight or excessive heat.
- Protect your furniture when placing your unit on a natural wood and lacquered finish. A cloth or other protective material should be placed between it and the furniture.
- Clean your unit with a soft cloth moistened only with mild soap and water. Stronger cleaning agents, such as thinner or similar materials can damage the surface of the unit.

What's Included

- 2 x iBT682 speakers
- 2x USB charging cables

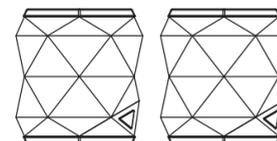


iBT682 speakers



USB charging cables


Meet Your iBT682

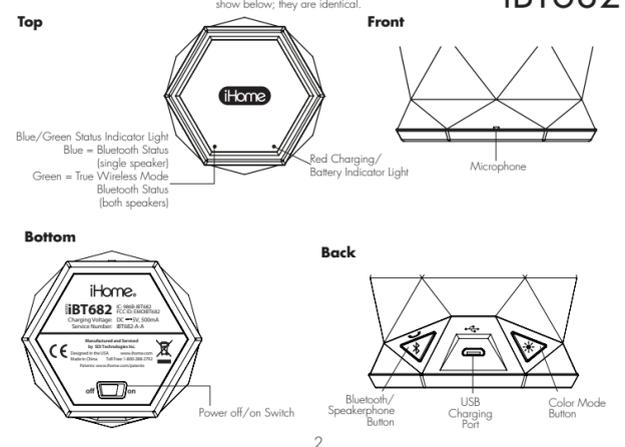

Getting Started: Charging the Speakers

CHARGE EACH SPEAKER BEFORE USE/KEEP SPEAKERS OFF FOR FASTER CHARGING

1. Connect the micro USB plug on the included USB cable to the USB Charging Port on the back of the speaker.
 2. Connect the standard USB plug end of the cable to a powered USB port on a computer, a USB AC adaptor or other USB charging device. For first time use, charge each speaker for about 4 hours. The red charge status indicator LED on top of the speaker glows while speaker is charging.
- Note: When unit is ON and not charging, the LED flashing red to indicates low battery (speaker needs charging).

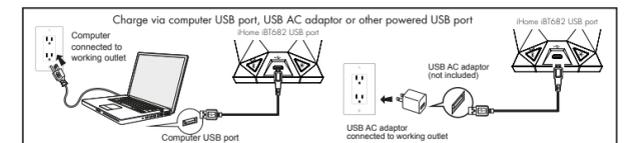

TIP: On some iOS (Apple) devices, you can view the iBT682 battery status on your device's screen. When device is paired and connected, look for a vertical battery icon next to the Bluetooth icon on the upper right corner of the device's screen.

Getting Started: First Time Use True Wireless Stereo

Using the iBT682

Each of your iBT682 speakers are pre-synced to one another for True Wireless stereo operation. This sync is permanent (neither speaker can be synced with a different or third speaker). True Wireless link range is about 5 meters (about 16 feet). If one of the speakers is moved out of True Wireless range, the stereo link between the two speakers will fail.



Left Speaker Right Speaker
Power ON both speakers within 10 seconds for True Wireless

Slide the **Power Off/On Switch** located on the bottom of each speaker to ON to turn it on and start True Wireless link. Tones will sound and each speaker will flash green while attempting to establish a link. The indicator on the top of each speaker will glow green when the True Wireless stereo link is successful and an audio prompt will identify each speaker as **left channel** or **right channel**. After successful True Wireless linking, the speakers will enter Bluetooth pairing mode (see below). After first time power on, user must pair manually (see page 5).

NOTE: Once speakers are linked, powering OFF one speaker will also turn the other speaker off. To turn that speaker back on, move the **Power Off/On Switch** to OFF then back to ON.

Bluetooth: Pairing Your Device the First Time Using the iBT682

Pairing is the set-up process to introduce your Bluetooth-capable device to the iBT682. Once your device is paired, the speakers can recognize it and you can play your audio through them. Turn on your Bluetooth device and make it "discoverable" by turning on Bluetooth mode (check in Options or Settings).

- The first time both speakers are turned on, after establishing the True Wireless link, the speakers will enter auto-pairing mode and attempt to connect to a Bluetooth device. The status indicator light on the top of each speaker will flash quickly and the left speaker will flash blue.
- "iHome iBT682" should appear in your device's Bluetooth menu. Select "iHome iBT682" to connect it. If prompted for a passcode, enter "1234" on your device's keypad.



If pairing is successful, 1 beep will sound and the status indicator light will appear solid on each speaker, indicating the iBT682 is ready to play music. There should also be an indication on your device. If no device is successfully paired within 3 minutes the iBT682 will default to standby mode. Once the iBT682 is paired to a device, it will attempt to autolink when the device is within Bluetooth range (about 33 feet).

Manual Pairing

1. Slide the **Power Off/On Switch** on each speaker to ON. True Wireless linking should take about 10 seconds.
2. Press and hold the **Bluetooth Button** (located on the back) on the left speaker for 2 seconds.
3. Select "iHome iBT682" on your device's Bluetooth menu to complete pairing.

Pairing with a Single iBT682 Speaker (Mono Operation)

To use a single speaker, just turn one on instead of both. To use both speakers separately, place each outside of True Wireless range (about 16 feet) then turn on and pair each speaker separately with a different device. When separately paired speakers are returned to within True Wireless range, each will maintain separate pairing unless one is powered off then powered back on, in which case it will attempt True Wireless linking.

Playing Audio Via Bluetooth

1. Slide the **Power Off/On Switch** on BOTH speakers to ON within 10 seconds. Following True Wireless linking the Bluetooth status indicator will glow solid blue when a linked device is in range and detected. You can then listen to audio streamed wirelessly from your paired Bluetooth device.
2. Use controls on your Bluetooth device to adjust volume and to play, pause and navigate tracks.
3. When done listening, slide the **Power Off/On Switch** to OFF on both speakers.

Speakerphone Operation

NOTE: In True Wireless mode, speakerphone function is only on the LEFT speaker. Speaker must be powered on and linked to a Bluetooth phone to receive a call.

1. When a call is received, playing music is muted to hear the ring tone and the left cabinet flashes green. Press the **Bluetooth/Speakerphone Button** to answer the call.
2. When a call is completed, press the **Bluetooth/Speakerphone Button** to end the call and resume previous function.

Using Color Modes

There are five color modes, which you cycle through in this order:

- a. Slow Fade (colors slowly fade from one into the next)
 - b. Fast Change (colors change rapidly)
 - c. One Color (select a favorite color)
 - d. Pulse to Music (lights flash to the beat of the music)
 - e. Off (no display)
1. Slide the **Power Off/On Switch** to ON to turn the unit ON.
 2. Press the **Color Mode Button** repeatedly on either speaker to cycle to the desired color mode. For One Color mode, first cycle to Fast Change mode then press the **Color Mode Button** when the desired color appears. For Pulse to Music, make sure the volume on your connected Bluetooth device is above 50%.
 3. When done, slide the **Power Off/On Switch** to OFF to turn the unit OFF.