

Getting Started

1

INSTALL AND CHARGE THE BATTERY

Hold the pdQ™ smartphone so the keypad faces away from you. Put the base of the battery into the battery slot. Rotate the top of the battery until it clicks into place.

Plug pdQ's HotSync® cradle into a wall socket. Slide the pdQ smartphone into its cradle over the data connectors until you hear a snap and the light on the cradle is illuminated. The light on the cradle changes to green when the battery is fully charged.

 Once you've entered information into the pdQ smartphone, always synchronize the phone with your computer before removing the pdQ smartphone's battery. Always reinsert the battery within two minutes to ensure your information remains safe.

 To save battery power, turn off the phone when you are not using it. You can use organizer features when the phone is turned off.

2

ALIGN pdQ SMARTPHONE'S SCREEN AND SET THE TIME AND DATE
Open the keypad to display the pdQ smartphone's entire screen. Tap the exact center of each target with the stylus to align the screen. Then tap boxes and arrows to set the time and date.

3

MAKE THE CONNECTION
Remove the pdQ smartphone from its cradle. Turn off your computer. Plug the cradle's serial connector into a serial (COM) port on the back of the computer. Turn on your computer when the cradle is connected.

4

INSTALL THE SOFTWARE
Put the pdQ smartphone in its cradle. Insert the pdQ CD-ROM into the computer CD drive. Follow the instructions on the screen.

 If using an NT: you need to have write privileges and install the software in a user, not administrator, account.

 If using a Macintosh: you can order the Mac Pac by calling Palm Computing® at: (800) 881-7256 (U.S.), (800) 891-6342 (Canada) or (801) 431-1536 (Worldwide).

5

SYNCHRONIZE THE pdQ SMARTPHONE WITH YOUR COMPUTER

Open the pdQ smartphone's keypad to display its entire screen. Tap HotSync.



HotSync technology synchronizes information between the pdQ smartphone and your computer.

Enter Information Three Ways

■ Use your computer keyboard


After you have installed the Palm Desktop software, type information into your computer using your computer keyboard. Use HotSync technology to synchronize information on your computer with the pdQ smartphone.

■ Use the on-screen keyboard

Tap ● near abc or 123 inside the writing area on the bottom of the pdQ smartphone's screen to display a keyboard. Tap letters or numbers.

■ Use Graffiti® script

Write Graffiti script in the writing area using the stylus. Write alphabetic characters on the left side and numeric characters on the right side.

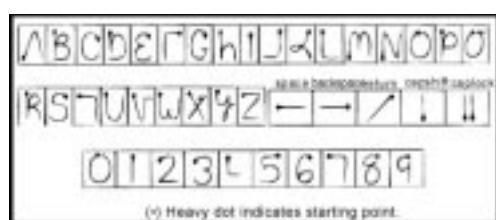

GRAFFITI SCRIPT

Working with the pdQ Smartphone

Dialing a Phone Number

IMMEDIATE DIALING CAPABILITY

Placing a call couldn't be easier! Here is how to make your first phone call:

- 1 Press PWR on the keypad to turn on the phone.
- 2 Press keys to enter the phone number, then press SEND.
- 3 When you are finished with the call, press END.

DIRECT ADDRESS BOOK DIALING

It only takes a couple of taps to place a call to a contact, friend, or business associate. In addition to storing thousands of numbers, the pdQ smartphone makes it easy to add and update information.

After you enter information in the Address Book as described in the *pdQ Applications Handbook*, here is all you have to do to place a call:

- 1 Open the keypad; to turn on the phone, tap .
- 2 To display the Applications Launcher, tap .
- 3 To display the Address List screen, tap .
- 4 Tap the phone number you want to call, then tap Dial.
- 5 Tap End when finished.

Saving Time

MIGRATING FROM THE PALM PILOT™ OR PALM III™ CONNECTED ORGANIZER TO THE pdQ SMARTPHONE


To transfer information from your Palm Pilot or Palm III connected organizer, first synchronize your Palm connected organizer to your computer and then synchronize the pdQ smartphone to your computer.

pdQmail

Read, forward, write, delete, and respond to email. The *pdQ Basics Handbook* explains how to get started.

Web

After setting up Internet services, use Web to gain immediate access to web sites.

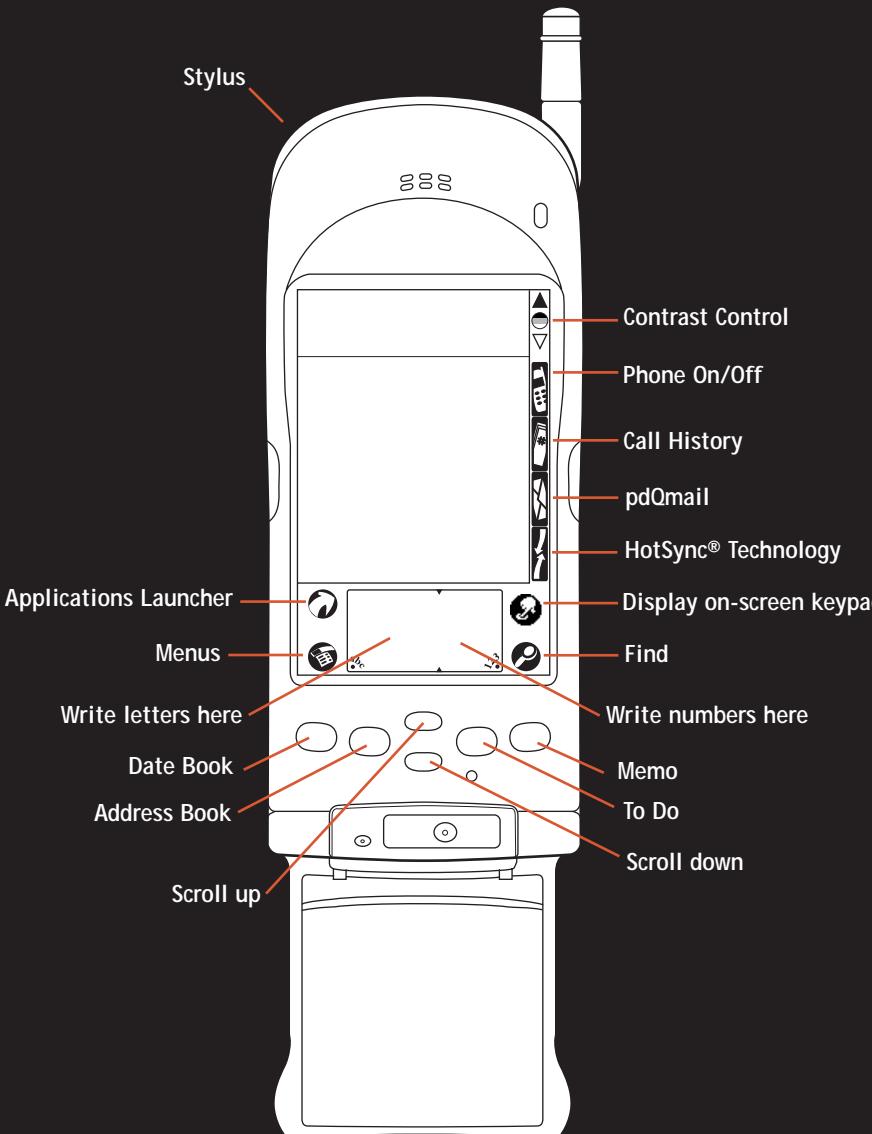

Contact Information

To learn more about pdQ smartphone and its capabilities, refer to the two handbooks enclosed with your product packaging. The pdQ Basics Handbook contains the information you need to get started. The pdQ Applications Handbook provides detailed information about the pdQ smartphone's applications.

If you have service-based questions, such as those regarding your phone, phone bill, or call coverage area, call your service provider at *611. For answers to questions regarding pdQ applications or advanced features, contact Technical Support:

World Wide Web - <http://www.qualcomm.com/pdq>
U.S. and Canada (800) 349-4478

Email - cdma-pdq-techspt@qualcomm.com
Other Countries (619) 651-4028

Download games, utilities, and upgrades from QUALCOMM's web site and other sites. Any applications that work on Palm Pilot™ or Palm Pilot III™ also work on the pdQ smartphone.

FCC/IC Notice

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This technology is controlled by the United States Government. Diversion contrary to U.S. Law prohibited.

All data and information contained in or disclosed by this document are confidential and proprietary information of QUALCOMM Incorporated, and all rights therein are expressly reserved. By accepting this material, the recipient agrees that this material and the information contained therein are held in confidence and trust and will not be used, copied, reproduced in whole or part, nor its contents revealed in any manner to others without the express written permission of QUALCOMM Incorporated.

QUALCOMM is a registered trademark and registered service mark of QUALCOMM Incorporated. 3Com, the 3Com logo, Palm Computing, Graffiti and HotSync are registered trademarks, and PalmPilot, Palm III, Palm OS, Palm, the Palm Computing platform logo, the PalmPilot logo and the Palm III logo are trademarks of Palm Computing Inc., 3Com Corporation or its subsidiaries. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Proprietary Information ©1998 QUALCOMM Incorporated. All rights reserved.

QUALCOMM®

6455 Lusk Boulevard, San Diego, California 92121-2779 USA

www.qualcomm.com

80-67674-1 Rev. X2



Preliminary
Subject to Change
October 1998