




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

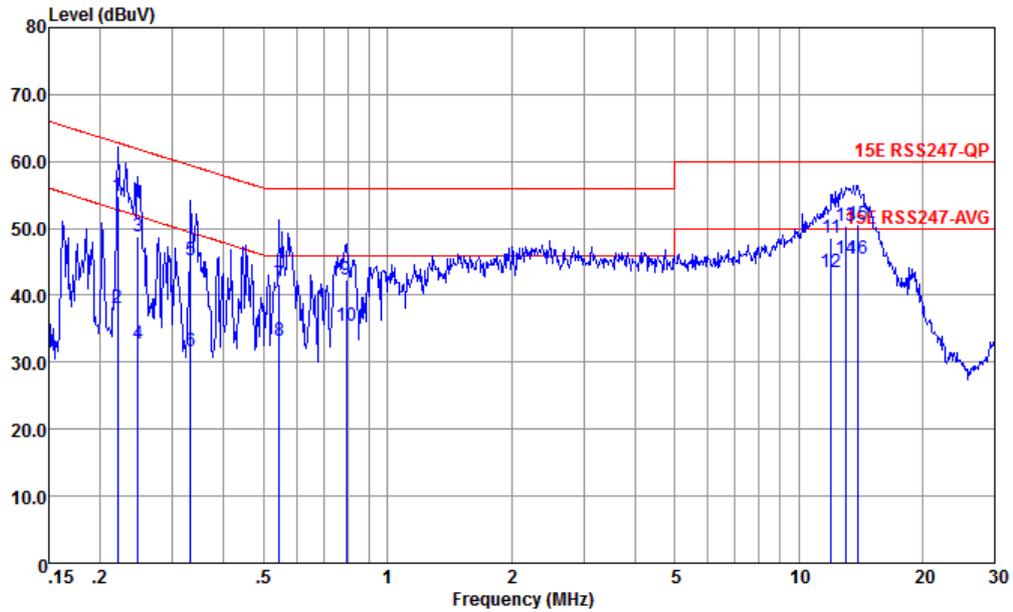


Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.221	54.75	-8.04	62.79	44.21	0.08	10.46	QP
2	0.221	38.05	-14.74	52.79	27.51	0.08	10.46	Average
3	0.247	48.75	-13.11	61.86	38.19	0.09	10.47	QP
4	0.247	32.85	-19.01	51.86	22.29	0.09	10.47	Average
5	0.332	45.13	-14.27	59.40	34.60	0.05	10.48	QP
6	0.332	31.73	-17.67	49.40	21.20	0.05	10.48	Average
7	0.546	41.77	-14.23	56.00	31.50	-0.12	10.39	QP
8	0.546	33.17	-12.83	46.00	22.90	-0.12	10.39	Average
9	0.792	42.35	-13.65	56.00	32.20	-0.16	10.31	QP
10	0.792	35.45	-10.55	46.00	25.30	-0.16	10.31	Average
11	11.996	48.55	-11.45	60.00	38.50	-0.21	10.26	QP
12	11.996	43.45	-6.55	50.00	33.40	-0.21	10.26	Average
13	12.988	50.27	-9.73	60.00	40.20	-0.20	10.27	QP
14	12.988	45.37	-4.63	50.00	35.30	-0.20	10.27	Average
15	13.915	50.58	-9.42	60.00	40.50	-0.19	10.27	QP
16 *	13.915	45.38	-4.62	50.00	35.30	-0.19	10.27	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

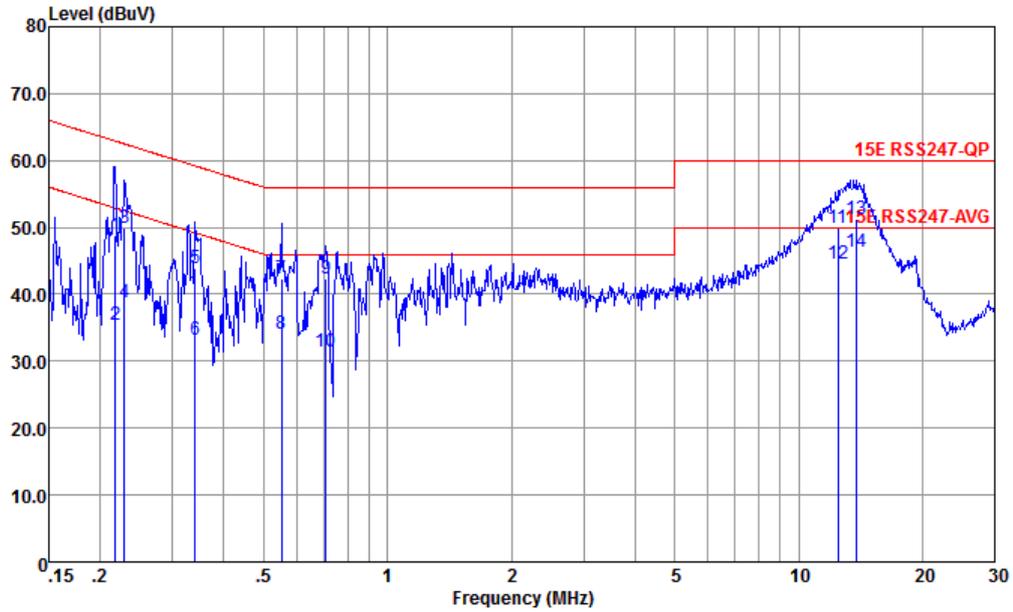

Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.217	48.74	-14.18	62.92	38.21	0.07	10.46	QP
2	0.217	35.44	-17.48	52.92	24.91	0.07	10.46	Average
3	0.229	49.81	-12.67	62.48	39.30	0.04	10.47	QP
4	0.229	38.71	-13.77	52.48	28.20	0.04	10.47	Average
5	0.341	43.86	-15.32	59.18	33.51	-0.13	10.48	QP
6	0.341	33.26	-15.92	49.18	22.91	-0.13	10.48	Average
7	0.552	42.43	-13.57	56.00	32.19	-0.15	10.39	QP
8	0.552	34.13	-11.87	46.00	23.89	-0.15	10.39	Average
9	0.708	42.37	-13.63	56.00	32.20	-0.17	10.34	QP
10	0.708	31.37	-14.63	46.00	21.20	-0.17	10.34	Average
11	12.449	49.94	-10.06	60.00	39.91	-0.23	10.26	QP
12	12.449	44.64	-5.36	50.00	34.61	-0.23	10.26	Average
13	13.841	51.17	-8.83	60.00	41.10	-0.20	10.27	QP
14 *	13.841	46.27	-3.73	50.00	36.20	-0.20	10.27	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Jake	Relative Humidity :	41~42%
		Temperature :	22~23°C

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	CDD	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	CDD	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	CDD	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	CDD	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	CDD	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	CDD	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	CDD	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	CDD	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	CDD	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	STBC	802.11ax HE20	36	5180	MCS0	Full	-
Mode 11	U-NII-1	5.15-5.25	STBC	802.11ax HE20	44	5220	MCS0	Full	-
Mode 12	U-NII-1	5.15-5.25	STBC	802.11ax HE20	48	5240	MCS0	Full	-
Mode 13	U-NII-2A	5.25-5.35	STBC	802.11ax HE20	52	5260	MCS0	Full	-
Mode 14	U-NII-2A	5.25-5.35	STBC	802.11ax HE20	60	5300	MCS0	Full	-
Mode 15	U-NII-2A	5.25-5.35	STBC	802.11ax HE20	64	5320	MCS0	Full	-
Mode 16	U-NII-2C	5.47-5.725	STBC	802.11ax HE20	100	5500	MCS0	Full	-
Mode 17	U-NII-2C	5.47-5.725	STBC	802.11ax HE20	116	5580	MCS0	Full	-
Mode 18	U-NII-2C	5.47-5.725	STBC	802.11ax HE20	140	5700	MCS0	Full	-
Mode 19	U-NII-1	5.15-5.25	STBC	802.11ax HE20	36	5180	MCS0	RU26/0	-
Mode 20	U-NII-2A	5.25-5.35	STBC	802.11ax HE20	64	5320	MCS0	RU26/8	-
Mode 21	U-NII-2C	5.47-5.725	STBC	802.11ax HE20	100	5500	MCS0	RU26/0	-
Mode 22	U-NII-2C	5.47-5.725	STBC	802.11ax HE20	140	5700	MCS0	RU26/8	-
Mode 23	U-NII-1	5.15-5.25	STBC	802.11ax HE20	36	5180	MCS0	RU52/37	-
Mode 24	U-NII-2A	5.25-5.35	STBC	802.11ax HE20	64	5320	MCS0	RU52/40	-
Mode 25	U-NII-2C	5.47-5.725	STBC	802.11ax HE20	100	5500	MCS0	RU52/37	-
Mode 26	U-NII-2C	5.47-5.725	STBC	802.11ax HE20	140	5700	MCS0	RU52/40	-
Mode 27	U-NII-1	5.15-5.25	STBC	802.11ax HE20	36	5180	MCS0	RU106/53	-
Mode 28	U-NII-2A	5.25-5.35	STBC	802.11ax HE20	64	5320	MCS0	RU106/54	-
Mode 29	U-NII-2C	5.47-5.725	STBC	802.11ax HE20	100	5500	MCS0	RU106/53	-
Mode 30	U-NII-2C	5.47-5.725	STBC	802.11ax HE20	140	5700	MCS0	RU106/54	-
Mode 31	U-NII-1	5.15-5.25	STBC	802.11ax HE40	38	5190	MCS0	Full	-
Mode 32	U-NII-1	5.15-5.25	STBC	802.11ax HE40	46	5230	MCS0	Full	-
Mode 33	U-NII-2A	5.25-5.35	STBC	802.11ax HE40	54	5270	MCS0	Full	-
Mode 34	U-NII-2A	5.25-5.35	STBC	802.11ax HE40	62	5310	MCS0	Full	-
Mode 35	U-NII-2C	5.47-5.725	STBC	802.11ax HE40	102	5510	MCS0	Full	-
Mode 36	U-NII-2C	5.47-5.725	STBC	802.11ax HE40	110	5550	MCS0	Full	-
Mode 37	U-NII-2C	5.47-5.725	STBC	802.11ax HE40	134	5670	MCS0	Full	-



Mode 38	U-NII-1	5.15-5.25	STBC	802.11ax HE80	42	5210	MCS0	Full	-
Mode 39	U-NII-2A	5.25-5.35	STBC	802.11ax HE80	58	5290	MCS0	Full	-
Mode 40	U-NII-2C	5.47-5.725	STBC	802.11ax HE80	106	5530	MCS0	Full	-
Mode 41	U-NII-2C	5.47-5.725	STBC	802.11ax HE80	122	5610	MCS0	Full	-
Mode 44	U-NII-3	5.725-5.85	CDD	802.11a	149	5745	6Mbps	-	-
Mode 45	U-NII-3	5.725-5.85	CDD	802.11a	157	5785	6Mbps	-	-
Mode 46	U-NII-3	5.725-5.85	CDD	802.11a	165	5825	6Mbps	-	-
Mode 47	U-NII-3	5.725-5.85	STBC	802.11ax HE20	149	5745	MCS0	Full	-
Mode 48	U-NII-3	5.725-5.85	STBC	802.11ax HE20	157	5785	MCS0	Full	-
Mode 49	U-NII-3	5.725-5.85	STBC	802.11ax HE20	165	5825	MCS0	Full	-
Mode 50	U-NII-3	5.725-5.85	STBC	802.11ax HE40	151	5755	MCS0	Full	-
Mode 51	U-NII-3	5.725-5.85	STBC	802.11ax HE40	159	5795	MCS0	Full	-
Mode 52	U-NII-3	5.725-5.85	STBC	802.11ax HE80	155	5775	MCS0	Full	-
Mode 53	U-NII-3	5.725-5.85	STBC	802.11ax HE20	149	5745	MCS0	RU26/0	-
Mode 54	U-NII-3	5.725-5.85	STBC	802.11ax HE20	165	5825	MCS0	RU26/8	-
Mode 55	U-NII-3	5.725-5.85	STBC	802.11ax HE20	149	5745	MCS0	RU52/37	-
Mode 56	U-NII-3	5.725-5.85	STBC	802.11ax HE20	165	5825	MCS0	RU52/40	-
Mode 57	U-NII-3	5.725-5.85	STBC	802.11ax HE20	149	5745	MCS0	RU106/53	-
Mode 58	U-NII-3	5.725-5.85	STBC	802.11ax HE20	165	5825	MCS0	RU106/54	-
Mode 59	U-NII-2C	5.47-5.85	CDD	802.11a	144	5720	6Mbps	-	-
Mode 60	U-NII-2C	5.47-5.85	STBC	802.11ax HE20	144	5720	MCS0	Full	-
Mode 61	U-NII-2C	5.47-5.85	STBC	802.11ax HE40	142	5710	MCS0	Full	-
Mode 62	U-NII-2C	5.47-5.85	STBC	802.11ax HE80	138	5690	MCS0	Full	-
Mode 63	2400-2483.5	2400-2483.5	1	Bluetooth-LE_GSFK	39	2480	2Mbps	Full	-
Mode 63	U-NII-1	5.15-5.25	STBC	802.11ax HE20	36	5180	MCS0	Full	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5150.00	50.62	54.00	-3.38	V	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	57.88	68.20	-10.32	H	PEAK	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	57.57	68.20	-10.63	V	PEAK	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	57.46	68.20	-10.74	V	PEAK	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	51.60	68.20	-16.60	H	PEAK	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	10600.00	45.13	54.00	-8.87	H	AVERAGE	Pass	Harmonic
6	802.11a	64	5350.00	49.64	54.00	-4.36	V	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	45.66	54.00	-8.34	H	AVERAGE	Pass	Harmonic
7	802.11a	100	5459.92	45.40	54.00	-8.60	V	AVERAGE	Pass	Band Edge
7	802.11a	100	11000.00	48.01	54.00	-5.99	H	AVERAGE	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	11160.00	47.34	54.00	-6.66	V	AVERAGE	Pass	Harmonic
9	802.11a	140	5725.08	59.52	68.20	-8.68	V	PEAK	Pass	Band Edge
9	802.11a	140	11400.00	47.94	54.00	-6.06	H	AVERAGE	Pass	Harmonic
10	802.11ax HE20	36	5149.60	50.72	54.00	-3.28	V	AVERAGE	Pass	Band Edge
10	802.11ax HE20	36	10360.00	49.20	68.20	-19.00	V	PEAK	Pass	Harmonic
11	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
11	802.11ax HE20	44	10440.00	56.53	68.20	-11.67	V	PEAK	Pass	Harmonic
12	802.11ax HE20	48	-	-	-	-	-	-	-	Band Edge
12	802.11ax HE20	48	10480.00	55.65	68.20	-12.55	V	PEAK	Pass	Harmonic
13	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
13	802.11ax HE20	52	10520.00	55.58	68.20	-12.62	V	PEAK	Pass	Harmonic
14	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
14	802.11ax HE20	60	10600.00	45.43	54.00	-8.57	V	AVERAGE	Pass	Harmonic
15	802.11ax HE20	64	5350.70	50.24	54.00	-3.76	V	AVERAGE	Pass	Band Edge
15	802.11ax HE20	64	10640.00	45.13	54.00	-8.87	H	AVERAGE	Pass	Harmonic
16	802.11ax HE20	100	5458.32	45.21	54.00	-8.79	V	AVERAGE	Pass	Band Edge
16	802.11ax HE20	100	11000.00	47.74	54.00	-6.26	H	AVERAGE	Pass	Harmonic
17	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE20	116	11160.00	47.39	54.00	-6.61	H	AVERAGE	Pass	Harmonic
18	802.11ax HE20	140	5725.64	64.76	68.20	-3.44	V	PEAK	Pass	Band Edge
18	802.11ax HE20	140	11400.00	46.84	54.00	-7.16	H	AVERAGE	Pass	Harmonic
19	802.11ax HE20	36	5146.90	43.66	54.00	-10.34	V	AVERAGE	Pass	Band Edge
19	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
20	802.11ax HE20	64	5369.20	43.23	54.00	-10.77	V	AVERAGE	Pass	Band Edge
20	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
21	802.11ax HE20	100	5410.80	44.62	54.00	-9.38	V	AVERAGE	Pass	Band Edge
21	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
22	802.11ax HE20	140	5725.16	54.21	68.20	-13.99	V	PEAK	Pass	Band Edge
22	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic



23	802.11ax HE20	36	5149.40	43.83	54.00	-10.17	V	AVERAGE	Pass	Band Edge
23	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
24	802.11ax HE20	64	5350.20	43.06	54.00	-10.94	V	AVERAGE	Pass	Band Edge
24	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
25	802.11ax HE20	100	5410.96	43.61	54.00	-10.39	V	AVERAGE	Pass	Band Edge
25	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
26	802.11ax HE20	140	5729.24	53.45	68.20	-14.75	V	PEAK	Pass	Band Edge
26	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE20	36	5149.60	44.08	54.00	-9.92	V	AVERAGE	Pass	Band Edge
27	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
28	802.11ax HE20	64	5350.10	43.07	54.00	-10.93	V	AVERAGE	Pass	Band Edge
28	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
29	802.11ax HE20	100	5454.96	43.54	54.00	-10.46	V	AVERAGE	Pass	Band Edge
29	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
30	802.11ax HE20	140	5729.72	53.55	68.20	-14.65	V	PEAK	Pass	Band Edge
30	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
31	802.11ax HE40	38	5149.60	50.26	54.00	-3.74	V	AVERAGE	Pass	Band Edge
31	802.11ax HE40	38	10380.00	45.53	68.20	-22.67	V	PEAK	Pass	Harmonic
32	802.11ax HE40	46	5147.68	46.67	54.00	-7.33	V	AVERAGE	Pass	Band Edge
32	802.11ax HE40	46	10460.00	54.35	68.20	-13.85	V	PEAK	Pass	Harmonic
33	802.11ax HE40	54	-	-	-	-	-	-	-	Band Edge
33	802.11ax HE40	54	10540.00	50.38	68.20	-17.82	H	PEAK	Pass	Harmonic
34	802.11ax HE40	62	5350.30	50.14	54.00	-3.86	V	AVERAGE	Pass	Band Edge
34	802.11ax HE40	62	10620.00	45.53	74.00	-28.47	H	PEAK	Pass	Harmonic
35	802.11ax HE40	102	5467.60	64.64	68.20	-3.56	V	Peak	Pass	Band Edge
35	802.11ax HE40	102	11020.00	46.00	74.00	-28.00	H	PEAK	Pass	Harmonic
36	802.11ax HE40	110	-	-	-	-	-	-	-	Band Edge
36	802.11ax HE40	110	11100.00	45.11	54.00	-8.89	H	AVERAGE	Pass	Harmonic
37	802.11ax HE40	134	5458.96	43.61	54.00	-10.39	V	AVERAGE	Pass	Band Edge
37	802.11ax HE40	134	11340.00	45.44	54.00	-8.56	H	AVERAGE	Pass	Harmonic
38	802.11ax HE80	42	5149.28	50.17	54.00	-3.83	V	AVERAGE	Pass	Band Edge
38	802.11ax HE80	42	10420.00	44.61	68.20	-23.59	V	PEAK	Pass	Harmonic
39	802.11ax HE80	58	5350.40	49.77	54.00	-4.23	V	AVERAGE	Pass	Band Edge
39	802.11ax HE80	58	10580.00	43.05	68.20	-25.15	V	PEAK	Pass	Harmonic
40	802.11ax HE80	106	5459.92	50.67	54.00	-3.33	V	AVERAGE	Pass	Band Edge
40	802.11ax HE80	106	11060.00	44.60	74.00	-29.40	H	PEAK	Pass	Harmonic
41	802.11ax HE80	122	5458.80	45.58	54.00	-8.42	V	AVERAGE	Pass	Band Edge
41	802.11ax HE80	122	11220.00	47.41	74.00	-26.59	H	PEAK	Pass	Harmonic
44	802.11a	149	5630.00	52.73	68.20	-15.47	V	PEAK	Pass	Band Edge
44	802.11a	149	11490.00	43.74	54.00	-10.26	H	AVERAGE	Pass	Harmonic
45	802.11a	157	-	-	-	-	-	-	-	Band Edge
45	802.11a	157	11570.00	41.84	54.00	-12.16	H	AVERAGE	Pass	Harmonic
46	802.11a	165	5938.40	51.17	68.20	-17.03	H	PEAK	Pass	Band Edge
46	802.11a	165	11650.00	39.26	54.00	-14.74	H	AVERAGE	Pass	Harmonic
47	802.11ax HE20	149	5609.20	52.87	68.20	-15.33	V	PEAK	Pass	Band Edge
47	802.11ax HE20	149	11490.00	43.91	54.00	-10.09	H	AVERAGE	Pass	Harmonic



48	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
48	802.11ax HE20	157	11570.00	42.77	54.00	-11.23	H	AVERAGE	Pass	Harmonic
49	802.11ax HE20	165	5928.00	52.80	68.20	-15.40	V	PEAK	Pass	Band Edge
49	802.11ax HE20	165	11650.00	38.46	54.00	-15.54	H	AVERAGE	Pass	Harmonic
50	802.11ax HE40	151	5619.69	54.83	68.20	-13.37	V	PEAK	Pass	Band Edge
50	802.11ax HE40	151	11510.00	40.12	54.00	-13.88	H	AVERAGE	Pass	Harmonic
51	802.11ax HE40	159	5633.20	53.72	68.20	-14.48	V	PEAK	Pass	Band Edge
51	802.11ax HE40	159	7243.75	44.70	68.20	-23.50	V	PEAK	Pass	Harmonic
52	802.11ax HE80	155	5640.80	59.27	68.20	-8.93	V	PEAK	Pass	Band Edge
52	802.11ax HE80	155	7218.75	43.29	68.20	-24.91	V	PEAK	Pass	Harmonic
53	802.11ax HE20	149	5624.80	54.38	68.20	-13.82	H	PEAK	Pass	Band Edge
53	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
54	802.11ax HE20	165	5971.60	52.49	68.20	-15.71	V	PEAK	Pass	Band Edge
54	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
55	802.11ax HE20	149	5622.80	54.33	68.20	-13.87	V	PEAK	Pass	Band Edge
55	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
56	802.11ax HE20	165	5936.80	52.82	68.20	-15.38	V	PEAK	Pass	Band Edge
56	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
57	802.11ax HE20	149	5646.40	54.93	68.20	-13.27	V	PEAK	Pass	Band Edge
57	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
58	802.11ax HE20	165	5925.20	53.21	68.20	-14.99	H	PEAK	Pass	Band Edge
58	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
59	802.11a	144	-	-	-	-	-	-	-	Band Edge
59	802.11a	144	11440.00	46.24	54.00	-7.76	H	AVERAGE	Pass	Harmonic
60	802.11ax HE20	144	-	-	-	-	-	-	-	Band Edge
60	802.11ax HE20	144	11440.00	46.93	54.00	-7.07	H	AVERAGE	Pass	Harmonic
61	802.11ax HE40	142	-	-	-	-	-	-	-	Band Edge
61	802.11ax HE40	142	11420.00	44.83	54.00	-9.17	H	AVERAGE	Pass	Harmonic
62	802.11ax HE80	138	-	-	-	-	-	-	-	Band Edge
62	802.11ax HE80	138	7112.50	42.99	68.20	-25.21	V	PEAK	Pass	Harmonic
63	Bluetooth-LE_GSFK	39	2483.50	48.23	54.00	-5.77	V	AVERAGE	Pass	Band Edge
63	Bluetooth-LE_GSFK	39	4960.00	41.34	74.00	-32.66	V	PEAK	Pass	Harmonic
63	802.11ax HE20	36	5149.10	49.20	54.00	-4.80	V	AVERAGE	Pass	Band Edge
63	802.11ax HE20	36	10360.00	49.43	68.20	-18.77	V	PEAK	Pass	Harmonic



Mode	1																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	CDD																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.50</td> <td>57.53</td> <td>74.00</td> <td>-16.47</td> <td>49.18</td> <td>34.40</td> <td>10.61</td> <td>36.66</td> <td>0.00</td> <td>301</td> <td>123</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5148.50	57.53	74.00	-16.47	49.18	34.40	10.61	36.66	0.00	301	123	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.56</td> <td>-----</td> <td>-----</td> <td>100.10</td> <td>34.43</td> <td>10.64</td> <td>36.61</td> <td>0.00</td> <td>301</td> <td>123</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	108.56	-----	-----	100.10	34.43	10.64	36.61	0.00	301	123	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5148.50	57.53	74.00	-16.47	49.18	34.40	10.61	36.66	0.00	301	123	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	108.56	-----	-----	100.10	34.43	10.64	36.61	0.00	301	123	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.30</td> <td>45.34</td> <td>54.00</td> <td>-8.66</td> <td>36.99</td> <td>34.40</td> <td>10.61</td> <td>36.66</td> <td>0.00</td> <td>301</td> <td>123</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5147.30	45.34	54.00	-8.66	36.99	34.40	10.61	36.66	0.00	301	123	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.97</td> <td>-----</td> <td>-----</td> <td>92.51</td> <td>34.43</td> <td>10.64</td> <td>36.61</td> <td>0.00</td> <td>301</td> <td>123</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	100.97	-----	-----	92.51	34.43	10.64	36.61	0.00	301	123	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5147.30	45.34	54.00	-8.66	36.99	34.40	10.61	36.66	0.00	301	123	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	100.97	-----	-----	92.51	34.43	10.64	36.61	0.00	301	123	AVERAGE																																																																														



Mode	1																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	CDD																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5142.50</td> <td>61.25</td> <td>74.00</td> <td>-12.75</td> <td>52.91</td> <td>34.40</td> <td>10.60</td> <td>36.66</td> <td>0.00</td> <td>154</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5142.50	61.25	74.00	-12.75	52.91	34.40	10.60	36.66	0.00	154	150	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>112.60</td> <td>-----</td> <td>-----</td> <td>104.15</td> <td>34.43</td> <td>10.64</td> <td>36.62</td> <td>0.00</td> <td>154</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	112.60	-----	-----	104.15	34.43	10.64	36.62	0.00	154	150	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5142.50	61.25	74.00	-12.75	52.91	34.40	10.60	36.66	0.00	154	150	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	112.60	-----	-----	104.15	34.43	10.64	36.62	0.00	154	150	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>50.62</td> <td>54.00</td> <td>-3.38</td> <td>42.26</td> <td>34.40</td> <td>10.61</td> <td>36.65</td> <td>0.00</td> <td>154</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5150.00	50.62	54.00	-3.38	42.26	34.40	10.61	36.65	0.00	154	150	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.70</td> <td>-----</td> <td>-----</td> <td>97.29</td> <td>34.44</td> <td>10.65</td> <td>36.60</td> <td>0.00</td> <td>154</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	105.70	-----	-----	97.29	34.44	10.65	36.60	0.00	154	150	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5150.00	50.62	54.00	-3.38	42.26	34.40	10.61	36.65	0.00	154	150	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	105.70	-----	-----	97.29	34.44	10.65	36.60	0.00	154	150	AVERAGE																																																																														



Mode	1																																																																																							
	Harmonic																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																							
ANT	CDD																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>57.88</td> <td>68.20</td> <td>-10.32</td> <td>72.03</td> <td>37.36</td> <td>15.45</td> <td>66.96</td> <td>0.00</td> <td>101</td> <td>288</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	57.88	68.20	-10.32	72.03	37.36	15.45	66.96	0.00	101	288	PEAK	<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>57.20</td> <td>68.20</td> <td>-11.00</td> <td>71.35</td> <td>37.36</td> <td>15.45</td> <td>66.96</td> <td>0.00</td> <td>100</td> <td>322</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	57.20	68.20	-11.00	71.35	37.36	15.45	66.96	0.00	100	322	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10360.00	57.88	68.20	-10.32	72.03	37.36	15.45	66.96	0.00	101	288	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10360.00	57.20	68.20	-11.00	71.35	37.36	15.45	66.96	0.00	100	322	PEAK																																																																													



Mode	2																																																																																							
	Harmonic																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																							
ANT	CDD																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>54.07</td> <td>68.20</td> <td>-14.13</td> <td>68.02</td> <td>37.44</td> <td>15.53</td> <td>66.92</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10440.00	54.07	68.20	-14.13	68.02	37.44	15.53	66.92	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>57.57</td> <td>68.20</td> <td>-10.63</td> <td>71.52</td> <td>37.44</td> <td>15.53</td> <td>66.92</td> <td>0.00</td> <td>302</td> <td>54</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10440.00	57.57	68.20	-10.63	71.52	37.44	15.53	66.92	0.00	302	54	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10440.00	54.07	68.20	-14.13	68.02	37.44	15.53	66.92	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10440.00	57.57	68.20	-10.63	71.52	37.44	15.53	66.92	0.00	302	54	PEAK																																																																													



Mode	3																																																																																							
	Harmonic																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																							
ANT	CDD																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10400.00</td> <td>52.54</td> <td>68.20</td> <td>-15.66</td> <td>66.37</td> <td>37.49</td> <td>15.57</td> <td>66.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10400.00	52.54	68.20	-15.66	66.37	37.49	15.57	66.89	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10400.00</td> <td>57.46</td> <td>68.20</td> <td>-10.74</td> <td>71.31</td> <td>37.48</td> <td>15.56</td> <td>66.89</td> <td>0.00</td> <td>252</td> <td>40</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10400.00	57.46	68.20	-10.74	71.31	37.48	15.56	66.89	0.00	252	40	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10400.00	52.54	68.20	-15.66	66.37	37.49	15.57	66.89	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10400.00	57.46	68.20	-10.74	71.31	37.48	15.56	66.89	0.00	252	40	PEAK																																																																													



Mode	4																																																																																							
	Harmonic																																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																							
ANT	CDD																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>51.60</td> <td>68.20</td> <td>-16.60</td> <td>65.35</td> <td>37.52</td> <td>15.60</td> <td>66.87</td> <td>0.00</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10520.00	51.60	68.20	-16.60	65.35	37.52	15.60	66.87	0.00	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>49.55</td> <td>68.20</td> <td>-18.65</td> <td>63.30</td> <td>37.52</td> <td>15.60</td> <td>66.87</td> <td>0.00</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10520.00	49.55	68.20	-18.65	63.30	37.52	15.60	66.87	0.00	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	10520.00	51.60	68.20	-16.60	65.35	37.52	15.60	66.87	0.00	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	10520.00	49.55	68.20	-18.65	63.30	37.52	15.60	66.87	0.00	---	PEAK																																																																													







Mode	5																																																																																											
	Harmonic																																																																																											
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																											
ANT	CDD																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>55.61</td> <td>74.00</td> <td>-18.39</td> <td>69.17</td> <td>37.60</td> <td>15.67</td> <td>66.83</td> <td>0.00</td> <td>297</td> <td>32 PEAK</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>45.13</td> <td>54.00</td> <td>-8.87</td> <td>58.69</td> <td>37.60</td> <td>15.67</td> <td>66.83</td> <td>0.00</td> <td>297</td> <td>32 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	10600.00	55.61	74.00	-18.39	69.17	37.60	15.67	66.83	0.00	297	32 PEAK	2	10600.00	45.13	54.00	-8.87	58.69	37.60	15.67	66.83	0.00	297	32 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>54.78</td> <td>74.00</td> <td>-19.22</td> <td>68.34</td> <td>37.60</td> <td>15.67</td> <td>66.83</td> <td>0.00</td> <td>236</td> <td>39 PEAK</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>44.55</td> <td>54.00</td> <td>-9.45</td> <td>58.11</td> <td>37.60</td> <td>15.67</td> <td>66.83</td> <td>0.00</td> <td>236</td> <td>39 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	10600.00	54.78	74.00	-19.22	68.34	37.60	15.67	66.83	0.00	236	39 PEAK	2	10600.00	44.55	54.00	-9.45	58.11	37.60	15.67	66.83	0.00	236	39 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																	
1	10600.00	55.61	74.00	-18.39	69.17	37.60	15.67	66.83	0.00	297	32 PEAK																																																																																	
2	10600.00	45.13	54.00	-8.87	58.69	37.60	15.67	66.83	0.00	297	32 AVERAGE																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																	
1	10600.00	54.78	74.00	-19.22	68.34	37.60	15.67	66.83	0.00	236	39 PEAK																																																																																	
2	10600.00	44.55	54.00	-9.45	58.11	37.60	15.67	66.83	0.00	236	39 AVERAGE																																																																																	



Mode	6																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																									
ANT	CDD																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.70</td> <td>53.73</td> <td>74.00</td> <td>-20.27</td> <td>44.76</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>107</td> <td>113</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.70	53.73	74.00	-20.27	44.76	34.59	10.75	36.37	0.00	107	113	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>108.56</td> <td>-----</td> <td>-----</td> <td>99.66</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>107</td> <td>113</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	108.56	-----	-----	99.66	34.57	10.73	36.40	0.00	107	113	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.70	53.73	74.00	-20.27	44.76	34.59	10.75	36.37	0.00	107	113	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	108.56	-----	-----	99.66	34.57	10.73	36.40	0.00	107	113	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>45.45</td> <td>54.00</td> <td>-8.55</td> <td>36.48</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>107</td> <td>113</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.10	45.45	54.00	-8.55	36.48	34.59	10.75	36.37	0.00	107	113	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>108.40</td> <td>-----</td> <td>-----</td> <td>91.50</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>107</td> <td>113</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	108.40	-----	-----	91.50	34.57	10.73	36.40	0.00	107	113	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.10	45.45	54.00	-8.55	36.48	34.59	10.75	36.37	0.00	107	113	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	108.40	-----	-----	91.50	34.57	10.73	36.40	0.00	107	113	AVERAGE																																																																														

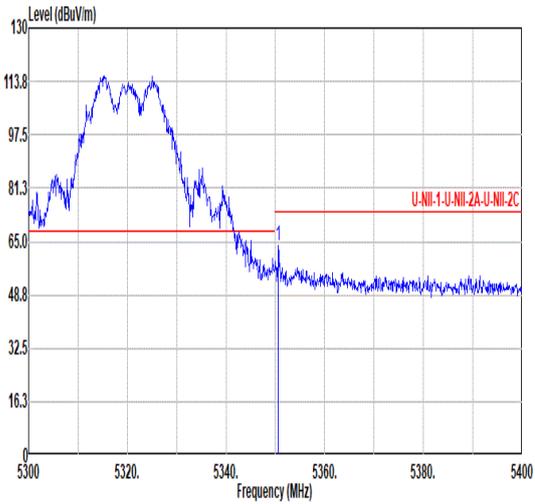
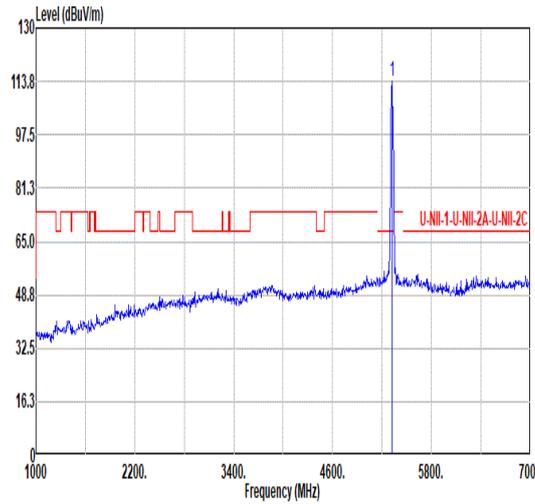
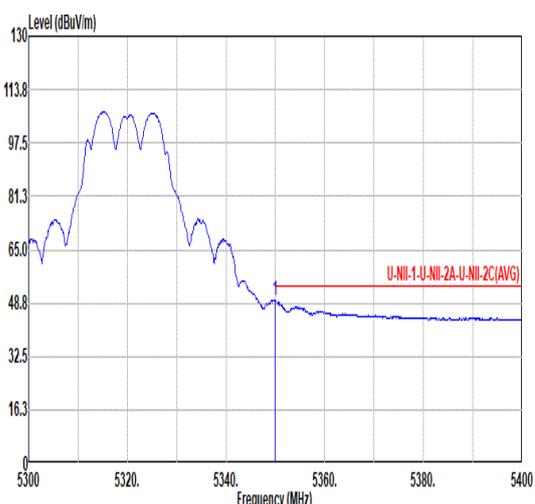
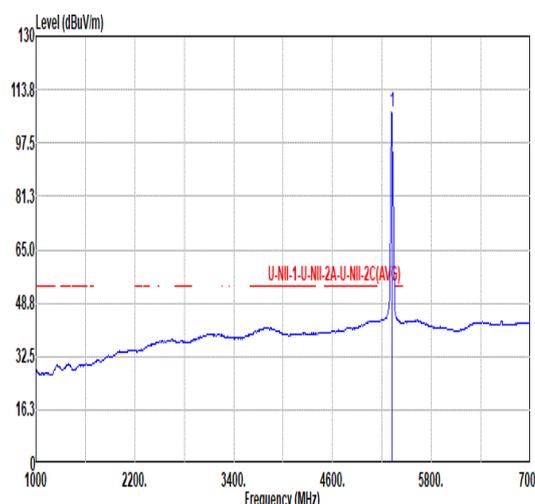


Mode	6																																																																																							
	Band Edge																																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																							
ANT	CDD																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 <table border="1" data-bbox="263 1120 782 1254"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.60</td> <td>63.63</td> <td>74.00</td> <td>-10.37</td> <td>54.66</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>189</td> <td>150 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.60	63.63	74.00	-10.37	54.66	34.59	10.75	36.37	0.00	189	150 PEAK	 <table border="1" data-bbox="901 1120 1420 1254"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>113.69</td> <td>-----</td> <td>-----</td> <td>104.79</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>189</td> <td>150 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	113.69	-----	-----	104.79	34.57	10.73	36.40	0.00	189	150 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5350.60	63.63	74.00	-10.37	54.66	34.59	10.75	36.37	0.00	189	150 PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5320.00	113.69	-----	-----	104.79	34.57	10.73	36.40	0.00	189	150 PEAK																																																																													
Avg	 <table border="1" data-bbox="263 1792 782 1926"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>49.64</td> <td>54.00</td> <td>-4.36</td> <td>40.67</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>189</td> <td>150 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.00	49.64	54.00	-4.36	40.67	34.59	10.75	36.37	0.00	189	150 AVERAGE	 <table border="1" data-bbox="901 1792 1420 1926"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.73</td> <td>-----</td> <td>-----</td> <td>97.86</td> <td>34.56</td> <td>10.73</td> <td>36.42</td> <td>0.00</td> <td>189</td> <td>150 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	106.73	-----	-----	97.86	34.56	10.73	36.42	0.00	189	150 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5350.00	49.64	54.00	-4.36	40.67	34.59	10.75	36.37	0.00	189	150 AVERAGE																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5320.00	106.73	-----	-----	97.86	34.56	10.73	36.42	0.00	189	150 AVERAGE																																																																													







Mode	6																																																																																																						
	Harmonic																																																																																																						
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																						
ANT	CDD																																																																																																						
Pol.	Horizontal	Vertical																																																																																																					
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>55.10</td> <td>74.00</td> <td>-18.90</td> <td>68.60</td> <td>37.60</td> <td>15.71</td> <td>66.81</td> <td>0.00</td> <td>175</td> <td>24</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>45.66</td> <td>54.00</td> <td>-8.34</td> <td>59.16</td> <td>37.60</td> <td>15.71</td> <td>66.81</td> <td>0.00</td> <td>175</td> <td>24</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10640.00	55.10	74.00	-18.90	68.60	37.60	15.71	66.81	0.00	175	24	PEAK	2	10640.00	45.66	54.00	-8.34	59.16	37.60	15.71	66.81	0.00	175	24	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>47.71</td> <td>74.00</td> <td>-26.29</td> <td>61.21</td> <td>37.60</td> <td>15.71</td> <td>66.81</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10640.00	47.71	74.00	-26.29	61.21	37.60	15.71	66.81	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	10640.00	55.10	74.00	-18.90	68.60	37.60	15.71	66.81	0.00	175	24	PEAK																																																																																											
2	10640.00	45.66	54.00	-8.34	59.16	37.60	15.71	66.81	0.00	175	24	AVERAGE																																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	10640.00	47.71	74.00	-26.29	61.21	37.60	15.71	66.81	0.00	---	---	PEAK																																																																																											

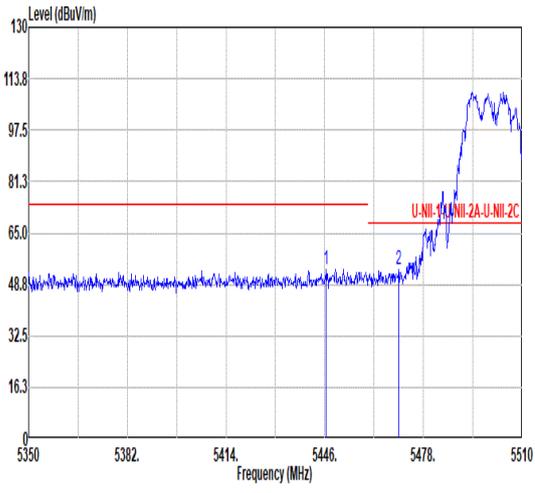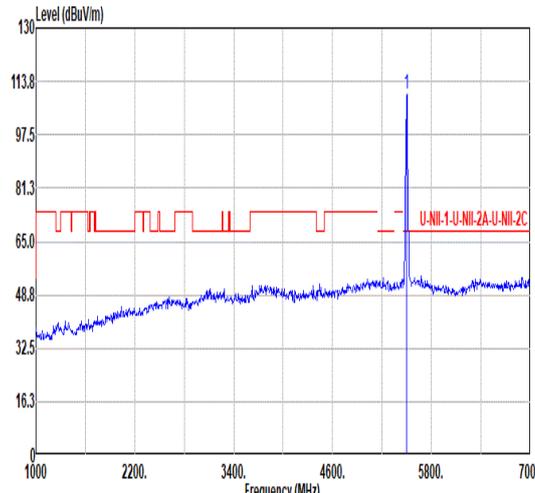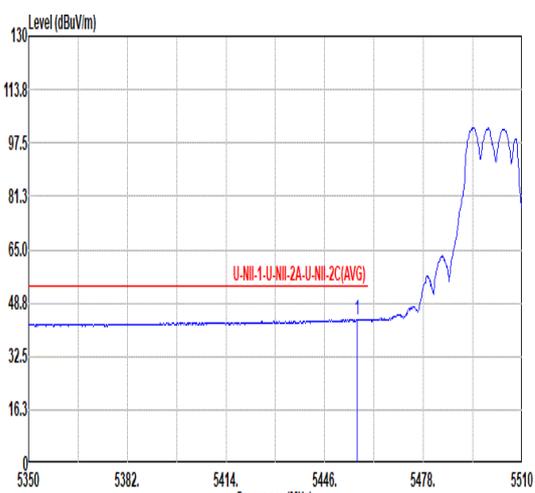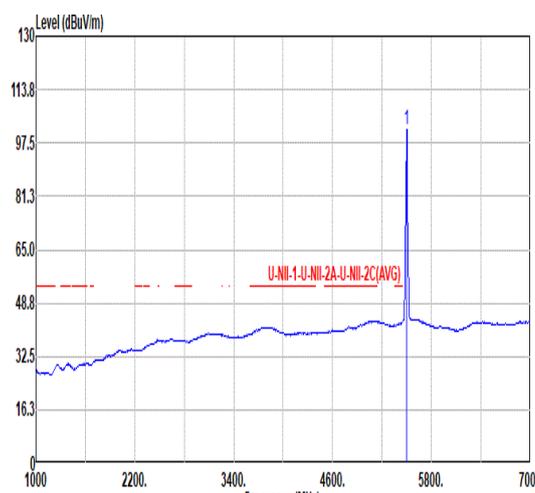

Mode	7																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																	
ANT	CDD																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 <table border="1" data-bbox="263 1097 774 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Over Level</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5446.48</td> <td>53.59</td> <td>74.00</td> <td>-20.41</td> <td>44.32</td> <td>34.68</td> <td>10.82</td> <td>36.23</td> <td>0.00</td> <td>285</td> <td>122 PEAK</td> </tr> <tr> <td>2</td> <td>5470.00</td> <td>53.37</td> <td>68.20</td> <td>-14.83</td> <td>44.01</td> <td>34.71</td> <td>10.85</td> <td>36.20</td> <td>0.00</td> <td>285</td> <td>122 PEAK</td> </tr> </tbody> </table>		Limit Freq	Over Level	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5446.48	53.59	74.00	-20.41	44.32	34.68	10.82	36.23	0.00	285	122 PEAK	2	5470.00	53.37	68.20	-14.83	44.01	34.71	10.85	36.20	0.00	285	122 PEAK	 <table border="1" data-bbox="901 1097 1412 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Over Level</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>110.04</td> <td>-----</td> <td>-----</td> <td>100.56</td> <td>34.74</td> <td>10.89</td> <td>36.15</td> <td>0.00</td> <td>285</td> <td>122 PEAK</td> </tr> </tbody> </table>		Limit Freq	Over Level	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	110.04	-----	-----	100.56	34.74	10.89	36.15	0.00	285	122 PEAK
		Limit Freq	Over Level	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5446.48	53.59	74.00	-20.41	44.32	34.68	10.82	36.23	0.00	285	122 PEAK																																																																							
2	5470.00	53.37	68.20	-14.83	44.01	34.71	10.85	36.20	0.00	285	122 PEAK																																																																							
	Limit Freq	Over Level	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5500.00	110.04	-----	-----	100.56	34.74	10.89	36.15	0.00	285	122 PEAK																																																																							
Avg	 <table border="1" data-bbox="263 1769 774 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Over Level</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.56</td> <td>43.85</td> <td>54.00</td> <td>-10.15</td> <td>34.54</td> <td>34.69</td> <td>10.84</td> <td>36.22</td> <td>0.00</td> <td>285</td> <td>122 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Over Level	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.56	43.85	54.00	-10.15	34.54	34.69	10.84	36.22	0.00	285	122 AVERAGE	 <table border="1" data-bbox="901 1769 1412 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Over Level</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>101.74</td> <td>-----</td> <td>-----</td> <td>92.30</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>285</td> <td>122 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Over Level	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	101.74	-----	-----	92.30	34.73	10.88	36.17	0.00	285	122 AVERAGE												
	Limit Freq	Over Level	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5456.56	43.85	54.00	-10.15	34.54	34.69	10.84	36.22	0.00	285	122 AVERAGE																																																																							
	Limit Freq	Over Level	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5500.00	101.74	-----	-----	92.30	34.73	10.88	36.17	0.00	285	122 AVERAGE																																																																							

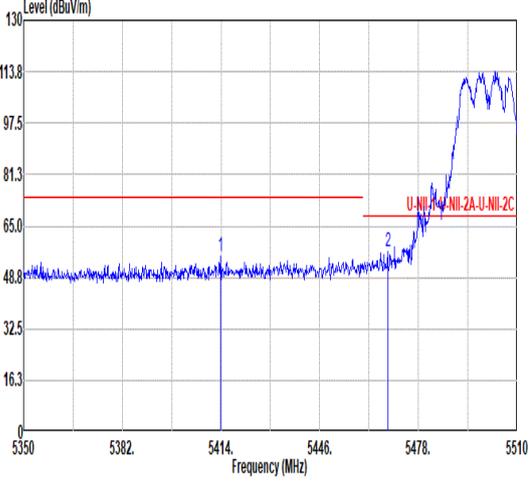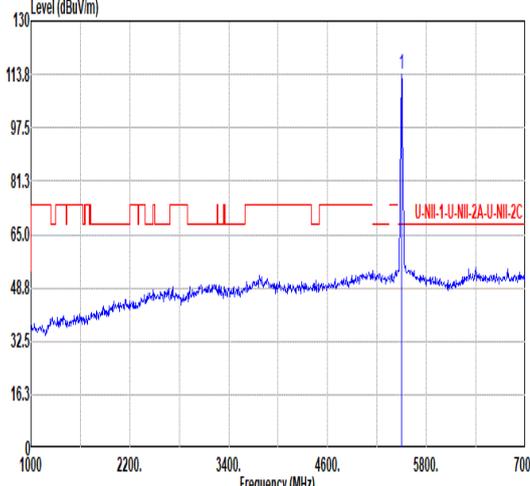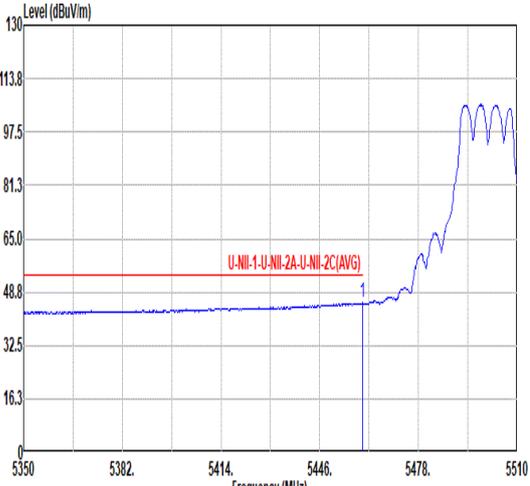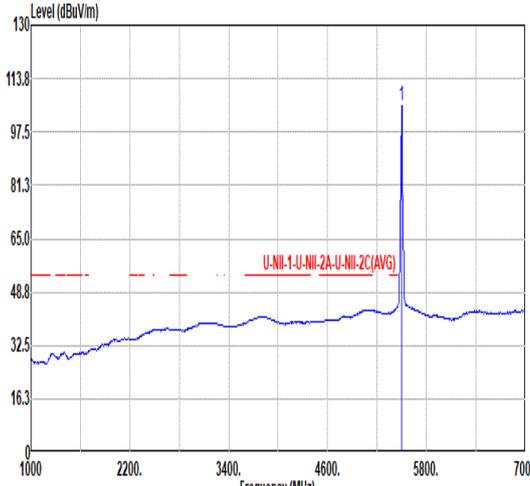

Mode	7																																																																														
	Band Edge																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																														
ANT	CDD																																																																														
Pol.	Vertical	Fundamental																																																																													
Peak	 <table border="1" data-bbox="268 1108 774 1243"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5413.84</td> <td>55.22</td> <td>74.00</td> <td>-18.78</td> <td>46.06</td> <td>34.65</td> <td>10.79</td> <td>36.28</td> <td>0.00</td> <td>143</td> <td>141 PEAK</td> </tr> <tr> <td>2 5468.08</td> <td>56.89</td> <td>68.20</td> <td>-11.31</td> <td>47.54</td> <td>34.70</td> <td>10.85</td> <td>36.20</td> <td>0.00</td> <td>143</td> <td>141 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5413.84	55.22	74.00	-18.78	46.06	34.65	10.79	36.28	0.00	143	141 PEAK	2 5468.08	56.89	68.20	-11.31	47.54	34.70	10.85	36.20	0.00	143	141 PEAK	 <table border="1" data-bbox="906 1108 1412 1243"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>113.60</td> <td>-----</td> <td>-----</td> <td>104.14</td> <td>34.73</td> <td>10.89</td> <td>36.16</td> <td>0.00</td> <td>143</td> <td>141 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5500.00	113.60	-----	-----	104.14	34.73	10.89	36.16	0.00	143	141 PEAK
	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5413.84	55.22	74.00	-18.78	46.06	34.65	10.79	36.28	0.00	143	141 PEAK																																																																					
2 5468.08	56.89	68.20	-11.31	47.54	34.70	10.85	36.20	0.00	143	141 PEAK																																																																					
Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5500.00	113.60	-----	-----	104.14	34.73	10.89	36.16	0.00	143	141 PEAK																																																																					
Avg	 <table border="1" data-bbox="268 1785 774 1919"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.92</td> <td>45.40</td> <td>54.00</td> <td>-8.60</td> <td>36.07</td> <td>34.70</td> <td>10.84</td> <td>36.21</td> <td>0.00</td> <td>143</td> <td>141 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5459.92	45.40	54.00	-8.60	36.07	34.70	10.84	36.21	0.00	143	141 AVERAGE	 <table border="1" data-bbox="906 1785 1412 1919"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>105.51</td> <td>-----</td> <td>-----</td> <td>96.05</td> <td>34.73</td> <td>10.89</td> <td>36.16</td> <td>0.00</td> <td>143</td> <td>141 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5500.00	105.51	-----	-----	96.05	34.73	10.89	36.16	0.00	143	141 AVERAGE											
	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5459.92	45.40	54.00	-8.60	36.07	34.70	10.84	36.21	0.00	143	141 AVERAGE																																																																					
Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5500.00	105.51	-----	-----	96.05	34.73	10.89	36.16	0.00	143	141 AVERAGE																																																																					



Mode	7																																																																																																											
	Harmonic																																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																											
ANT	CDD																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>58.70</td> <td>74.00</td> <td>-15.30</td> <td>71.37</td> <td>37.90</td> <td>16.04</td> <td>66.61</td> <td>0.00</td> <td>161</td> <td>46</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>48.01</td> <td>54.00</td> <td>-5.99</td> <td>60.68</td> <td>37.90</td> <td>16.04</td> <td>66.61</td> <td>0.00</td> <td>161</td> <td>46</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11000.00	58.70	74.00	-15.30	71.37	37.90	16.04	66.61	0.00	161	46	PEAK	2	11000.00	48.01	54.00	-5.99	60.68	37.90	16.04	66.61	0.00	161	46	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>55.82</td> <td>74.00</td> <td>-18.18</td> <td>68.49</td> <td>37.90</td> <td>16.04</td> <td>66.61</td> <td>0.00</td> <td>161</td> <td>223</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>45.74</td> <td>54.00</td> <td>-8.26</td> <td>58.41</td> <td>37.90</td> <td>16.04</td> <td>66.61</td> <td>0.00</td> <td>161</td> <td>223</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11000.00	55.82	74.00	-18.18	68.49	37.90	16.04	66.61	0.00	161	223	PEAK	2	11000.00	45.74	54.00	-8.26	58.41	37.90	16.04	66.61	0.00	161	223	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11000.00	58.70	74.00	-15.30	71.37	37.90	16.04	66.61	0.00	161	46	PEAK																																																																																																
2	11000.00	48.01	54.00	-5.99	60.68	37.90	16.04	66.61	0.00	161	46	AVERAGE																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11000.00	55.82	74.00	-18.18	68.49	37.90	16.04	66.61	0.00	161	223	PEAK																																																																																																
2	11000.00	45.74	54.00	-8.26	58.41	37.90	16.04	66.61	0.00	161	223	AVERAGE																																																																																																






Mode	8																																																																																																											
	Harmonic																																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																											
ANT	CDD																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>58.53</td> <td>74.00</td> <td>-15.47</td> <td>71.04</td> <td>37.86</td> <td>16.15</td> <td>66.52</td> <td>0.00</td> <td>315</td> <td>41</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>47.28</td> <td>54.00</td> <td>-6.72</td> <td>59.79</td> <td>37.86</td> <td>16.15</td> <td>66.52</td> <td>0.00</td> <td>315</td> <td>41</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11160.00	58.53	74.00	-15.47	71.04	37.86	16.15	66.52	0.00	315	41	PEAK	2	11160.00	47.28	54.00	-6.72	59.79	37.86	16.15	66.52	0.00	315	41	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>57.60</td> <td>74.00</td> <td>-16.40</td> <td>70.11</td> <td>37.86</td> <td>16.15</td> <td>66.52</td> <td>0.00</td> <td>100</td> <td>225</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>47.34</td> <td>54.00</td> <td>-6.66</td> <td>59.85</td> <td>37.86</td> <td>16.15</td> <td>66.52</td> <td>0.00</td> <td>100</td> <td>225</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11160.00	57.60	74.00	-16.40	70.11	37.86	16.15	66.52	0.00	100	225	PEAK	2	11160.00	47.34	54.00	-6.66	59.85	37.86	16.15	66.52	0.00	100	225	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																				
1	11160.00	58.53	74.00	-15.47	71.04	37.86	16.15	66.52	0.00	315	41	PEAK																																																																																																
2	11160.00	47.28	54.00	-6.72	59.79	37.86	16.15	66.52	0.00	315	41	AVERAGE																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																				
1	11160.00	57.60	74.00	-16.40	70.11	37.86	16.15	66.52	0.00	100	225	PEAK																																																																																																
2	11160.00	47.34	54.00	-6.66	59.85	37.86	16.15	66.52	0.00	100	225	AVERAGE																																																																																																



Mode	9																																																																																							
	Band Edge - L																																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																							
ANT	CDD																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5728.36</td> <td>59.49</td> <td>68.20</td> <td>-8.71</td> <td>50.71</td> <td>34.95</td> <td>11.18</td> <td>37.35</td> <td>0.00</td> <td>293</td> <td>122</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5728.36	59.49	68.20	-8.71	50.71	34.95	11.18	37.35	0.00	293	122	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>110.34</td> <td>-----</td> <td>-----</td> <td>101.15</td> <td>34.92</td> <td>11.14</td> <td>36.87</td> <td>0.00</td> <td>293</td> <td>122</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5700.00	110.34	-----	-----	101.15	34.92	11.14	36.87	0.00	293	122	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 5728.36	59.49	68.20	-8.71	50.71	34.95	11.18	37.35	0.00	293	122	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 5700.00	110.34	-----	-----	101.15	34.92	11.14	36.87	0.00	293	122	PEAK																																																																													
Avg		<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>102.22</td> <td>-----</td> <td>-----</td> <td>92.95</td> <td>34.92</td> <td>11.13</td> <td>36.78</td> <td>0.00</td> <td>293</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5700.00	102.22	-----	-----	92.95	34.92	11.13	36.78	0.00	293	122	AVERAGE																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 5700.00	102.22	-----	-----	92.95	34.92	11.13	36.78	0.00	293	122	AVERAGE																																																																													

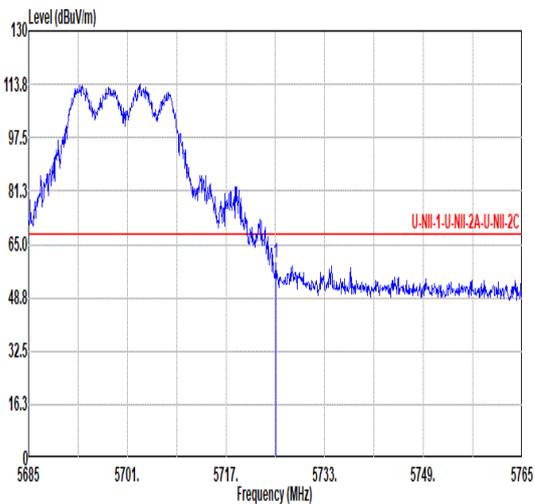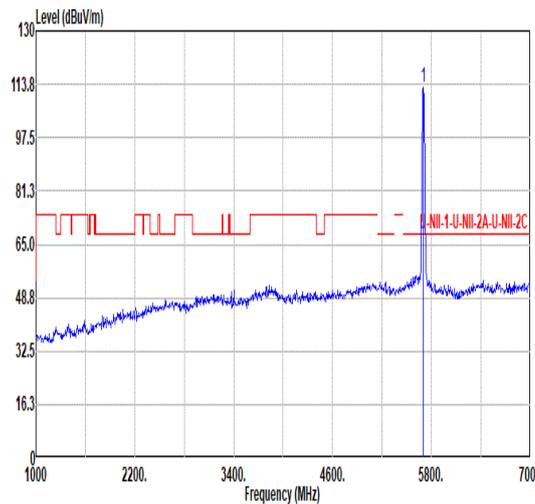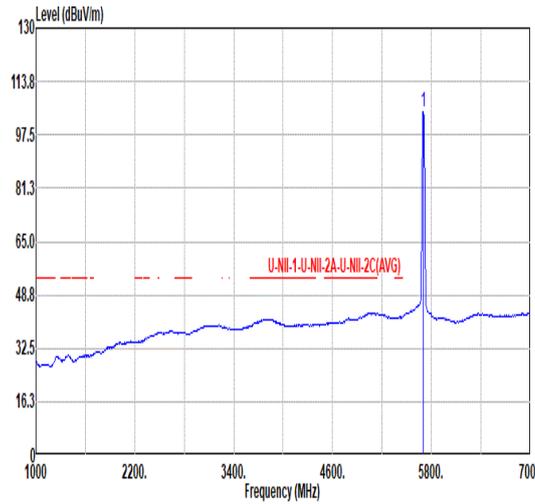

Mode	9																																																																																									
	Band Edge - L																																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																									
ANT	CDD																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>5685 5701. 5717. 5733. 5749. 5765</p> <p>Frequency (MHz)</p> <p style="color: red;">U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.08</td> <td>59.52</td> <td>68.20</td> <td>-8.68</td> <td>50.68</td> <td>34.95</td> <td>11.18</td> <td>37.29</td> <td>0.00</td> <td>387</td> <td>183</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5725.08	59.52	68.20	-8.68	50.68	34.95	11.18	37.29	0.00	387	183	PEAK	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>1000 2200. 3400. 4600. 5800. 7000</p> <p>Frequency (MHz)</p> <p style="color: red;">U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>112.64</td> <td>-----</td> <td>-----</td> <td>103.52</td> <td>34.93</td> <td>11.15</td> <td>36.96</td> <td>0.00</td> <td>387</td> <td>183</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5700.00	112.64	-----	-----	103.52	34.93	11.15	36.96	0.00	387	183	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5725.08	59.52	68.20	-8.68	50.68	34.95	11.18	37.29	0.00	387	183	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5700.00	112.64	-----	-----	103.52	34.93	11.15	36.96	0.00	387	183	PEAK																																																																														
Avg		 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>1000 2200. 3400. 4600. 5800. 7000</p> <p>Frequency (MHz)</p> <p style="color: red;">U-NII-1-U-NII-2A-U-NII-2C(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>104.58</td> <td>-----</td> <td>-----</td> <td>95.31</td> <td>34.92</td> <td>11.13</td> <td>36.78</td> <td>0.00</td> <td>387</td> <td>183</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5700.00	104.58	-----	-----	95.31	34.92	11.13	36.78	0.00	387	183	AVERAGE																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5700.00	104.58	-----	-----	95.31	34.92	11.13	36.78	0.00	387	183	AVERAGE																																																																														







Mode	9																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																			
ANT	CDD																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>58.20</td> <td>74.00</td> <td>-15.80</td> <td>70.29</td> <td>38.00</td> <td>16.30</td> <td>66.39</td> <td>0.00</td> <td>196</td> <td>20</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>47.94</td> <td>54.00</td> <td>-6.06</td> <td>60.02</td> <td>38.00</td> <td>16.30</td> <td>66.38</td> <td>0.00</td> <td>196</td> <td>20</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11400.00	58.20	74.00	-15.80	70.29	38.00	16.30	66.39	0.00	196	20	PEAK	2	11400.00	47.94	54.00	-6.06	60.02	38.00	16.30	66.38	0.00	196	20	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>55.64</td> <td>74.00</td> <td>-18.36</td> <td>67.73</td> <td>38.00</td> <td>16.30</td> <td>66.39</td> <td>0.00</td> <td>100</td> <td>201</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>46.04</td> <td>54.00</td> <td>-7.96</td> <td>58.12</td> <td>38.00</td> <td>16.30</td> <td>66.38</td> <td>0.00</td> <td>100</td> <td>201</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11400.00	55.64	74.00	-18.36	67.73	38.00	16.30	66.39	0.00	100	201	PEAK	2	11400.00	46.04	54.00	-7.96	58.12	38.00	16.30	66.38	0.00	100	201	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	11400.00	58.20	74.00	-15.80	70.29	38.00	16.30	66.39	0.00	196	20	PEAK																																																																																																								
2	11400.00	47.94	54.00	-6.06	60.02	38.00	16.30	66.38	0.00	196	20	AVERAGE																																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	11400.00	55.64	74.00	-18.36	67.73	38.00	16.30	66.39	0.00	100	201	PEAK																																																																																																								
2	11400.00	46.04	54.00	-7.96	58.12	38.00	16.30	66.38	0.00	100	201	AVERAGE																																																																																																								



Mode	10																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full_5180MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.10</td> <td>55.55</td> <td>74.00</td> <td>-18.45</td> <td>47.21</td> <td>34.40</td> <td>10.60</td> <td>36.66</td> <td>0.00</td> <td>300</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5144.10	55.55	74.00	-18.45	47.21	34.40	10.60	36.66	0.00	300	144	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>107.61</td> <td>-----</td> <td>-----</td> <td>99.16</td> <td>34.43</td> <td>10.64</td> <td>36.62</td> <td>0.00</td> <td>300</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	107.61	-----	-----	99.16	34.43	10.64	36.62	0.00	300	144	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5144.10	55.55	74.00	-18.45	47.21	34.40	10.60	36.66	0.00	300	144	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	107.61	-----	-----	99.16	34.43	10.64	36.62	0.00	300	144	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.40</td> <td>46.05</td> <td>54.00</td> <td>-7.95</td> <td>37.69</td> <td>34.40</td> <td>10.61</td> <td>36.65</td> <td>0.00</td> <td>300</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.40	46.05	54.00	-7.95	37.69	34.40	10.61	36.65	0.00	300	144	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>96.72</td> <td>-----</td> <td>-----</td> <td>88.26</td> <td>34.43</td> <td>10.64</td> <td>36.61</td> <td>0.00</td> <td>300</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	96.72	-----	-----	88.26	34.43	10.64	36.61	0.00	300	144	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.40	46.05	54.00	-7.95	37.69	34.40	10.61	36.65	0.00	300	144	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	96.72	-----	-----	88.26	34.43	10.64	36.61	0.00	300	144	AVERAGE																																																																														

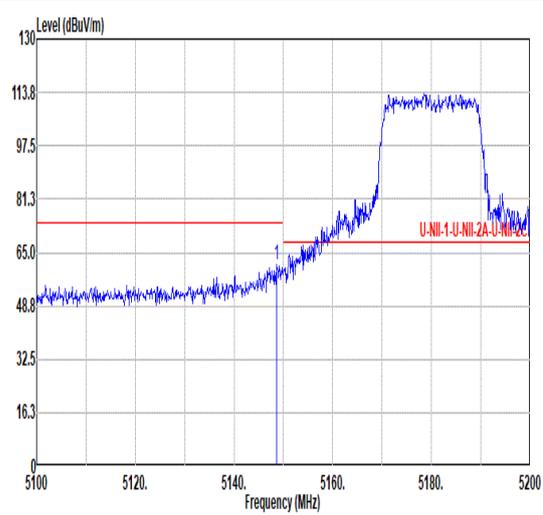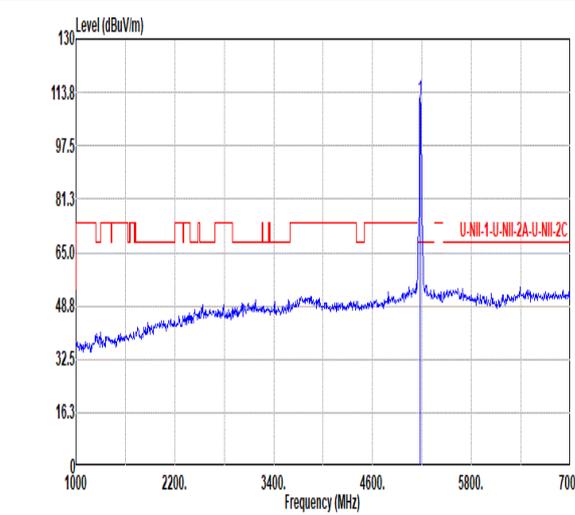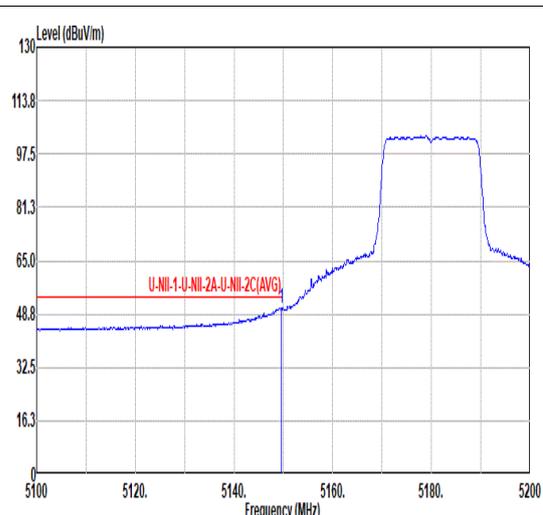
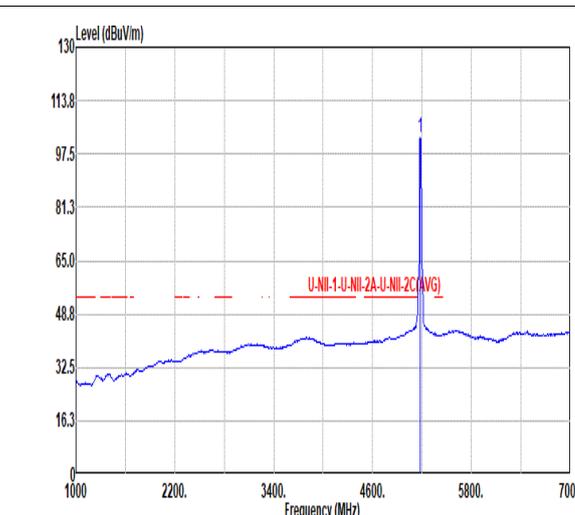


Mode	10																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full_5180MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a signal rising from ~48.8 dBuV/m at 5100 MHz to a peak of ~113.8 dBuV/m at 5180 MHz. A red limit line is shown at 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.70</td> <td>61.47</td> <td>74.00</td> <td>-12.53</td> <td>53.12</td> <td>34.40</td> <td>10.61</td> <td>36.66</td> <td>0.00</td> <td>207</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5148.70	61.47	74.00	-12.53	53.12	34.40	10.61	36.66	0.00	207	149	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal rising from ~32.5 dBuV/m at 1000 MHz to a peak of ~113.8 dBuV/m at 5180 MHz. A red limit line is shown at 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>111.59</td> <td>-----</td> <td>-----</td> <td>103.13</td> <td>34.43</td> <td>10.64</td> <td>36.61</td> <td>0.00</td> <td>207</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	111.59	-----	-----	103.13	34.43	10.64	36.61	0.00	207	149	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5148.70	61.47	74.00	-12.53	53.12	34.40	10.61	36.66	0.00	207	149	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	111.59	-----	-----	103.13	34.43	10.64	36.61	0.00	207	149	PEAK																																																																														
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows the average signal level, rising from ~48.8 dBuV/m at 5100 MHz to a peak of ~113.8 dBuV/m at 5180 MHz. A red limit line is shown at 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.60</td> <td>50.72</td> <td>54.00</td> <td>-3.28</td> <td>42.36</td> <td>34.40</td> <td>10.61</td> <td>36.65</td> <td>0.00</td> <td>207</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.60	50.72	54.00	-3.28	42.36	34.40	10.61	36.65	0.00	207	149	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows the average signal level, rising from ~32.5 dBuV/m at 1000 MHz to a peak of ~113.8 dBuV/m at 5180 MHz. A red limit line is shown at 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.54</td> <td>-----</td> <td>-----</td> <td>94.08</td> <td>34.43</td> <td>10.64</td> <td>36.61</td> <td>0.00</td> <td>207</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	102.54	-----	-----	94.08	34.43	10.64	36.61	0.00	207	149	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.60	50.72	54.00	-3.28	42.36	34.40	10.61	36.65	0.00	207	149	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	102.54	-----	-----	94.08	34.43	10.64	36.61	0.00	207	149	AVERAGE																																																																														



Mode	10																																																																																							
	Harmonic																																																																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full_5180MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>47.44</td> <td>68.20</td> <td>-20.76</td> <td>61.57</td> <td>37.37</td> <td>15.46</td> <td>66.96</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	47.44	68.20	-20.76	61.57	37.37	15.46	66.96	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>49.20</td> <td>68.20</td> <td>-19.00</td> <td>63.35</td> <td>37.36</td> <td>15.45</td> <td>66.96</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	49.20	68.20	-19.00	63.35	37.36	15.45	66.96	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10360.00	47.44	68.20	-20.76	61.57	37.37	15.46	66.96	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10360.00	49.20	68.20	-19.00	63.35	37.36	15.45	66.96	0.00	---	---	PEAK																																																																													

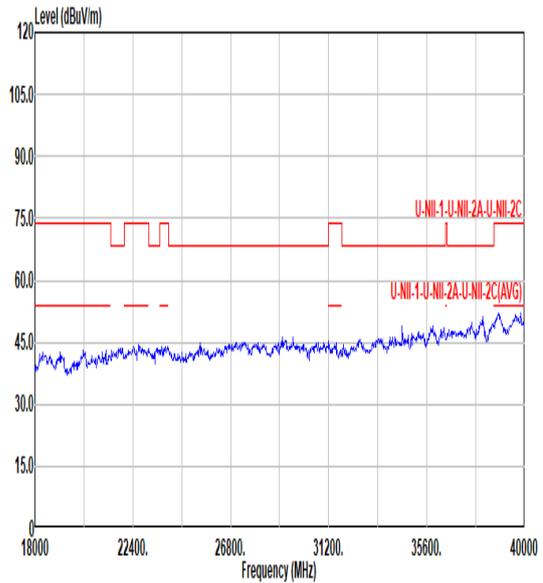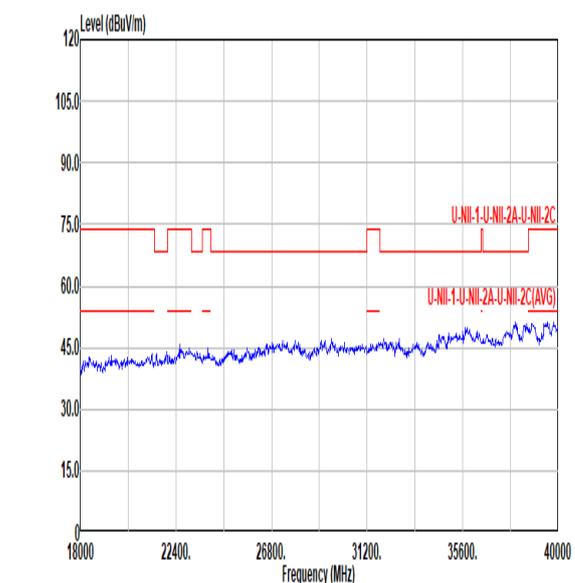

Mode	10	
	18G-40G	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full_5180MHz	
ANT	STBC	
Pol.	Horizontal	Vertical
Peak Avg		



Mode	10																																																																																																																																																																									
	30-1G																																																																																																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full_5180MHz																																																																																																																																																																									
ANT	STBC																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>101.54</td><td>39.32</td><td>43.50</td><td>-4.18</td><td>54.00</td><td>16.12</td><td>1.05</td><td>32.65</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>225.21</td><td>41.33</td><td>46.00</td><td>-4.67</td><td>56.90</td><td>15.69</td><td>1.57</td><td>32.63</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>252.37</td><td>42.37</td><td>46.00</td><td>-3.63</td><td>54.77</td><td>18.83</td><td>1.66</td><td>32.89</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>302.81</td><td>40.14</td><td>46.00</td><td>-5.86</td><td>51.79</td><td>19.36</td><td>1.82</td><td>32.83</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>381.38</td><td>35.58</td><td>46.00</td><td>-10.42</td><td>45.37</td><td>21.11</td><td>2.06</td><td>32.96</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>563.02</td><td>34.25</td><td>46.00</td><td>-11.75</td><td>38.64</td><td>26.39</td><td>2.47</td><td>33.25</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	APos (cm)	TPos (deg)	Remark	1	101.54	39.32	43.50	-4.18	54.00	16.12	1.05	32.65	--	--	Peak	2	225.21	41.33	46.00	-4.67	56.90	15.69	1.57	32.63	--	--	Peak	3	252.37	42.37	46.00	-3.63	54.77	18.83	1.66	32.89	--	--	Peak	4	302.81	40.14	46.00	-5.86	51.79	19.36	1.82	32.83	--	--	Peak	5	381.38	35.58	46.00	-10.42	45.37	21.11	2.06	32.96	--	--	Peak	6	563.02	34.25	46.00	-11.75	38.64	26.39	2.47	33.25	--	--	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Over (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>41.16</td><td>36.07</td><td>40.00</td><td>-3.93</td><td>49.04</td><td>19.27</td><td>0.00</td><td>32.84</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>102.27</td><td>39.07</td><td>43.50</td><td>-4.43</td><td>54.46</td><td>16.21</td><td>1.05</td><td>32.65</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>142.04</td><td>34.28</td><td>43.50</td><td>-9.22</td><td>48.45</td><td>17.35</td><td>1.18</td><td>32.70</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>244.37</td><td>35.76</td><td>46.00</td><td>-10.24</td><td>49.22</td><td>17.76</td><td>1.65</td><td>32.87</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>299.66</td><td>34.57</td><td>46.00</td><td>-11.43</td><td>46.27</td><td>19.31</td><td>1.82</td><td>32.83</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>556.47</td><td>32.16</td><td>46.00</td><td>-13.84</td><td>36.81</td><td>26.13</td><td>2.45</td><td>33.23</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	APos (cm)	TPos (deg)	Remark	1	41.16	36.07	40.00	-3.93	49.04	19.27	0.00	32.84	--	--	Peak	2	102.27	39.07	43.50	-4.43	54.46	16.21	1.05	32.65	--	--	Peak	3	142.04	34.28	43.50	-9.22	48.45	17.35	1.18	32.70	--	--	Peak	4	244.37	35.76	46.00	-10.24	49.22	17.76	1.65	32.87	--	--	Peak	5	299.66	34.57	46.00	-11.43	46.27	19.31	1.82	32.83	--	--	Peak	6	556.47	32.16	46.00	-13.84	36.81	26.13	2.45	33.23	--	--	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																														
1	101.54	39.32	43.50	-4.18	54.00	16.12	1.05	32.65	--	--	Peak																																																																																																																																																															
2	225.21	41.33	46.00	-4.67	56.90	15.69	1.57	32.63	--	--	Peak																																																																																																																																																															
3	252.37	42.37	46.00	-3.63	54.77	18.83	1.66	32.89	--	--	Peak																																																																																																																																																															
4	302.81	40.14	46.00	-5.86	51.79	19.36	1.82	32.83	--	--	Peak																																																																																																																																																															
5	381.38	35.58	46.00	-10.42	45.37	21.11	2.06	32.96	--	--	Peak																																																																																																																																																															
6	563.02	34.25	46.00	-11.75	38.64	26.39	2.47	33.25	--	--	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	41.16	36.07	40.00	-3.93	49.04	19.27	0.00	32.84	--	--	Peak																																																																																																																																																															
2	102.27	39.07	43.50	-4.43	54.46	16.21	1.05	32.65	--	--	Peak																																																																																																																																																															
3	142.04	34.28	43.50	-9.22	48.45	17.35	1.18	32.70	--	--	Peak																																																																																																																																																															
4	244.37	35.76	46.00	-10.24	49.22	17.76	1.65	32.87	--	--	Peak																																																																																																																																																															
5	299.66	34.57	46.00	-11.43	46.27	19.31	1.82	32.83	--	--	Peak																																																																																																																																																															
6	556.47	32.16	46.00	-13.84	36.81	26.13	2.45	33.23	--	--	Peak																																																																																																																																																															



Mode	11																																																																																							
	Harmonic																																																																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full_5220MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>50.48</td> <td>68.20</td> <td>-17.72</td> <td>64.41</td> <td>37.45</td> <td>15.53</td> <td>66.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10440.00	50.48	68.20	-17.72	64.41	37.45	15.53	66.91	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>56.53</td> <td>68.20</td> <td>-11.67</td> <td>70.48</td> <td>37.44</td> <td>15.53</td> <td>66.92</td> <td>0.00</td> <td>187</td> <td>37</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10440.00	56.53	68.20	-11.67	70.48	37.44	15.53	66.92	0.00	187	37	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10440.00	50.48	68.20	-17.72	64.41	37.45	15.53	66.91	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10440.00	56.53	68.20	-11.67	70.48	37.44	15.53	66.92	0.00	187	37	PEAK																																																																													



Mode	12																																																																																							
	Harmonic																																																																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full_5240MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10400.00</td> <td>51.19</td> <td>68.20</td> <td>-17.01</td> <td>65.04</td> <td>37.48</td> <td>15.56</td> <td>66.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10400.00	51.19	68.20	-17.01	65.04	37.48	15.56	66.89	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10400.00</td> <td>55.65</td> <td>68.20</td> <td>-12.55</td> <td>69.50</td> <td>37.48</td> <td>15.56</td> <td>66.89</td> <td>0.00</td> <td>186</td> <td>37</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10400.00	55.65	68.20	-12.55	69.50	37.48	15.56	66.89	0.00	186	37	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10400.00	51.19	68.20	-17.01	65.04	37.48	15.56	66.89	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10400.00	55.65	68.20	-12.55	69.50	37.48	15.56	66.89	0.00	186	37	PEAK																																																																													



Mode	13																																																																																							
	Harmonic																																																																																							
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full_5260MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>51.87</td> <td>68.20</td> <td>-16.33</td> <td>65.62</td> <td>37.52</td> <td>15.60</td> <td>66.87</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10520.00	51.87	68.20	-16.33	65.62	37.52	15.60	66.87	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>55.58</td> <td>68.20</td> <td>-12.62</td> <td>69.33</td> <td>37.52</td> <td>15.60</td> <td>66.87</td> <td>0.00</td> <td>265</td> <td>46</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10520.00	55.58	68.20	-12.62	69.33	37.52	15.60	66.87	0.00	265	46	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10520.00	51.87	68.20	-16.33	65.62	37.52	15.60	66.87	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 10520.00	55.58	68.20	-12.62	69.33	37.52	15.60	66.87	0.00	265	46	PEAK																																																																													



Mode	14																																																																																											
	Harmonic																																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_Full_5300MHZ																																																																																											
ANT	STBC																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>54.37</td> <td>74.00</td> <td>-19.63</td> <td>67.93</td> <td>37.60</td> <td>15.67</td> <td>66.83</td> <td>0.00</td> <td>100</td> <td>18 PEAK</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>45.06</td> <td>54.00</td> <td>-8.94</td> <td>58.62</td> <td>37.60</td> <td>15.67</td> <td>66.83</td> <td>0.00</td> <td>100</td> <td>18 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	10600.00	54.37	74.00	-19.63	67.93	37.60	15.67	66.83	0.00	100	18 PEAK	2	10600.00	45.06	54.00	-8.94	58.62	37.60	15.67	66.83	0.00	100	18 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>55.16</td> <td>74.00</td> <td>-18.84</td> <td>68.72</td> <td>37.60</td> <td>15.67</td> <td>66.83</td> <td>0.00</td> <td>122</td> <td>54 PEAK</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>45.43</td> <td>54.00</td> <td>-8.57</td> <td>58.99</td> <td>37.60</td> <td>15.67</td> <td>66.83</td> <td>0.00</td> <td>122</td> <td>54 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	10600.00	55.16	74.00	-18.84	68.72	37.60	15.67	66.83	0.00	122	54 PEAK	2	10600.00	45.43	54.00	-8.57	58.99	37.60	15.67	66.83	0.00	122	54 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																	
1	10600.00	54.37	74.00	-19.63	67.93	37.60	15.67	66.83	0.00	100	18 PEAK																																																																																	
2	10600.00	45.06	54.00	-8.94	58.62	37.60	15.67	66.83	0.00	100	18 AVERAGE																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																	
1	10600.00	55.16	74.00	-18.84	68.72	37.60	15.67	66.83	0.00	122	54 PEAK																																																																																	
2	10600.00	45.43	54.00	-8.57	58.99	37.60	15.67	66.83	0.00	122	54 AVERAGE																																																																																	



Mode	15																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full_5320MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.00</td> <td>55.52</td> <td>74.00</td> <td>-18.48</td> <td>46.55</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>100</td> <td>163</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5351.00	55.52	74.00	-18.48	46.55	34.59	10.75	36.37	0.00	100	163	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>107.53</td> <td>-----</td> <td>-----</td> <td>98.66</td> <td>34.56</td> <td>10.73</td> <td>36.42</td> <td>0.00</td> <td>100</td> <td>163</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	107.53	-----	-----	98.66	34.56	10.73	36.42	0.00	100	163	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5351.00	55.52	74.00	-18.48	46.55	34.59	10.75	36.37	0.00	100	163	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	107.53	-----	-----	98.66	34.56	10.73	36.42	0.00	100	163	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.70</td> <td>46.37</td> <td>54.00</td> <td>-7.63</td> <td>37.40</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>100</td> <td>163</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.70	46.37	54.00	-7.63	37.40	34.59	10.75	36.37	0.00	100	163	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.26</td> <td>-----</td> <td>-----</td> <td>89.36</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>100</td> <td>163</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	98.26	-----	-----	89.36	34.57	10.73	36.40	0.00	100	163	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.70	46.37	54.00	-7.63	37.40	34.59	10.75	36.37	0.00	100	163	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	98.26	-----	-----	89.36	34.57	10.73	36.40	0.00	100	163	AVERAGE																																																																														



Mode	15																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full_5320MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.90</td> <td>59.75</td> <td>74.00</td> <td>-14.25</td> <td>50.78</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>122</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.90	59.75	74.00	-14.25	50.78	34.59	10.75	36.37	0.00	122	144	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>113.36</td> <td>-----</td> <td>-----</td> <td>104.46</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>122</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	113.36	-----	-----	104.46	34.57	10.73	36.40	0.00	122	144	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.90	59.75	74.00	-14.25	50.78	34.59	10.75	36.37	0.00	122	144	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	113.36	-----	-----	104.46	34.57	10.73	36.40	0.00	122	144	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.70</td> <td>50.24</td> <td>54.00</td> <td>-3.76</td> <td>41.27</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>122</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.70	50.24	54.00	-3.76	41.27	34.59	10.75	36.37	0.00	122	144	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>103.99</td> <td>-----</td> <td>-----</td> <td>95.09</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>122</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	103.99	-----	-----	95.09	34.57	10.73	36.40	0.00	122	144	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.70	50.24	54.00	-3.76	41.27	34.59	10.75	36.37	0.00	122	144	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	103.99	-----	-----	95.09	34.57	10.73	36.40	0.00	122	144	AVERAGE																																																																														



Mode	15																																																																																																											
	Harmonic																																																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full_5320MHz																																																																																																											
ANT	STBC																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>54.99</td> <td>74.00</td> <td>-19.01</td> <td>68.49</td> <td>37.60</td> <td>15.71</td> <td>66.81</td> <td>0.00</td> <td>100</td> <td>15</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>45.13</td> <td>54.00</td> <td>-8.87</td> <td>58.63</td> <td>37.60</td> <td>15.71</td> <td>66.81</td> <td>0.00</td> <td>100</td> <td>15</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	10640.00	54.99	74.00	-19.01	68.49	37.60	15.71	66.81	0.00	100	15	PEAK	2	10640.00	45.13	54.00	-8.87	58.63	37.60	15.71	66.81	0.00	100	15	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>54.26</td> <td>74.00</td> <td>-19.74</td> <td>67.76</td> <td>37.60</td> <td>15.71</td> <td>66.81</td> <td>0.00</td> <td>184</td> <td>38</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>44.42</td> <td>54.00</td> <td>-9.58</td> <td>57.92</td> <td>37.60</td> <td>15.71</td> <td>66.81</td> <td>0.00</td> <td>184</td> <td>38</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	10640.00	54.26	74.00	-19.74	67.76	37.60	15.71	66.81	0.00	184	38	PEAK	2	10640.00	44.42	54.00	-9.58	57.92	37.60	15.71	66.81	0.00	184	38	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	10640.00	54.99	74.00	-19.01	68.49	37.60	15.71	66.81	0.00	100	15	PEAK																																																																																																
2	10640.00	45.13	54.00	-8.87	58.63	37.60	15.71	66.81	0.00	100	15	AVERAGE																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	10640.00	54.26	74.00	-19.74	67.76	37.60	15.71	66.81	0.00	184	38	PEAK																																																																																																
2	10640.00	44.42	54.00	-9.58	57.92	37.60	15.71	66.81	0.00	184	38	AVERAGE																																																																																																



Mode	16																																																																																																				
	Band Edge																																																																																																				
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full_5500MHz																																																																																																				
ANT	STBC																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.16</td> <td>53.77</td> <td>74.00</td> <td>-20.23</td> <td>44.46</td> <td>34.69</td> <td>10.84</td> <td>36.22</td> <td>0.00</td> <td>100</td> <td>120</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5470.00</td> <td>58.33</td> <td>68.20</td> <td>-9.87</td> <td>48.97</td> <td>34.71</td> <td>10.85</td> <td>36.20</td> <td>0.00</td> <td>100</td> <td>120</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.16	53.77	74.00	-20.23	44.46	34.69	10.84	36.22	0.00	100	120	PEAK	2	5470.00	58.33	68.20	-9.87	48.97	34.71	10.85	36.20	0.00	100	120	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>109.04</td> <td>-----</td> <td>-----</td> <td>99.60</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>100</td> <td>120</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	109.04	-----	-----	99.60	34.73	10.88	36.17	0.00	100	120	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5458.16	53.77	74.00	-20.23	44.46	34.69	10.84	36.22	0.00	100	120	PEAK																																																																																									
2	5470.00	58.33	68.20	-9.87	48.97	34.71	10.85	36.20	0.00	100	120	PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	109.04	-----	-----	99.60	34.73	10.88	36.17	0.00	100	120	PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>44.26</td> <td>54.00</td> <td>-9.74</td> <td>34.94</td> <td>34.70</td> <td>10.84</td> <td>36.22</td> <td>0.00</td> <td>100</td> <td>120</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	44.26	54.00	-9.74	34.94	34.70	10.84	36.22	0.00	100	120	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.38</td> <td>-----</td> <td>-----</td> <td>89.94</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>100</td> <td>120</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	99.38	-----	-----	89.94	34.73	10.88	36.17	0.00	100	120	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5459.60	44.26	54.00	-9.74	34.94	34.70	10.84	36.22	0.00	100	120	AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	99.38	-----	-----	89.94	34.73	10.88	36.17	0.00	100	120	AVERAGE																																																																																									



Mode	16																																																																																																				
	Band Edge																																																																																																				
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full_5500MHz																																																																																																				
ANT	STBC																																																																																																				
Pol.	Vertical	Fundamental																																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.44</td> <td>55.11</td> <td>74.00</td> <td>-18.89</td> <td>45.82</td> <td>34.69</td> <td>10.83</td> <td>36.23</td> <td>0.00</td> <td>100</td> <td>144</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.84</td> <td>58.83</td> <td>68.20</td> <td>-9.37</td> <td>49.47</td> <td>34.71</td> <td>10.85</td> <td>36.20</td> <td>0.00</td> <td>100</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5451.44	55.11	74.00	-18.89	45.82	34.69	10.83	36.23	0.00	100	144	PEAK	2	5469.84	58.83	68.20	-9.37	49.47	34.71	10.85	36.20	0.00	100	144	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>113.24</td> <td>-----</td> <td>-----</td> <td>103.80</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>100</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	113.24	-----	-----	103.80	34.73	10.88	36.17	0.00	100	144	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5451.44	55.11	74.00	-18.89	45.82	34.69	10.83	36.23	0.00	100	144	PEAK																																																																																									
2	5469.84	58.83	68.20	-9.37	49.47	34.71	10.85	36.20	0.00	100	144	PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	113.24	-----	-----	103.80	34.73	10.88	36.17	0.00	100	144	PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.32</td> <td>45.21</td> <td>54.00</td> <td>-8.79</td> <td>35.90</td> <td>34.69</td> <td>10.84</td> <td>36.22</td> <td>0.00</td> <td>100</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.32	45.21	54.00	-8.79	35.90	34.69	10.84	36.22	0.00	100	144	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>102.16</td> <td>-----</td> <td>-----</td> <td>92.72</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>100</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.16	-----	-----	92.72	34.73	10.88	36.17	0.00	100	144	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5458.32	45.21	54.00	-8.79	35.90	34.69	10.84	36.22	0.00	100	144	AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	102.16	-----	-----	92.72	34.73	10.88	36.17	0.00	100	144	AVERAGE																																																																																									



Mode	16																																																																																																											
	Harmonic																																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full_5500MHz																																																																																																											
ANT	STBC																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>57.00</td> <td>74.00</td> <td>-17.00</td> <td>69.67</td> <td>37.90</td> <td>16.04</td> <td>66.61</td> <td>0.00</td> <td>136</td> <td>79</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>47.74</td> <td>54.00</td> <td>-6.26</td> <td>60.41</td> <td>37.90</td> <td>16.04</td> <td>66.61</td> <td>0.00</td> <td>136</td> <td>79</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11000.00	57.00	74.00	-17.00	69.67	37.90	16.04	66.61	0.00	136	79	PEAK	2	11000.00	47.74	54.00	-6.26	60.41	37.90	16.04	66.61	0.00	136	79	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>55.07</td> <td>74.00</td> <td>-18.93</td> <td>67.74</td> <td>37.90</td> <td>16.04</td> <td>66.61</td> <td>0.00</td> <td>120</td> <td>223</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>45.80</td> <td>54.00</td> <td>-8.20</td> <td>58.47</td> <td>37.90</td> <td>16.04</td> <td>66.61</td> <td>0.00</td> <td>120</td> <td>223</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11000.00	55.07	74.00	-18.93	67.74	37.90	16.04	66.61	0.00	120	223	PEAK	2	11000.00	45.80	54.00	-8.20	58.47	37.90	16.04	66.61	0.00	120	223	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11000.00	57.00	74.00	-17.00	69.67	37.90	16.04	66.61	0.00	136	79	PEAK																																																																																																
2	11000.00	47.74	54.00	-6.26	60.41	37.90	16.04	66.61	0.00	136	79	AVERAGE																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11000.00	55.07	74.00	-18.93	67.74	37.90	16.04	66.61	0.00	120	223	PEAK																																																																																																
2	11000.00	45.80	54.00	-8.20	58.47	37.90	16.04	66.61	0.00	120	223	AVERAGE																																																																																																






Mode	17																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full_5580MHz																																																																																																																			
ANT	STBC																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>59.04</td> <td>74.00</td> <td>-14.96</td> <td>71.55</td> <td>37.86</td> <td>16.15</td> <td>66.52</td> <td>0.00</td> <td>300</td> <td>64</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>47.39</td> <td>54.00</td> <td>-6.61</td> <td>59.90</td> <td>37.86</td> <td>16.15</td> <td>66.52</td> <td>0.00</td> <td>300</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11160.00	59.04	74.00	-14.96	71.55	37.86	16.15	66.52	0.00	300	64	PEAK	2	11160.00	47.39	54.00	-6.61	59.90	37.86	16.15	66.52	0.00	300	64	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>57.27</td> <td>74.00</td> <td>-16.73</td> <td>69.78</td> <td>37.86</td> <td>16.15</td> <td>66.52</td> <td>0.00</td> <td>100</td> <td>223</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>47.33</td> <td>54.00</td> <td>-6.67</td> <td>59.84</td> <td>37.86</td> <td>16.15</td> <td>66.52</td> <td>0.00</td> <td>100</td> <td>223</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11160.00	57.27	74.00	-16.73	69.78	37.86	16.15	66.52	0.00	100	223	PEAK	2	11160.00	47.33	54.00	-6.67	59.84	37.86	16.15	66.52	0.00	100	223	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	11160.00	59.04	74.00	-14.96	71.55	37.86	16.15	66.52	0.00	300	64	PEAK																																																																																																								
2	11160.00	47.39	54.00	-6.61	59.90	37.86	16.15	66.52	0.00	300	64	AVERAGE																																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	11160.00	57.27	74.00	-16.73	69.78	37.86	16.15	66.52	0.00	100	223	PEAK																																																																																																								
2	11160.00	47.33	54.00	-6.67	59.84	37.86	16.15	66.52	0.00	100	223	AVERAGE																																																																																																								



Mode	18																																																																																									
	Band Edge																																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full_5700MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.00</td> <td>63.20</td> <td>68.20</td> <td>-5.00</td> <td>54.36</td> <td>34.95</td> <td>11.18</td> <td>37.29</td> <td>0.00</td> <td>300</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5725.00	63.20	68.20	-5.00	54.36	34.95	11.18	37.29	0.00	300	126	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>107.59</td> <td>-----</td> <td>-----</td> <td>98.32</td> <td>34.92</td> <td>11.13</td> <td>36.78</td> <td>0.00</td> <td>300</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5700.00	107.59	-----	-----	98.32	34.92	11.13	36.78	0.00	300	126	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5725.00	63.20	68.20	-5.00	54.36	34.95	11.18	37.29	0.00	300	126	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5700.00	107.59	-----	-----	98.32	34.92	11.13	36.78	0.00	300	126	PEAK																																																																														
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>97.53</td> <td>-----</td> <td>-----</td> <td>88.26</td> <td>34.92</td> <td>11.13</td> <td>36.78</td> <td>0.00</td> <td>300</td> <td>126</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5700.00	97.53	-----	-----	88.26	34.92	11.13	36.78	0.00	300	126	AVERAGE																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5700.00	97.53	-----	-----	88.26	34.92	11.13	36.78	0.00	300	126	AVERAGE																																																																														

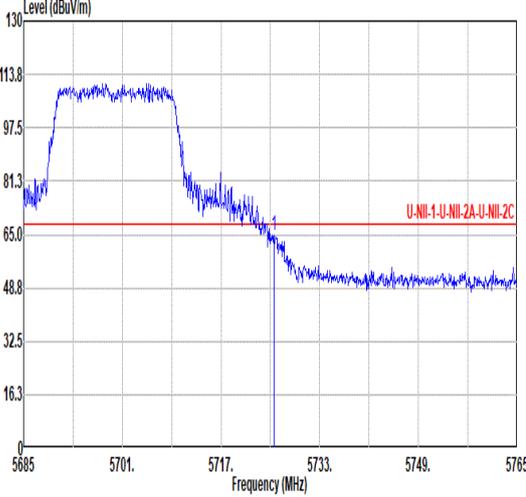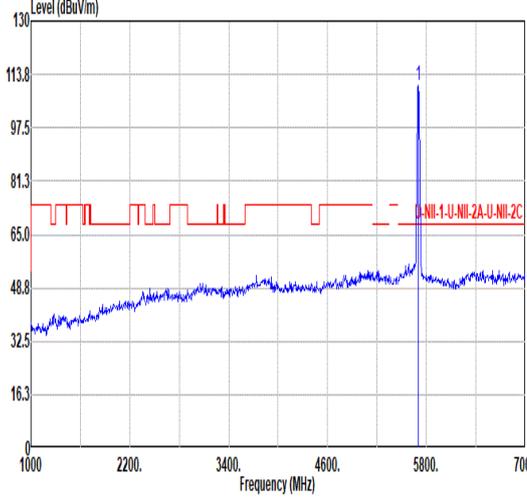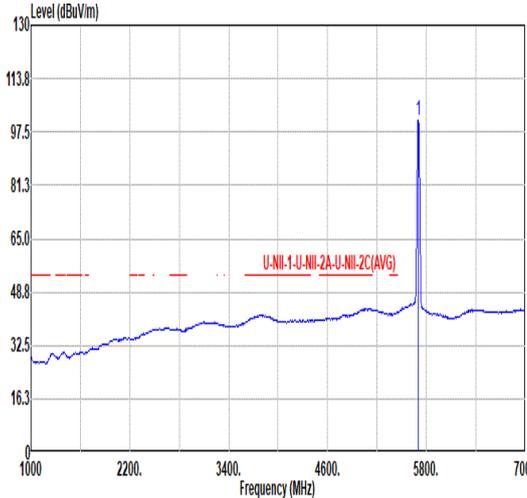

Mode	18																																																																																					
	Band Edge																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full_5700MHz																																																																																					
ANT	STBC																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.64</td> <td>64.76</td> <td>68.20</td> <td>-3.44</td> <td>55.93</td> <td>34.95</td> <td>11.18</td> <td>37.30</td> <td>0.00</td> <td>387</td> <td>178 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5725.64	64.76	68.20	-3.44	55.93	34.95	11.18	37.30	0.00	387	178 PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>110.31</td> <td>-----</td> <td>-----</td> <td>101.19</td> <td>34.93</td> <td>11.15</td> <td>36.96</td> <td>0.00</td> <td>387</td> <td>178 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5700.00	110.31	-----	-----	101.19	34.93	11.15	36.96	0.00	387	178 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5725.64	64.76	68.20	-3.44	55.93	34.95	11.18	37.30	0.00	387	178 PEAK																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5700.00	110.31	-----	-----	101.19	34.93	11.15	36.96	0.00	387	178 PEAK																																																																											
Avg	Blank	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>101.26</td> <td>-----</td> <td>-----</td> <td>92.07</td> <td>34.92</td> <td>11.14</td> <td>36.87</td> <td>0.00</td> <td>387</td> <td>178 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5700.00	101.26	-----	-----	92.07	34.92	11.14	36.87	0.00	387	178 AVERAGE																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5700.00	101.26	-----	-----	92.07	34.92	11.14	36.87	0.00	387	178 AVERAGE																																																																											



Mode	18																																																																																																											
	Harmonic																																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full_5700MHz																																																																																																											
ANT	STBC																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>57.00</td> <td>74.00</td> <td>-17.00</td> <td>69.09</td> <td>38.00</td> <td>16.30</td> <td>66.39</td> <td>0.00</td> <td>152</td> <td>27</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>46.84</td> <td>54.00</td> <td>-7.16</td> <td>58.93</td> <td>38.00</td> <td>16.30</td> <td>66.39</td> <td>0.00</td> <td>152</td> <td>27</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11400.00	57.00	74.00	-17.00	69.09	38.00	16.30	66.39	0.00	152	27	PEAK	2	11400.00	46.84	54.00	-7.16	58.93	38.00	16.30	66.39	0.00	152	27	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>55.27</td> <td>74.00</td> <td>-18.73</td> <td>67.36</td> <td>38.00</td> <td>16.30</td> <td>66.39</td> <td>0.00</td> <td>135</td> <td>222</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>44.93</td> <td>54.00</td> <td>-9.07</td> <td>57.02</td> <td>38.00</td> <td>16.30</td> <td>66.39</td> <td>0.00</td> <td>135</td> <td>222</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11400.00	55.27	74.00	-18.73	67.36	38.00	16.30	66.39	0.00	135	222	PEAK	2	11400.00	44.93	54.00	-9.07	57.02	38.00	16.30	66.39	0.00	135	222	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																				
1	11400.00	57.00	74.00	-17.00	69.09	38.00	16.30	66.39	0.00	152	27	PEAK																																																																																																
2	11400.00	46.84	54.00	-7.16	58.93	38.00	16.30	66.39	0.00	152	27	AVERAGE																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																				
1	11400.00	55.27	74.00	-18.73	67.36	38.00	16.30	66.39	0.00	135	222	PEAK																																																																																																
2	11400.00	44.93	54.00	-9.07	57.02	38.00	16.30	66.39	0.00	135	222	AVERAGE																																																																																																



Mode	19																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU26/0_5180MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.30</td> <td>54.98</td> <td>74.00</td> <td>-19.02</td> <td>46.64</td> <td>34.40</td> <td>10.60</td> <td>36.66</td> <td>0.00</td> <td>282</td> <td>121</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5145.30	54.98	74.00	-19.02	46.64	34.40	10.60	36.66	0.00	282	121	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>110.37</td> <td>-----</td> <td>-----</td> <td>101.95</td> <td>34.42</td> <td>10.63</td> <td>36.63</td> <td>0.00</td> <td>282</td> <td>121</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	110.37	-----	-----	101.95	34.42	10.63	36.63	0.00	282	121	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5145.30	54.98	74.00	-19.02	46.64	34.40	10.60	36.66	0.00	282	121	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	110.37	-----	-----	101.95	34.42	10.63	36.63	0.00	282	121	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.60</td> <td>42.98</td> <td>54.00</td> <td>-11.02</td> <td>34.63</td> <td>34.40</td> <td>10.61</td> <td>36.66</td> <td>0.00</td> <td>282</td> <td>121</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5147.60	42.98	54.00	-11.02	34.63	34.40	10.61	36.66	0.00	282	121	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.71</td> <td>-----</td> <td>-----</td> <td>94.29</td> <td>34.42</td> <td>10.63</td> <td>36.63</td> <td>0.00</td> <td>282</td> <td>121</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	102.71	-----	-----	94.29	34.42	10.63	36.63	0.00	282	121	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5147.60	42.98	54.00	-11.02	34.63	34.40	10.61	36.66	0.00	282	121	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	102.71	-----	-----	94.29	34.42	10.63	36.63	0.00	282	121	AVERAGE																																																																														



Mode	19																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU26/0_5180MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.90</td> <td>55.57</td> <td>74.00</td> <td>-18.43</td> <td>47.22</td> <td>34.40</td> <td>10.61</td> <td>36.66</td> <td>0.00</td> <td>300</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5146.90	55.57	74.00	-18.43	47.22	34.40	10.61	36.66	0.00	300	143	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>115.57</td> <td>-----</td> <td>-----</td> <td>107.15</td> <td>34.42</td> <td>10.63</td> <td>36.63</td> <td>0.00</td> <td>300</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	115.57	-----	-----	107.15	34.42	10.63	36.63	0.00	300	143	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5146.90	55.57	74.00	-18.43	47.22	34.40	10.61	36.66	0.00	300	143	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	115.57	-----	-----	107.15	34.42	10.63	36.63	0.00	300	143	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.90</td> <td>43.66</td> <td>54.00</td> <td>-10.34</td> <td>35.31</td> <td>34.40</td> <td>10.61</td> <td>36.66</td> <td>0.00</td> <td>300</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5146.90	43.66	54.00	-10.34	35.31	34.40	10.61	36.66	0.00	300	143	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>106.24</td> <td>-----</td> <td>-----</td> <td>97.82</td> <td>34.42</td> <td>10.63</td> <td>36.63</td> <td>0.00</td> <td>300</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	106.24	-----	-----	97.82	34.42	10.63	36.63	0.00	300	143	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5146.90	43.66	54.00	-10.34	35.31	34.40	10.61	36.66	0.00	300	143	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	106.24	-----	-----	97.82	34.42	10.63	36.63	0.00	300	143	AVERAGE																																																																														



Mode	20																																																																					
	Band Edge																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU26/8_5320MHz																																																																					
ANT	STBC																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5391.10</td> <td>53.83</td> <td>74.00</td> <td>-20.17</td> <td>44.74</td> <td>34.63</td> <td>10.77</td> <td>36.31</td> <td>0.00</td> <td>290</td> <td>152</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5391.10	53.83	74.00	-20.17	44.74	34.63	10.77	36.31	0.00	290	152	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>111.10</td> <td>-----</td> <td>-----</td> <td>102.20</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>290</td> <td>152</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5320.00	111.10	-----	-----	102.20	34.57	10.73	36.40	0.00	290	152	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																													
1	5391.10	53.83	74.00	-20.17	44.74	34.63	10.77	36.31	0.00	290	152	PEAK																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	5320.00	111.10	-----	-----	102.20	34.57	10.73	36.40	0.00	290	152	PEAK																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.30</td> <td>42.15</td> <td>54.00</td> <td>-11.85</td> <td>33.18</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>290</td> <td>152</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5351.30	42.15	54.00	-11.85	33.18	34.59	10.75	36.37	0.00	290	152	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>103.10</td> <td>-----</td> <td>-----</td> <td>94.20</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>290</td> <td>152</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5320.00	103.10	-----	-----	94.20	34.57	10.73	36.40	0.00	290	152	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	5351.30	42.15	54.00	-11.85	33.18	34.59	10.75	36.37	0.00	290	152	AVERAGE																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	5320.00	103.10	-----	-----	94.20	34.57	10.73	36.40	0.00	290	152	AVERAGE																																																										







Mode	20																																																																																							
	Band Edge																																																																																							
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU26/8_5320MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5374.50</td> <td>53.75</td> <td>74.00</td> <td>-20.25</td> <td>44.71</td> <td>34.62</td> <td>10.76</td> <td>36.34</td> <td>0.00</td> <td>101</td> <td>139</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5374.50	53.75	74.00	-20.25	44.71	34.62	10.76	36.34	0.00	101	139	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>115.51</td> <td>-----</td> <td>-----</td> <td>106.61</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>101</td> <td>139</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	115.51	-----	-----	106.61	34.57	10.73	36.40	0.00	101	139	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5374.50	53.75	74.00	-20.25	44.71	34.62	10.76	36.34	0.00	101	139	PEAK																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5320.00	115.51	-----	-----	106.61	34.57	10.73	36.40	0.00	101	139	PEAK																																																																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5369.20</td> <td>43.23</td> <td>54.00</td> <td>-10.77</td> <td>34.20</td> <td>34.61</td> <td>10.76</td> <td>36.34</td> <td>0.00</td> <td>101</td> <td>139</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5369.20	43.23	54.00	-10.77	34.20	34.61	10.76	36.34	0.00	101	139	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>107.86</td> <td>-----</td> <td>-----</td> <td>98.96</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>101</td> <td>139</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	107.86	-----	-----	98.96	34.57	10.73	36.40	0.00	101	139	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5369.20	43.23	54.00	-10.77	34.20	34.61	10.76	36.34	0.00	101	139	AVERAGE																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5320.00	107.86	-----	-----	98.96	34.57	10.73	36.40	0.00	101	139	AVERAGE																																																																												



Mode	21																																																																																																				
	Band Edge																																																																																																				
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU26/0_5500MHz																																																																																																				
ANT	STBC																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5430.64</td> <td>52.84</td> <td>74.00</td> <td>-21.16</td> <td>43.62</td> <td>34.67</td> <td>10.81</td> <td>36.26</td> <td>0.00</td> <td>100</td> <td>114</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.72</td> <td>53.43</td> <td>68.20</td> <td>-14.77</td> <td>44.08</td> <td>34.70</td> <td>10.85</td> <td>36.20</td> <td>0.00</td> <td>100</td> <td>114</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5430.64	52.84	74.00	-21.16	43.62	34.67	10.81	36.26	0.00	100	114	PEAK	2	5468.72	53.43	68.20	-14.77	44.08	34.70	10.85	36.20	0.00	100	114	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>111.71</td> <td>-----</td> <td>-----</td> <td>102.27</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>100</td> <td>114</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	111.71	-----	-----	102.27	34.73	10.88	36.17	0.00	100	114	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5430.64	52.84	74.00	-21.16	43.62	34.67	10.81	36.26	0.00	100	114	PEAK																																																																																									
2	5468.72	53.43	68.20	-14.77	44.08	34.70	10.85	36.20	0.00	100	114	PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	111.71	-----	-----	102.27	34.73	10.88	36.17	0.00	100	114	PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5411.12</td> <td>43.26</td> <td>54.00</td> <td>-10.74</td> <td>34.11</td> <td>34.65</td> <td>10.78</td> <td>36.28</td> <td>0.00</td> <td>100</td> <td>114</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5411.12	43.26	54.00	-10.74	34.11	34.65	10.78	36.28	0.00	100	114	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.60</td> <td>-----</td> <td>-----</td> <td>94.16</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>100</td> <td>114</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	103.60	-----	-----	94.16	34.73	10.88	36.17	0.00	100	114	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5411.12	43.26	54.00	-10.74	34.11	34.65	10.78	36.28	0.00	100	114	AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	103.60	-----	-----	94.16	34.73	10.88	36.17	0.00	100	114	AVERAGE																																																																																									

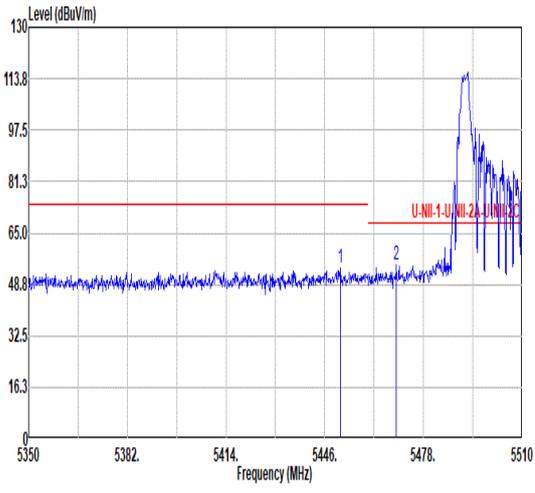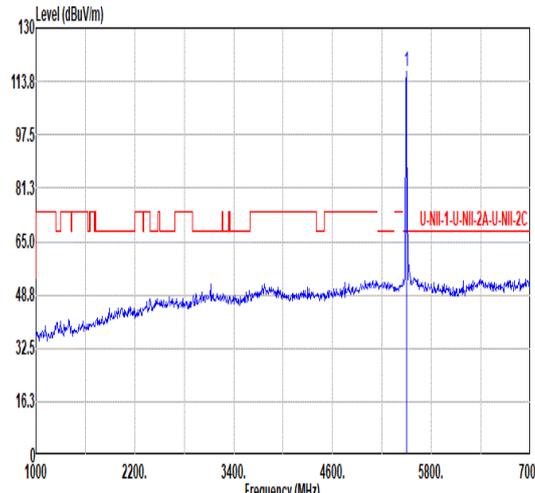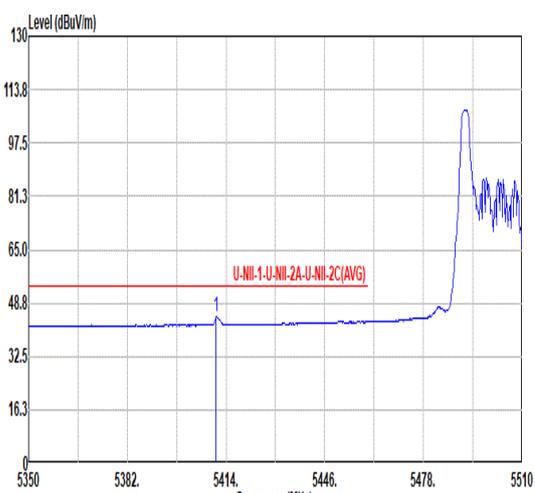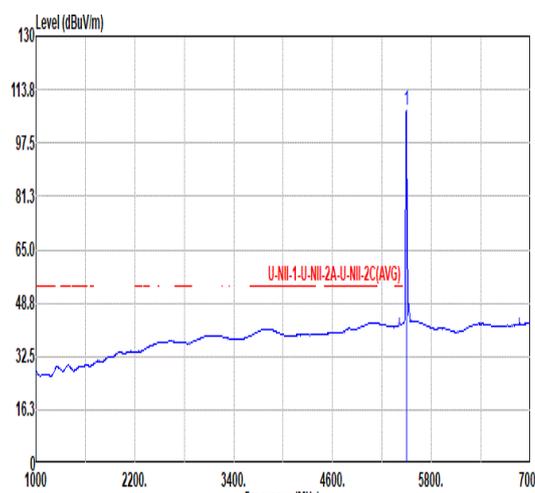

		<b>21</b>																																																																													
<b>Mode</b>	<b>Band Edge</b>																																																																														
	<b>U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU26/0_5500MHZ</b>																																																																														
<b>ANT</b>	<b>STBC</b>																																																																														
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																													
<b>Peak</b>	 <table border="1" data-bbox="263 1097 774 1243"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5450.96</td> <td>53.97</td> <td>74.00</td> <td>-20.03</td> <td>44.68</td> <td>34.69</td> <td>10.83</td> <td>36.23</td> <td>0.00</td> <td>300</td> <td>136 PEAK</td> </tr> <tr> <td>2 5469.20</td> <td>54.79</td> <td>68.20</td> <td>-13.41</td> <td>45.44</td> <td>34.70</td> <td>10.85</td> <td>36.20</td> <td>0.00</td> <td>300</td> <td>136 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5450.96	53.97	74.00	-20.03	44.68	34.69	10.83	36.23	0.00	300	136 PEAK	2 5469.20	54.79	68.20	-13.41	45.44	34.70	10.85	36.20	0.00	300	136 PEAK	 <table border="1" data-bbox="901 1097 1412 1243"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>116.04</td> <td>-----</td> <td>-----</td> <td>107.40</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>300</td> <td>136 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5500.00	116.04	-----	-----	107.40	34.73	10.88	36.17	0.00	300	136 PEAK
	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5450.96	53.97	74.00	-20.03	44.68	34.69	10.83	36.23	0.00	300	136 PEAK																																																																					
2 5469.20	54.79	68.20	-13.41	45.44	34.70	10.85	36.20	0.00	300	136 PEAK																																																																					
Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5500.00	116.04	-----	-----	107.40	34.73	10.88	36.17	0.00	300	136 PEAK																																																																					
<b>Avg</b>	 <table border="1" data-bbox="263 1769 774 1915"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5410.80</td> <td>44.62</td> <td>54.00</td> <td>-9.38</td> <td>35.47</td> <td>34.65</td> <td>10.78</td> <td>36.28</td> <td>0.00</td> <td>300</td> <td>136 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5410.80	44.62	54.00	-9.38	35.47	34.65	10.78	36.28	0.00	300	136 AVERAGE	 <table border="1" data-bbox="901 1769 1412 1915"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>107.29</td> <td>-----</td> <td>-----</td> <td>97.85</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>300</td> <td>136 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5500.00	107.29	-----	-----	97.85	34.73	10.88	36.17	0.00	300	136 AVERAGE											
	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5410.80	44.62	54.00	-9.38	35.47	34.65	10.78	36.28	0.00	300	136 AVERAGE																																																																					
Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5500.00	107.29	-----	-----	97.85	34.73	10.88	36.17	0.00	300	136 AVERAGE																																																																					



Mode	22																																																																																			
	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU26/8_5700MHz																																																																																			
ANT	STBC																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5730.60</td> <td>53.64</td> <td>68.20</td> <td>-14.56</td> <td>44.89</td> <td>34.95</td> <td>11.18</td> <td>37.38</td> <td>0.00</td> <td>289</td> <td>122 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5730.60	53.64	68.20	-14.56	44.89	34.95	11.18	37.38	0.00	289	122 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>111.33</td> <td>-----</td> <td>-----</td> <td>102.30</td> <td>34.93</td> <td>11.16</td> <td>37.06</td> <td>0.00</td> <td>289</td> <td>122 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5700.00	111.33	-----	-----	102.30	34.93	11.16	37.06	0.00	289	122 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 5730.60	53.64	68.20	-14.56	44.89	34.95	11.18	37.38	0.00	289	122 PEAK																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 5700.00	111.33	-----	-----	102.30	34.93	11.16	37.06	0.00	289	122 PEAK																																																																										
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>102.64</td> <td>-----</td> <td>-----</td> <td>93.61</td> <td>34.93</td> <td>11.16</td> <td>37.06</td> <td>0.00</td> <td>289</td> <td>122 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5700.00	102.64	-----	-----	93.61	34.93	11.16	37.06	0.00	289	122 AVERAGE																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 5700.00	102.64	-----	-----	93.61	34.93	11.16	37.06	0.00	289	122 AVERAGE																																																																										







Mode	22																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU26/8_5700MHZ																																																																																	
ANT	STBC																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.16</td> <td>54.21</td> <td>68.20</td> <td>-13.99</td> <td>45.38</td> <td>34.95</td> <td>11.18</td> <td>37.30</td> <td>0.00</td> <td>106</td> <td>127</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5725.16	54.21	68.20	-13.99	45.38	34.95	11.18	37.30	0.00	106	127	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>113.49</td> <td>-----</td> <td>-----</td> <td>104.46</td> <td>34.93</td> <td>11.16</td> <td>37.06</td> <td>0.00</td> <td>106</td> <td>127</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	113.49	-----	-----	104.46	34.93	11.16	37.06	0.00	106	127	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5725.16	54.21	68.20	-13.99	45.38	34.95	11.18	37.30	0.00	106	127	PEAK																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5700.00	113.49	-----	-----	104.46	34.93	11.16	37.06	0.00	106	127	PEAK																																																																						
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>105.53</td> <td>-----</td> <td>-----</td> <td>96.50</td> <td>34.93</td> <td>11.16</td> <td>37.06</td> <td>0.00</td> <td>106</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	105.53	-----	-----	96.50	34.93	11.16	37.06	0.00	106	127	AVERAGE																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5700.00	105.53	-----	-----	96.50	34.93	11.16	37.06	0.00	106	127	AVERAGE																																																																						



Mode	23																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.50</td> <td>55.81</td> <td>74.00</td> <td>-18.19</td> <td>47.48</td> <td>34.40</td> <td>10.60</td> <td>36.67</td> <td>0.00</td> <td>317</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5141.50	55.81	74.00	-18.19	47.48	34.40	10.60	36.67	0.00	317	140	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>106.64</td> <td>-----</td> <td>-----</td> <td>98.22</td> <td>34.42</td> <td>10.63</td> <td>36.63</td> <td>0.00</td> <td>317</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	106.64	-----	-----	98.22	34.42	10.63	36.63	0.00	317	140	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5141.50	55.81	74.00	-18.19	47.48	34.40	10.60	36.67	0.00	317	140	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	106.64	-----	-----	98.22	34.42	10.63	36.63	0.00	317	140	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5113.60</td> <td>43.36</td> <td>54.00</td> <td>-10.64</td> <td>35.13</td> <td>34.37</td> <td>10.57</td> <td>36.71</td> <td>0.00</td> <td>317</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5113.60	43.36	54.00	-10.64	35.13	34.37	10.57	36.71	0.00	317	140	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.49</td> <td>-----</td> <td>-----</td> <td>91.07</td> <td>34.42</td> <td>10.63</td> <td>36.63</td> <td>0.00</td> <td>317</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	99.49	-----	-----	91.07	34.42	10.63	36.63	0.00	317	140	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5113.60	43.36	54.00	-10.64	35.13	34.37	10.57	36.71	0.00	317	140	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	99.49	-----	-----	91.07	34.42	10.63	36.63	0.00	317	140	AVERAGE																																																																														

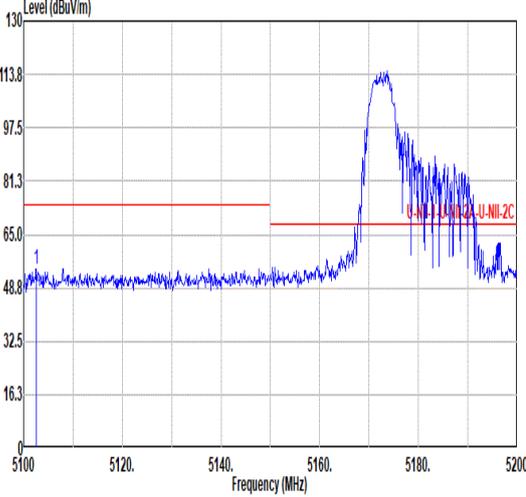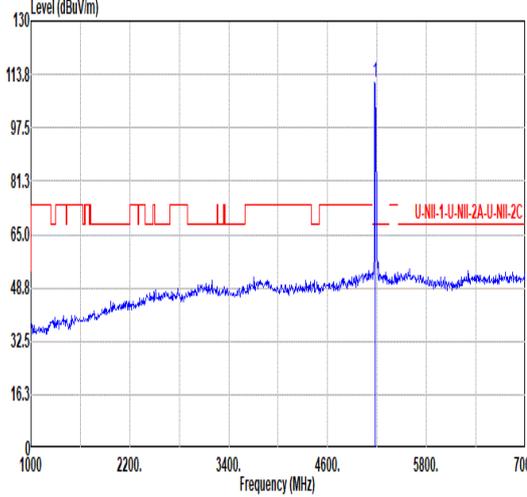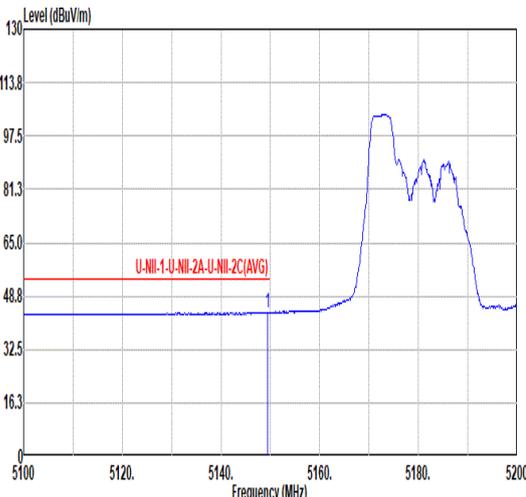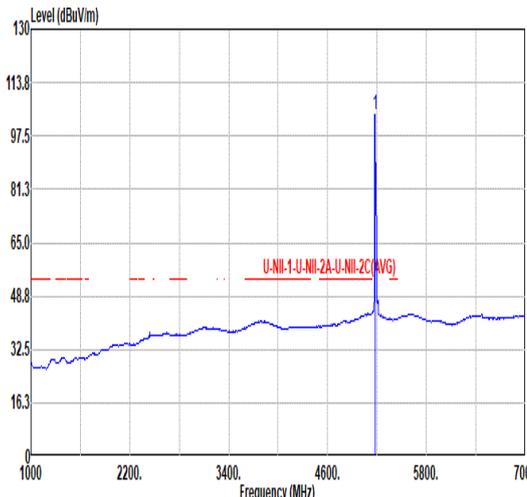

Mode	23																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <table border="1" data-bbox="268 1120 794 1243"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5102.60</td> <td>54.66</td> <td>74.00</td> <td>-19.34</td> <td>46.46</td> <td>34.36</td> <td>10.56</td> <td>36.72</td> <td>0.00</td> <td>300</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5102.60	54.66	74.00	-19.34	46.46	34.36	10.56	36.72	0.00	300	145	PEAK	 <table border="1" data-bbox="906 1120 1433 1243"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>111.21</td> <td>-----</td> <td>-----</td> <td>102.79</td> <td>34.42</td> <td>10.63</td> <td>36.63</td> <td>0.00</td> <td>300</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	111.21	-----	-----	102.79	34.42	10.63	36.63	0.00	300	145	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5102.60	54.66	74.00	-19.34	46.46	34.36	10.56	36.72	0.00	300	145	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	111.21	-----	-----	102.79	34.42	10.63	36.63	0.00	300	145	PEAK																																																																														
Avg	 <table border="1" data-bbox="268 1792 794 1915"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.40</td> <td>43.83</td> <td>54.00</td> <td>-10.17</td> <td>35.47</td> <td>34.40</td> <td>10.61</td> <td>36.65</td> <td>0.00</td> <td>300</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.40	43.83	54.00	-10.17	35.47	34.40	10.61	36.65	0.00	300	145	AVERAGE	 <table border="1" data-bbox="906 1792 1433 1915"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>103.88</td> <td>-----</td> <td>-----</td> <td>95.43</td> <td>34.43</td> <td>10.64</td> <td>36.62</td> <td>0.00</td> <td>300</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	103.88	-----	-----	95.43	34.43	10.64	36.62	0.00	300	145	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.40	43.83	54.00	-10.17	35.47	34.40	10.61	36.65	0.00	300	145	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	103.88	-----	-----	95.43	34.43	10.64	36.62	0.00	300	145	AVERAGE																																																																														



Mode	24																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU52/40_5320MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.60</td> <td>52.64</td> <td>74.00</td> <td>-21.36</td> <td>43.66</td> <td>34.60</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>300</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5353.60	52.64	74.00	-21.36	43.66	34.60	10.75	36.37	0.00	300	150	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>109.24</td> <td>-----</td> <td>-----</td> <td>100.34</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>300</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	109.24	-----	-----	100.34	34.57	10.73	36.40	0.00	300	150	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5353.60	52.64	74.00	-21.36	43.66	34.60	10.75	36.37	0.00	300	150	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	109.24	-----	-----	100.34	34.57	10.73	36.40	0.00	300	150	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.40</td> <td>42.52</td> <td>54.00</td> <td>-11.48</td> <td>33.54</td> <td>34.60</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>300</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5353.40	42.52	54.00	-11.48	33.54	34.60	10.75	36.37	0.00	300	150	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.94</td> <td>-----</td> <td>-----</td> <td>92.04</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>300</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	100.94	-----	-----	92.04	34.57	10.73	36.40	0.00	300	150	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5353.40	42.52	54.00	-11.48	33.54	34.60	10.75	36.37	0.00	300	150	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	100.94	-----	-----	92.04	34.57	10.73	36.40	0.00	300	150	AVERAGE																																																																														







Mode	24																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU52/40_5320MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.70</td> <td>53.60</td> <td>74.00</td> <td>-20.40</td> <td>44.63</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>100</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.70	53.60	74.00	-20.40	44.63	34.59	10.75	36.37	0.00	100	135	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>113.26</td> <td>-----</td> <td>-----</td> <td>104.36</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>100</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	113.26	-----	-----	104.36	34.57	10.73	36.40	0.00	100	135	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.70	53.60	74.00	-20.40	44.63	34.59	10.75	36.37	0.00	100	135	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	113.26	-----	-----	104.36	34.57	10.73	36.40	0.00	100	135	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.20</td> <td>43.06</td> <td>54.00</td> <td>-10.94</td> <td>34.09</td> <td>34.59</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>100</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.20	43.06	54.00	-10.94	34.09	34.59	10.75	36.37	0.00	100	135	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>104.32</td> <td>-----</td> <td>-----</td> <td>95.42</td> <td>34.57</td> <td>10.73</td> <td>36.40</td> <td>0.00</td> <td>100</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	104.32	-----	-----	95.42	34.57	10.73	36.40	0.00	100	135	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.20	43.06	54.00	-10.94	34.09	34.59	10.75	36.37	0.00	100	135	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	104.32	-----	-----	95.42	34.57	10.73	36.40	0.00	100	135	AVERAGE																																																																														



Mode	25																																																																																																				
	Band Edge																																																																																																				
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU52/37_5500MHz																																																																																																				
ANT	STBC																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.16</td> <td>54.05</td> <td>74.00</td> <td>-19.95</td> <td>44.75</td> <td>34.69</td> <td>10.83</td> <td>36.22</td> <td>0.00</td> <td>105</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5463.76</td> <td>53.59</td> <td>68.20</td> <td>-14.61</td> <td>44.26</td> <td>34.70</td> <td>10.84</td> <td>36.21</td> <td>0.00</td> <td>105</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.16	54.05	74.00	-19.95	44.75	34.69	10.83	36.22	0.00	105	110	PEAK	2	5463.76	53.59	68.20	-14.61	44.26	34.70	10.84	36.21	0.00	105	110	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>110.43</td> <td>-----</td> <td>-----</td> <td>100.99</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>105</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	110.43	-----	-----	100.99	34.73	10.88	36.17	0.00	105	110	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5454.16	54.05	74.00	-19.95	44.75	34.69	10.83	36.22	0.00	105	110	PEAK																																																																																									
2	5463.76	53.59	68.20	-14.61	44.26	34.70	10.84	36.21	0.00	105	110	PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	110.43	-----	-----	100.99	34.73	10.88	36.17	0.00	105	110	PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5410.80</td> <td>42.84</td> <td>54.00</td> <td>-11.16</td> <td>33.69</td> <td>34.65</td> <td>10.78</td> <td>36.28</td> <td>0.00</td> <td>105</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5410.80	42.84	54.00	-11.16	33.69	34.65	10.78	36.28	0.00	105	110	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>100.78</td> <td>-----</td> <td>-----</td> <td>91.34</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>105</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	100.78	-----	-----	91.34	34.73	10.88	36.17	0.00	105	110	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5410.80	42.84	54.00	-11.16	33.69	34.65	10.78	36.28	0.00	105	110	AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	100.78	-----	-----	91.34	34.73	10.88	36.17	0.00	105	110	AVERAGE																																																																																									

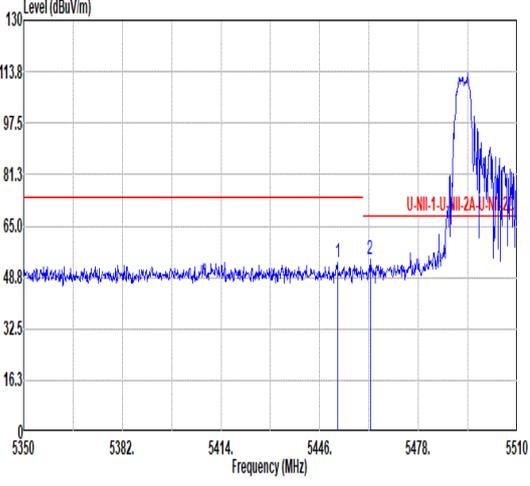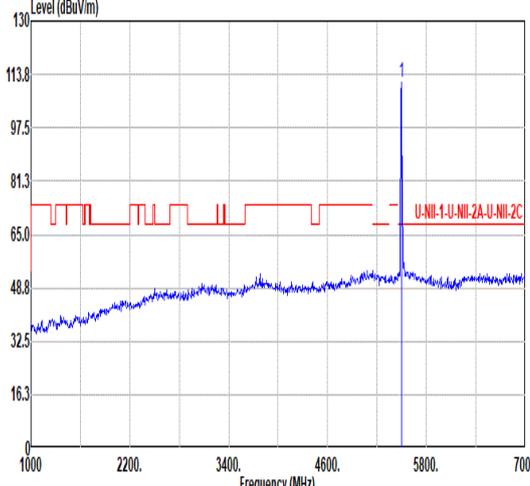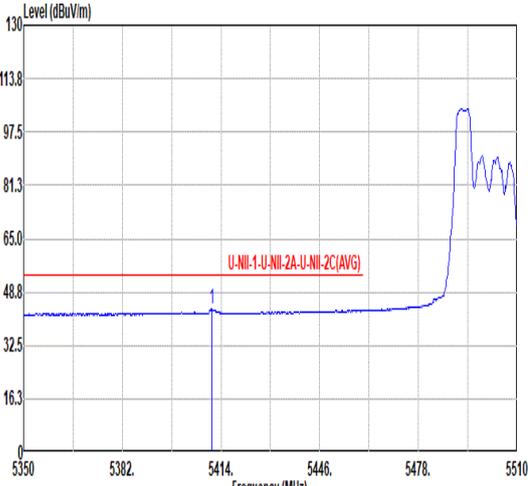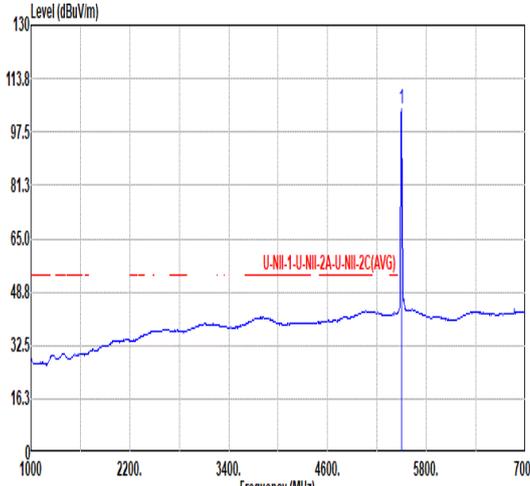

		25																																																																																
Mode		Band Edge																																																																																
		U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU52/37_5500MHz																																																																																
ANT		STBC																																																																																
Pol.	Vertical	Fundamental																																																																																
Peak	 <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.76</td> <td>53.48</td> <td>74.00</td> <td>-20.52</td> <td>44.19</td> <td>34.69</td> <td>10.83</td> <td>36.23</td> <td>0.00</td> <td>390</td> <td>133 PEAK</td> </tr> <tr> <td>2</td> <td>5462.32</td> <td>54.34</td> <td>68.20</td> <td>-13.86</td> <td>45.01</td> <td>34.70</td> <td>10.84</td> <td>36.21</td> <td>0.00</td> <td>390</td> <td>133 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5451.76	53.48	74.00	-20.52	44.19	34.69	10.83	36.23	0.00	390	133 PEAK	2	5462.32	54.34	68.20	-13.86	45.01	34.70	10.84	36.21	0.00	390	133 PEAK	 <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>111.53</td> <td>-----</td> <td>-----</td> <td>102.09</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>390</td> <td>133 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	111.53	-----	-----	102.09	34.73	10.88	36.17	0.00	390	133 PEAK
	Limit Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5451.76	53.48	74.00	-20.52	44.19	34.69	10.83	36.23	0.00	390	133 PEAK																																																																							
2	5462.32	54.34	68.20	-13.86	45.01	34.70	10.84	36.21	0.00	390	133 PEAK																																																																							
Limit Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5500.00	111.53	-----	-----	102.09	34.73	10.88	36.17	0.00	390	133 PEAK																																																																							
Avg	 <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5410.96</td> <td>43.61</td> <td>54.00</td> <td>-10.39</td> <td>34.46</td> <td>34.65</td> <td>10.78</td> <td>36.28</td> <td>0.00</td> <td>390</td> <td>133 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5410.96	43.61	54.00	-10.39	34.46	34.65	10.78	36.28	0.00	390	133 AVERAGE	 <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>104.31</td> <td>-----</td> <td>-----</td> <td>94.87</td> <td>34.73</td> <td>10.88</td> <td>36.17</td> <td>0.00</td> <td>390</td> <td>133 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	104.31	-----	-----	94.87	34.73	10.88	36.17	0.00	390	133 AVERAGE												
	Limit Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5410.96	43.61	54.00	-10.39	34.46	34.65	10.78	36.28	0.00	390	133 AVERAGE																																																																							
Limit Freq	Limit Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5500.00	104.31	-----	-----	94.87	34.73	10.88	36.17	0.00	390	133 AVERAGE																																																																							



Mode	26																																																																																																																															
	Band Edge																																																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU52/40_5700MHz																																																																																																																															
ANT	STBC																																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5740.12</td> <td>52.95</td> <td>68.20</td> <td>-15.25</td> <td>44.32</td> <td>34.96</td> <td>11.20</td> <td>37.53</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>289</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>120</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5740.12	52.95	68.20	-15.25	44.32	34.96	11.20	37.53	0.00									289									120									PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>110.10</td> <td>-----</td> <td>-----</td> <td>101.07</td> <td>34.93</td> <td>11.16</td> <td>37.06</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>289</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>120</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5700.00	110.10	-----	-----	101.07	34.93	11.16	37.06	0.00									289									120									PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																								
1 5740.12	52.95	68.20	-15.25	44.32	34.96	11.20	37.53	0.00																																																																																																																								
								289																																																																																																																								
								120																																																																																																																								
								PEAK																																																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																								
1 5700.00	110.10	-----	-----	101.07	34.93	11.16	37.06	0.00																																																																																																																								
								289																																																																																																																								
								120																																																																																																																								
								PEAK																																																																																																																								
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>99.92</td> <td>-----</td> <td>-----</td> <td>90.80</td> <td>34.93</td> <td>11.15</td> <td>36.96</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>289</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>120</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5700.00	99.92	-----	-----	90.80	34.93	11.15	36.96	0.00									289									120									AVERAGE																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																								
1 5700.00	99.92	-----	-----	90.80	34.93	11.15	36.96	0.00																																																																																																																								
								289																																																																																																																								
								120																																																																																																																								
								AVERAGE																																																																																																																								



Mode	26																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU52/40_5700MHz																																																																																	
ANT	STBC																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5729.24</td> <td>53.45</td> <td>68.20</td> <td>-14.75</td> <td>44.68</td> <td>34.95</td> <td>11.18</td> <td>37.36</td> <td>0.00</td> <td>136</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5729.24	53.45	68.20	-14.75	44.68	34.95	11.18	37.36	0.00	136	126	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>111.91</td> <td>-----</td> <td>-----</td> <td>102.79</td> <td>34.93</td> <td>11.15</td> <td>36.96</td> <td>0.00</td> <td>136</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	111.91	-----	-----	102.79	34.93	11.15	36.96	0.00	136	126	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5729.24	53.45	68.20	-14.75	44.68	34.95	11.18	37.36	0.00	136	126	PEAK																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5700.00	111.91	-----	-----	102.79	34.93	11.15	36.96	0.00	136	126	PEAK																																																																						
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>102.57</td> <td>-----</td> <td>-----</td> <td>93.54</td> <td>34.93</td> <td>11.16</td> <td>37.06</td> <td>0.00</td> <td>136</td> <td>126</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	102.57	-----	-----	93.54	34.93	11.16	37.06	0.00	136	126	AVERAGE																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5700.00	102.57	-----	-----	93.54	34.93	11.16	37.06	0.00	136	126	AVERAGE																																																																						



		<b>27</b>																																																																																								
<b>Mode</b>	<b>Band Edge</b>																																																																																									
	<b>U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz</b>																																																																																									
<b>ANT</b>	<b>STBC</b>																																																																																									
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																								
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5108.90</td> <td>54.93</td> <td>74.00</td> <td>-19.07</td> <td>46.70</td> <td>34.37</td> <td>10.57</td> <td>36.71</td> <td>0.00</td> <td>387</td> <td>137</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5108.90	54.93	74.00	-19.07	46.70	34.37	10.57	36.71	0.00	387	137	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>106.33</td> <td>-----</td> <td>-----</td> <td>97.88</td> <td>34.43</td> <td>10.64</td> <td>36.62</td> <td>0.00</td> <td>387</td> <td>137</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	106.33	-----	-----	97.88	34.43	10.64	36.62	0.00	387	137	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5108.90	54.93	74.00	-19.07	46.70	34.37	10.57	36.71	0.00	387	137	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	106.33	-----	-----	97.88	34.43	10.64	36.62	0.00	387	137	PEAK																																																																														
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.20</td> <td>43.47</td> <td>54.00</td> <td>-10.53</td> <td>35.15</td> <td>34.39</td> <td>10.60</td> <td>36.67</td> <td>0.00</td> <td>387</td> <td>137</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5139.20	43.47	54.00	-10.53	35.15	34.39	10.60	36.67	0.00	387	137	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.27</td> <td>-----</td> <td>-----</td> <td>88.82</td> <td>34.43</td> <td>10.64</td> <td>36.62</td> <td>0.00</td> <td>387</td> <td>137</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	97.27	-----	-----	88.82	34.43	10.64	36.62	0.00	387	137	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5139.20	43.47	54.00	-10.53	35.15	34.39	10.60	36.67	0.00	387	137	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	97.27	-----	-----	88.82	34.43	10.64	36.62	0.00	387	137	AVERAGE																																																																														



		<b>27</b>																																																																																								
<b>Mode</b>	<b>Band Edge</b>																																																																																									
	<b>U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz</b>																																																																																									
<b>ANT</b>	<b>STBC</b>																																																																																									
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																								
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5122.00</td> <td>54.35</td> <td>74.00</td> <td>-19.65</td> <td>46.00</td> <td>34.38</td> <td>10.58</td> <td>36.69</td> <td>0.00</td> <td>197</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5122.00	54.35	74.00	-19.65	46.00	34.38	10.58	36.69	0.00	197	143	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.94</td> <td>-----</td> <td>-----</td> <td>101.49</td> <td>34.43</td> <td>10.64</td> <td>36.62</td> <td>0.00</td> <td>197</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	109.94	-----	-----	101.49	34.43	10.64	36.62	0.00	197	143	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5122.00	54.35	74.00	-19.65	46.00	34.38	10.58	36.69	0.00	197	143	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	109.94	-----	-----	101.49	34.43	10.64	36.62	0.00	197	143	PEAK																																																																														
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.60</td> <td>44.08</td> <td>54.00</td> <td>-9.92</td> <td>35.72</td> <td>34.40</td> <td>10.61</td> <td>36.65</td> <td>0.00</td> <td>197</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.60	44.08	54.00	-9.92	35.72	34.40	10.61	36.65	0.00	197	143	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.88</td> <td>-----</td> <td>-----</td> <td>93.43</td> <td>34.43</td> <td>10.64</td> <td>36.62</td> <td>0.00</td> <td>197</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	101.88	-----	-----	93.43	34.43	10.64	36.62	0.00	197	143	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.60	44.08	54.00	-9.92	35.72	34.40	10.61	36.65	0.00	197	143	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	101.88	-----	-----	93.43	34.43	10.64	36.62	0.00	197	143	AVERAGE																																																																														



Mode	28																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_RU106/54_5320MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5395.20</td> <td>52.58</td> <td>74.00</td> <td>-21.42</td> <td>43.48</td> <td>34.64</td> <td>10.77</td> <td>36.31</td> <td>0.00</td> <td>300</td> <td>148</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5395.20	52.58	74.00	-21.42	43.48	34.64	10.77	36.31	0.00	300	148	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>105.93</td> <td>-----</td> <td>-----</td> <td>97.05</td> <td>34.56</td> <td>10.73</td> <td>36.41</td> <td>0.00</td> <td>300</td> <td>148</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	105.93	-----	-----	97.05	34.56	10.73	36.41	0.00	300	148	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5395.20	52.58	74.00	-21.42	43.48	34.64	10.77	36.31	0.00	300	148	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	105.93	-----	-----	97.05	34.56	10.73	36.41	0.00	300	148	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.70</td> <td>42.68</td> <td>54.00</td> <td>-11.32</td> <td>33.70</td> <td>34.60</td> <td>10.75</td> <td>36.37</td> <td>0.00</td> <td>300</td> <td>148</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5352.70	42.68	54.00	-11.32	33.70	34.60	10.75	36.37	0.00	300	148	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>97.26</td> <td>-----</td> <td>-----</td> <td>88.38</td> <td>34.56</td> <td>10.73</td> <td>36.41</td> <td>0.00</td> <td>300</td> <td>148</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	97.26	-----	-----	88.38	34.56	10.73	36.41	0.00	300	148	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5352.70	42.68	54.00	-11.32	33.70	34.60	10.75	36.37	0.00	300	148	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	97.26	-----	-----	88.38	34.56	10.73	36.41	0.00	300	148	AVERAGE																																																																														