





11AX20MIMO_Ant1_7095_26Tone_RU8

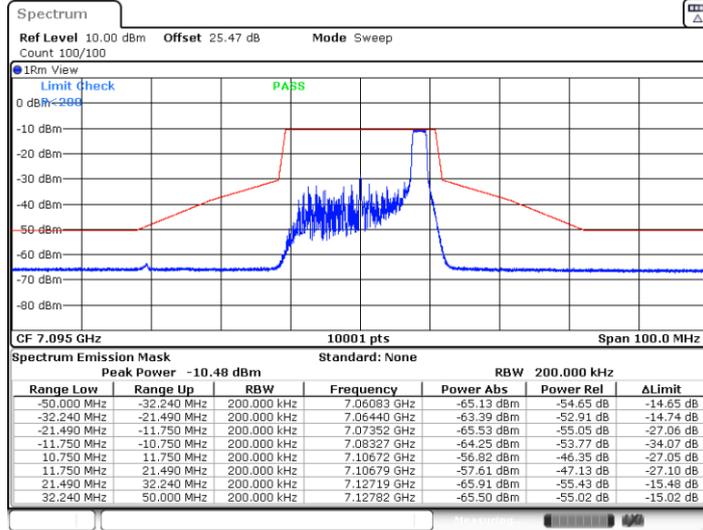

Date: 11.JAN.2025 11:49:33


11AX20MIMO_Ant1_7095_52Tone_RU40

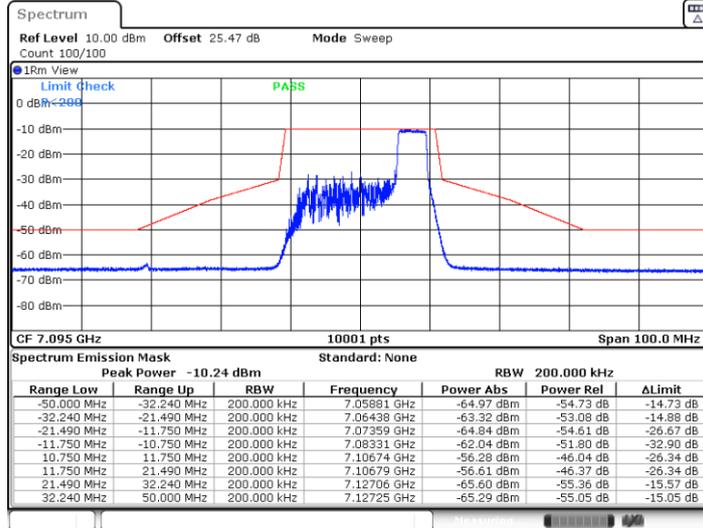

Date: 11.JAN.2025 11:55:20




11AX20MIMO_Ant1_7095_106Tone_RU54

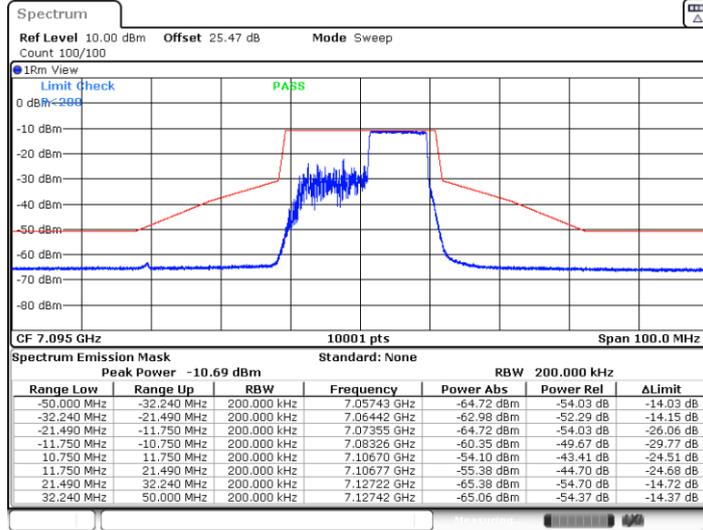

Date: 11.JAN.2025 11:57:17


11AX20MIMO_Ant2_7095_26Tone_RU8

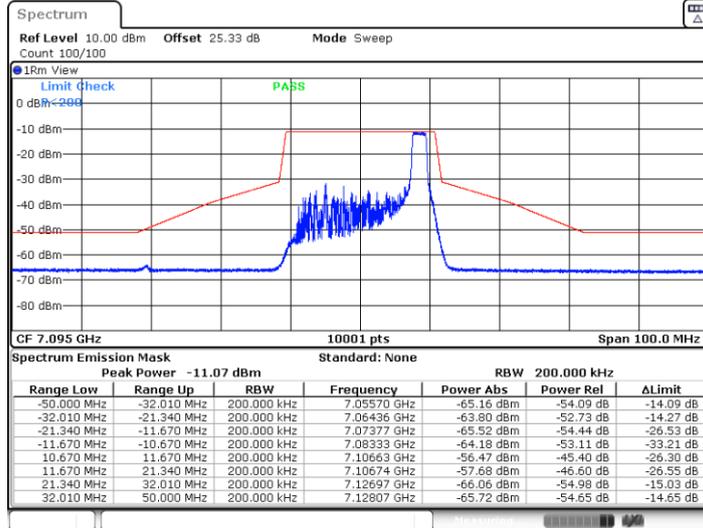

Date: 11.JAN.2025 11:50:28




11AX20MIMO_Ant2_7095_52Tone_RU40

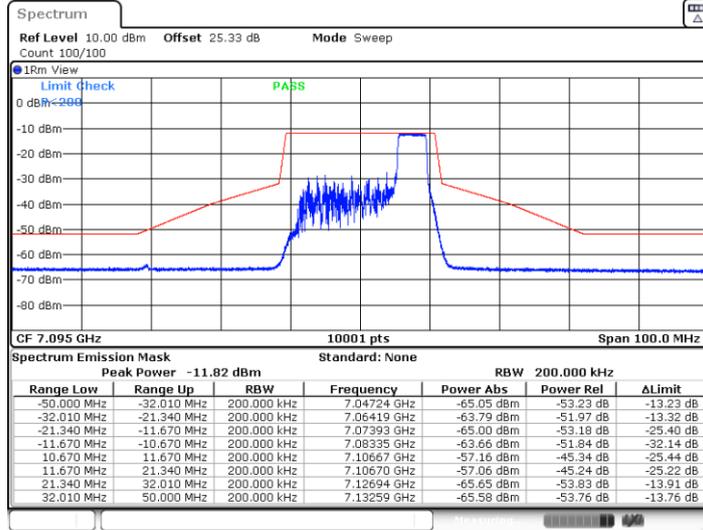

Date: 11.JAN.2025 11:56:18

11AX20MIMO_Ant2_7095_106Tone_RU54

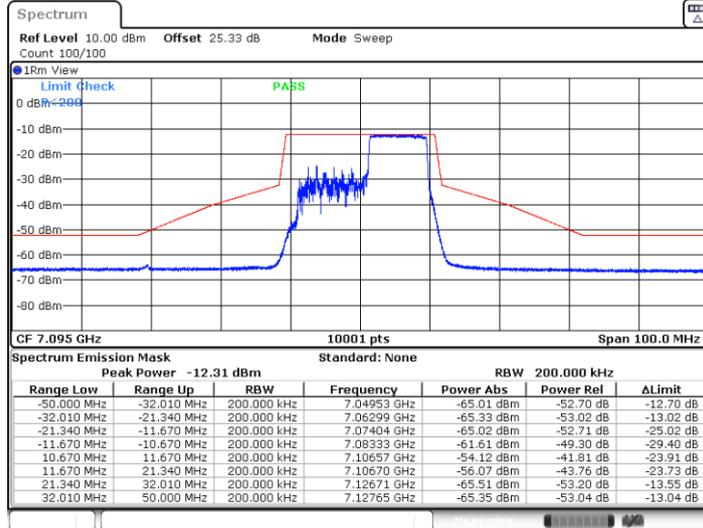


Date: 11.JAN.2025 11:58:25



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

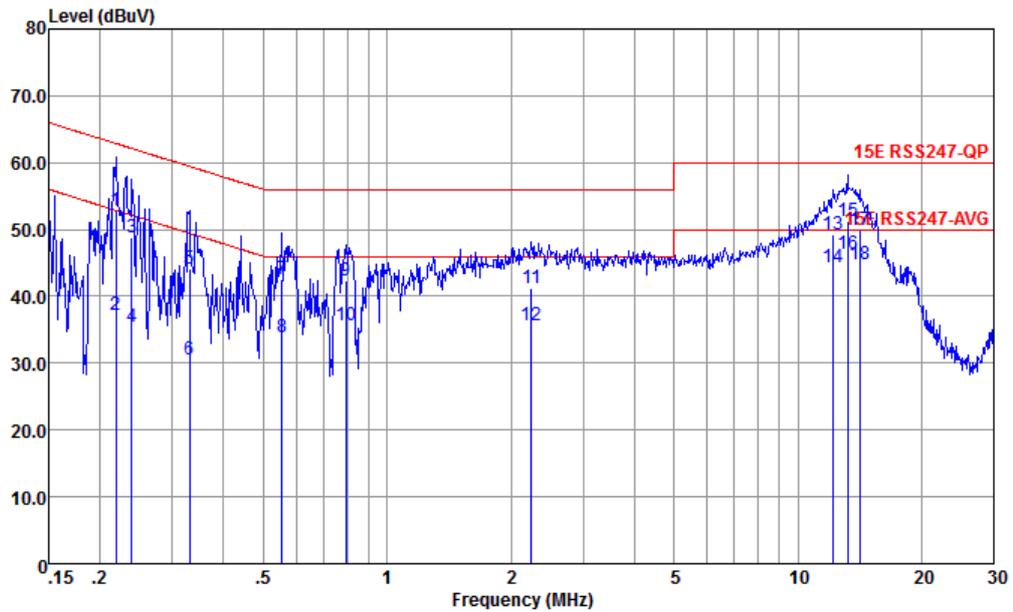


Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.219	52.75	-10.13	62.88	42.21	0.08	10.46	QP
2	0.219	37.15	-15.73	52.88	26.61	0.08	10.46	Average
3	0.239	48.75	-13.38	62.13	38.20	0.08	10.47	QP
4	0.239	35.45	-16.68	52.13	24.90	0.08	10.47	Average
5	0.330	44.13	-15.31	59.44	33.60	0.05	10.48	QP
6	0.330	30.43	-19.01	49.44	19.90	0.05	10.48	Average
7	0.555	42.47	-13.53	56.00	32.20	-0.12	10.39	QP
8	0.555	33.87	-12.13	46.00	23.60	-0.12	10.39	Average
9	0.792	42.35	-13.65	56.00	32.20	-0.16	10.31	QP
10	0.792	35.65	-10.35	46.00	25.50	-0.16	10.31	Average
11	2.249	41.23	-14.77	56.00	31.20	-0.20	10.23	QP
12	2.249	35.63	-10.37	46.00	25.60	-0.20	10.23	Average
13	12.188	49.35	-10.65	60.00	39.30	-0.21	10.26	QP
14	12.188	44.35	-5.65	50.00	34.30	-0.21	10.26	Average
15	13.197	51.17	-8.83	60.00	41.10	-0.20	10.27	QP
16 *	13.197	46.27	-3.73	50.00	36.20	-0.20	10.27	Average
17	14.138	49.99	-10.01	60.00	39.91	-0.19	10.27	QP
18	14.138	44.89	-5.11	50.00	34.81	-0.19	10.27	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

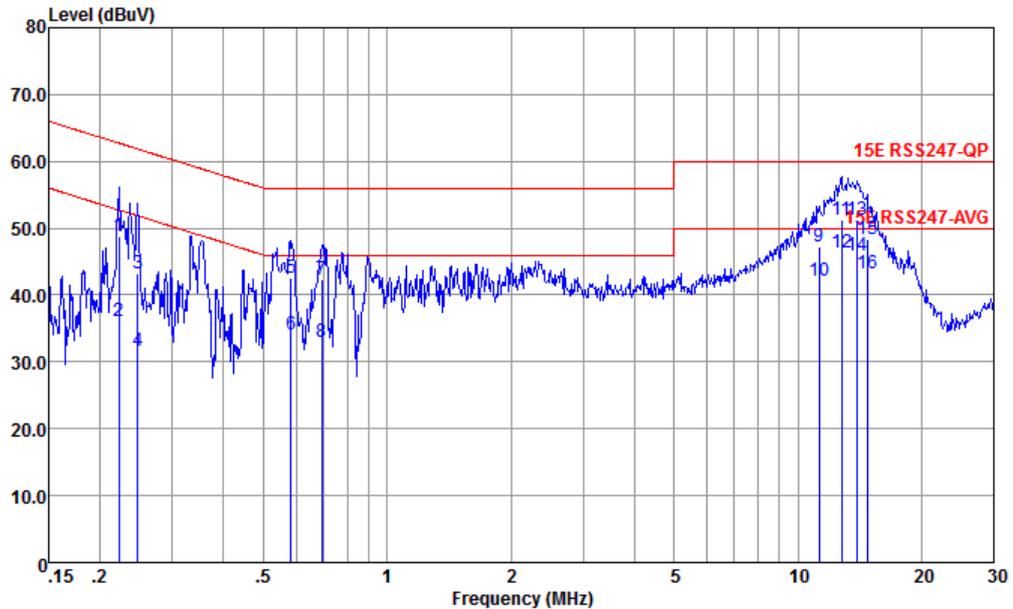

Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.222	48.73	-14.01	62.74	38.21	0.06	10.46	QP
2	0.222	36.13	-16.61	52.74	25.61	0.06	10.46	Average
3	0.247	43.27	-18.59	61.86	32.80	0.00	10.47	QP
4	0.247	31.67	-20.19	51.86	21.20	0.00	10.47	Average
5	0.582	42.52	-13.48	56.00	32.30	-0.16	10.38	QP
6	0.582	34.12	-11.88	46.00	23.90	-0.16	10.38	Average
7	0.694	42.38	-13.62	56.00	32.20	-0.16	10.34	QP
8	0.694	33.08	-12.92	46.00	22.90	-0.16	10.34	Average
9	11.257	47.20	-12.80	60.00	37.20	-0.25	10.25	QP
10	11.257	42.20	-7.80	50.00	32.20	-0.25	10.25	Average
11	12.784	51.25	-8.75	60.00	41.20	-0.22	10.27	QP
12 *	12.784	46.25	-3.75	50.00	36.20	-0.22	10.27	Average
13	13.989	51.18	-8.82	60.00	41.11	-0.20	10.27	QP
14	13.989	45.98	-4.02	50.00	35.91	-0.20	10.27	Average
15	14.750	48.29	-11.71	60.00	38.20	-0.19	10.28	QP
16	14.750	43.29	-6.71	50.00	33.20	-0.19	10.28	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jake	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-5	5.925-6.425	STBC	802.11ax HE20	1	5955	MCS0	Full	-
Mode 2	U-NII-5	5.925-6.425	STBC	802.11ax HE20	1	5955	MCS0	RU26/0	-
Mode 3	U-NII-5	5.925-6.425	STBC	802.11ax HE20	1	5955	MCS0	RU52/37	-
Mode 4	U-NII-5	5.925-6.425	STBC	802.11ax HE20	1	5955	MCS0	RU106/53	-
Mode 5	U-NII-5	5.925-6.425	STBC	802.11ax HE20	45	6175	MCS0	Full	-
Mode 6	U-NII-5	5.925-6.425	STBC	802.11ax HE20	93	6415	MCS0	Full	-
Mode 7	U-NII-5	5.925-6.425	STBC	802.11ax HE40	3	5965	MCS0	Full	-
Mode 8	U-NII-5	5.925-6.425	STBC	802.11ax HE40	43	6165	MCS0	Full	-
Mode 9	U-NII-5	5.925-6.425	STBC	802.11ax HE40	91	6405	MCS0	Full	-
Mode 10	U-NII-5	5.925-6.425	STBC	802.11ax HE80	7	5985	MCS0	Full	-
Mode 11	U-NII-5	5.925-6.425	STBC	802.11ax HE80	39	6145	MCS0	Full	-
Mode 12	U-NII-5	5.925-6.425	STBC	802.11ax HE80	87	6385	MCS0	Full	-
Mode 13	U-NII-6	5.925-6.425	STBC	802.11ax HE20	97	6435	MCS0	Full	-
Mode 14	U-NII-6	5.925-6.425	STBC	802.11ax HE20	105	6475	MCS0	Full	-
Mode 15	U-NII-6	5.925-6.425	STBC	802.11ax HE20	113	6515	MCS0	Full	-
Mode 16	U-NII-6	6.425-6.525	STBC	802.11ax HE40	99	6445	MCS0	Full	-
Mode 17	U-NII-6	6.425-6.525	STBC	802.11ax HE40	107	6485	MCS0	Full	-
Mode 18	U-NII-6	6.425-6.525	STBC	802.11ax HE80	103	6465	MCS0	Full	-
Mode 19	U-NII-6-7	6.425-6.525	STBC	802.11ax HE40	115	6525	MCS0	Full	-
Mode 20	U-NII-6-7	6.425-6.525	STBC	802.11ax HE80	119	6545	MCS0	Full	-
Mode 21	U-NII-7	6.525-6.875	STBC	802.11ax HE20	117	6535	MCS0	Full	-
Mode 22	U-NII-7	6.525-6.875	STBC	802.11ax HE20	149	6695	MCS0	Full	-
Mode 23	U-NII-7	6.525-6.875	STBC	802.11ax HE20	181	6855	MCS0	Full	-
Mode 24	U-NII-7	6.525-6.875	STBC	802.11ax HE40	123	6565	MCS0	Full	-
Mode 25	U-NII-7	6.525-6.875	STBC	802.11ax HE40	147	6685	MCS0	Full	-
Mode 26	U-NII-7	6.875-7.125	STBC	802.11ax HE40	179	6845	MCS0	Full	-
Mode 27	U-NII-7	6.525-6.875	STBC	802.11ax HE80	135	6625	MCS0	Full	-
Mode 28	U-NII-7	6.525-6.875	STBC	802.11ax HE80	151	6705	MCS0	Full	-
Mode 29	U-NII-7	6.525-6.875	STBC	802.11ax HE80	167	6785	MCS0	Full	-
Mode 30	U-NII-7-8	6.525-6.875	STBC	802.11ax HE20	185	6875	MCS0	Full	-
Mode 31	U-NII-7-8	6.875-7.125	STBC	802.11ax HE40	187	6885	MCS0	Full	-



Mode 32	U-NII-7-8	6.525-6.875	STBC	802.11ax HE80	183	6865	MCS0	Full	-
Mode 33	U-NII-8	6.875-7.125	STBC	802.11ax HE20	189	6895	MCS0	Full	-
Mode 34	U-NII-8	6.875-7.125	STBC	802.11ax HE20	209	6995	MCS0	Full	-
Mode 35	U-NII-8	6.875-7.125	STBC	802.11ax HE20	229	7095	MCS0	Full	-
Mode 36	U-NII-8	6.875-7.125	STBC	802.11ax HE20	229	7095	MCS0	RU26/8	-
Mode 37	U-NII-8	6.875-7.125	STBC	802.11ax HE20	229	7095	MCS0	RU52/40	-
Mode 38	U-NII-8	6.875-7.125	STBC	802.11ax HE20	229	7095	MCS0	RU106/54	-
Mode 39	U-NII-8	6.875-7.125	STBC	802.11ax HE40	195	6925	MCS0	Full	-
Mode 40	U-NII-8	6.875-7.125	STBC	802.11ax HE40	211	7005	MCS0	Full	-
Mode 41	U-NII-8	6.875-7.125	STBC	802.11ax HE40	227	7085	MCS0	Full	-
Mode 42	U-NII-8	6.875-7.125	STBC	802.11ax HE80	199	6945	MCS0	Full	-
Mode 43	U-NII-8	6.875-7.125	STBC	802.11ax HE80	215	7025	MCS0	Full	-

Co-location

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
44	2400-2483.5	2400-2483.5	1	Bluetooth-LE_GSFK	39	2480	2Mbps	Full	-
	U-NII-8	6.875-7.125	STBC	802.11ax HE20	229	7095	MCS0	Full	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ax HE20	1	5924.58	38.14	68.20	-30.06	V	AVERAGE	Pass	Band Edge
1	802.11ax HE20	1	11910.00	46.89	74.00	-27.11	V	PEAK	Pass	Harmonic
2	802.11ax HE20	1	5924.71	36.57	68.20	-31.63	V	AVERAGE	Pass	Band Edge
2	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
3	802.11ax HE20	1	5924.45	36.57	68.20	-31.63	V	AVERAGE	Pass	Band Edge
3	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
4	802.11ax HE20	1	5924.58	37.09	68.20	-31.11	V	AVERAGE	Pass	Band Edge
4	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
5	802.11ax HE20	45	-	-	-	-	-	-	-	Band Edge
5	802.11ax HE20	45	12350.00	46.52	74.00	-27.48	V	PEAK	Pass	Harmonic
6	802.11ax HE20	93	-	-	-	-	-	-	-	Band Edge
6	802.11ax HE20	93	12830.00	46.47	88.20	-41.73	V	PEAK	Pass	Harmonic
7	802.11ax HE40	3	5913.90	37.92	68.20	-30.28	V	AVERAGE	Pass	Band Edge
7	802.11ax HE40	3	11930.00	45.28	74.00	-28.72	V	PEAK	Pass	Harmonic
8	802.11ax HE40	43	-	-	-	-	-	-	-	Band Edge
8	802.11ax HE40	43	12330.00	46.62	74.00	-27.38	H	PEAK	Pass	Harmonic
9	802.11ax HE40	91	-	-	-	-	-	-	-	Band Edge
9	802.11ax HE40	91	12810.00	45.98	88.20	-42.22	H	PEAK	Pass	Harmonic
10	802.11ax HE80	7	5922.60	44.47	68.20	-23.73	V	AVERAGE	Pass	Band Edge
10	802.11ax HE80	7	11970.00	45.91	74.00	-28.09	V	PEAK	Pass	Harmonic
11	802.11ax HE80	39	-	-	-	-	-	-	-	Band Edge
11	802.11ax HE80	39	12290.00	46.64	74.00	-27.36	H	PEAK	Pass	Harmonic
12	802.11ax HE80	87	-	-	-	-	-	-	-	Band Edge
12	802.11ax HE80	87	12770.00	46.62	88.20	-41.58	H	PEAK	Pass	Harmonic
13	802.11ax HE20	97	-	-	-	-	-	-	-	Band Edge
13	802.11ax HE20	97	12870.00	46.92	88.20	-41.28	H	PEAK	Pass	Harmonic
14	802.11ax HE20	105	-	-	-	-	-	-	-	Band Edge
14	802.11ax HE20	105	12950.00	46.81	88.20	-41.39	V	PEAK	Pass	Harmonic
15	802.11ax HE20	113	-	-	-	-	-	-	-	Band Edge
15	802.11ax HE20	113	13030.00	46.45	88.20	-41.75	H	PEAK	Pass	Harmonic
16	802.11ax HE40	99	-	-	-	-	-	-	-	Band Edge
16	802.11ax HE40	99	12890.00	47.18	88.20	-41.02	V	PEAK	Pass	Harmonic
17	802.11ax HE40	107	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE40	107	12970.00	46.81	88.20	-41.39	V	PEAK	Pass	Harmonic
18	802.11ax HE80	103	-	-	-	-	-	-	-	Band Edge



18	802.11ax HE80	103	12930.00	47.05	88.20	-41.15	H	PEAK	Pass	Harmonic
19	802.11ax HE40	115	5910.00	38.14	68.20	-30.06	H	AVERAGE	Pass	Band Edge
19	802.11ax HE40	115	13050.00	47.26	88.20	-40.94	H	PEAK	Pass	Harmonic
20	802.11ax HE80	119	-	-	-	-	-	-	-	Band Edge
20	802.11ax HE80	119	13090.00	47.00	88.20	-41.20	H	PEAK	Pass	Harmonic
21	802.11ax HE20	117	-	-	-	-	-	-	-	Band Edge
21	802.11ax HE20	117	13070.00	46.37	88.20	-41.83	H	PEAK	Pass	Harmonic
22	802.11ax HE20	149	-	-	-	-	-	-	-	Band Edge
22	802.11ax HE20	149	13390.00	45.95	74.00	-28.05	H	PEAK	Pass	Harmonic
23	802.11ax HE20	181	-	-	-	-	-	-	-	Band Edge
23	802.11ax HE20	181	13710.00	44.98	88.20	-43.22	H	PEAK	Pass	Harmonic
24	802.11ax HE40	123	-	-	-	-	-	-	-	Band Edge
24	802.11ax HE40	123	13130.00	46.53	88.20	-41.67	H	PEAK	Pass	Harmonic
25	802.11ax HE40	147	-	-	-	-	-	-	-	Band Edge
25	802.11ax HE40	147	13370.00	46.40	74.00	-27.60	V	PEAK	Pass	Harmonic
26	802.11ax HE40	179	5482.00	47.81	68.2	-20.39	V	AVERAGE	Pass	RSE
26	802.11ax HE40	179	13690.00	45.16	88.20	-43.04	H	PEAK	Pass	Harmonic
27	802.11ax HE80	135	-	-	-	-	-	-	-	Band Edge
27	802.11ax HE80	135	13250.00	45.78	74.00	-28.22	V	PEAK	Pass	Harmonic
28	802.11ax HE80	151	-	-	-	-	-	-	-	Band Edge
28	802.11ax HE80	151	13410.00	45.98	88.20	-42.22	H	PEAK	Pass	Harmonic
29	802.11ax HE80	167	-	-	-	-	-	-	-	Band Edge
29	802.11ax HE80	167	13570.00	46.14	88.20	-42.06	H	PEAK	Pass	Harmonic
30	802.11ax HE20	185	-	-	-	-	-	-	-	Band Edge
30	802.11ax HE20	185	13750.00	45.66	88.20	-42.54	V	PEAK	Pass	Harmonic
31	802.11ax HE40	187	-	-	-	-	-	-	-	Band Edge
31	802.11ax HE40	187	13770.00	45.99	88.20	-42.21	H	PEAK	Pass	Harmonic
32	802.11ax HE80	183	-	-	-	-	-	-	-	Band Edge
32	802.11ax HE80	183	13730.00	46.13	88.20	-42.07	H	PEAK	Pass	Harmonic
33	802.11ax HE20	189	-	-	-	-	-	-	-	Band Edge
33	802.11ax HE20	189	13790.00	45.47	88.20	-42.73	H	PEAK	Pass	Harmonic
34	802.11ax HE20	209	-	-	-	-	-	-	-	Band Edge
34	802.11ax HE20	209	13990.00	45.77	88.20	-42.43	H	PEAK	Pass	Harmonic
35	802.11ax HE20	229	7125.00	60.23	68.20	-7.97	V	AVERAGE	Pass	Band Edge
35	802.11ax HE20	229	14190.00	48.62	88.20	-39.58	V	PEAK	Pass	Harmonic
36	802.11ax HE20	229	7183.88	38.78	68.20	-29.42	V	AVERAGE	Pass	Band Edge
36	802.11ax HE20	229	-	-	-	-	-	-	-	Harmonic
37	802.11ax HE20	229	7222.76	38.92	68.20	-29.28	V	AVERAGE	Pass	Band Edge
37	802.11ax HE20	229	-	-	-	-	-	-	-	Harmonic







38	802.11ax HE20	229	7182.76	39.26	68.20	-28.94	V	AVERAGE	Pass	Band Edge
38	802.11ax HE20	229	-	-	-	-	-	-	-	Harmonic
39	802.11ax HE40	195	-	-	-	-	-	-	-	Band Edge
39	802.11ax HE40	195	13850.00	46.05	88.20	-42.15	H	PEAK	Pass	Harmonic
40	802.11ax HE40	211	-	-	-	-	-	-	-	Band Edge
40	802.11ax HE40	211	14009.78	41.72	88.20	-46.48	H	Peak	Pass	Harmonic
41	802.11ax HE40	227	7125.48	42.25	68.20	-25.95	V	AVERAGE	Pass	Band Edge
41	802.11ax HE40	227	14170.00	47.05	88.20	-41.15	H	PEAK	Pass	Harmonic
42	802.11ax HE80	199	-	-	-	-	-	-	-	Band Edge
42	802.11ax HE80	199	13890.00	46.90	88.20	-41.30	V	PEAK	Pass	Harmonic
43	802.11ax HE80	215	7214.64	41.96	68.20	-26.24	V	AVERAGE	Pass	Band Edge
43	802.11ax HE80	215	14050.00	46.21	88.20	-41.99	V	PEAK	Pass	Harmonic

Co-location

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
44	Bluetooth-LE_GSKF	39	2483.50	46.36	54.00	-7.64	H	AVERAGE	Pass	Band Edge
9	Bluetooth-LE_GSKF	39	7440.00	43.12	74.00	-30.88	H	PEAK	Pass	Harmonic
44	802.11ax HE20	229	7125.16	56.96	68.20	-11.24	V	AVERAGE	Pass	Band Edge
35	802.11ax HE20	229	14190.00	39.66	68.20	-28.54	H	AVERAGE	Pass	Harmonic

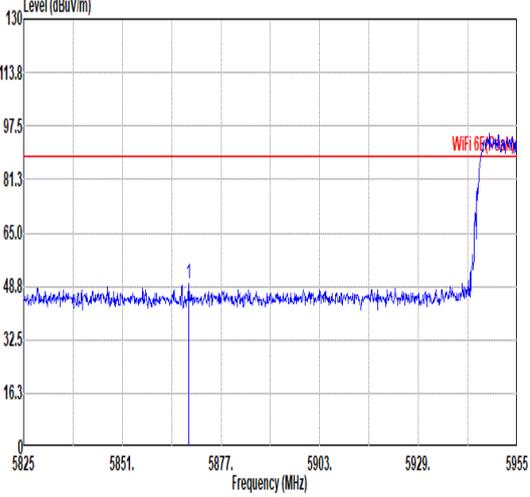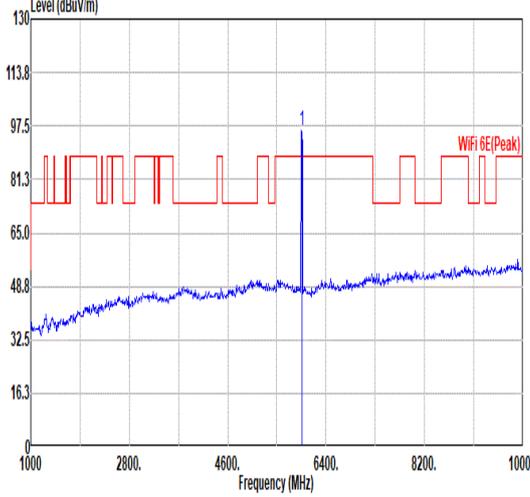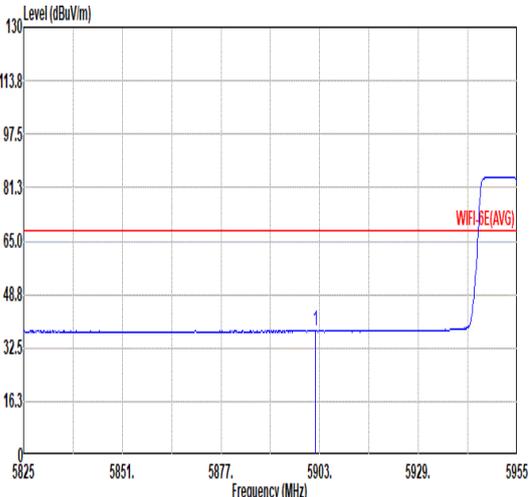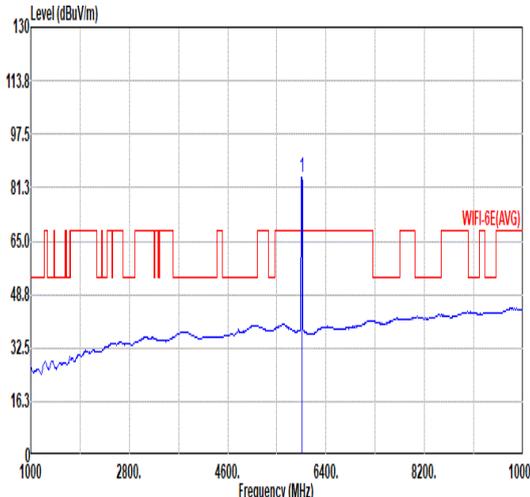

1																																												
Mode	Band Edge																																											
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Full_5955MHz																																											
ANT	STBC																																											
Pol.	Horizontal																																											
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a blue signal line and a red limit line. A peak is labeled 'Wifi 6E(Peak)' at approximately 5955 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5825 to 5955 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5868.55</td> <td>49.64</td> <td>88.20</td> <td>-38.56</td> <td>42.52</td> <td>35.08</td> <td>11.35</td> <td>39.31</td> <td>0.00</td> <td>286</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5868.55	49.64	88.20	-38.56	42.52	35.08	11.35	39.31	0.00	286	126	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5868.55	49.64	88.20	-38.56	42.52	35.08	11.35	39.31	0.00	286	126	PEAK																																
 <p>Horizontal Fundamental Peak Spectrum Plot. The plot shows a blue signal line and a red limit line. A peak is labeled 'Wifi 6E(Peak)' at approximately 5955 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>96.10</td> <td>-----</td> <td>-----</td> <td>88.68</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>286</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	96.10	-----	-----	88.68	35.16	11.43	39.17	0.00	286	126	PEAK	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5955.00	96.10	-----	-----	88.68	35.16	11.43	39.17	0.00	286	126	PEAK																																
Avg	 <p>Horizontal Avg Spectrum Plot. The plot shows a blue signal line and a red limit line. A peak is labeled 'Wifi 6E(AVG)' at approximately 5955 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5825 to 5955 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5901.96</td> <td>37.97</td> <td>68.20</td> <td>-30.23</td> <td>30.73</td> <td>35.11</td> <td>11.38</td> <td>39.25</td> <td>0.00</td> <td>286</td> <td>126</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5901.96	37.97	68.20	-30.23	30.73	35.11	11.38	39.25	0.00	286	126	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5901.96	37.97	68.20	-30.23	30.73	35.11	11.38	39.25	0.00	286	126	AVERAGE																																
 <p>Horizontal Avg Fundamental Spectrum Plot. The plot shows a blue signal line and a red limit line. A peak is labeled 'Wifi 6E(AVG)' at approximately 5955 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>84.38</td> <td>-----</td> <td>-----</td> <td>76.96</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>286</td> <td>126</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	84.38	-----	-----	76.96	35.16	11.43	39.17	0.00	286	126	AVERAGE	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5955.00	84.38	-----	-----	76.96	35.16	11.43	39.17	0.00	286	126	AVERAGE																																







		1																																												
Mode		Band Edge																																												
		U-NII-5_5.925-6.425_802.11ax HE20_CH1_Full_5955MHz																																												
ANT		STBC																																												
Pol.		Vertical					Fundamental																																							
Peak	Vertical	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5916.26</td> <td>49.20</td> <td>88.20</td> <td>-39.00</td> <td>41.91</td> <td>35.13</td> <td>11.39</td> <td>39.23</td> <td>0.00</td> <td>183</td> <td>153</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5916.26	49.20	88.20	-39.00	41.91	35.13	11.39	39.23	0.00	183	153	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	5916.26	49.20	88.20	-39.00	41.91	35.13	11.39	39.23	0.00	183	153	PEAK																																		
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>97.70</td> <td>-----</td> <td>-----</td> <td>90.28</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>183</td> <td>153</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5955.00	97.70	-----	-----	90.28	35.16	11.43	39.17	0.00	183	153	PEAK	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	5955.00	97.70	-----	-----	90.28	35.16	11.43	39.17	0.00	183	153	PEAK																																		
Avg	Vertical	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.58</td> <td>38.14</td> <td>68.20</td> <td>-30.06</td> <td>30.83</td> <td>35.13</td> <td>11.40</td> <td>39.22</td> <td>0.00</td> <td>183</td> <td>153</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5924.58	38.14	68.20	-30.06	30.83	35.13	11.40	39.22	0.00	183	153	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	5924.58	38.14	68.20	-30.06	30.83	35.13	11.40	39.22	0.00	183	153	AVERAGE																																		
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>86.69</td> <td>-----</td> <td>-----</td> <td>79.27</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>183</td> <td>153</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5955.00	86.69	-----	-----	79.27	35.16	11.43	39.17	0.00	183	153	AVERAGE	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	5955.00	86.69	-----	-----	79.27	35.16	11.43	39.17	0.00	183	153	AVERAGE																																		







Mode	1																																																																																							
	Harmonic																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Full_5955MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11910.00</td> <td>45.93</td> <td>74.00</td> <td>-28.07</td> <td>57.04</td> <td>38.60</td> <td>16.62</td> <td>66.33</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11910.00	45.93	74.00	-28.07	57.04	38.60	16.62	66.33	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11910.00</td> <td>46.89</td> <td>74.00</td> <td>-27.11</td> <td>58.00</td> <td>38.60</td> <td>16.62</td> <td>66.33</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11910.00	46.89	74.00	-27.11	58.00	38.60	16.62	66.33	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 11910.00	45.93	74.00	-28.07	57.04	38.60	16.62	66.33	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 11910.00	46.89	74.00	-27.11	58.00	38.60	16.62	66.33	0.00	---	---	PEAK																																																																													

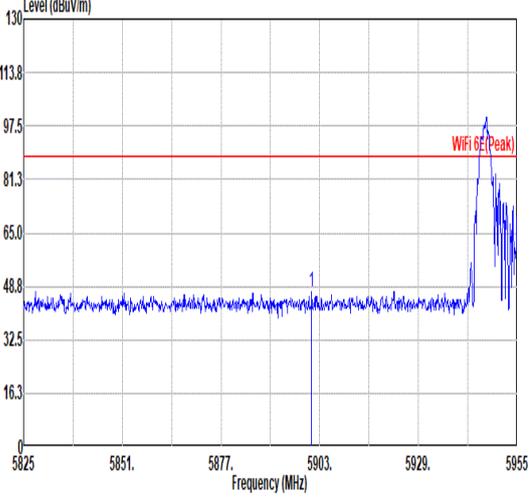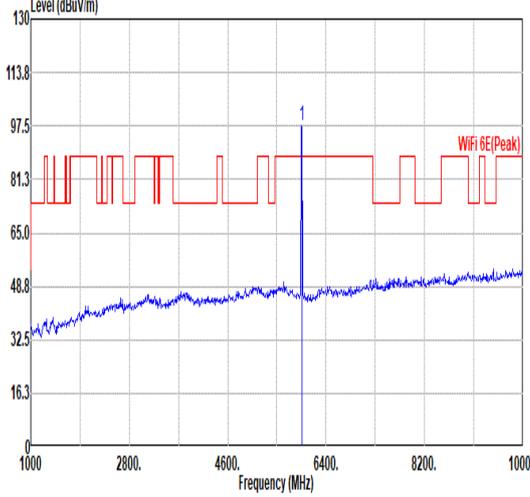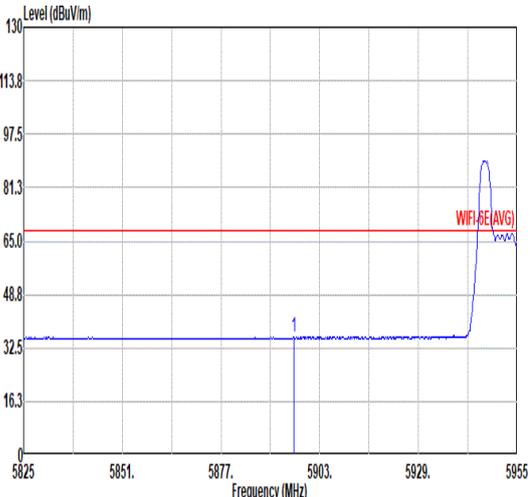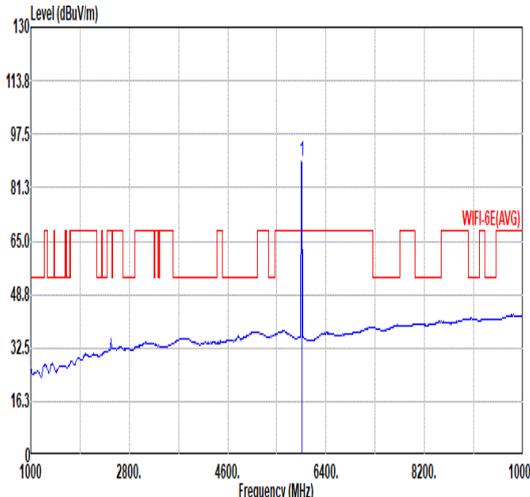

Mode	2																																																																																							
	Band Edge																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_RU26/0_5955MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WiFi 6E (Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5900.92</td> <td>47.11</td> <td>88.20</td> <td>-41.09</td> <td>39.87</td> <td>35.11</td> <td>11.38</td> <td>39.25</td> <td>0.00</td> <td>344</td> <td>314 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5900.92	47.11	88.20	-41.09	39.87	35.11	11.38	39.25	0.00	344	314 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WiFi 6E (Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>97.52</td> <td>-----</td> <td>-----</td> <td>90.10</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>344</td> <td>314 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	97.52	-----	-----	90.10	35.16	11.43	39.17	0.00	344	314 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5900.92	47.11	88.20	-41.09	39.87	35.11	11.38	39.25	0.00	344	314 PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5955.00	97.52	-----	-----	90.10	35.16	11.43	39.17	0.00	344	314 PEAK																																																																													
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WiFi 6E (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5896.11</td> <td>35.69</td> <td>68.20</td> <td>-32.51</td> <td>28.47</td> <td>35.11</td> <td>11.37</td> <td>39.26</td> <td>0.00</td> <td>344</td> <td>314 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5896.11	35.69	68.20	-32.51	28.47	35.11	11.37	39.26	0.00	344	314 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WiFi 6E (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>89.19</td> <td>-----</td> <td>-----</td> <td>81.77</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>344</td> <td>314 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	89.19	-----	-----	81.77	35.16	11.43	39.17	0.00	344	314 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5896.11	35.69	68.20	-32.51	28.47	35.11	11.37	39.26	0.00	344	314 AVERAGE																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5955.00	89.19	-----	-----	81.77	35.16	11.43	39.17	0.00	344	314 AVERAGE																																																																													

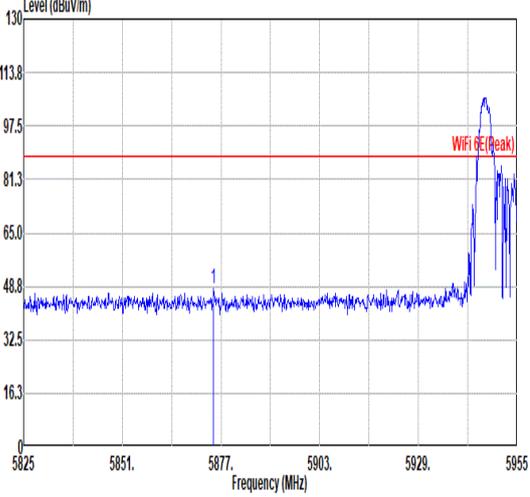
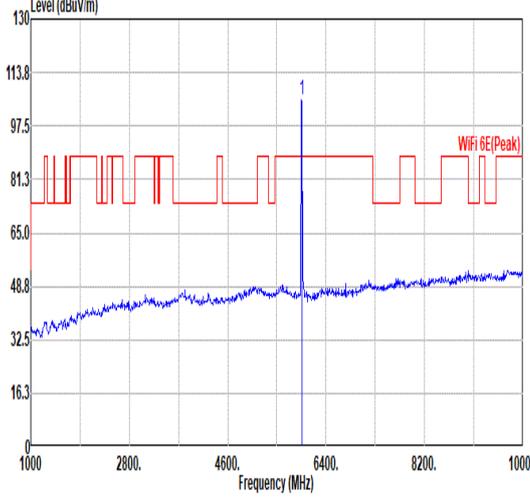
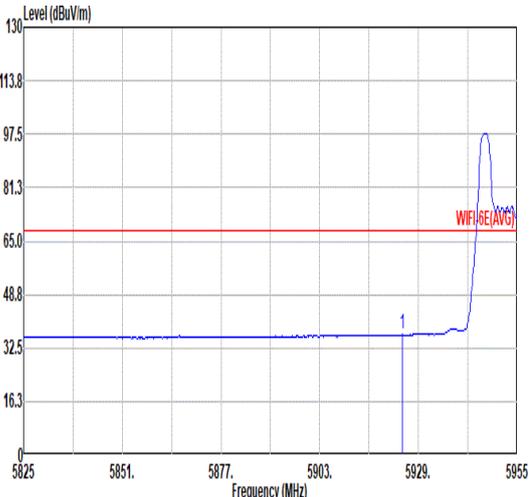
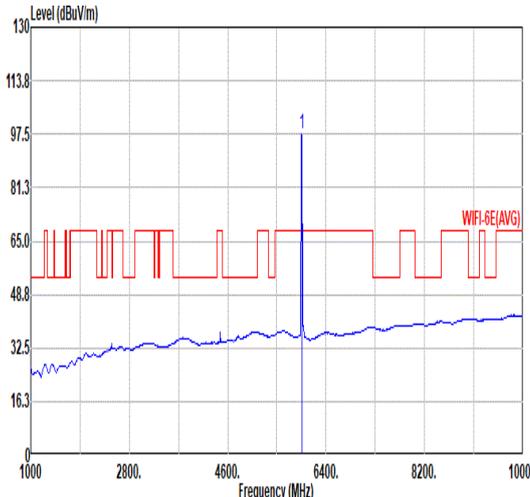


Mode	2																																																																																							
	Band Edge																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_RU26/0_5955MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI-6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5875.05</td> <td>48.00</td> <td>88.20</td> <td>-40.20</td> <td>40.86</td> <td>35.09</td> <td>11.35</td> <td>39.30</td> <td>0.00</td> <td>243</td> <td>303 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5875.05	48.00	88.20	-40.20	40.86	35.09	11.35	39.30	0.00	243	303 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI-6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>105.53</td> <td>-----</td> <td>-----</td> <td>98.11</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>243</td> <td>303 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	105.53	-----	-----	98.11	35.16	11.43	39.17	0.00	243	303 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5875.05	48.00	88.20	-40.20	40.86	35.09	11.35	39.30	0.00	243	303 PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5955.00	105.53	-----	-----	98.11	35.16	11.43	39.17	0.00	243	303 PEAK																																																																													
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI-6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.71</td> <td>36.57</td> <td>68.20</td> <td>-31.63</td> <td>29.26</td> <td>35.13</td> <td>11.40</td> <td>39.22</td> <td>0.00</td> <td>243</td> <td>303 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.71	36.57	68.20	-31.63	29.26	35.13	11.40	39.22	0.00	243	303 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI-6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>97.55</td> <td>-----</td> <td>-----</td> <td>90.13</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>243</td> <td>303 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	97.55	-----	-----	90.13	35.16	11.43	39.17	0.00	243	303 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5924.71	36.57	68.20	-31.63	29.26	35.13	11.40	39.22	0.00	243	303 AVERAGE																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5955.00	97.55	-----	-----	90.13	35.16	11.43	39.17	0.00	243	303 AVERAGE																																																																													



Mode	3																																																																																									
	Band Edge																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_RU52/37_5955MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5920.81</td> <td>46.82</td> <td>88.20</td> <td>-41.38</td> <td>39.51</td> <td>35.13</td> <td>11.40</td> <td>39.22</td> <td>0.00</td> <td>345</td> <td>314</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5920.81	46.82	88.20	-41.38	39.51	35.13	11.40	39.22	0.00	345	314	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>96.00</td> <td>-----</td> <td>-----</td> <td>89.38</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>345</td> <td>314</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	96.00	-----	-----	89.38	35.16	11.43	39.17	0.00	345	314	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5920.81	46.82	88.20	-41.38	39.51	35.13	11.40	39.22	0.00	345	314	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5955.00	96.00	-----	-----	89.38	35.16	11.43	39.17	0.00	345	314	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5911.84</td> <td>35.98</td> <td>68.20</td> <td>-32.22</td> <td>28.71</td> <td>35.12</td> <td>11.39</td> <td>39.24</td> <td>0.00</td> <td>345</td> <td>314</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5911.84	35.98	68.20	-32.22	28.71	35.12	11.39	39.24	0.00	345	314	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>86.64</td> <td>-----</td> <td>-----</td> <td>79.22</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>345</td> <td>314</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	86.64	-----	-----	79.22	35.16	11.43	39.17	0.00	345	314	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5911.84	35.98	68.20	-32.22	28.71	35.12	11.39	39.24	0.00	345	314	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5955.00	86.64	-----	-----	79.22	35.16	11.43	39.17	0.00	345	314	AVERAGE																																																																														

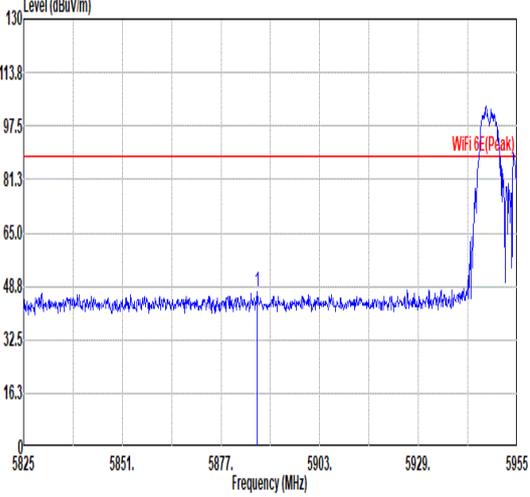
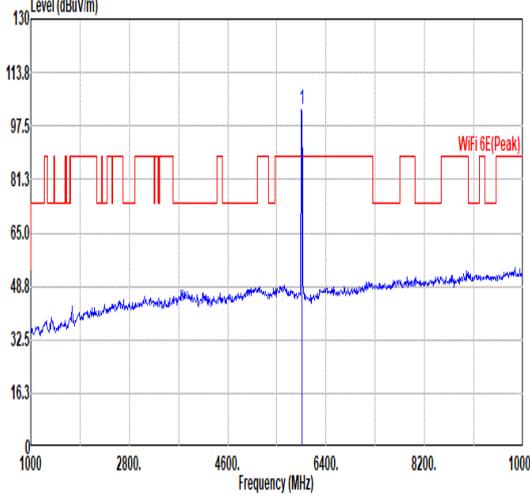
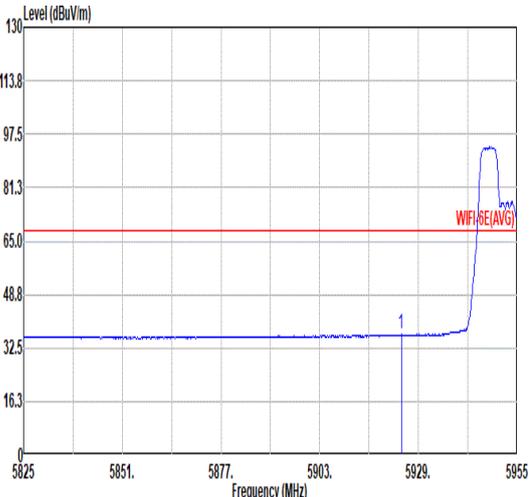
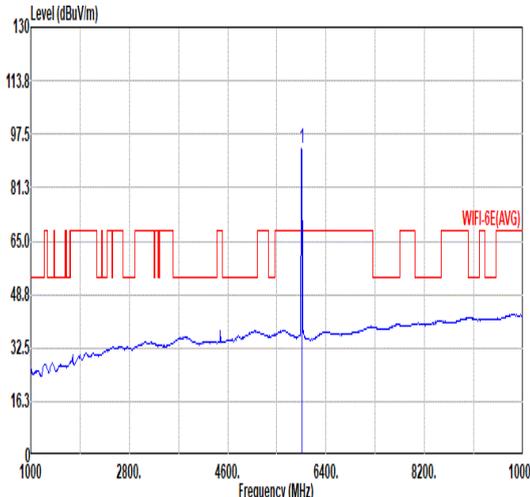


Mode	3																																																																																									
	Band Edge																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_RU52/37_5955MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI 6E (Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5886.62</td> <td>47.22</td> <td>88.20</td> <td>-40.98</td> <td>40.03</td> <td>35.10</td> <td>11.37</td> <td>39.28</td> <td>0.00</td> <td>300</td> <td>305</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5886.62	47.22	88.20	-40.98	40.03	35.10	11.37	39.28	0.00	300	305	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI 6E (Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>102.68</td> <td>-----</td> <td>-----</td> <td>95.26</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>300</td> <td>305</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	102.68	-----	-----	95.26	35.16	11.43	39.17	0.00	300	305	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5886.62	47.22	88.20	-40.98	40.03	35.10	11.37	39.28	0.00	300	305	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5955.00	102.68	-----	-----	95.26	35.16	11.43	39.17	0.00	300	305	PEAK																																																																														
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI 6E (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.45</td> <td>36.57</td> <td>68.20</td> <td>-31.63</td> <td>29.26</td> <td>35.13</td> <td>11.40</td> <td>39.22</td> <td>0.00</td> <td>300</td> <td>305</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.45	36.57	68.20	-31.63	29.26	35.13	11.40	39.22	0.00	300	305	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI 6E (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>93.15</td> <td>-----</td> <td>-----</td> <td>85.73</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>300</td> <td>305</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	93.15	-----	-----	85.73	35.16	11.43	39.17	0.00	300	305	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5924.45	36.57	68.20	-31.63	29.26	35.13	11.40	39.22	0.00	300	305	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5955.00	93.15	-----	-----	85.73	35.16	11.43	39.17	0.00	300	305	AVERAGE																																																																														



Mode	4																																																																																							
	Band Edge																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_RU106/53_5955MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5897.28</td> <td>47.32</td> <td>88.20</td> <td>-40.88</td> <td>40.09</td> <td>35.11</td> <td>11.38</td> <td>39.26</td> <td>0.00</td> <td>346</td> <td>314 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5897.28	47.32	88.20	-40.88	40.09	35.11	11.38	39.26	0.00	346	314 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>93.93</td> <td>-----</td> <td>-----</td> <td>86.51</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>346</td> <td>314 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	93.93	-----	-----	86.51	35.16	11.43	39.17	0.00	346	314 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5897.28	47.32	88.20	-40.88	40.09	35.11	11.38	39.26	0.00	346	314 PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5955.00	93.93	-----	-----	86.51	35.16	11.43	39.17	0.00	346	314 PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5899.88</td> <td>36.38</td> <td>68.20</td> <td>-31.82</td> <td>29.15</td> <td>35.11</td> <td>11.38</td> <td>39.26</td> <td>0.00</td> <td>346</td> <td>314 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5899.88	36.38	68.20	-31.82	29.15	35.11	11.38	39.26	0.00	346	314 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>83.57</td> <td>-----</td> <td>-----</td> <td>76.15</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>346</td> <td>314 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	83.57	-----	-----	76.15	35.16	11.43	39.17	0.00	346	314 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5899.88	36.38	68.20	-31.82	29.15	35.11	11.38	39.26	0.00	346	314 AVERAGE																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5955.00	83.57	-----	-----	76.15	35.16	11.43	39.17	0.00	346	314 AVERAGE																																																																													

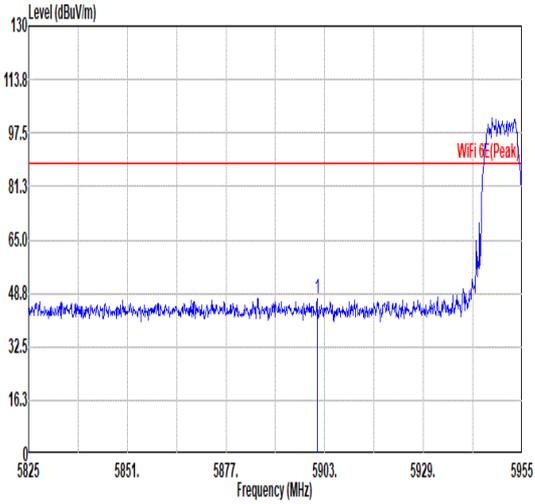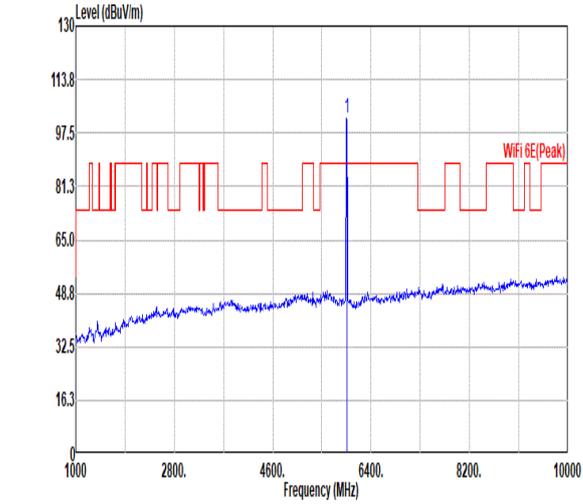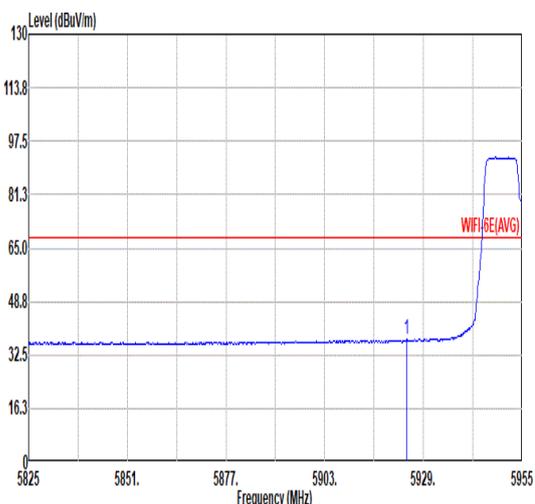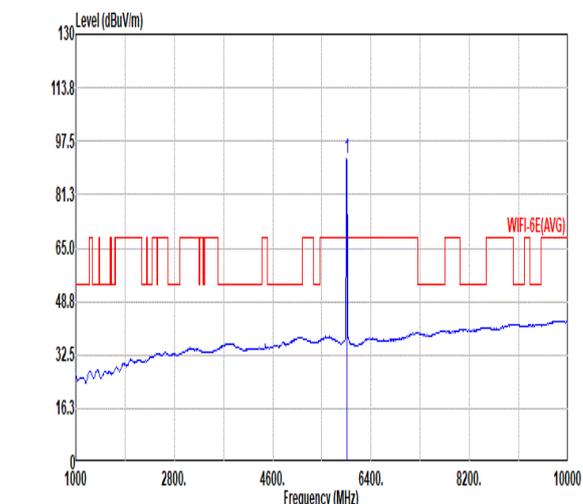

	4																																																																																							
Mode	Band Edge																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_RU106/53_5955MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a blue signal line with a sharp peak at approximately 5955 MHz. A red horizontal line indicates the limit at 81.3 dBuV/m. A red label 'Wifi 6E(Peak)' is placed near the peak. The x-axis ranges from 5825 to 5955 MHz, and the y-axis ranges from 0 to 130 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5901.05</td> <td>47.23</td> <td>88.20</td> <td>-40.97</td> <td>39.99</td> <td>35.11</td> <td>11.38</td> <td>39.25</td> <td>0.00</td> <td>250</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5901.05	47.23	88.20	-40.97	39.99	35.11	11.38	39.25	0.00	250	304	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line with a sharp peak at approximately 5955 MHz. A red horizontal line indicates the limit at 81.3 dBuV/m. A red label 'Wifi 6E(Peak)' is placed near the peak. The x-axis ranges from 1000 to 10000 MHz, and the y-axis ranges from 0 to 130 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>102.23</td> <td>-----</td> <td>-----</td> <td>94.81</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>250</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	102.23	-----	-----	94.81	35.16	11.43	39.17	0.00	250	304	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5901.05	47.23	88.20	-40.97	39.99	35.11	11.38	39.25	0.00	250	304	PEAK																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5955.00	102.23	-----	-----	94.81	35.16	11.43	39.17	0.00	250	304	PEAK																																																																												
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a blue signal line with a sharp peak at approximately 5955 MHz. A red horizontal line indicates the limit at 65.0 dBuV/m. A red label 'Wifi 6E(AVG)' is placed near the peak. The x-axis ranges from 5825 to 5955 MHz, and the y-axis ranges from 0 to 130 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.58</td> <td>37.09</td> <td>68.20</td> <td>-31.11</td> <td>29.78</td> <td>35.13</td> <td>11.40</td> <td>39.22</td> <td>0.00</td> <td>250</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.58	37.09	68.20	-31.11	29.78	35.13	11.40	39.22	0.00	250	304	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line with a sharp peak at approximately 5955 MHz. A red horizontal line indicates the limit at 65.0 dBuV/m. A red label 'Wifi 6E(AVG)' is placed near the peak. The x-axis ranges from 1000 to 10000 MHz, and the y-axis ranges from 0 to 130 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>92.34</td> <td>-----</td> <td>-----</td> <td>84.92</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>250</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	92.34	-----	-----	84.92	35.16	11.43	39.17	0.00	250	304	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5924.58	37.09	68.20	-31.11	29.78	35.13	11.40	39.22	0.00	250	304	AVERAGE																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5955.00	92.34	-----	-----	84.92	35.16	11.43	39.17	0.00	250	304	AVERAGE																																																																												



Mode	5																																																																																									
	Harmonic																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE20_CH45_Full_6175MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12350.00</td> <td>45.87</td> <td>74.00</td> <td>-28.13</td> <td>56.15</td> <td>38.00</td> <td>16.91</td> <td>65.99</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	12350.00	45.87	74.00	-28.13	56.15	38.00	16.91	65.99	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12350.00</td> <td>46.52</td> <td>74.00</td> <td>-27.48</td> <td>56.80</td> <td>38.00</td> <td>16.91</td> <td>65.99</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	12350.00	46.52	74.00	-27.48	56.80	38.00	16.91	65.99	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	12350.00	45.87	74.00	-28.13	56.15	38.00	16.91	65.99	0.00	---	---	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	12350.00	46.52	74.00	-27.48	56.80	38.00	16.91	65.99	0.00	---	---	PEAK																																																																														







Mode	6																																																																																							
	Harmonic																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE20_CH93_Full_6415MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12830.00</td> <td>45.97</td> <td>88.20</td> <td>-42.23</td> <td>55.15</td> <td>39.13</td> <td>17.22</td> <td>65.53</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12830.00	45.97	88.20	-42.23	55.15	39.13	17.22	65.53	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12830.00</td> <td>46.47</td> <td>88.20</td> <td>-41.73</td> <td>55.65</td> <td>39.13</td> <td>17.22</td> <td>65.53</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12830.00	46.47	88.20	-41.73	55.65	39.13	17.22	65.53	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12830.00	45.97	88.20	-42.23	55.15	39.13	17.22	65.53	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12830.00	46.47	88.20	-41.73	55.65	39.13	17.22	65.53	0.00	---	---	PEAK																																																																													



Mode	7																																																																																							
	Band Edge																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_Full_5965MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5914.60</td> <td>47.18</td> <td>88.20</td> <td>-41.02</td> <td>39.89</td> <td>35.13</td> <td>11.39</td> <td>39.23</td> <td>0.00</td> <td>324</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5914.60	47.18	88.20	-41.02	39.89	35.13	11.39	39.23	0.00	324	135	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>88.45</td> <td>-----</td> <td>-----</td> <td>81.03</td> <td>35.16</td> <td>11.43</td> <td>39.17</td> <td>0.00</td> <td>324</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5965.00	88.45	-----	-----	81.03	35.16	11.43	39.17	0.00	324	135	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5914.60	47.18	88.20	-41.02	39.89	35.13	11.39	39.23	0.00	324	135	PEAK																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5965.00	88.45	-----	-----	81.03	35.16	11.43	39.17	0.00	324	135	PEAK																																																																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5911.52</td> <td>36.40</td> <td>68.20</td> <td>-31.80</td> <td>29.13</td> <td>35.12</td> <td>11.39</td> <td>39.24</td> <td>0.00</td> <td>324</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5911.52	36.40	68.20	-31.80	29.13	35.12	11.39	39.24	0.00	324	135	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>78.33</td> <td>-----</td> <td>-----</td> <td>70.85</td> <td>35.18</td> <td>11.44</td> <td>39.14</td> <td>0.00</td> <td>324</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5965.00	78.33	-----	-----	70.85	35.18	11.44	39.14	0.00	324	135	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5911.52	36.40	68.20	-31.80	29.13	35.12	11.39	39.24	0.00	324	135	AVERAGE																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5965.00	78.33	-----	-----	70.85	35.18	11.44	39.14	0.00	324	135	AVERAGE																																																																												

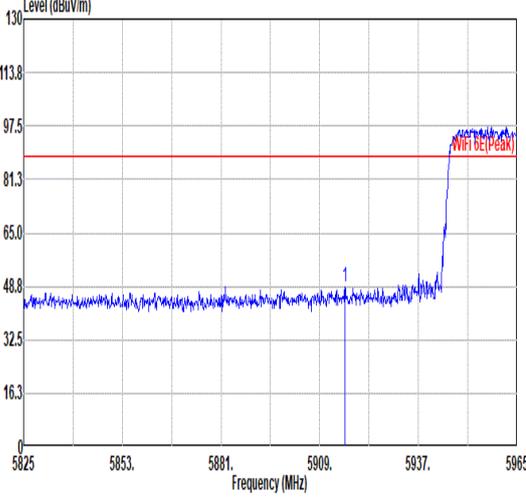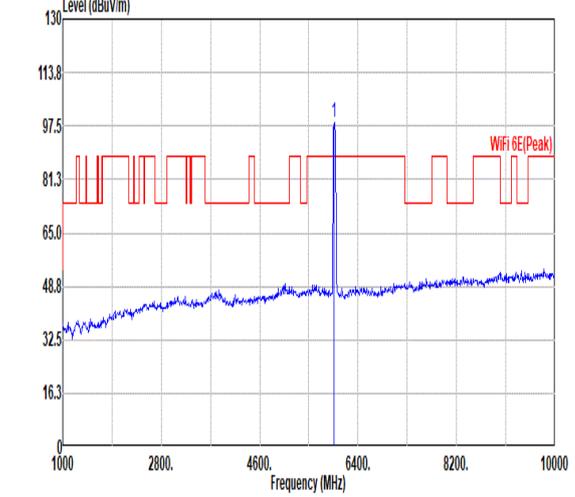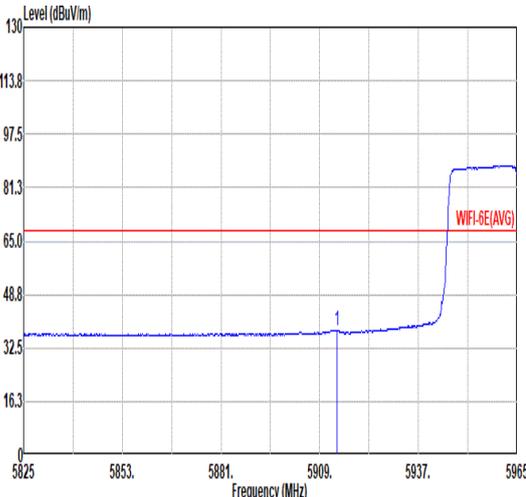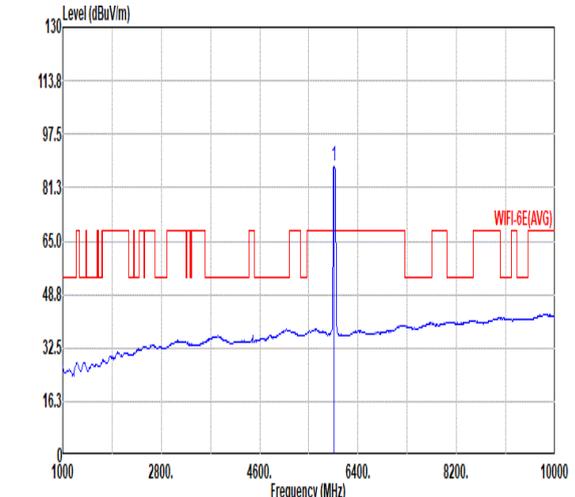

Mode	7																																																																																									
	Band Edge																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_Full_5965MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5916.14</td> <td>48.65</td> <td>88.20</td> <td>-39.55</td> <td>41.36</td> <td>35.13</td> <td>11.39</td> <td>39.23</td> <td>0.00</td> <td>244</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5916.14	48.65	88.20	-39.55	41.36	35.13	11.39	39.23	0.00	244	126	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>90.42</td> <td>-----</td> <td>-----</td> <td>90.94</td> <td>35.18</td> <td>11.44</td> <td>39.14</td> <td>0.00</td> <td>244</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5965.00	90.42	-----	-----	90.94	35.18	11.44	39.14	0.00	244	126	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5916.14	48.65	88.20	-39.55	41.36	35.13	11.39	39.23	0.00	244	126	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5965.00	90.42	-----	-----	90.94	35.18	11.44	39.14	0.00	244	126	PEAK																																																																														
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5913.90</td> <td>37.92</td> <td>68.20</td> <td>-30.28</td> <td>30.64</td> <td>35.12</td> <td>11.39</td> <td>39.23</td> <td>0.00</td> <td>244</td> <td>126</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5913.90	37.92	68.20	-30.28	30.64	35.12	11.39	39.23	0.00	244	126	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>87.60</td> <td>-----</td> <td>-----</td> <td>80.16</td> <td>35.17</td> <td>11.43</td> <td>39.16</td> <td>0.00</td> <td>244</td> <td>126</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5965.00	87.60	-----	-----	80.16	35.17	11.43	39.16	0.00	244	126	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5913.90	37.92	68.20	-30.28	30.64	35.12	11.39	39.23	0.00	244	126	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5965.00	87.60	-----	-----	80.16	35.17	11.43	39.16	0.00	244	126	AVERAGE																																																																														



Mode	7																																																																																							
	Harmonic																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_Full_5965MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11930.00</td> <td>45.22</td> <td>74.00</td> <td>-28.78</td> <td>56.32</td> <td>38.60</td> <td>16.63</td> <td>66.33</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11930.00	45.22	74.00	-28.78	56.32	38.60	16.63	66.33	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11930.00</td> <td>45.28</td> <td>74.00</td> <td>-28.72</td> <td>56.38</td> <td>38.60</td> <td>16.63</td> <td>66.33</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11930.00	45.28	74.00	-28.72	56.38	38.60	16.63	66.33	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 11930.00	45.22	74.00	-28.78	56.32	38.60	16.63	66.33	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 11930.00	45.28	74.00	-28.72	56.38	38.60	16.63	66.33	0.00	---	---	PEAK																																																																													







Mode	8																																																																																							
	Harmonic																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE40_CH43_Full_6165MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12330.00</td> <td>46.62</td> <td>74.00</td> <td>-27.38</td> <td>56.93</td> <td>38.00</td> <td>16.90</td> <td>66.01</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12330.00	46.62	74.00	-27.38	56.93	38.00	16.90	66.01	0.00	---	---	PEAK	<table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12330.00</td> <td>46.06</td> <td>74.00</td> <td>-27.94</td> <td>56.37</td> <td>38.00</td> <td>16.90</td> <td>66.01</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12330.00	46.06	74.00	-27.94	56.37	38.00	16.90	66.01	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12330.00	46.62	74.00	-27.38	56.93	38.00	16.90	66.01	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12330.00	46.06	74.00	-27.94	56.37	38.00	16.90	66.01	0.00	---	---	PEAK																																																																													







Mode	9																																																																																			
	Harmonic																																																																																			
	U-NII-5_5.925-6.425_802.11ax HE40_CH91_Full_6405MHz																																																																																			
ANT	STBC																																																																																			
Pol.	Horizontal	Vertical																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12810.00</td> <td>45.98</td> <td>88.20</td> <td>-42.22</td> <td>55.21</td> <td>39.11</td> <td>17.21</td> <td>65.55</td> <td>0.00</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 12810.00	45.98	88.20	-42.22	55.21	39.11	17.21	65.55	0.00	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12810.00</td> <td>45.59</td> <td>88.20</td> <td>-42.61</td> <td>54.82</td> <td>39.11</td> <td>17.21</td> <td>65.55</td> <td>0.00</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 12810.00	45.59	88.20	-42.61	54.82	39.11	17.21	65.55	0.00	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1 12810.00	45.98	88.20	-42.22	55.21	39.11	17.21	65.55	0.00	---	PEAK																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1 12810.00	45.59	88.20	-42.61	54.82	39.11	17.21	65.55	0.00	---	PEAK																																																																										

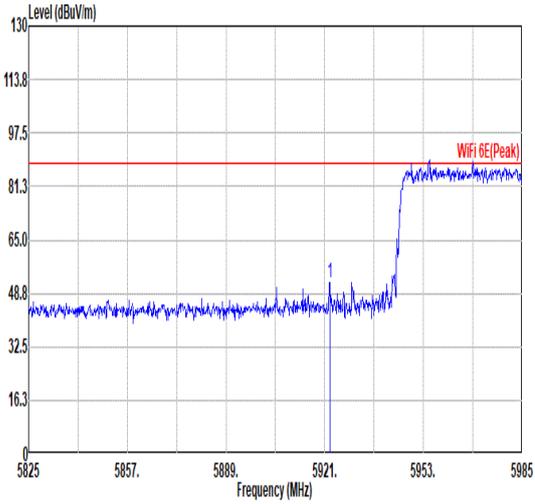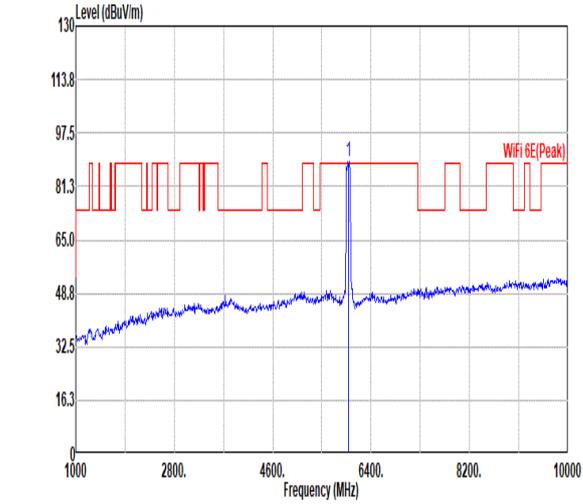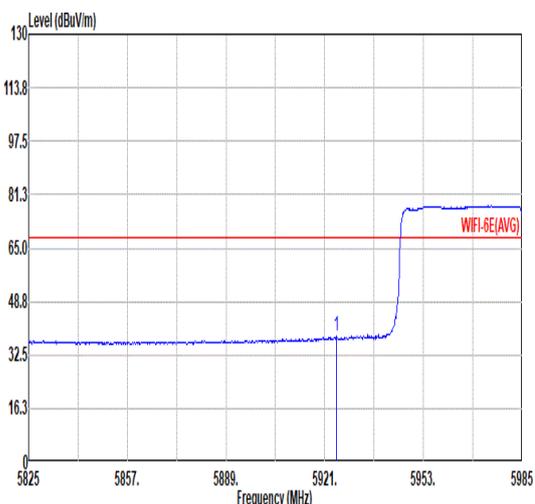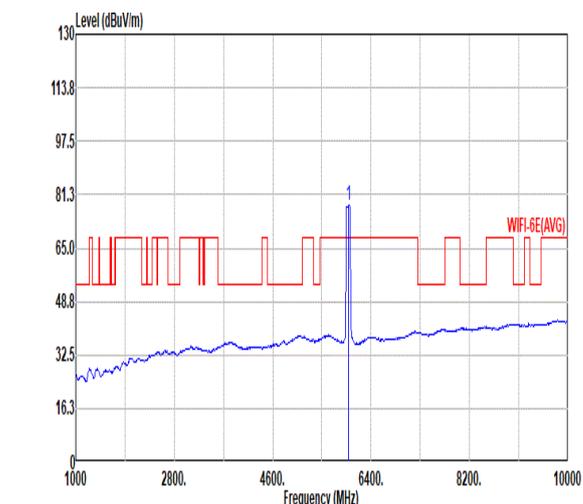

		10																																																																																										
Mode		Band Edge																																																																																										
		U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full_5985MHz																																																																																										
ANT		STBC																																																																																										
Pol.		Horizontal					Fundamental																																																																																					
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Wifi 6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.60</td> <td>51.95</td> <td>88.20</td> <td>-36.25</td> <td>44.64</td> <td>35.13</td> <td>11.40</td> <td>39.22</td> <td>0.00</td> <td>300</td> <td>187 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5922.60	51.95	88.20	-36.25	44.64	35.13	11.40	39.22	0.00	300	187 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Wifi 6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>88.76</td> <td>-----</td> <td>-----</td> <td>81.19</td> <td>35.20</td> <td>11.47</td> <td>39.10</td> <td>0.00</td> <td>300</td> <td>187 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5985.00	88.76	-----	-----	81.19	35.20	11.47	39.10	0.00	300	187 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5922.60	51.95	88.20	-36.25	44.64	35.13	11.40	39.22	0.00	300	187 PEAK																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5985.00	88.76	-----	-----	81.19	35.20	11.47	39.10	0.00	300	187 PEAK																																																																																	
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Wifi 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.84</td> <td>38.05</td> <td>68.20</td> <td>-30.15</td> <td>30.74</td> <td>35.13</td> <td>11.40</td> <td>39.22</td> <td>0.00</td> <td>300</td> <td>187 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.84	38.05	68.20	-30.15	30.74	35.13	11.40	39.22	0.00	300	187 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Wifi 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>78.10</td> <td>-----</td> <td>-----</td> <td>70.53</td> <td>35.20</td> <td>11.47</td> <td>39.10</td> <td>0.00</td> <td>300</td> <td>187 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5985.00	78.10	-----	-----	70.53	35.20	11.47	39.10	0.00	300	187 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5924.84	38.05	68.20	-30.15	30.74	35.13	11.40	39.22	0.00	300	187 AVERAGE																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5985.00	78.10	-----	-----	70.53	35.20	11.47	39.10	0.00	300	187 AVERAGE																																																																																	

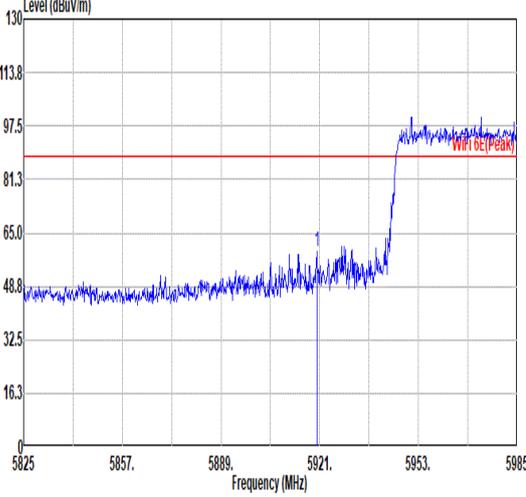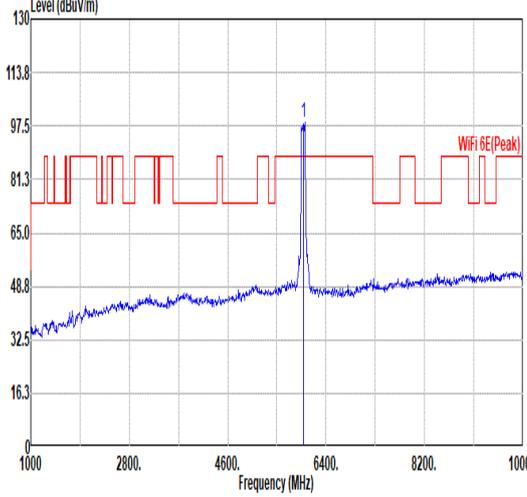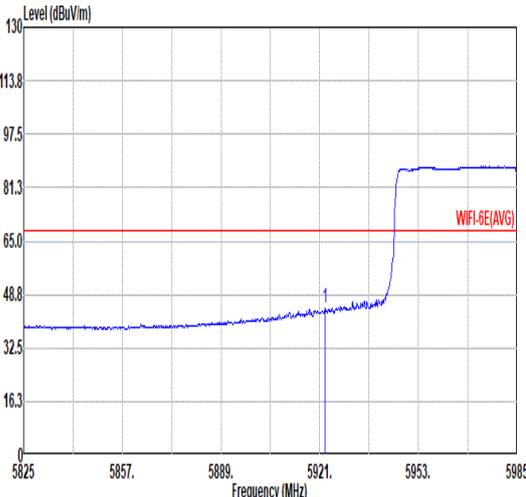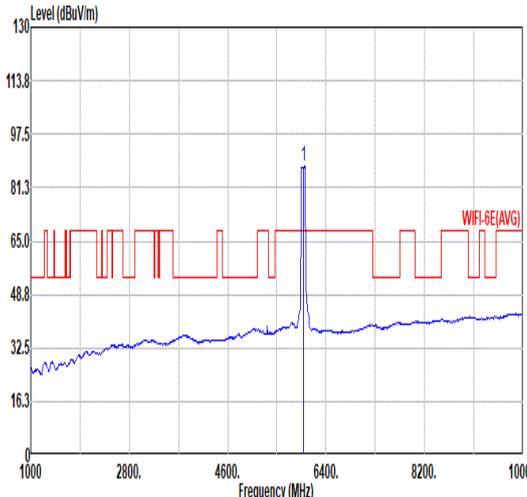

		10																																																																																												
Mode		Band Edge																																																																																												
		U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full_5985MHz																																																																																												
ANT		STBC																																																																																												
Pol.		Vertical					Fundamental																																																																																							
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WiFi 6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5920.04</td> <td>59.42</td> <td>88.20</td> <td>-28.78</td> <td>52.11</td> <td>35.13</td> <td>11.40</td> <td>39.22</td> <td>0.00</td> <td>241</td> <td>127</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5920.04	59.42	88.20	-28.78	52.11	35.13	11.40	39.22	0.00	241	127	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WiFi 6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>98.83</td> <td>-----</td> <td>-----</td> <td>91.20</td> <td>35.22</td> <td>11.48</td> <td>39.07</td> <td>0.00</td> <td>241</td> <td>127</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5985.00	98.83	-----	-----	91.20	35.22	11.48	39.07	0.00	241	127	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5920.04	59.42	88.20	-28.78	52.11	35.13	11.40	39.22	0.00	241	127	PEAK																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5985.00	98.83	-----	-----	91.20	35.22	11.48	39.07	0.00	241	127	PEAK																																																																																		
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WiFi 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.60</td> <td>44.47</td> <td>68.20</td> <td>-23.73</td> <td>37.16</td> <td>35.13</td> <td>11.40</td> <td>39.22</td> <td>0.00</td> <td>241</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5922.60	44.47	68.20	-23.73	37.16	35.13	11.40	39.22	0.00	241	127	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WiFi 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>87.75</td> <td>-----</td> <td>-----</td> <td>80.18</td> <td>35.20</td> <td>11.47</td> <td>39.10</td> <td>0.00</td> <td>241</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5985.00	87.75	-----	-----	80.18	35.20	11.47	39.10	0.00	241	127	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5922.60	44.47	68.20	-23.73	37.16	35.13	11.40	39.22	0.00	241	127	AVERAGE																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5985.00	87.75	-----	-----	80.18	35.20	11.47	39.10	0.00	241	127	AVERAGE																																																																																		



Mode	10																																																																																									
	Harmonic																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full_5985MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11970.00</td> <td>45.14</td> <td>74.00</td> <td>-28.86</td> <td>56.21</td> <td>38.60</td> <td>16.66</td> <td>66.33</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11970.00	45.14	74.00	-28.86	56.21	38.60	16.66	66.33	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11970.00</td> <td>45.91</td> <td>74.00</td> <td>-28.09</td> <td>56.98</td> <td>38.60</td> <td>16.66</td> <td>66.33</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11970.00	45.91	74.00	-28.09	56.98	38.60	16.66	66.33	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	11970.00	45.14	74.00	-28.86	56.21	38.60	16.66	66.33	0.00	---	---	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	11970.00	45.91	74.00	-28.09	56.98	38.60	16.66	66.33	0.00	---	---	PEAK																																																																														



Mode	11																																																																																									
	Harmonic																																																																																									
	U-NII-5_5.925-6.425_802.11ax HE80_CH39_Full_6145MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12290.00</td> <td>46.64</td> <td>74.00</td> <td>-27.36</td> <td>57.02</td> <td>38.00</td> <td>16.87</td> <td>66.05</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	12290.00	46.64	74.00	-27.36	57.02	38.00	16.87	66.05	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12290.00</td> <td>46.38</td> <td>74.00</td> <td>-27.62</td> <td>56.76</td> <td>38.00</td> <td>16.87</td> <td>66.05</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	12290.00	46.38	74.00	-27.62	56.76	38.00	16.87	66.05	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	12290.00	46.64	74.00	-27.36	57.02	38.00	16.87	66.05	0.00	---	---	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	12290.00	46.38	74.00	-27.62	56.76	38.00	16.87	66.05	0.00	---	---	PEAK																																																																														



Mode	12																																																																																							
	Harmonic																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE80_CH87_Full_6385MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12770.00</td> <td>46.62</td> <td>88.20</td> <td>-41.58</td> <td>55.93</td> <td>39.10</td> <td>17.18</td> <td>65.59</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12770.00	46.62	88.20	-41.58	55.93	39.10	17.18	65.59	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12770.00</td> <td>46.37</td> <td>88.20</td> <td>-41.83</td> <td>55.68</td> <td>39.10</td> <td>17.18</td> <td>65.59</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12770.00	46.37	88.20	-41.83	55.68	39.10	17.18	65.59	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12770.00	46.62	88.20	-41.58	55.93	39.10	17.18	65.59	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12770.00	46.37	88.20	-41.83	55.68	39.10	17.18	65.59	0.00	---	---	PEAK																																																																													



Mode	13																																																																																							
	Harmonic																																																																																							
	U-NII-6_5.925-6.425_802.11ax HE20_CH97_Full_6435MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12870.00</td> <td>46.92</td> <td>88.20</td> <td>-41.28</td> <td>55.99</td> <td>39.17</td> <td>17.25</td> <td>65.49</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12870.00	46.92	88.20	-41.28	55.99	39.17	17.25	65.49	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12870.00</td> <td>46.28</td> <td>88.20</td> <td>-41.92</td> <td>55.35</td> <td>39.17</td> <td>17.25</td> <td>65.49</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12870.00	46.28	88.20	-41.92	55.35	39.17	17.25	65.49	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12870.00	46.92	88.20	-41.28	55.99	39.17	17.25	65.49	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12870.00	46.28	88.20	-41.92	55.35	39.17	17.25	65.49	0.00	---	---	PEAK																																																																													



Mode	14																																																																																							
	Harmonic																																																																																							
	U-NII-6_5.925-6.425_802.11ax HE20_CH105_Full_6475MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12950.00</td> <td>45.81</td> <td>88.20</td> <td>-42.39</td> <td>54.72</td> <td>39.20</td> <td>17.30</td> <td>65.41</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12950.00	45.81	88.20	-42.39	54.72	39.20	17.30	65.41	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12950.00</td> <td>46.81</td> <td>88.20</td> <td>-41.39</td> <td>55.72</td> <td>39.20</td> <td>17.30</td> <td>65.41</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12950.00	46.81	88.20	-41.39	55.72	39.20	17.30	65.41	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12950.00	45.81	88.20	-42.39	54.72	39.20	17.30	65.41	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12950.00	46.81	88.20	-41.39	55.72	39.20	17.30	65.41	0.00	---	---	PEAK																																																																													



Mode	15																																																																																							
	Harmonic																																																																																							
	U-NII-6_5.925-6.425_802.11ax HE20_CH113_Full_6515MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13030.00</td> <td>46.45</td> <td>88.20</td> <td>-41.75</td> <td>55.28</td> <td>39.14</td> <td>17.36</td> <td>65.33</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13030.00	46.45	88.20	-41.75	55.28	39.14	17.36	65.33	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13030.00</td> <td>46.44</td> <td>88.20</td> <td>-41.76</td> <td>55.27</td> <td>39.14</td> <td>17.36</td> <td>65.33</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13030.00	46.44	88.20	-41.76	55.27	39.14	17.36	65.33	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13030.00	46.45	88.20	-41.75	55.28	39.14	17.36	65.33	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13030.00	46.44	88.20	-41.76	55.27	39.14	17.36	65.33	0.00	---	---	PEAK																																																																													



Mode	16																																																																																							
	Harmonic																																																																																							
	U-NII-6_6.425-6.525_802.11ax HE40_CH99_Full_6445MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12890.00</td> <td>46.47</td> <td>88.20</td> <td>-41.73</td> <td>55.49</td> <td>39.19</td> <td>17.26</td> <td>65.47</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12890.00	46.47	88.20	-41.73	55.49	39.19	17.26	65.47	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12890.00</td> <td>47.18</td> <td>88.20</td> <td>-41.02</td> <td>56.20</td> <td>39.19</td> <td>17.26</td> <td>65.47</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12890.00	47.18	88.20	-41.02	56.20	39.19	17.26	65.47	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12890.00	46.47	88.20	-41.73	55.49	39.19	17.26	65.47	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 12890.00	47.18	88.20	-41.02	56.20	39.19	17.26	65.47	0.00	---	---	PEAK																																																																													



Mode	17																																																																																					
	Harmonic																																																																																					
	U-NII-6_6.425-6.525_802.11ax HE40_CH107_Full_6485MHz																																																																																					
ANT	STBC																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12970.00</td> <td>46.20</td> <td>88.20</td> <td>-42.00</td> <td>55.07</td> <td>39.20</td> <td>17.32</td> <td>65.39</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 12970.00	46.20	88.20	-42.00	55.07	39.20	17.32	65.39	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12970.00</td> <td>46.01</td> <td>88.20</td> <td>-41.39</td> <td>55.68</td> <td>39.20</td> <td>17.32</td> <td>65.39</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 12970.00	46.01	88.20	-41.39	55.68	39.20	17.32	65.39	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1 12970.00	46.20	88.20	-42.00	55.07	39.20	17.32	65.39	0.00	---	---	PEAK																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1 12970.00	46.01	88.20	-41.39	55.68	39.20	17.32	65.39	0.00	---	---	PEAK																																																																											



Mode	18																																																																																					
	Harmonic																																																																																					
	U-NII-6_6.425-6.525_802.11ax HE80_CH103_Full_6465MHz																																																																																					
ANT	STBC																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12930.00</td> <td>47.05</td> <td>88.20</td> <td>-41.15</td> <td>55.99</td> <td>39.20</td> <td>17.29</td> <td>65.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12930.00	47.05	88.20	-41.15	55.99	39.20	17.29	65.43	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12930.00</td> <td>46.04</td> <td>88.20</td> <td>-41.36</td> <td>55.78</td> <td>39.20</td> <td>17.29</td> <td>65.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12930.00	46.04	88.20	-41.36	55.78	39.20	17.29	65.43	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 12930.00	47.05	88.20	-41.15	55.99	39.20	17.29	65.43	0.00	---	---	PEAK																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 12930.00	46.04	88.20	-41.36	55.78	39.20	17.29	65.43	0.00	---	---	PEAK																																																																											



		19																																																																						
Mode		Band Edge																																																																						
		U-NII-6-7_6.425-6.525_802.11ax HE40_CH115_Full_6525MHz																																																																						
ANT		STBC																																																																						
Pol.		Horizontal					Fundamental																																																																	
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line and a red limit line labeled 'Wifi 6E(Peak)' at approximately 81.3 dBuV/m. A peak is marked at 5920.20 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5920.20</td> <td>48.29</td> <td>88.20</td> <td>-39.91</td> <td>40.98</td> <td>35.13</td> <td>11.40</td> <td>39.22</td> <td>0.00</td> <td>100</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5920.20	48.29	88.20	-39.91	40.98	35.13	11.40	39.22	0.00	100	135	PEAK	<p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a blue signal line and a red limit line labeled 'Wifi 6E(Peak)' at approximately 81.3 dBuV/m. A peak is marked at 6525.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6525.00</td> <td>93.12</td> <td>-----</td> <td>-----</td> <td>83.81</td> <td>35.50</td> <td>12.03</td> <td>38.22</td> <td>0.00</td> <td>100</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	6525.00	93.12	-----	-----	83.81	35.50	12.03	38.22	0.00	100	135	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	5920.20	48.29	88.20	-39.91	40.98	35.13	11.40	39.22	0.00	100	135	PEAK																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	6525.00	93.12	-----	-----	83.81	35.50	12.03	38.22	0.00	100	135	PEAK																																																												
Avg	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line and a red limit line labeled 'Wifi 6E(AVG)' at approximately 65.0 dBuV/m. A peak is marked at 5910.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5910.00</td> <td>38.14</td> <td>68.20</td> <td>-30.06</td> <td>30.87</td> <td>35.12</td> <td>11.39</td> <td>39.24</td> <td>0.00</td> <td>100</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5910.00	38.14	68.20	-30.06	30.87	35.12	11.39	39.24	0.00	100	135	AVERAGE	<p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a blue signal line and a red limit line labeled 'Wifi 6E(AVG)' at approximately 65.0 dBuV/m. A peak is marked at 6525.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6525.00</td> <td>83.56</td> <td>-----</td> <td>-----</td> <td>74.27</td> <td>35.50</td> <td>12.02</td> <td>38.23</td> <td>0.00</td> <td>100</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	6525.00	83.56	-----	-----	74.27	35.50	12.02	38.23	0.00	100	135	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	5910.00	38.14	68.20	-30.06	30.87	35.12	11.39	39.24	0.00	100	135	AVERAGE																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																														
1	6525.00	83.56	-----	-----	74.27	35.50	12.02	38.23	0.00	100	135	AVERAGE																																																												



Mode	19																																																																																	
	Band Edge																																																																																	
	U-NII-6-7_6.425-6.525_802.11ax HE40_CH115_Full_6525MHz																																																																																	
ANT	STBC																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5917.48</td> <td>48.04</td> <td>88.20</td> <td>-40.16</td> <td>40.75</td> <td>35.13</td> <td>11.39</td> <td>39.23</td> <td>0.00</td> <td>100</td> <td>148</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5917.48	48.04	88.20	-40.16	40.75	35.13	11.39	39.23	0.00	100	148	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6525.00</td> <td>98.99</td> <td>-----</td> <td>-----</td> <td>89.72</td> <td>35.50</td> <td>12.02</td> <td>38.25</td> <td>0.00</td> <td>100</td> <td>148</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	6525.00	98.99	-----	-----	89.72	35.50	12.02	38.25	0.00	100	148	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5917.48	48.04	88.20	-40.16	40.75	35.13	11.39	39.23	0.00	100	148	PEAK																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	6525.00	98.99	-----	-----	89.72	35.50	12.02	38.25	0.00	100	148	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5880.76</td> <td>38.08</td> <td>68.20</td> <td>-30.12</td> <td>30.92</td> <td>35.09</td> <td>11.36</td> <td>39.29</td> <td>0.00</td> <td>100</td> <td>148</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5880.76	38.08	68.20	-30.12	30.92	35.09	11.36	39.29	0.00	100	148	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6525.00</td> <td>88.14</td> <td>-----</td> <td>-----</td> <td>78.87</td> <td>35.50</td> <td>12.02</td> <td>38.25</td> <td>0.00</td> <td>100</td> <td>148</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	6525.00	88.14	-----	-----	78.87	35.50	12.02	38.25	0.00	100	148	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5880.76	38.08	68.20	-30.12	30.92	35.09	11.36	39.29	0.00	100	148	AVERAGE																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	6525.00	88.14	-----	-----	78.87	35.50	12.02	38.25	0.00	100	148	AVERAGE																																																																						



Mode	19																																																																																							
	Harmonic																																																																																							
	U-NII-6-7_6.425-6.525_802.11ax HE40_CH115_Full_6525MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13050.00</td> <td>47.26</td> <td>88.20</td> <td>-40.94</td> <td>56.11</td> <td>39.10</td> <td>17.37</td> <td>65.32</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13050.00	47.26	88.20	-40.94	56.11	39.10	17.37	65.32	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13050.00</td> <td>46.61</td> <td>88.20</td> <td>-41.59</td> <td>55.46</td> <td>39.10</td> <td>17.37</td> <td>65.32</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13050.00	46.61	88.20	-41.59	55.46	39.10	17.37	65.32	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13050.00	47.26	88.20	-40.94	56.11	39.10	17.37	65.32	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13050.00	46.61	88.20	-41.59	55.46	39.10	17.37	65.32	0.00	---	---	PEAK																																																																													



Mode	20																																																																																									
	Harmonic																																																																																									
	U-NII-6-7_6.425-6.525_802.11ax HE80_CH119_Full_6545MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak																																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13090.00</td> <td>47.00</td> <td>88.20</td> <td>-41.20</td> <td>55.86</td> <td>39.02</td> <td>17.40</td> <td>65.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	13090.00	47.00	88.20	-41.20	55.86	39.02	17.40	65.28	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13090.00</td> <td>46.17</td> <td>88.20</td> <td>-42.03</td> <td>55.03</td> <td>39.02</td> <td>17.40</td> <td>65.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	13090.00	46.17	88.20	-42.03	55.03	39.02	17.40	65.28	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	13090.00	47.00	88.20	-41.20	55.86	39.02	17.40	65.28	0.00	---	---	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	13090.00	46.17	88.20	-42.03	55.03	39.02	17.40	65.28	0.00	---	---	PEAK																																																																														



Mode	21																																																																																							
	Harmonic																																																																																							
	U-NII-7_6.525-6.875_802.11ax HE20_CH117_Full_6535MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13070.00</td> <td>46.37</td> <td>88.20</td> <td>-41.83</td> <td>55.23</td> <td>39.06</td> <td>17.38</td> <td>65.30</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13070.00	46.37	88.20	-41.83	55.23	39.06	17.38	65.30	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13070.00</td> <td>46.36</td> <td>88.20</td> <td>-41.84</td> <td>55.22</td> <td>39.06</td> <td>17.38</td> <td>65.30</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13070.00	46.36	88.20	-41.84	55.22	39.06	17.38	65.30	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13070.00	46.37	88.20	-41.83	55.23	39.06	17.38	65.30	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13070.00	46.36	88.20	-41.84	55.22	39.06	17.38	65.30	0.00	---	---	PEAK																																																																													



Mode	22																																																																																							
	Harmonic																																																																																							
	U-NII-7_6.525-6.875_802.11ax HE20_CH149_Full_6695MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13390.00</td> <td>45.95</td> <td>74.00</td> <td>-28.05</td> <td>54.43</td> <td>38.90</td> <td>17.61</td> <td>64.99</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13390.00	45.95	74.00	-28.05	54.43	38.90	17.61	64.99	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13390.00</td> <td>45.54</td> <td>74.00</td> <td>-28.46</td> <td>54.02</td> <td>38.90</td> <td>17.61</td> <td>64.99</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13390.00	45.54	74.00	-28.46	54.02	38.90	17.61	64.99	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13390.00	45.95	74.00	-28.05	54.43	38.90	17.61	64.99	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13390.00	45.54	74.00	-28.46	54.02	38.90	17.61	64.99	0.00	---	---	PEAK																																																																													



Mode	23																																																																																							
	Harmonic																																																																																							
	U-NII-7_6.525-6.875_802.11ax HE20_CH181_Full_6855MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak																																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13710.00</td> <td>44.98</td> <td>88.20</td> <td>-43.22</td> <td>53.55</td> <td>38.50</td> <td>17.84</td> <td>64.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13710.00	44.98	88.20	-43.22	53.55	38.50	17.84	64.91	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13710.00</td> <td>44.64</td> <td>88.20</td> <td>-43.56</td> <td>53.21</td> <td>38.50</td> <td>17.84</td> <td>64.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13710.00	44.64	88.20	-43.56	53.21	38.50	17.84	64.91	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13710.00	44.98	88.20	-43.22	53.55	38.50	17.84	64.91	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13710.00	44.64	88.20	-43.56	53.21	38.50	17.84	64.91	0.00	---	---	PEAK																																																																													



Mode	24																																																																																							
	Harmonic																																																																																							
	U-NII-7_6.525-6.875_802.11ax HE40_CH123_Full_6565MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13130.00</td> <td>46.53</td> <td>88.20</td> <td>-41.67</td> <td>55.34</td> <td>39.00</td> <td>17.43</td> <td>65.24</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13130.00	46.53	88.20	-41.67	55.34	39.00	17.43	65.24	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13130.00</td> <td>46.29</td> <td>88.20</td> <td>-41.91</td> <td>55.10</td> <td>39.00</td> <td>17.43</td> <td>65.24</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13130.00	46.29	88.20	-41.91	55.10	39.00	17.43	65.24	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13130.00	46.53	88.20	-41.67	55.34	39.00	17.43	65.24	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13130.00	46.29	88.20	-41.91	55.10	39.00	17.43	65.24	0.00	---	---	PEAK																																																																													



Mode	25																																																																																							
	Harmonic																																																																																							
	U-NII-7_6.525-6.875_802.11ax HE40_CH147_Full_6685MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13370.00</td> <td>46.08</td> <td>74.00</td> <td>-27.92</td> <td>54.59</td> <td>38.90</td> <td>17.60</td> <td>65.01</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13370.00	46.08	74.00	-27.92	54.59	38.90	17.60	65.01	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13370.00</td> <td>46.40</td> <td>74.00</td> <td>-27.60</td> <td>54.91</td> <td>38.90</td> <td>17.60</td> <td>65.01</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13370.00	46.40	74.00	-27.60	54.91	38.90	17.60	65.01	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13370.00	46.08	74.00	-27.92	54.59	38.90	17.60	65.01	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13370.00	46.40	74.00	-27.60	54.91	38.90	17.60	65.01	0.00	---	---	PEAK																																																																													



Mode	26																																																																																									
	Harmonic																																																																																									
	U-NII-7_6.875-7.125_802.11ax HE40_CH179_Full_6845MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13690.00</td> <td>45.16</td> <td>88.20</td> <td>-43.04</td> <td>53.75</td> <td>38.50</td> <td>17.82</td> <td>64.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	13690.00	45.16	88.20	-43.04	53.75	38.50	17.82	64.91	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13690.00</td> <td>44.57</td> <td>88.20</td> <td>-43.63</td> <td>53.16</td> <td>38.50</td> <td>17.82</td> <td>64.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	13690.00	44.57	88.20	-43.63	53.16	38.50	17.82	64.91	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	13690.00	45.16	88.20	-43.04	53.75	38.50	17.82	64.91	0.00	---	---	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	13690.00	44.57	88.20	-43.63	53.16	38.50	17.82	64.91	0.00	---	---	PEAK																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5482.00</td> <td>44.70</td> <td>68.20</td> <td>-23.50</td> <td>35.29</td> <td>34.72</td> <td>10.87</td> <td>36.18</td> <td>0.00</td> <td>394</td> <td>88</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5482.00	44.70	68.20	-23.50	35.29	34.72	10.87	36.18	0.00	394	88	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5482.00</td> <td>47.81</td> <td>68.20</td> <td>-20.39</td> <td>38.40</td> <td>34.72</td> <td>10.87</td> <td>36.18</td> <td>0.00</td> <td>289</td> <td>139</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5482.00	47.81	68.20	-20.39	38.40	34.72	10.87	36.18	0.00	289	139	Average
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5482.00	44.70	68.20	-23.50	35.29	34.72	10.87	36.18	0.00	394	88	Average																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5482.00	47.81	68.20	-20.39	38.40	34.72	10.87	36.18	0.00	289	139	Average																																																																														



Mode	27																																																																																							
	Harmonic																																																																																							
	U-NII-7_6.525-6.875_802.11ax HE80_CH135_Full_6625MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13250.00</td> <td>45.74</td> <td>74.00</td> <td>-28.26</td> <td>54.40</td> <td>38.95</td> <td>17.51</td> <td>65.12</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13250.00	45.74	74.00	-28.26	54.40	38.95	17.51	65.12	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13250.00</td> <td>45.78</td> <td>74.00</td> <td>-28.22</td> <td>54.44</td> <td>38.95</td> <td>17.51</td> <td>65.12</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13250.00	45.78	74.00	-28.22	54.44	38.95	17.51	65.12	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13250.00	45.74	74.00	-28.26	54.40	38.95	17.51	65.12	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13250.00	45.78	74.00	-28.22	54.44	38.95	17.51	65.12	0.00	---	---	PEAK																																																																													



Mode	28																																																																																							
	Harmonic																																																																																							
	U-NII-7_6.525-6.875_802.11ax HE80_CH151_Full_6705MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak																																																																																								
Avg																																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13410.00</td> <td>45.98</td> <td>88.20</td> <td>-42.22</td> <td>54.45</td> <td>38.88</td> <td>17.62</td> <td>64.97</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13410.00	45.98	88.20	-42.22	54.45	38.88	17.62	64.97	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13410.00</td> <td>45.96</td> <td>88.20</td> <td>-42.24</td> <td>54.43</td> <td>38.88</td> <td>17.62</td> <td>64.97</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13410.00	45.96	88.20	-42.24	54.43	38.88	17.62	64.97	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13410.00	45.98	88.20	-42.22	54.45	38.88	17.62	64.97	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13410.00	45.96	88.20	-42.24	54.43	38.88	17.62	64.97	0.00	---	---	PEAK																																																																													



Mode	29																																																																																							
	Harmonic																																																																																							
	U-NII-7_6.525-6.875_802.11ax HE80_CH167_Full_6785MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13570.00</td> <td>46.14</td> <td>88.20</td> <td>-42.06</td> <td>54.73</td> <td>38.56</td> <td>17.74</td> <td>64.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13570.00	46.14	88.20	-42.06	54.73	38.56	17.74	64.89	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13570.00</td> <td>45.16</td> <td>88.20</td> <td>-43.04</td> <td>53.75</td> <td>38.56</td> <td>17.74</td> <td>64.89</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13570.00	45.16	88.20	-43.04	53.75	38.56	17.74	64.89	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13570.00	46.14	88.20	-42.06	54.73	38.56	17.74	64.89	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13570.00	45.16	88.20	-43.04	53.75	38.56	17.74	64.89	0.00	---	---	PEAK																																																																													



Mode	30																																																																																							
	Harmonic																																																																																							
	U-NII-7-8_6.525-6.875_802.11ax HE20_CH185_Full_6875MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak																																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13750.00</td> <td>45.66</td> <td>88.20</td> <td>-42.54</td> <td>54.20</td> <td>38.50</td> <td>17.87</td> <td>64.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13750.00	45.66	88.20	-42.54	54.20	38.50	17.87	64.91	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13750.00</td> <td>45.66</td> <td>88.20</td> <td>-42.54</td> <td>54.20</td> <td>38.50</td> <td>17.87</td> <td>64.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13750.00	45.66	88.20	-42.54	54.20	38.50	17.87	64.91	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13750.00	45.66	88.20	-42.54	54.20	38.50	17.87	64.91	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13750.00	45.66	88.20	-42.54	54.20	38.50	17.87	64.91	0.00	---	---	PEAK																																																																													



Mode	31																																																																																							
	Harmonic																																																																																							
	U-NII-7-8_6.875-7.125_802.11ax HE40_CH187_Full_6885MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak																																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13770.00</td> <td>45.99</td> <td>88.20</td> <td>-42.21</td> <td>54.53</td> <td>38.50</td> <td>17.88</td> <td>64.92</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13770.00	45.99	88.20	-42.21	54.53	38.50	17.88	64.92	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13770.00</td> <td>45.60</td> <td>88.20</td> <td>-42.60</td> <td>54.14</td> <td>38.50</td> <td>17.88</td> <td>64.92</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13770.00	45.60	88.20	-42.60	54.14	38.50	17.88	64.92	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13770.00	45.99	88.20	-42.21	54.53	38.50	17.88	64.92	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13770.00	45.60	88.20	-42.60	54.14	38.50	17.88	64.92	0.00	---	---	PEAK																																																																													





Mode	32																																																																																							
	Harmonic																																																																																							
	U-NII-7-8_6.525-6.875_802.11ax HE80_CH183_Full_6865MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13730.00</td> <td>46.13</td> <td>88.20</td> <td>-42.07</td> <td>54.69</td> <td>38.50</td> <td>17.85</td> <td>64.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13730.00	46.13	88.20	-42.07	54.69	38.50	17.85	64.91	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13730.00</td> <td>45.27</td> <td>88.20</td> <td>-42.93</td> <td>53.83</td> <td>38.50</td> <td>17.85</td> <td>64.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13730.00	45.27	88.20	-42.93	53.83	38.50	17.85	64.91	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13730.00	46.13	88.20	-42.07	54.69	38.50	17.85	64.91	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13730.00	45.27	88.20	-42.93	53.83	38.50	17.85	64.91	0.00	---	---	PEAK																																																																													



Mode	33																																																																																							
	Harmonic																																																																																							
	U-NII-8_6.875-7.125_802.11ax HE20_CH189_Full_6895MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak																																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13790.00</td> <td>45.47</td> <td>88.20</td> <td>-42.73</td> <td>54.00</td> <td>38.50</td> <td>17.89</td> <td>64.92</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13790.00	45.47	88.20	-42.73	54.00	38.50	17.89	64.92	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13790.00</td> <td>44.88</td> <td>88.20</td> <td>-43.32</td> <td>53.41</td> <td>38.50</td> <td>17.89</td> <td>64.92</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13790.00	44.88	88.20	-43.32	53.41	38.50	17.89	64.92	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13790.00	45.47	88.20	-42.73	54.00	38.50	17.89	64.92	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13790.00	44.88	88.20	-43.32	53.41	38.50	17.89	64.92	0.00	---	---	PEAK																																																																													

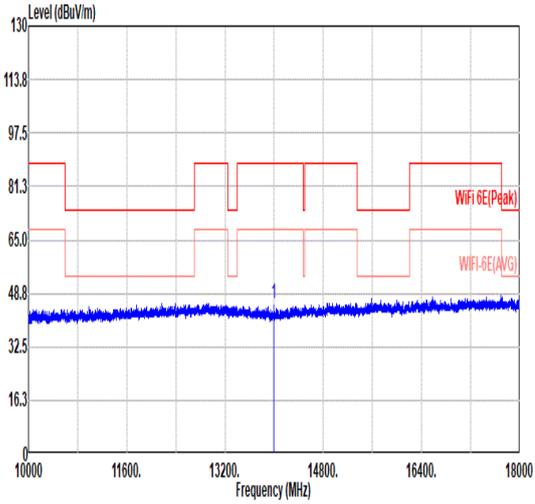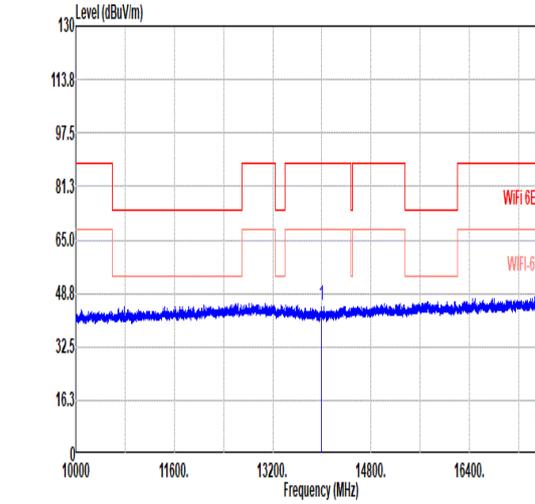

Mode	34																																																																																									
	Harmonic																																																																																									
	U-NII-8_6.875-7.125_802.11ax HE20_CH209_Full_6995MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>10000 11600 13200 14800 16400 18000</p> <p>Frequency (MHz)</p> <p>WiFi 6E(Peak)</p> <p>WiFi 6E(AVG)</p>	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>10000 11600 13200 14800 16400 18000</p> <p>Frequency (MHz)</p> <p>WiFi 6E(Peak)</p> <p>WiFi 6E(AVG)</p>																																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13990.00</td> <td>45.77</td> <td>88.20</td> <td>-42.43</td> <td>53.99</td> <td>38.69</td> <td>18.04</td> <td>64.95</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	13990.00	45.77	88.20	-42.43	53.99	38.69	18.04	64.95	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13990.00</td> <td>45.34</td> <td>88.20</td> <td>-42.86</td> <td>53.56</td> <td>38.69</td> <td>18.04</td> <td>64.95</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	13990.00	45.34	88.20	-42.86	53.56	38.69	18.04	64.95	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	13990.00	45.77	88.20	-42.43	53.99	38.69	18.04	64.95	0.00	---	---	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	13990.00	45.34	88.20	-42.86	53.56	38.69	18.04	64.95	0.00	---	---	PEAK																																																																														



Mode	35																																																																																									
	Band Edge																																																																																									
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full_7095MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7126.28</td> <td>64.20</td> <td>88.20</td> <td>-24.00</td> <td>53.73</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>392</td> <td>231</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7126.28	64.20	88.20	-24.00	53.73	35.70	12.62	37.85	0.00	392	231	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>105.83</td> <td>-----</td> <td>-----</td> <td>95.45</td> <td>35.69</td> <td>12.58</td> <td>37.89</td> <td>0.00</td> <td>392</td> <td>231</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7095.00	105.83	-----	-----	95.45	35.69	12.58	37.89	0.00	392	231	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7126.28	64.20	88.20	-24.00	53.73	35.70	12.62	37.85	0.00	392	231	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7095.00	105.83	-----	-----	95.45	35.69	12.58	37.89	0.00	392	231	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.16</td> <td>50.21</td> <td>68.20</td> <td>-17.99</td> <td>39.74</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>392</td> <td>231</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7125.16	50.21	68.20	-17.99	39.74	35.70	12.62	37.85	0.00	392	231	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>94.11</td> <td>-----</td> <td>-----</td> <td>83.77</td> <td>35.67</td> <td>12.57</td> <td>37.90</td> <td>0.00</td> <td>392</td> <td>231</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7095.00	94.11	-----	-----	83.77	35.67	12.57	37.90	0.00	392	231	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7125.16	50.21	68.20	-17.99	39.74	35.70	12.62	37.85	0.00	392	231	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7095.00	94.11	-----	-----	83.77	35.67	12.57	37.90	0.00	392	231	AVERAGE																																																																														







		35																																																																				
Mode		Band Edge																																																																				
		U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full_7095MHz																																																																				
ANT		STBC																																																																				
Pol.		Vertical					Fundamental																																																															
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical. Peak at 7127.40 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7127.40</td> <td>73.31</td> <td>88.20</td> <td>-14.89</td> <td>62.84</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>300</td> <td>198 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	7127.40	73.31	88.20	-14.89	62.84	35.70	12.62	37.85	0.00	300	198 PEAK	<p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Peak at 7095.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>110.25</td> <td>-----</td> <td>-----</td> <td>99.84</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>300</td> <td>198 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	7095.00	110.25	-----	-----	99.84	35.70	12.59	37.88	0.00	300	198 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	7127.40	73.31	88.20	-14.89	62.84	35.70	12.62	37.85	0.00	300	198 PEAK																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	7095.00	110.25	-----	-----	99.84	35.70	12.59	37.88	0.00	300	198 PEAK																																																											
Avg	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical. Average at 7125.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.00</td> <td>60.23</td> <td>68.20</td> <td>-7.97</td> <td>49.76</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>300</td> <td>198 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	7125.00	60.23	68.20	-7.97	49.76	35.70	12.62	37.85	0.00	300	198 AVERAGE	<p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Average at 7095.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>100.85</td> <td>-----</td> <td>-----</td> <td>90.47</td> <td>35.69</td> <td>12.58</td> <td>37.89</td> <td>0.00</td> <td>300</td> <td>198 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	7095.00	100.85	-----	-----	90.47	35.69	12.58	37.89	0.00	300	198 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	7125.00	60.23	68.20	-7.97	49.76	35.70	12.62	37.85	0.00	300	198 AVERAGE																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	7095.00	100.85	-----	-----	90.47	35.69	12.58	37.89	0.00	300	198 AVERAGE																																																											



Mode	35																																																																																									
	Harmonic																																																																																									
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full_7095MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak																																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14190.00</td> <td>46.75</td> <td>88.20</td> <td>-41.45</td> <td>54.50</td> <td>38.89</td> <td>18.17</td> <td>64.81</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	14190.00	46.75	88.20	-41.45	54.50	38.89	18.17	64.81	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14190.00</td> <td>48.62</td> <td>88.20</td> <td>-39.58</td> <td>56.37</td> <td>38.89</td> <td>18.17</td> <td>64.81</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	14190.00	48.62	88.20	-39.58	56.37	38.89	18.17	64.81	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	14190.00	46.75	88.20	-41.45	54.50	38.89	18.17	64.81	0.00	---	---	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	14190.00	48.62	88.20	-39.58	56.37	38.89	18.17	64.81	0.00	---	---	PEAK																																																																														

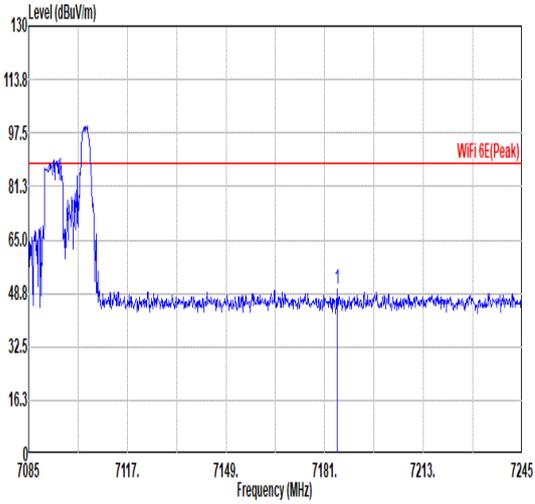
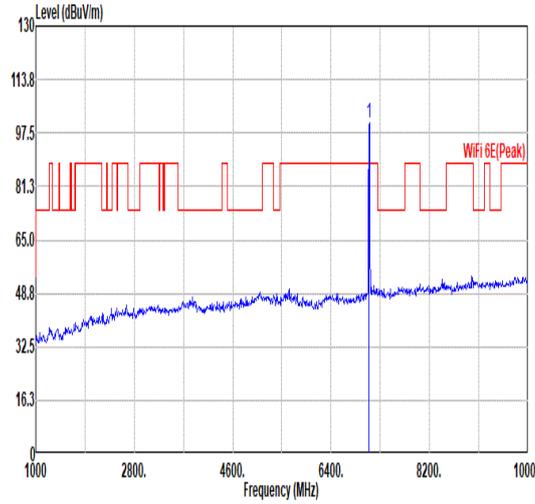
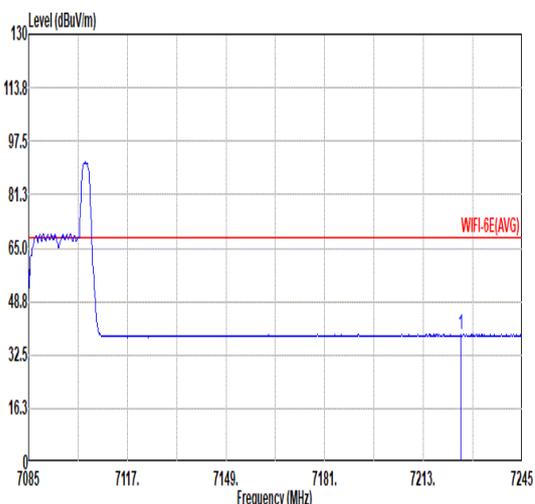
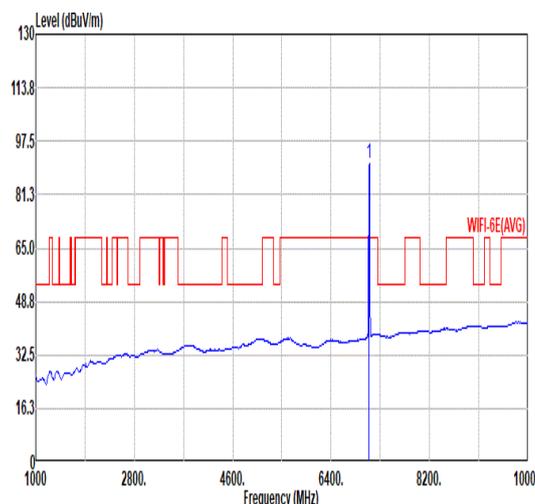


Mode	36																																																																																									
	Band Edge																																																																																									
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_RU26/8_7095MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. Peak at 7185.16 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7185.16</td> <td>50.03</td> <td>88.20</td> <td>-38.17</td> <td>39.41</td> <td>35.70</td> <td>12.70</td> <td>37.78</td> <td>0.00</td> <td>102</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7185.16	50.03	88.20	-38.17	39.41	35.70	12.70	37.78	0.00	102	252	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. Peak at 7095.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>100.79</td> <td>-----</td> <td>-----</td> <td>90.38</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>102</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7095.00	100.79	-----	-----	90.38	35.70	12.59	37.88	0.00	102	252	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7185.16	50.03	88.20	-38.17	39.41	35.70	12.70	37.78	0.00	102	252	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7095.00	100.79	-----	-----	90.38	35.70	12.59	37.88	0.00	102	252	PEAK																																																																														
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. Average level at 7225.16 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7225.16</td> <td>38.68</td> <td>68.20</td> <td>-29.52</td> <td>28.00</td> <td>35.70</td> <td>12.71</td> <td>37.73</td> <td>0.00</td> <td>102</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7225.16	38.68	68.20	-29.52	28.00	35.70	12.71	37.73	0.00	102	252	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. Average level at 7095.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>90.87</td> <td>-----</td> <td>-----</td> <td>80.46</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>102</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7095.00	90.87	-----	-----	80.46	35.70	12.59	37.88	0.00	102	252	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7225.16	38.68	68.20	-29.52	28.00	35.70	12.71	37.73	0.00	102	252	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7095.00	90.87	-----	-----	80.46	35.70	12.59	37.88	0.00	102	252	AVERAGE																																																																														



Mode	36																																																																																									
	Band Edge																																																																																									
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_RU26/8_7095MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7224.36</td> <td>50.47</td> <td>88.20</td> <td>-37.73</td> <td>39.79</td> <td>35.70</td> <td>12.71</td> <td>37.73</td> <td>0.00</td> <td>265</td> <td>324</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7224.36	50.47	88.20	-37.73	39.79	35.70	12.71	37.73	0.00	265	324	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>106.71</td> <td>-----</td> <td>-----</td> <td>96.30</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>265</td> <td>324</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7095.00	106.71	-----	-----	96.30	35.70	12.59	37.88	0.00	265	324	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7224.36	50.47	88.20	-37.73	39.79	35.70	12.71	37.73	0.00	265	324	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7095.00	106.71	-----	-----	96.30	35.70	12.59	37.88	0.00	265	324	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7183.88</td> <td>38.78</td> <td>68.20</td> <td>-29.42</td> <td>28.16</td> <td>35.70</td> <td>12.70</td> <td>37.78</td> <td>0.00</td> <td>265</td> <td>324</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7183.88	38.78	68.20	-29.42	28.16	35.70	12.70	37.78	0.00	265	324	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>97.48</td> <td>-----</td> <td>-----</td> <td>87.07</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>265</td> <td>324</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7095.00	97.48	-----	-----	87.07	35.70	12.59	37.88	0.00	265	324	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7183.88	38.78	68.20	-29.42	28.16	35.70	12.70	37.78	0.00	265	324	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7095.00	97.48	-----	-----	87.07	35.70	12.59	37.88	0.00	265	324	AVERAGE																																																																														

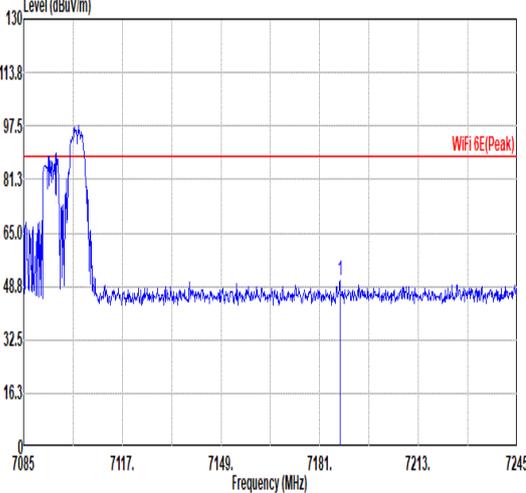
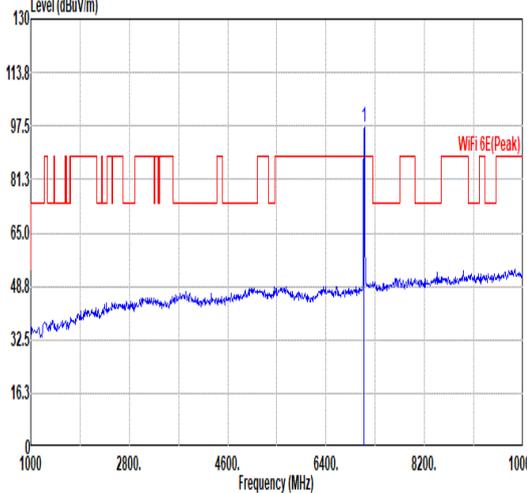
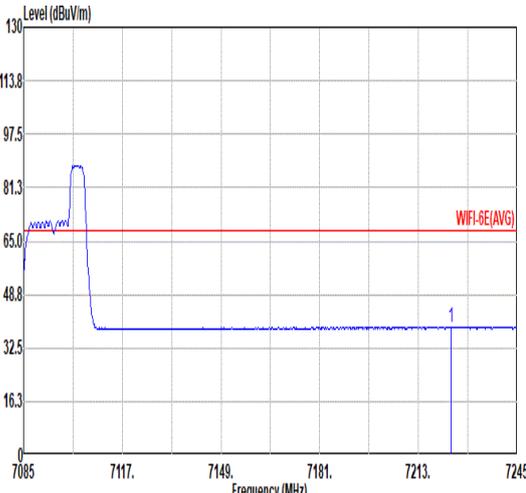
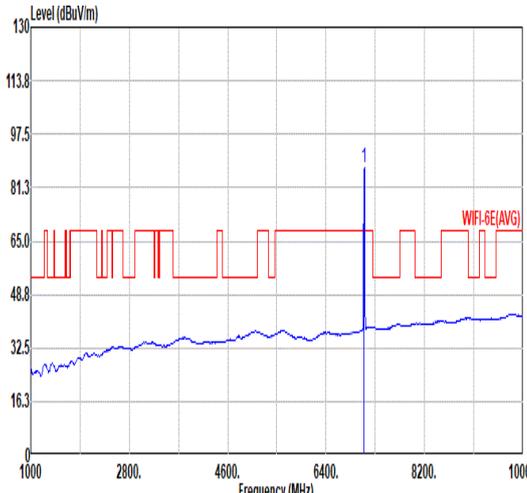


		37																																																																																												
Mode		Band Edge																																																																																												
		U-NII-8_6.875-7.125_802.11ax HE20_CH229_RU52/40_7095MHz																																																																																												
ANT		STBC																																																																																												
Pol.		Horizontal					Fundamental																																																																																							
Peak	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>7085 7117 7149 7181 7213 7245</p> <p>Frequency (MHz)</p> <p>Wifi 6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7187.56</td> <td>50.51</td> <td>88.20</td> <td>-37.69</td> <td>39.88</td> <td>35.70</td> <td>12.70</td> <td>37.77</td> <td>0.00</td> <td>108</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7187.56	50.51	88.20	-37.69	39.88	35.70	12.70	37.77	0.00	108	254	PEAK	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2800 4600 6400 8200 10000</p> <p>Frequency (MHz)</p> <p>Wifi 6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>97.35</td> <td>-----</td> <td>-----</td> <td>86.94</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>108</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7095.00	97.35	-----	-----	86.94	35.70	12.59	37.88	0.00	108	254	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	7187.56	50.51	88.20	-37.69	39.88	35.70	12.70	37.77	0.00	108	254	PEAK																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	7095.00	97.35	-----	-----	86.94	35.70	12.59	37.88	0.00	108	254	PEAK																																																																																		
Avg	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>7085 7117 7149 7181 7213 7245</p> <p>Frequency (MHz)</p> <p>Wifi 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7223.56</td> <td>38.84</td> <td>68.20</td> <td>-29.36</td> <td>28.16</td> <td>35.70</td> <td>12.71</td> <td>37.73</td> <td>0.00</td> <td>108</td> <td>254</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7223.56	38.84	68.20	-29.36	28.16	35.70	12.71	37.73	0.00	108	254	AVERAGE	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2800 4600 6400 8200 10000</p> <p>Frequency (MHz)</p> <p>Wifi 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>87.44</td> <td>-----</td> <td>-----</td> <td>77.03</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>108</td> <td>254</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7095.00	87.44	-----	-----	77.03	35.70	12.59	37.88	0.00	108	254	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	7223.56	38.84	68.20	-29.36	28.16	35.70	12.71	37.73	0.00	108	254	AVERAGE																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	7095.00	87.44	-----	-----	77.03	35.70	12.59	37.88	0.00	108	254	AVERAGE																																																																																		



		37																																																																				
Mode		Band Edge																																																																				
		U-NII-8_6.875-7.125_802.11ax HE20_CH229_RU52/40_7095MHz																																																																				
ANT		STBC																																																																				
Pol.		Vertical					Fundamental																																																															
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Wifi 6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7176.36</td> <td>49.29</td> <td>88.20</td> <td>-38.91</td> <td>38.69</td> <td>35.70</td> <td>12.69</td> <td>37.79</td> <td>0.00</td> <td>274</td> <td>324 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	7176.36	49.29	88.20	-38.91	38.69	35.70	12.69	37.79	0.00	274	324 PEAK	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Wifi 6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>105.58</td> <td>-----</td> <td>-----</td> <td>95.17</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>274</td> <td>324 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	7095.00	105.58	-----	-----	95.17	35.70	12.59	37.88	0.00	274	324 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	7176.36	49.29	88.20	-38.91	38.69	35.70	12.69	37.79	0.00	274	324 PEAK																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	7095.00	105.58	-----	-----	95.17	35.70	12.59	37.88	0.00	274	324 PEAK																																																											
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Wifi 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7222.76</td> <td>38.92</td> <td>68.20</td> <td>-29.28</td> <td>28.24</td> <td>35.70</td> <td>12.71</td> <td>37.73</td> <td>0.00</td> <td>274</td> <td>324 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	7222.76	38.92	68.20	-29.28	28.24	35.70	12.71	37.73	0.00	274	324 AVERAGE	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Wifi 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>94.62</td> <td>-----</td> <td>-----</td> <td>84.21</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>274</td> <td>324 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	7095.00	94.62	-----	-----	84.21	35.70	12.59	37.88	0.00	274	324 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	7222.76	38.92	68.20	-29.28	28.24	35.70	12.71	37.73	0.00	274	324 AVERAGE																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1	7095.00	94.62	-----	-----	84.21	35.70	12.59	37.88	0.00	274	324 AVERAGE																																																											

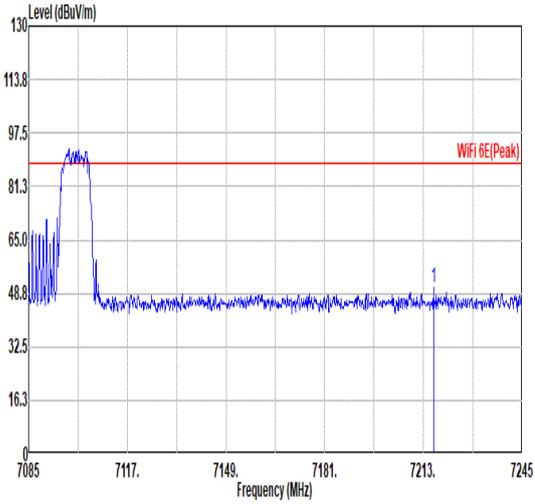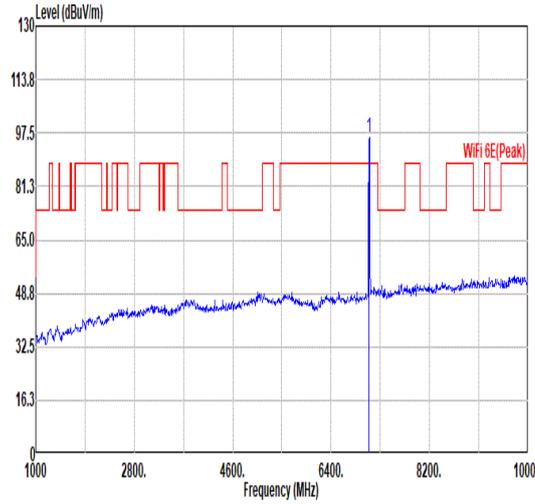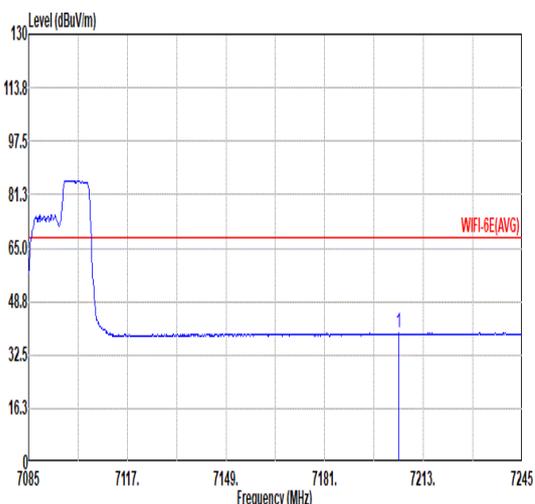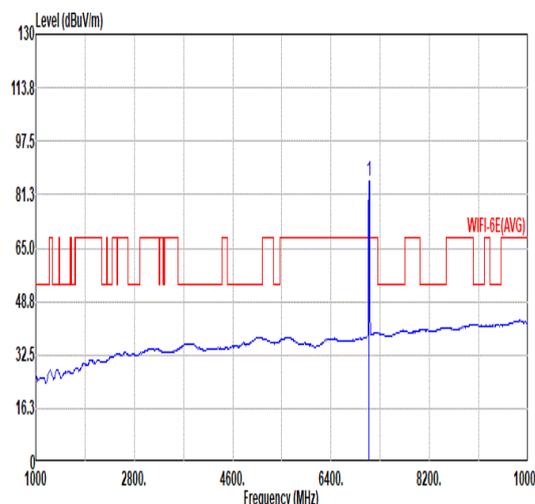

		38																																																																																										
Mode		Band Edge																																																																																										
		U-NII-8_6.875-7.125_802.11ax HE20_CH229_RU106/54_7095MHz																																																																																										
ANT		STBC																																																																																										
Pol.		Horizontal					Fundamental																																																																																					
Peak	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>7085 7117. 7149. 7181. 7213. 7245</p> <p>Frequency (MHz)</p> <p>Wifi 6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7216.20</td> <td>50.49</td> <td>88.20</td> <td>-37.71</td> <td>39.82</td> <td>35.70</td> <td>12.71</td> <td>37.74</td> <td>0.00</td> <td>105</td> <td>252 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7216.20	50.49	88.20	-37.71	39.82	35.70	12.71	37.74	0.00	105	252 PEAK	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2800. 4600. 6400. 8200. 10000</p> <p>Frequency (MHz)</p> <p>Wifi 6E(Peak)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>95.96</td> <td>-----</td> <td>-----</td> <td>85.55</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>105</td> <td>252 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7095.00	95.96	-----	-----	85.55	35.70	12.59	37.88	0.00	105	252 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	7216.20	50.49	88.20	-37.71	39.82	35.70	12.71	37.74	0.00	105	252 PEAK																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	7095.00	95.96	-----	-----	85.55	35.70	12.59	37.88	0.00	105	252 PEAK																																																																																	
Avg	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>7085 7117. 7149. 7181. 7213. 7245</p> <p>Frequency (MHz)</p> <p>Wifi-6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7204.84</td> <td>39.21</td> <td>68.20</td> <td>-28.99</td> <td>28.55</td> <td>35.70</td> <td>12.71</td> <td>37.75</td> <td>0.00</td> <td>105</td> <td>252 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7204.84	39.21	68.20	-28.99	28.55	35.70	12.71	37.75	0.00	105	252 AVERAGE	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>1000 2800. 4600. 6400. 8200. 10000</p> <p>Frequency (MHz)</p> <p>Wifi-6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>85.53</td> <td>-----</td> <td>-----</td> <td>75.12</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>105</td> <td>252 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7095.00	85.53	-----	-----	75.12	35.70	12.59	37.88	0.00	105	252 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	7204.84	39.21	68.20	-28.99	28.55	35.70	12.71	37.75	0.00	105	252 AVERAGE																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	7095.00	85.53	-----	-----	75.12	35.70	12.59	37.88	0.00	105	252 AVERAGE																																																																																	



		38																																																									
Mode		Band Edge																																																									
		U-NII-8_6.875-7.125_802.11ax HE20_CH229_RU106/54_7095MHz																																																									
ANT		STBC																																																									
Pol.		Vertical					Fundamental																																																				
Peak	Vertical	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7177.32</td> <td>50.02</td> <td>88.20</td> <td>-38.18</td> <td>39.42</td> <td>35.70</td> <td>12.69</td> <td>37.79</td> <td>0.00</td> <td>244</td> <td>322</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7177.32	50.02	88.20	-38.18	39.42	35.70	12.69	37.79	0.00	244	322	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	7177.32	50.02	88.20	-38.18	39.42	35.70	12.69	37.79	0.00	244	322	PEAK																																															
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>102.38</td> <td>-----</td> <td>-----</td> <td>91.97</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>244</td> <td>322</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7095.00	102.38	-----	-----	91.97	35.70	12.59	37.88	0.00	244	322	PEAK	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	7095.00	102.38	-----	-----	91.97	35.70	12.59	37.88	0.00	244	322	PEAK																																															
Avg	Vertical	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7182.76</td> <td>39.26</td> <td>68.20</td> <td>-28.94</td> <td>28.64</td> <td>35.70</td> <td>12.70</td> <td>37.78</td> <td>0.00</td> <td>244</td> <td>322</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7182.76	39.26	68.20	-28.94	28.64	35.70	12.70	37.78	0.00	244	322	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	7182.76	39.26	68.20	-28.94	28.64	35.70	12.70	37.78	0.00	244	322	AVERAGE																																															
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>92.27</td> <td>-----</td> <td>-----</td> <td>81.86</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>244</td> <td>322</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7095.00	92.27	-----	-----	81.86	35.70	12.59	37.88	0.00	244	322	AVERAGE	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	7095.00	92.27	-----	-----	81.86	35.70	12.59	37.88	0.00	244	322	AVERAGE																																															



Mode	39																																																																																									
	Harmonic																																																																																									
	U-NII-8_6.875-7.125_802.11ax HE40_CH195_Full_6925MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak																																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13850.00</td> <td>46.05</td> <td>88.20</td> <td>-42.15</td> <td>54.49</td> <td>38.55</td> <td>17.94</td> <td>64.93</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	13850.00	46.05	88.20	-42.15	54.49	38.55	17.94	64.93	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13850.00</td> <td>45.47</td> <td>88.20</td> <td>-42.73</td> <td>53.91</td> <td>38.55</td> <td>17.94</td> <td>64.93</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	13850.00	45.47	88.20	-42.73	53.91	38.55	17.94	64.93	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	13850.00	46.05	88.20	-42.15	54.49	38.55	17.94	64.93	0.00	---	---	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	13850.00	45.47	88.20	-42.73	53.91	38.55	17.94	64.93	0.00	---	---	PEAK																																																																														



Mode	40																																																																																							
	Harmonic																																																																																							
	U-NII-8_6.875-7.125_802.11ax HE40_CH211_Full_7005MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak																																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14009.78</td> <td>41.72</td> <td>88.20</td> <td>-46.48</td> <td>49.90</td> <td>38.71</td> <td>18.05</td> <td>64.94</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	14009.78	41.72	88.20	-46.48	49.90	38.71	18.05	64.94	0.00	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14009.78</td> <td>41.59</td> <td>88.20</td> <td>-46.61</td> <td>49.77</td> <td>38.71</td> <td>18.05</td> <td>64.94</td> <td>0.00</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	14009.78	41.59	88.20	-46.61	49.77	38.71	18.05	64.94	0.00	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	14009.78	41.72	88.20	-46.48	49.90	38.71	18.05	64.94	0.00	---	Peak																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	14009.78	41.59	88.20	-46.61	49.77	38.71	18.05	64.94	0.00	---	Peak																																																																													



Mode	41																																																																																									
	Band Edge																																																																																									
	U-NII-8_6.875-7.125_802.11ax HE40_CH227_Full_7085MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7126.28</td> <td>52.53</td> <td>88.20</td> <td>-35.67</td> <td>42.06</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>366</td> <td>124</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7126.28	52.53	88.20	-35.67	42.06	35.70	12.62	37.85	0.00	366	124	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7085.00</td> <td>94.04</td> <td>-----</td> <td>-----</td> <td>83.66</td> <td>35.69</td> <td>12.58</td> <td>37.89</td> <td>0.00</td> <td>366</td> <td>124</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7085.00	94.04	-----	-----	83.66	35.69	12.58	37.89	0.00	366	124	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7126.28	52.53	88.20	-35.67	42.06	35.70	12.62	37.85	0.00	366	124	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7085.00	94.04	-----	-----	83.66	35.69	12.58	37.89	0.00	366	124	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7217.48</td> <td>41.17</td> <td>68.20</td> <td>-27.03</td> <td>30.50</td> <td>35.70</td> <td>12.71</td> <td>37.74</td> <td>0.00</td> <td>366</td> <td>124</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7217.48	41.17	68.20	-27.03	30.50	35.70	12.71	37.74	0.00	366	124	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7085.00</td> <td>83.42</td> <td>-----</td> <td>-----</td> <td>73.08</td> <td>35.67</td> <td>12.57</td> <td>37.90</td> <td>0.00</td> <td>366</td> <td>124</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7085.00	83.42	-----	-----	73.08	35.67	12.57	37.90	0.00	366	124	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7217.48	41.17	68.20	-27.03	30.50	35.70	12.71	37.74	0.00	366	124	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7085.00	83.42	-----	-----	73.08	35.67	12.57	37.90	0.00	366	124	AVERAGE																																																																														



Mode	41																																																																																									
	Band Edge																																																																																									
	U-NII-8_6.875-7.125_802.11ax HE40_CH227_Full_7085MHz																																																																																									
ANT	STBC																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7230.12</td> <td>51.95</td> <td>88.20</td> <td>-36.25</td> <td>41.26</td> <td>35.70</td> <td>12.71</td> <td>37.72</td> <td>0.00</td> <td>100</td> <td>211</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7230.12	51.95	88.20	-36.25	41.26	35.70	12.71	37.72	0.00	100	211	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7085.00</td> <td>90.37</td> <td>-----</td> <td>-----</td> <td>88.03</td> <td>35.67</td> <td>12.57</td> <td>37.90</td> <td>0.00</td> <td>100</td> <td>211</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7085.00	90.37	-----	-----	88.03	35.67	12.57	37.90	0.00	100	211	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7230.12	51.95	88.20	-36.25	41.26	35.70	12.71	37.72	0.00	100	211	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7085.00	90.37	-----	-----	88.03	35.67	12.57	37.90	0.00	100	211	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.48</td> <td>42.25</td> <td>68.20</td> <td>-25.95</td> <td>31.78</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>100</td> <td>211</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7125.48	42.25	68.20	-25.95	31.78	35.70	12.62	37.85	0.00	100	211	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7085.00</td> <td>87.54</td> <td>-----</td> <td>-----</td> <td>77.20</td> <td>35.67</td> <td>12.57</td> <td>37.90</td> <td>0.00</td> <td>100</td> <td>211</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7085.00	87.54	-----	-----	77.20	35.67	12.57	37.90	0.00	100	211	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7125.48	42.25	68.20	-25.95	31.78	35.70	12.62	37.85	0.00	100	211	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7085.00	87.54	-----	-----	77.20	35.67	12.57	37.90	0.00	100	211	AVERAGE																																																																														



Mode	41																																																																																	
	Harmonic																																																																																	
	U-NII-8_6.875-7.125_802.11ax HE40_CH227_Full_7085MHz																																																																																	
ANT	STBC																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14170.00</td> <td>47.05</td> <td>88.20</td> <td>-41.15</td> <td>54.85</td> <td>38.87</td> <td>18.15</td> <td>64.82</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	14170.00	47.05	88.20	-41.15	54.85	38.87	18.15	64.82	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14170.00</td> <td>46.16</td> <td>88.20</td> <td>-42.04</td> <td>53.96</td> <td>38.87</td> <td>18.15</td> <td>64.82</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	14170.00	46.16	88.20	-42.04	53.96	38.87	18.15	64.82	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	14170.00	47.05	88.20	-41.15	54.85	38.87	18.15	64.82	0.00	---	---	PEAK																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	14170.00	46.16	88.20	-42.04	53.96	38.87	18.15	64.82	0.00	---	---	PEAK																																																																						



Mode	42																																																																																							
	Harmonic																																																																																							
	U-NII-8_6.875-7.125_802.11ax HE80_CH199_Full_6945MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13890.00</td> <td>45.15</td> <td>88.20</td> <td>-43.05</td> <td>53.53</td> <td>38.59</td> <td>17.96</td> <td>64.93</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13890.00	45.15	88.20	-43.05	53.53	38.59	17.96	64.93	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13890.00</td> <td>46.90</td> <td>88.20</td> <td>-41.30</td> <td>55.28</td> <td>38.59</td> <td>17.96</td> <td>64.93</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13890.00	46.90	88.20	-41.30	55.28	38.59	17.96	64.93	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13890.00	45.15	88.20	-43.05	53.53	38.59	17.96	64.93	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 13890.00	46.90	88.20	-41.30	55.28	38.59	17.96	64.93	0.00	---	---	PEAK																																																																													



Mode	43																																																																																	
	Band Edge																																																																																	
	U-NII-8_6.875-7.125_802.11ax HE80_CH215_Full_7025MHz																																																																																	
ANT	STBC																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7146.44</td> <td>51.54</td> <td>88.20</td> <td>-36.66</td> <td>41.02</td> <td>35.70</td> <td>12.65</td> <td>37.83</td> <td>0.00</td> <td>367</td> <td>125</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7146.44	51.54	88.20	-36.66	41.02	35.70	12.65	37.83	0.00	367	125	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7025.00</td> <td>94.74</td> <td>-----</td> <td>-----</td> <td>84.64</td> <td>35.60</td> <td>12.48</td> <td>37.98</td> <td>0.00</td> <td>367</td> <td>125</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7025.00	94.74	-----	-----	84.64	35.60	12.48	37.98	0.00	367	125	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	7146.44	51.54	88.20	-36.66	41.02	35.70	12.65	37.83	0.00	367	125	PEAK																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	7025.00	94.74	-----	-----	84.64	35.60	12.48	37.98	0.00	367	125	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7204.74</td> <td>41.80</td> <td>68.20</td> <td>-26.40</td> <td>31.14</td> <td>35.70</td> <td>12.71</td> <td>37.75</td> <td>0.00</td> <td>367</td> <td>125</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7204.74	41.80	68.20	-26.40	31.14	35.70	12.71	37.75	0.00	367	125	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7025.00</td> <td>83.03</td> <td>-----</td> <td>-----</td> <td>72.95</td> <td>35.60</td> <td>12.47</td> <td>37.99</td> <td>0.00</td> <td>367</td> <td>125</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7025.00	83.03	-----	-----	72.95	35.60	12.47	37.99	0.00	367	125	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	7204.74	41.80	68.20	-26.40	31.14	35.70	12.71	37.75	0.00	367	125	AVERAGE																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	7025.00	83.03	-----	-----	72.95	35.60	12.47	37.99	0.00	367	125	AVERAGE																																																																						





Mode	43																																																																																	
	Band Edge																																																																																	
	U-NII-8_6.875-7.125_802.11ax HE80_CH215_Full_7025MHz																																																																																	
ANT	STBC																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7148.20</td> <td>52.78</td> <td>88.20</td> <td>-35.42</td> <td>42.25</td> <td>35.70</td> <td>12.65</td> <td>37.82</td> <td>0.00</td> <td>100</td> <td>211</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	7148.20	52.78	88.20	-35.42	42.25	35.70	12.65	37.82	0.00	100	211	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7025.00</td> <td>97.75</td> <td>-----</td> <td>-----</td> <td>87.63</td> <td>35.60</td> <td>12.49</td> <td>37.97</td> <td>0.00</td> <td>100</td> <td>211</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	7025.00	97.75	-----	-----	87.63	35.60	12.49	37.97	0.00	100	211	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	7148.20	52.78	88.20	-35.42	42.25	35.70	12.65	37.82	0.00	100	211	PEAK																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	7025.00	97.75	-----	-----	87.63	35.60	12.49	37.97	0.00	100	211	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7214.64</td> <td>41.96</td> <td>68.20</td> <td>-26.24</td> <td>31.29</td> <td>35.70</td> <td>12.71</td> <td>37.74</td> <td>0.00</td> <td>100</td> <td>211</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	7214.64	41.96	68.20	-26.24	31.29	35.70	12.71	37.74	0.00	100	211	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7025.00</td> <td>86.61</td> <td>-----</td> <td>-----</td> <td>76.56</td> <td>35.60</td> <td>12.46</td> <td>38.01</td> <td>0.00</td> <td>100</td> <td>211</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	7025.00	86.61	-----	-----	76.56	35.60	12.46	38.01	0.00	100	211	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	7214.64	41.96	68.20	-26.24	31.29	35.70	12.71	37.74	0.00	100	211	AVERAGE																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	7025.00	86.61	-----	-----	76.56	35.60	12.46	38.01	0.00	100	211	AVERAGE																																																																						





Mode	43																																																																																							
	Harmonic																																																																																							
	U-NII-8_6.875-7.125_802.11ax HE80_CH215_Full_7025MHz																																																																																							
ANT	STBC																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 14050.00</td> <td>45.58</td> <td>88.20</td> <td>-42.62</td> <td>53.67</td> <td>38.75</td> <td>18.07</td> <td>64.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 14050.00	45.58	88.20	-42.62	53.67	38.75	18.07	64.91	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 14050.00</td> <td>46.21</td> <td>88.20</td> <td>-41.99</td> <td>54.30</td> <td>38.75</td> <td>18.07</td> <td>64.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 14050.00	46.21	88.20	-41.99	54.30	38.75	18.07	64.91	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 14050.00	45.58	88.20	-42.62	53.67	38.75	18.07	64.91	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 14050.00	46.21	88.20	-41.99	54.30	38.75	18.07	64.91	0.00	---	---	PEAK																																																																													

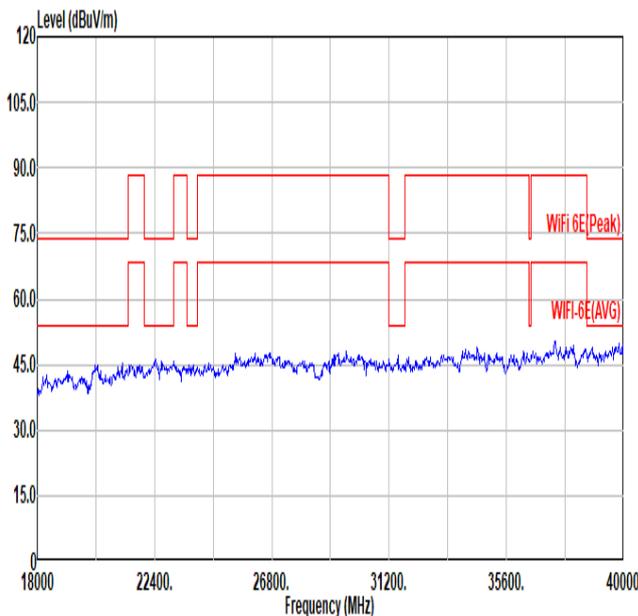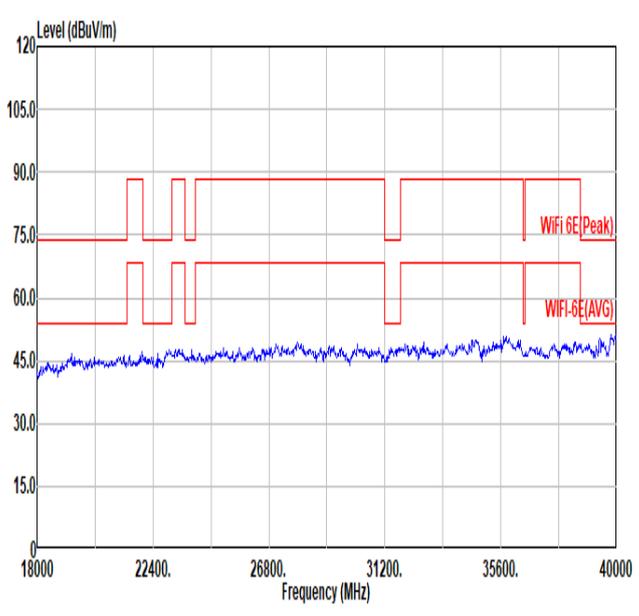

Mode	45	
	18G-40G	
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full_7095MHz	
ANT	STBC	
Pol.	Horizontal	Vertical
Peak Avg		

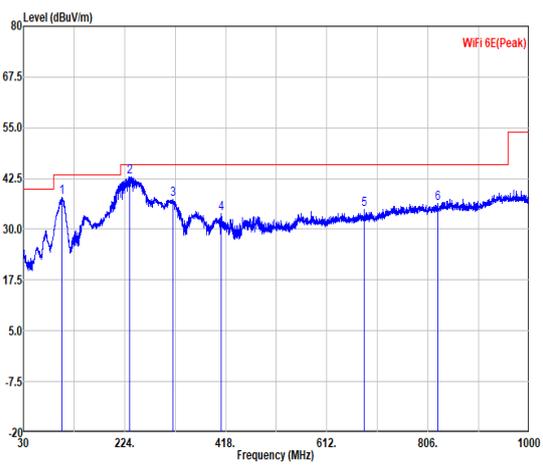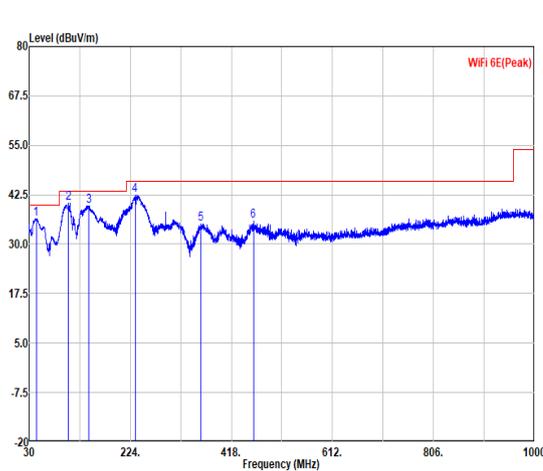

Mode	45																																																																																																																																																																																																	
	30-1G																																																																																																																																																																																																	
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full_7095MHz																																																																																																																																																																																																	
ANT	STBC																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>103.48</td><td>37.89</td><td>43.50</td><td>-5.61</td><td>53.16</td><td>16.33</td><td>1.05</td><td>32.65</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>233.70</td><td>42.95</td><td>46.00</td><td>-3.05</td><td>57.57</td><td>16.63</td><td>1.60</td><td>32.85</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>317.36</td><td>37.50</td><td>46.00</td><td>-8.50</td><td>48.94</td><td>19.52</td><td>1.88</td><td>32.84</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>408.54</td><td>33.93</td><td>46.00</td><td>-12.07</td><td>42.64</td><td>22.16</td><td>2.17</td><td>33.04</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>683.05</td><td>34.99</td><td>46.00</td><td>-11.01</td><td>38.89</td><td>26.64</td><td>2.71</td><td>33.25</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>824.43</td><td>36.33</td><td>46.00</td><td>-9.67</td><td>37.58</td><td>28.56</td><td>2.99</td><td>32.80</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	103.48	37.89	43.50	-5.61	53.16	16.33	1.05	32.65	--	--	Peak	2	233.70	42.95	46.00	-3.05	57.57	16.63	1.60	32.85	--	--	Peak	3	317.36	37.50	46.00	-8.50	48.94	19.52	1.88	32.84	--	--	Peak	4	408.54	33.93	46.00	-12.07	42.64	22.16	2.17	33.04	--	--	Peak	5	683.05	34.99	46.00	-11.01	38.89	26.64	2.71	33.25	--	--	Peak	6	824.43	36.33	46.00	-9.67	37.58	28.56	2.99	32.80	--	--	Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>43.34</td><td>36.51</td><td>40.00</td><td>-3.49</td><td>50.65</td><td>18.07</td><td>0.60</td><td>32.81</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>105.42</td><td>40.30</td><td>43.50</td><td>-3.20</td><td>55.37</td><td>16.54</td><td>1.05</td><td>32.66</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>143.73</td><td>39.74</td><td>43.50</td><td>-3.76</td><td>53.95</td><td>17.29</td><td>1.20</td><td>32.70</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>232.97</td><td>42.47</td><td>46.00</td><td>-3.53</td><td>57.17</td><td>16.56</td><td>1.59</td><td>32.85</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>359.32</td><td>35.24</td><td>46.00</td><td>-10.76</td><td>45.50</td><td>20.66</td><td>1.97</td><td>32.89</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>460.20</td><td>35.82</td><td>46.00</td><td>-10.18</td><td>43.34</td><td>23.29</td><td>2.27</td><td>33.08</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	43.34	36.51	40.00	-3.49	50.65	18.07	0.60	32.81	--	--	Peak	2	105.42	40.30	43.50	-3.20	55.37	16.54	1.05	32.66	--	--	Peak	3	143.73	39.74	43.50	-3.76	53.95	17.29	1.20	32.70	--	--	Peak	4	232.97	42.47	46.00	-3.53	57.17	16.56	1.59	32.85	--	--	Peak	5	359.32	35.24	46.00	-10.76	45.50	20.66	1.97	32.89	--	--	Peak	6	460.20	35.82	46.00	-10.18	43.34	23.29	2.27	33.08	--	--	Peak
	Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																								
1	103.48	37.89	43.50	-5.61	53.16	16.33	1.05	32.65	--	--	Peak																																																																																																																																																																																							
2	233.70	42.95	46.00	-3.05	57.57	16.63	1.60	32.85	--	--	Peak																																																																																																																																																																																							
3	317.36	37.50	46.00	-8.50	48.94	19.52	1.88	32.84	--	--	Peak																																																																																																																																																																																							
4	408.54	33.93	46.00	-12.07	42.64	22.16	2.17	33.04	--	--	Peak																																																																																																																																																																																							
5	683.05	34.99	46.00	-11.01	38.89	26.64	2.71	33.25	--	--	Peak																																																																																																																																																																																							
6	824.43	36.33	46.00	-9.67	37.58	28.56	2.99	32.80	--	--	Peak																																																																																																																																																																																							
Peak	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																								
1	43.34	36.51	40.00	-3.49	50.65	18.07	0.60	32.81	--	--	Peak																																																																																																																																																																																							
2	105.42	40.30	43.50	-3.20	55.37	16.54	1.05	32.66	--	--	Peak																																																																																																																																																																																							
3	143.73	39.74	43.50	-3.76	53.95	17.29	1.20	32.70	--	--	Peak																																																																																																																																																																																							
4	232.97	42.47	46.00	-3.53	57.17	16.56	1.59	32.85	--	--	Peak																																																																																																																																																																																							
5	359.32	35.24	46.00	-10.76	45.50	20.66	1.97	32.89	--	--	Peak																																																																																																																																																																																							
6	460.20	35.82	46.00	-10.18	43.34	23.29	2.27	33.08	--	--	Peak																																																																																																																																																																																							




Co-location


Mode	44																																																																															
	Band Edge																																																																															
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH39_Full_2480MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>55.57</td> <td>74.00</td> <td>-18.43</td> <td>46.69</td> <td>32.47</td> <td>7.26</td> <td>36.85</td> <td>6.00</td> <td>140</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2483.50	55.57	74.00	-18.43	46.69	32.47	7.26	36.85	6.00	140	117 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>107.50</td> <td>-----</td> <td>-----</td> <td>98.65</td> <td>32.46</td> <td>7.25</td> <td>36.86</td> <td>6.00</td> <td>140</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2480.00	107.50	-----	-----	98.65	32.46	7.25	36.86	6.00	140	117 PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1	2483.50	55.57	74.00	-18.43	46.69	32.47	7.26	36.85	6.00	140	117 PEAK																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1	2480.00	107.50	-----	-----	98.65	32.46	7.25	36.86	6.00	140	117 PEAK																																																																					



Avg

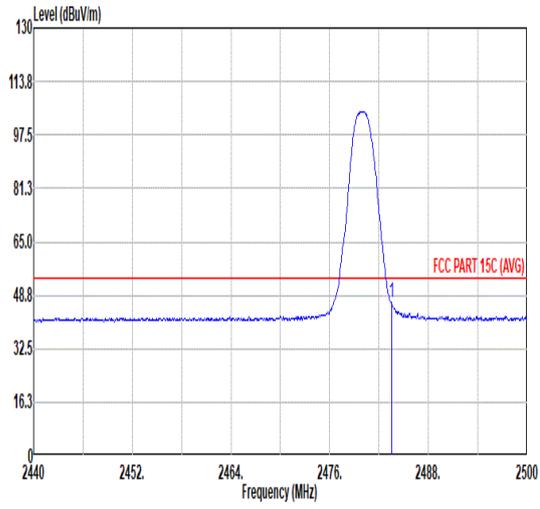

Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	2483.50	46.36	54.00	-7.64	37.48	32.47	7.26	36.85	6.00	140	117	AVERAGE

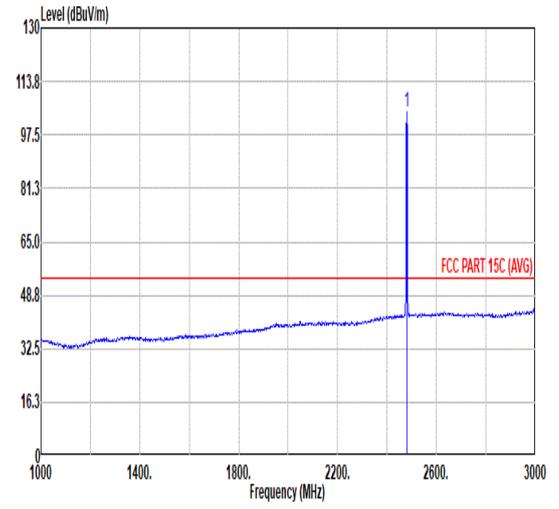

Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	2480.00	104.59	-----	-----	95.74	32.46	7.25	36.86	6.00	140	117	AVERAGE







Mode	44																																																																																							
	Band Edge																																																																																							
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH39_Full_2480MHz																																																																																							
ANT	1																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>56.16</td> <td>74.00</td> <td>-17.84</td> <td>47.28</td> <td>32.47</td> <td>7.26</td> <td>36.85</td> <td>6.00</td> <td>100</td> <td>179 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	56.16	74.00	-17.84	47.28	32.47	7.26	36.85	6.00	100	179 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>108.30</td> <td>-----</td> <td>-----</td> <td>99.45</td> <td>32.46</td> <td>7.25</td> <td>36.86</td> <td>6.00</td> <td>100</td> <td>179 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	108.30	-----	-----	99.45	32.46	7.25	36.86	6.00	100	179 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2483.50	56.16	74.00	-17.84	47.28	32.47	7.26	36.85	6.00	100	179 PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2480.00	108.30	-----	-----	99.45	32.46	7.25	36.86	6.00	100	179 PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>46.34</td> <td>54.00</td> <td>-7.66</td> <td>37.46</td> <td>32.47</td> <td>7.26</td> <td>36.85</td> <td>6.00</td> <td>100</td> <td>179 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	46.34	54.00	-7.66	37.46	32.47	7.26	36.85	6.00	100	179 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>105.36</td> <td>-----</td> <td>-----</td> <td>96.51</td> <td>32.46</td> <td>7.25</td> <td>36.86</td> <td>6.00</td> <td>100</td> <td>179 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	105.36	-----	-----	96.51	32.46	7.25	36.86	6.00	100	179 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2483.50	46.34	54.00	-7.66	37.46	32.47	7.26	36.85	6.00	100	179 AVERAGE																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2480.00	105.36	-----	-----	96.51	32.46	7.25	36.86	6.00	100	179 AVERAGE																																																																													



Mode	44																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH39_Full_2480MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>40.48</td> <td>74.00</td> <td>-33.52</td> <td>61.45</td> <td>34.22</td> <td>10.40</td> <td>65.59</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7095.00</td> <td>45.76</td> <td>74.00</td> <td>-28.24</td> <td>63.22</td> <td>35.69</td> <td>12.58</td> <td>65.73</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>43.12</td> <td>74.00</td> <td>-30.88</td> <td>61.17</td> <td>35.00</td> <td>12.78</td> <td>66.63</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	40.48	74.00	-33.52	61.45	34.22	10.40	65.59	0.00	---	---	PEAK	2	7095.00	45.76	74.00	-28.24	63.22	35.69	12.58	65.73	0.00	---	---	Peak	3	7440.00	43.12	74.00	-30.88	61.17	35.00	12.78	66.63	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>40.38</td> <td>74.00</td> <td>-33.62</td> <td>61.35</td> <td>34.22</td> <td>10.40</td> <td>65.59</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7095.00</td> <td>51.19</td> <td>74.00</td> <td>-22.81</td> <td>68.65</td> <td>35.69</td> <td>12.58</td> <td>65.73</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>42.38</td> <td>74.00</td> <td>-31.62</td> <td>60.43</td> <td>35.80</td> <td>12.78</td> <td>66.63</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	40.38	74.00	-33.62	61.35	34.22	10.40	65.59	0.00	---	---	PEAK	2	7095.00	51.19	74.00	-22.81	68.65	35.69	12.58	65.73	0.00	---	---	Peak	3	7440.00	42.38	74.00	-31.62	60.43	35.80	12.78	66.63	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	4960.00	40.48	74.00	-33.52	61.45	34.22	10.40	65.59	0.00	---	---	PEAK																																																																																																																																		
2	7095.00	45.76	74.00	-28.24	63.22	35.69	12.58	65.73	0.00	---	---	Peak																																																																																																																																		
3	7440.00	43.12	74.00	-30.88	61.17	35.00	12.78	66.63	0.00	---	---	PEAK																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	4960.00	40.38	74.00	-33.62	61.35	34.22	10.40	65.59	0.00	---	---	PEAK																																																																																																																																		
2	7095.00	51.19	74.00	-22.81	68.65	35.69	12.58	65.73	0.00	---	---	Peak																																																																																																																																		
3	7440.00	42.38	74.00	-31.62	60.43	35.80	12.78	66.63	0.00	---	---	PEAK																																																																																																																																		

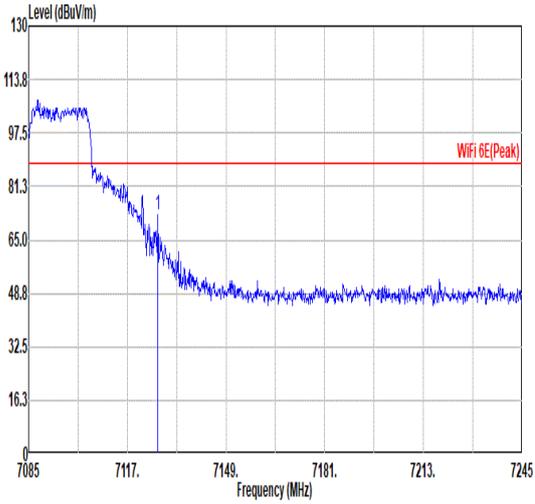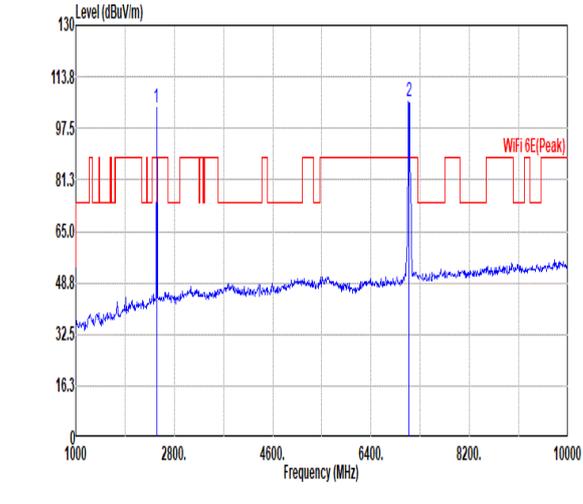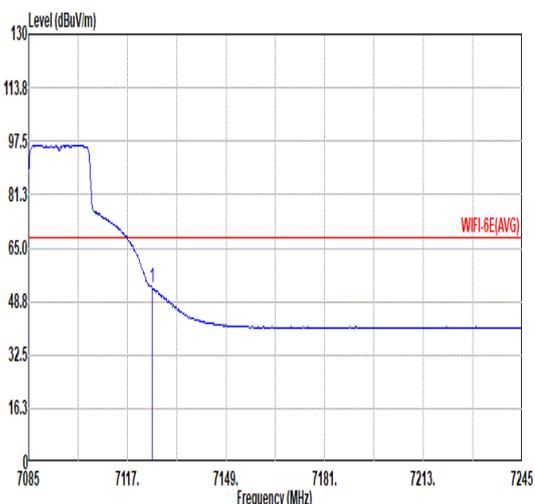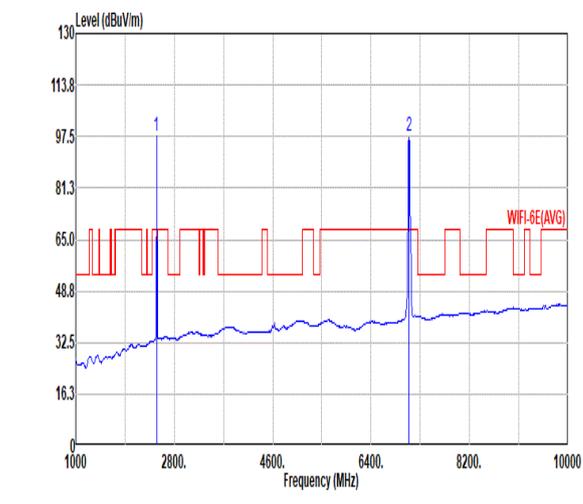

Mode	44																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full_7095MHz																																																																																																						
ANT	STBC																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7126.92</td> <td>72.42</td> <td>88.20</td> <td>-15.78</td> <td>61.95</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>348</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7126.92	72.42	88.20	-15.78	61.95	35.70	12.62	37.85	0.00	348	115	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2476.00</td> <td>104.03</td> <td>-----</td> <td>-----</td> <td>101.21</td> <td>32.45</td> <td>7.24</td> <td>36.87</td> <td>0.00</td> <td>348</td> <td>115</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7095.00</td> <td>105.04</td> <td>-----</td> <td>-----</td> <td>95.50</td> <td>35.67</td> <td>12.57</td> <td>37.90</td> <td>0.00</td> <td>348</td> <td>115</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2476.00	104.03	-----	-----	101.21	32.45	7.24	36.87	0.00	348	115	Peak	2	7095.00	105.04	-----	-----	95.50	35.67	12.57	37.90	0.00	348	115	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	7126.92	72.42	88.20	-15.78	61.95	35.70	12.62	37.85	0.00	348	115	PEAK																																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	2476.00	104.03	-----	-----	101.21	32.45	7.24	36.87	0.00	348	115	Peak																																																																																											
2	7095.00	105.04	-----	-----	95.50	35.67	12.57	37.90	0.00	348	115	Peak																																																																																											
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.00</td> <td>52.85</td> <td>68.20</td> <td>-15.35</td> <td>42.38</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>348</td> <td>115</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7125.00	52.85	68.20	-15.35	42.38	35.70	12.62	37.85	0.00	348	115	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2476.00</td> <td>97.86</td> <td>-----</td> <td>-----</td> <td>95.04</td> <td>32.45</td> <td>7.24</td> <td>36.87</td> <td>0.00</td> <td>348</td> <td>115</td> <td>Average</td> </tr> <tr> <td>2</td> <td>7095.00</td> <td>97.86</td> <td>-----</td> <td>-----</td> <td>95.04</td> <td>32.45</td> <td>7.24</td> <td>36.87</td> <td>0.00</td> <td>348</td> <td>115</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2476.00	97.86	-----	-----	95.04	32.45	7.24	36.87	0.00	348	115	Average	2	7095.00	97.86	-----	-----	95.04	32.45	7.24	36.87	0.00	348	115	Average
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	7125.00	52.85	68.20	-15.35	42.38	35.70	12.62	37.85	0.00	348	115	AVERAGE																																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	2476.00	97.86	-----	-----	95.04	32.45	7.24	36.87	0.00	348	115	Average																																																																																											
2	7095.00	97.86	-----	-----	95.04	32.45	7.24	36.87	0.00	348	115	Average																																																																																											

Remark: All signals exceeding the limit are fundamental frequency signals and can be ignored.



Mode	35																																													
	Band Edge - R																																													
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full_7095MHz																																													
ANT	STBC																																													
Pol.	Horizontal	Fundamental																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7126.92</td> <td>72.42</td> <td>88.20</td> <td>-15.78</td> <td>61.95</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>348</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7126.92	72.42	88.20	-15.78	61.95	35.70	12.62	37.85	0.00	348	115	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	7126.92	72.42	88.20	-15.78	61.95	35.70	12.62	37.85	0.00	348	115	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.00</td> <td>52.85</td> <td>68.20</td> <td>-15.35</td> <td>42.38</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>348</td> <td>115</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7125.00	52.85	68.20	-15.35	42.38	35.70	12.62	37.85	0.00	348	115	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	7125.00	52.85	68.20	-15.35	42.38	35.70	12.62	37.85	0.00	348	115	AVERAGE																																		



		44																																																																																																			
Mode		Band Edge - L																																																																																																			
		U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full_7095MHz																																																																																																			
ANT		STBC																																																																																																			
Pol.		Vertical					Fundamental																																																																																														
Peak																																																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7129.16</td> <td>71.82</td> <td>88.20</td> <td>-16.38</td> <td>61.35</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>128</td> <td>202 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7129.16	71.82	88.20	-16.38	61.35	35.70	12.62	37.85	0.00	128	202 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.00</td> <td>106.00</td> <td>-----</td> <td>103.12</td> <td>32.47</td> <td>7.26</td> <td>36.85</td> <td>0.00</td> <td>128</td> <td>202 Peak</td> </tr> <tr> <td>2</td> <td>7095.00</td> <td>110.65</td> <td>-----</td> <td>100.24</td> <td>35.70</td> <td>12.59</td> <td>37.88</td> <td>0.00</td> <td>128</td> <td>202 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2485.00	106.00	-----	103.12	32.47	7.26	36.85	0.00	128	202 Peak	2	7095.00	110.65	-----	100.24	35.70	12.59	37.88	0.00	128
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	7129.16	71.82	88.20	-16.38	61.35	35.70	12.62	37.85	0.00	128	202 PEAK																																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2485.00	106.00	-----	103.12	32.47	7.26	36.85	0.00	128	202 Peak																																																																																											
2	7095.00	110.65	-----	100.24	35.70	12.59	37.88	0.00	128	202 PEAK																																																																																											
Avg																																																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.16</td> <td>56.96</td> <td>68.20</td> <td>-11.24</td> <td>46.49</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>128</td> <td>202 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7125.16	56.96	68.20	-11.24	46.49	35.70	12.62	37.85	0.00	128	202 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2476.00</td> <td>99.82</td> <td>-----</td> <td>97.00</td> <td>32.45</td> <td>7.24</td> <td>36.87</td> <td>0.00</td> <td>128</td> <td>202 Average</td> </tr> <tr> <td>2</td> <td>7095.00</td> <td>100.14</td> <td>-----</td> <td>89.76</td> <td>35.69</td> <td>12.58</td> <td>37.89</td> <td>0.00</td> <td>128</td> <td>202 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2476.00	99.82	-----	97.00	32.45	7.24	36.87	0.00	128	202 Average	2	7095.00	100.14	-----	89.76	35.69	12.58	37.89	0.00	128
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	7125.16	56.96	68.20	-11.24	46.49	35.70	12.62	37.85	0.00	128	202 AVERAGE																																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2476.00	99.82	-----	97.00	32.45	7.24	36.87	0.00	128	202 Average																																																																																											
2	7095.00	100.14	-----	89.76	35.69	12.58	37.89	0.00	128	202 AVERAGE																																																																																											



Mode	44																																												
	Band Edge - R																																												
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full_7095MHz																																												
ANT	STBC																																												
Pol.	Vertical	Fundamental																																											
Peak																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7129.16</td> <td>71.82</td> <td>88.20</td> <td>-16.38</td> <td>61.35</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>128</td> <td>202</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7129.16	71.82	88.20	-16.38	61.35	35.70	12.62	37.85	0.00	128	202
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	7129.16	71.82	88.20	-16.38	61.35	35.70	12.62	37.85	0.00	128	202	PEAK																																	
Avg																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.16</td> <td>56.96</td> <td>68.20</td> <td>-11.24</td> <td>46.49</td> <td>35.70</td> <td>12.62</td> <td>37.85</td> <td>0.00</td> <td>128</td> <td>202</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7125.16	56.96	68.20	-11.24	46.49	35.70	12.62	37.85	0.00	128	202
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	7125.16	56.96	68.20	-11.24	46.49	35.70	12.62	37.85	0.00	128	202	AVERAGE																																	




Mode	44																																																																																																						
	Harmonic																																																																																																						
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full_7095MHz																																																																																																						
ANT	STBC																																																																																																						
Pol.	Horizontal	Vertical																																																																																																					
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14190.00</td> <td>51.00</td> <td>88.20</td> <td>-37.20</td> <td>58.75</td> <td>38.89</td> <td>18.17</td> <td>64.81</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>14190.00</td> <td>39.66</td> <td>68.20</td> <td>-28.54</td> <td>47.42</td> <td>38.89</td> <td>18.16</td> <td>64.81</td> <td>0.00</td> <td>300</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	14190.00	51.00	88.20	-37.20	58.75	38.89	18.17	64.81	0.00	300	0	PEAK	2	14190.00	39.66	68.20	-28.54	47.42	38.89	18.16	64.81	0.00	300	0	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14190.00</td> <td>47.02</td> <td>88.20</td> <td>-41.18</td> <td>54.77</td> <td>38.89</td> <td>18.17</td> <td>64.81</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	14190.00	47.02	88.20	-41.18	54.77	38.89	18.17	64.81	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	14190.00	51.00	88.20	-37.20	58.75	38.89	18.17	64.81	0.00	300	0	PEAK																																																																																											
2	14190.00	39.66	68.20	-28.54	47.42	38.89	18.16	64.81	0.00	300	0	AVERAGE																																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	14190.00	47.02	88.20	-41.18	54.77	38.89	18.17	64.81	0.00	---	---	PEAK																																																																																											

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11ax HE20	94.22	2.458	0.407	0.43kHz
802.11ax HE40	89.29	1.268	0.789	0.82KHz
802.11ax HE80	85.61	0.681	1.468	1.6KHz
802.11ax HE20_RU26	97.44	5.239	0.191	0.2kHz
802.11ax HE20_RU52	94.04	2.630	0.380	0.39kHz
802.11ax HE20_RU106	89.39	1.283	0.780	0.82kHz

802.11ax HE20

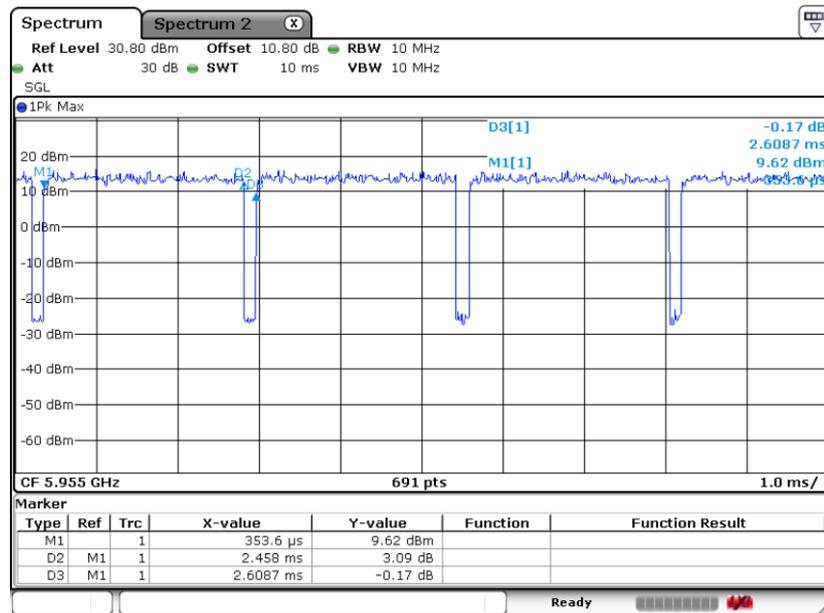




802.11ax HE40

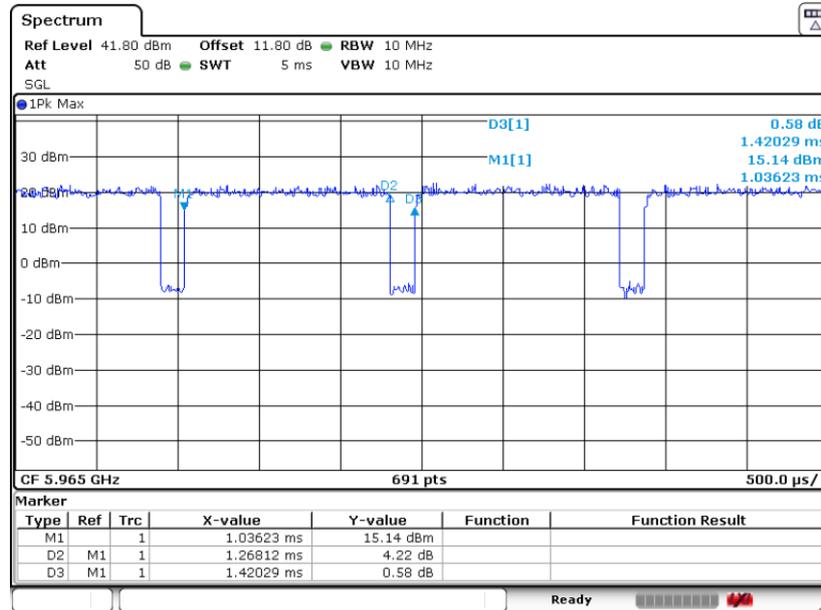


802.11ax HE80

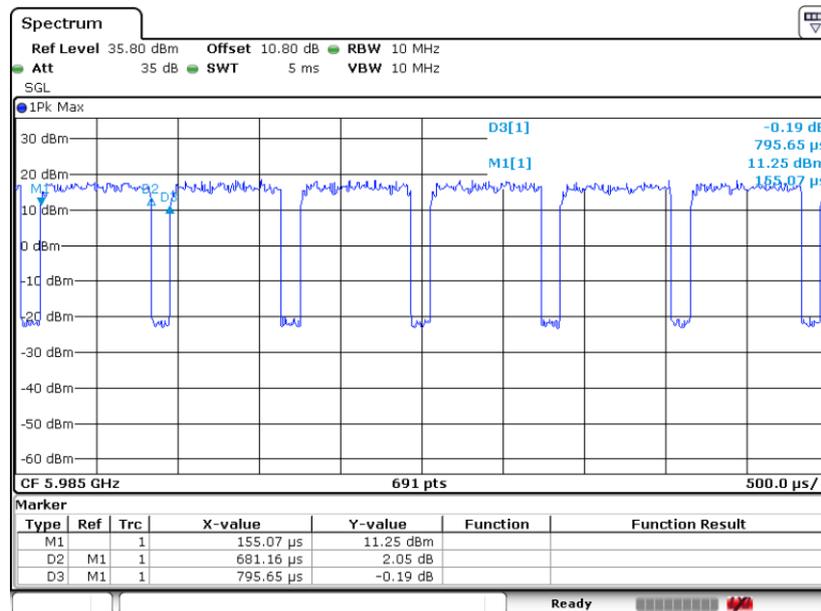




802.11ax HE20_RU26

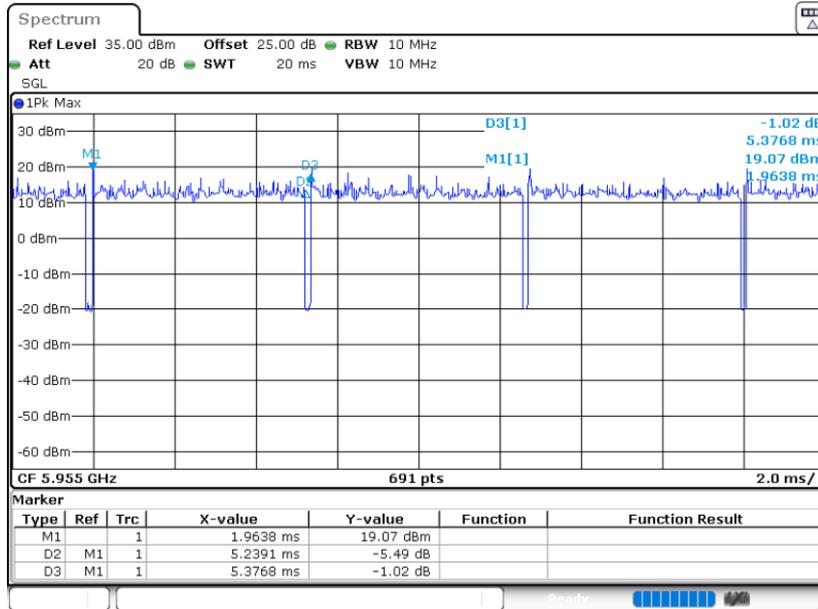

802.11ax HE20_RU52

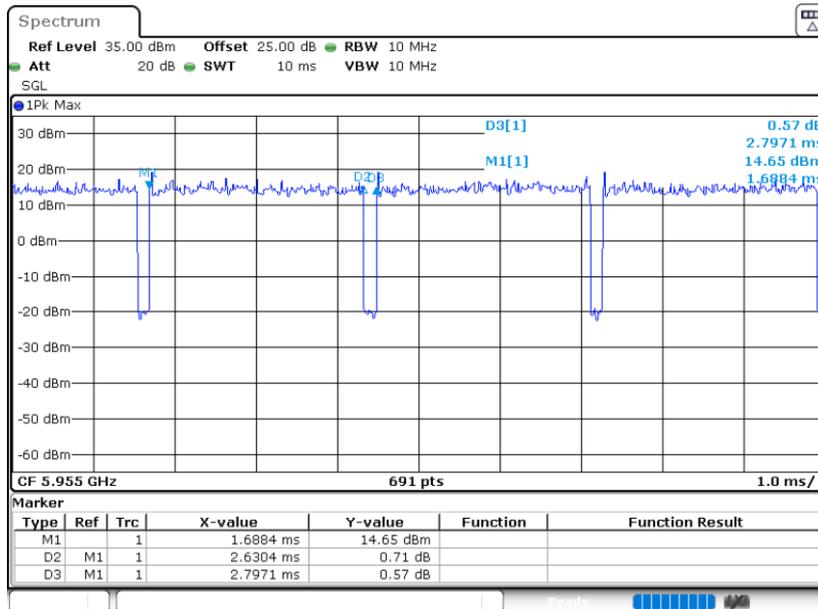



802.11ax HE20_RU106

