


DSS TRIAD BLOCK DIAGRAM

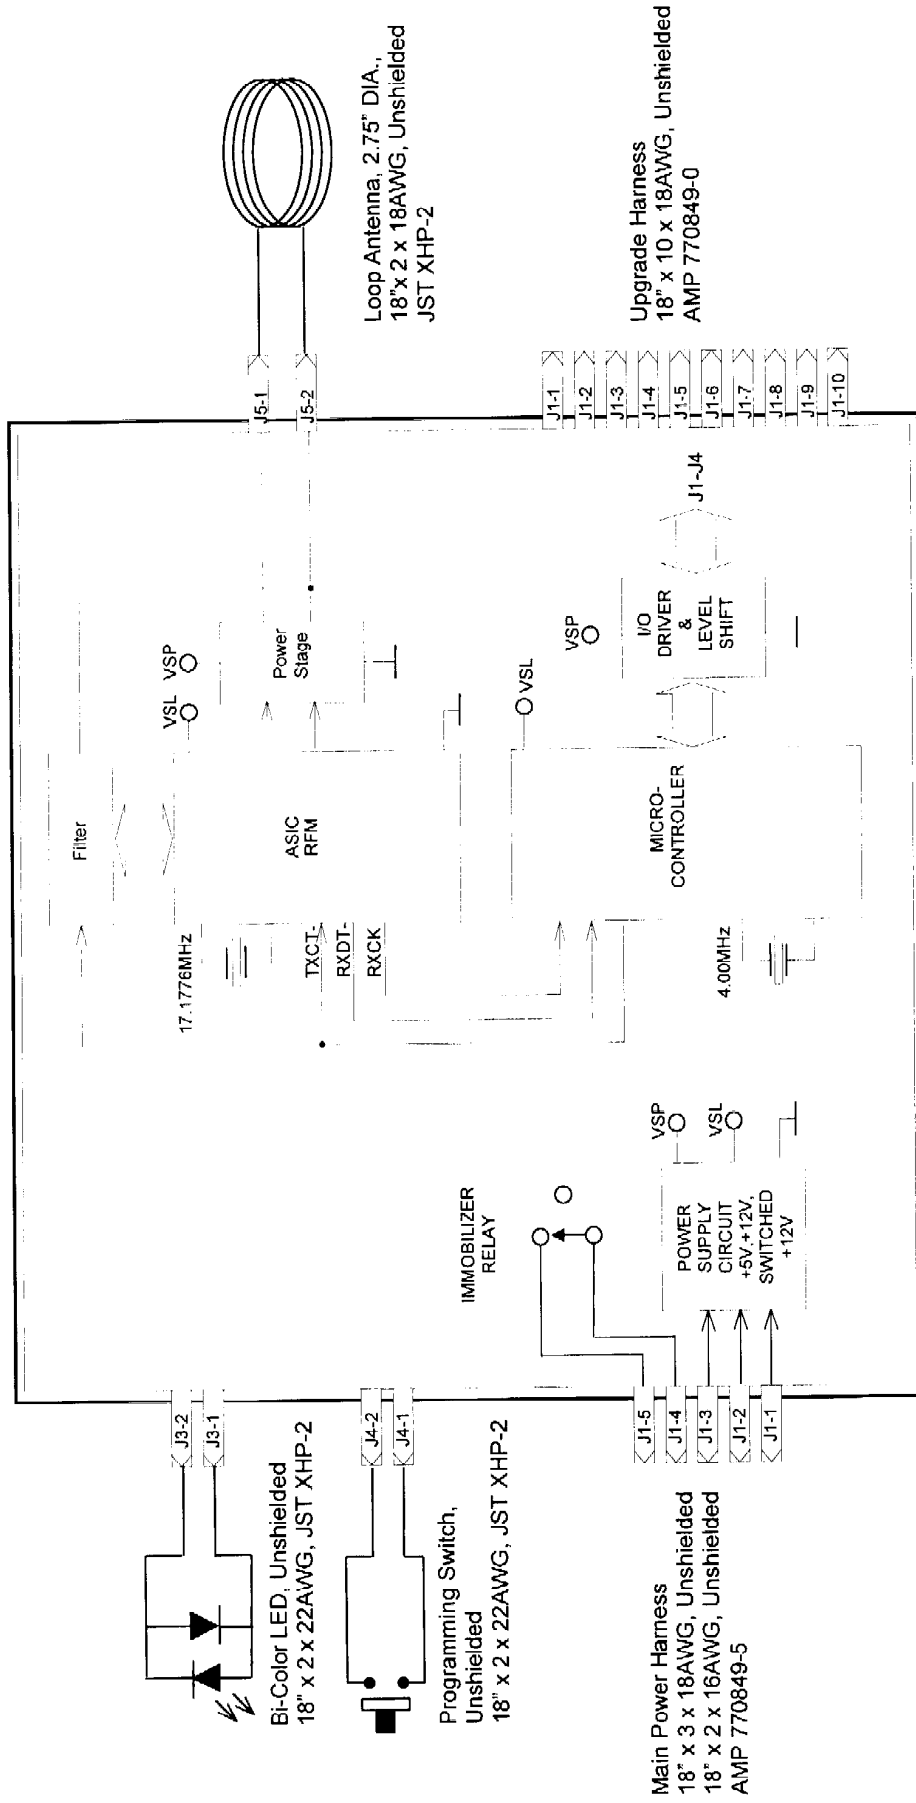

** J2 PIN ASSIGNMENT **

- J2-1. +12V Battery
- J2-2. +12V Switched Ignition
- J2-3. Battery Ground
- J2-4. Immobilize Relay In
- J2-5. Immobilize Relay Out

** J1 PIN ASSIGNMENT **

- J1-1. Piezo Buzzer Output (-), 4.2KHZ, 250mA
- J1-2. Ground When Armed (-), 250mA
- J1-3. Door Unlock (+), Lock (-), 250mA
- J1-4. Door Lock (+), Unlock (-), 250mA
- J1-5. Dome Light Output (-), 3A
- J1-6. Neg. Trigger Input
- J1-7. Neg. Trigger Input
- J1-8. Pos. Trigger Input
- J1-9. Parking Light (+) Output, 10A
- J1-10. Horn Relay Output (-), 250mA