



TEST REPORT

Report Number: 102752932DEN-001

Project Number: G102752932

Report Issue Date: November 11, 2016

Product Designation: Model: RC-04-MCT-M

Standards: FCC Part 15 Subpart C (15.209)2016

FCC Part 15 Subpart C (15.225)2016

IC RSS-210, Issue 9: 2016

IC RSS-GEN, Issue 4: 2014

Tested by:
Intertek Testing Services NA, Inc.
1795 Dogwood St. Suite 200
Louisville, CO 80027

Client:
ISONAS Inc.
4750 Walnut Street
Boulder, CO 80301

Report prepared by

Duan Wei Lin
EMC Project Engineer

Report reviewed by

Mike Spataro
Engineering Team Leader

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TABLE OF CONTENTS

| | | |
|-----------|---|------------------|
| 1 | <i>Introduction and Conclusion</i> | <i>3</i> |
| 2 | <i>Test Summary</i> | <i>4</i> |
| 3 | <i>System setup including cable interconnection details, support equipment and simplified block diagram.....</i> | <i>8</i> |
| 4 | <i>Radiated Unintentional & Spurious Emissions.....</i> | <i>11</i> |
| 5 | <i>Tx Voltage Variation – FCC 15.31</i> | <i>25</i> |
| 6 | <i>Radiated Tx Intentional Emissions – Fundamental</i> | <i>27</i> |
| 7 | <i>AC Mains Conducted Emissions - Transmitter.....</i> | <i>33</i> |
| 8 | <i>Occupied Bandwidth (OBW) – RSS-GEN, Section 6.6</i> | <i>37</i> |
| 9 | <i>Measurement Uncertainty</i> | <i>40</i> |
| 10 | <i>Revision History.....</i> | <i>41</i> |

| Intertek | |
|---------------------------------|--------------------|
| Report Number: 102752932DEN-001 | Issued: 11/11/2016 |

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 3.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded **the product tested complies with the requirements of the standard(s) indicated**. The results obtained in this test report pertain only to the item(s) tested.

1.1 Test Report Scope

1.2 Test Methodology

All measurements were performed according to the procedures in the following documents:

- ANSI C63.10: 2013 – ANSI Standard for Testing Unlicensed Wireless Devices

Radiated emissions tests were formed at an antenna-to-product distance of 3-meters.

1.3 Test Facility

Intertek Denver's testing facilities are located at 1795 Dogwood St. Suite 200 Louisville, CO 80027. The testing facility is ISO17025:2005 accredited by A2LA, our lab code is 2506.02, our VCCI registration numbers are. R-1643, C-1752 and T-1558, our FCC designation no. US1121 and our IC lab no. 2042N.

Testing contained in this test report may not be covered under the laboratories scope of accreditation. A note will be placed in the specific test section for testing not covered under the laboratories scope.

2 Test Summary

| TEST SECTION | TESTS | FCC/IC REFERENCE | TEST DATE | RESULT |
|--------------|---|---|---------------------------|--------|
| 4 | Radiated Unintentional Spurious Emissions | FCC 15.209/15.109 RSS-GEN: Sec. 7/8.9 RSS-210: sec. 2 | 10/17/2016- 10/20/2016 | PASS |
| 5 | Tx Voltage Variation | FCC 15.31 | 10/17/2016- 10/20/2016 | PASS |
| 6 | Tx Fundament and Harmonic Emissions | FCC 15.209/15.225 RSS-GEN 8.9 RSS-210: B.6 | 10/17/2016- 10/20/2016 | PASS |
| 7 | AC Conducted Emissions | FCC 15.207 RSS-GEN: 8.8 | 10/27/2016 | PASS |
| 8 | Occupied Bandwidth Measurement | RSS-GEN: 6.6 | 10/17/2016- 10/20/2016 | PASS |

General Notes:

- 1) The following product options were covered in this testing:
 - Power Over Ethernet (POE)
 - 12VDC
- 2) Product is RSS-210 Category 1 equipment.

Radio Notes:

- 1) FCC CFR47 Part 15.31: Measurement Standards: In any case where the device is powered off a battery, a fresh battery was used during test. In cases where the device is powered off an AC supply, voltage was varied per Part 15.31 to find worst case emissions.
- 2) FCC CFR47 Part 15.35: Measurement Detector Functions and Bandwidths: FCC Part 15.35 was utilized when performing the measurements within this report.
- 3) Near field correction was made to Radiated emissions from unlicensed wireless devices below 30MHz. refer to ANSIC63.10-2013, section 6.4.4 for detail.

Description of Product Under Test

| | |
|-------------------------------------|--|
| Model: | RC-04-MCT-M Pure IP MCT Reader-Controller Mullion, |
| Type of EUT: | Reader Controller |
| Serial Number: | Units under test were FCC Mullion #1 |
| FCC ID: | OCZRC-04M |
| Industry Canada ID: | 8431A-RC04M |
| Related Submittal(s) Grants: | NA |
| Company: | Isonas Inc |
| Customer: | Isonas Inc |
| Address: | 4750 Walnut Street, Boulder, Colorado, USA, 80301 |
| Phone: | 970-324-0156 |
| Fax: | N/A |
| e-mail: | MBetaM@gmail.com |
| Test Standards: | <input checked="" type="checkbox"/> 47 CFR, Part 15C:§15.225 <input checked="" type="checkbox"/> RSS-210, Issue 8, 2010 <input checked="" type="checkbox"/> RSS-Gen, Issue 3, 2010 <input checked="" type="checkbox"/> Other 47 CFR, Part 15C:§15.209 |
| Type of radio: | <input checked="" type="checkbox"/> Stand -alone <input type="checkbox"/> Module <input type="checkbox"/> Hybrid |
| Date Sample Submitted: | 10/17/2016 |
| Test Work Started: | 10/17/2016 |
| Test Work Completed: | 10/31/2016 |
| Test Sample Conditions: | <input type="checkbox"/> Damaged <input type="checkbox"/> Poor (Usable) <input checked="" type="checkbox"/> Good |

| | |
|---|---|
| Product Description: | RFID Security Access Reader Controller |
| Transmitter Type: | RFID |
| Operating Frequency Range(s): | LF @ 125KHz HF @ 13.56MHz |
| Number of Channels: | 1 in each band |
| Modulation: | ASK |
| Antenna(s) Info: | Loop antenna |
| Rated Power: | EIRP 3μW |
| Antenna Installation: | <input type="checkbox"/> User <input type="checkbox"/> Professional <input checked="" type="checkbox"/> Factory |
| Transmitter power configuration: | <input type="checkbox"/> Internal battery <input checked="" type="checkbox"/> External power source |
| Special Test Arrangement: | NA |
| Test Facility Accreditation: | A2LA (Certificate No. 2506.01) |
| Test Methodology: | Measurements performed according to the procedures in ANSI C63.10-2013 |

2.1 Product Description - Detailed

| |
|--|
| Description of Equipment Under Test (provided by client) |
| RFID Security Access Reader Controller |

| Equipment Under Test Power Configuration | | | |
|--|---------------|-----------------|------------------|
| Rated Voltage | Rated Current | Rated Frequency | Number of Phases |
| POE | Class 4 | N/A | N/A |
| 12VDC | 0.2A | N/A | N/A |
| | | | |

| Descriptions of EUT Exercising | |
|---|--|
| <input type="checkbox"/> Standby/Idle Mode | |
| <input checked="" type="checkbox"/> Continuous transmission, un-modulated carrier (CW) | |
| <input type="checkbox"/> Continuous transmission, modulated carrier (CW) utilizing worst-case data rate | |
| <input type="checkbox"/> Continuous Receive Mode | |


Note: The chosen mode of operation described above is dependent upon the specific test to be performed.

3 System setup including cable interconnection details, support equipment and simplified block diagram

3.1 Method:

Record the details of EUT cabling, document the support equipment, and show the interconnections in a block diagram.

3.2 EUT Block Diagram:

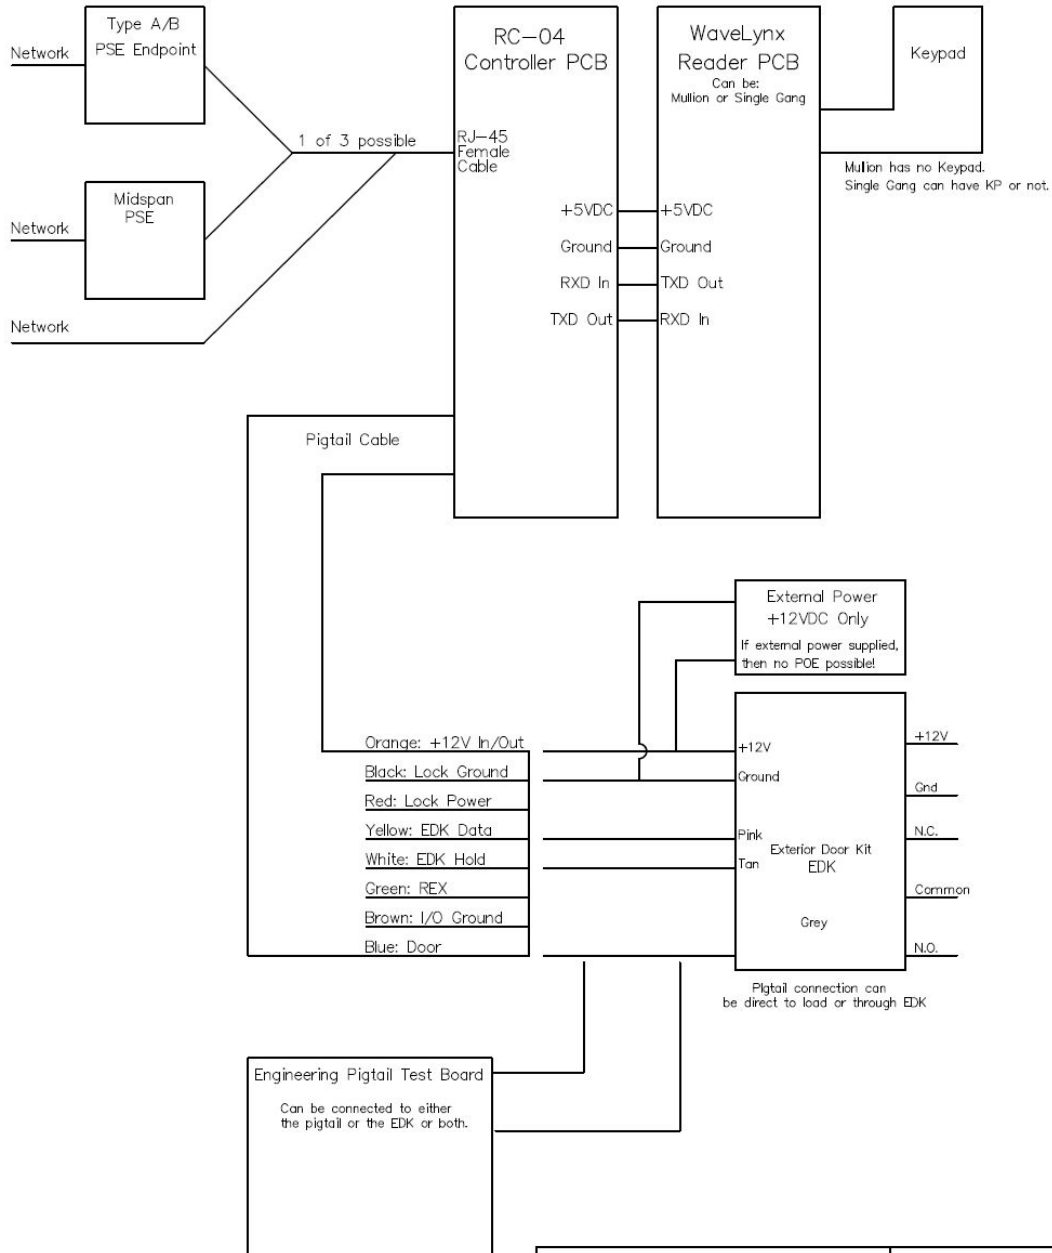

| Intertek | |
|---------------------------------|--------------------|
| Report Number: 102752932DEN-001 | Issued: 11/11/2016 |

3.3 Antenna Specifications: NA integral loop antenna

3.4 Determination of RF Power supplied to antenna input for testing

3.5 Support Data:

| ID | Description/ Function | Shield Type | Length | Connector | Connection | Ferrites |
|----|-----------------------|-------------|--------|-----------|------------|----------|
| 1 | Network cable | None | 6 feet | RJ-45 | POE | None |
| 2 | Pigtail | None | 6 feet | DC | DC | Yes |
| | | | | | | |

| Support Equipment | | | |
|-------------------|--------------|--------------|---------------|
| Description | Manufacturer | Model Number | Serial Number |
| Load Board | Isonas | Custom | EMC-1 |
| Generic Laptop | Dell | EMC-1 | EMC-1 |

Notes:

- 1) Add as needed

Variant Models:

The following variant models were not tested as part of this evaluation, but have been identified by the manufacturer as being electrically identical models, depopulated models, or with reasonable similarity to the model(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

RC-04-PRX-M Pure IP Prox Reader-Controller Mullion (125kHz, BLE)

RC-04-MCT-M Pure IP MCT Reader-Controller Mullion (13.56MHz, 125kHz, BLE) – unit tested

RC-04-PRX-M was not tested but does not add or remove any components, the 13.56MHz radio is turned off via software.

3.6 Photograph: Product Tested

4 Radiated Unintentional & Spurious Emissions

4.1 Method:

Unless otherwise stated no deviations were made from FCC 15.209/ IC RSS-210.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

4.2 Test Equipment Used:

| Asset | Description | Manufacturer | Model | Serial | Cal Date | Cal Due |
|---------|-------------------------------|--------------------|--|------------------------------|------------|------------|
| 19936 | Bilog Antenna 30MHz - 6GHz | Sunol Sciences | JB6 | A050707-1 | 6/22/2016 | 6/22/2017 |
| 18897 | Magnetic loop | EMCO | 6502 | 9205-2738 | 11/12/2015 | 11/12/2016 |
| 18912 | 9 kHz- 1.3GHz Pre Amp | Hewlett-Packard | HP | 5 | 3/31/2016 | 3/31/2017 |
| DEN-073 | EMI Receiver (10Hz – 26.5GHz) | RHODE & SCHWARZ | ESU 26 | 100265 | 12/19/2015 | 12/19/2016 |
| CC1-E2 | Radiated Cable | Teledyne | 90-206-300; PN:F-130-S1S1-100; 90-206-072; | E2-A; 5026702002; E2-C; E2-D | 11/17/2015 | 11/17/2016 |
| 260 | Humidity and Temp. Pen | Extech Instruments | 445580 | 958123 | 07/21/2016 | 07/21/2017 |

4.3 Results:

The sample tested was found to comply.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
 AF = 7.4 dB/m
 CF = 1.6 dB
 AG = 29.0 dB
 FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

$$NF = \text{Net Reading in dB}\mu\text{V}$$

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

4.4 Test Data:

| | | | | | | | |
|------------------|--|------------|-------------------------|--|--------------------|-------|-----|
| Test Report #: | G102752932 | Test Area: | CC1 Radiated | | Temperature: | 23.9 | °C |
| Test Method: | FCC 15.209/ IC RSS-210 | Test Date: | 10/17/2016 – 10/20/2016 | | Relative Humidity: | 15.7 | % |
| EUT Model #: | RC-04-MCT-M | EUT Power: | POE, 12Vdc | | Air Pressure: | 835.7 | kPa |
| EUT Serial #: | Units under test were FCC Mullion #1 | | | | | | |
| Manufacturer: | Isonas | | | | Level Key | | |
| EUT Description: | RFID Security Access Reader Controller | | | | Pk – Peak | | |
| Notes: | | | | | Qp – Quasi Peak | | |
| | | | | | Av - Average | | |
| | | | | | | | |

| FREQ | LEVEL | DET | CABLE | ANT | PREAMP | ATTE N | FINAL | POL | HG T | AZ | DELTA1 | Limit | RBW |
|---------------------------------|-------|---|----------------|----------|--------|-----------|----------|-------|---------|-------|--|-----------|-------|
| MHz | dBuV | $\frac{Qp}{Av}$ $\frac{Pk}{Pk}$ $\frac{Rms}{Rms}$ | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m) | (DEG) | FCC 15.109 B & 209 < 1GHz Qp | Limit | (MHz) |
| V_12Vdc_X1_Ethernet terminated_ | | | RC 04_Mullion_ | | | | | | | | | | |
| 40.6795 | 45.91 | Qp | 0.57 | 19.26 | 28.16 | 0.00 | 37.57 | V | 1.00 | 79.8 | - 2.43 | (40.00) | 0.120 |
| 61.0192 | 44.91 | Qp | 0.69 | 13.60 | 28.10 | 0.00 | 31.10 | V | 1.00 | 359.9 | - 8.90 | (40.00) | 0.120 |
| 104.2965 | 47.18 | Qp | 0.91 | 17.56 | 27.93 | 0.00 | 37.72 | V | 1.00 | 151.6 | - 5.80 | (43.52) | 0.120 |
| 106.6987 | 48.05 | Qp | 0.93 | 18.04 | 27.92 | 0.00 | 39.10 | V | 1.00 | 185.0 | - 4.42 | (43.52) | 0.120 |
| 298.3173 | 43.66 | Qp | 1.55 | 19.77 | 27.06 | 0.00 | 37.92 | V | 1.00 | 175.9 | - 8.10 | (46.02) | 0.120 |
| 579.1842 | 37.16 | Qp | 2.15 | 24.88 | 28.36 | 0.00 | 35.83 | V | 1.00 | 158.3 | - 10.19 | (46.02) | 0.120 |
| H_12Vdc_X1_Ethernet terminated_ | | | RC 04_Mullion_ | | | | | | | | | | |
| 106.7708 | 38.80 | Qp | 0.93 | 18.05 | 27.92 | 0.00 | 29.86 | H | 1.99 | 81.2 | - 13.66 | (43.52) | 0.120 |
| 175.0048 | 40.74 | Qp | 1.20 | 17.60 | 27.55 | 0.00 | 31.99 | H | 1.50 | 266.9 | - 11.53 | (43.52) | 0.120 |
| 271.1971 | 45.56 | Qp | 1.47 | 19.30 | 27.05 | 0.00 | 39.28 | H | 1.17 | 68.6 | - 6.74 | (46.02) | 0.120 |
| 352.5576 | 42.65 | Qp | 1.69 | 20.40 | 27.38 | 0.00 | 37.36 | H | 1.18 | 69.6 | - 8.66 | (46.02) | 0.120 |
| 575.0176 | 39.83 | Qp | 2.15 | 24.80 | 28.36 | 0.00 | 38.42 | H | 1.25 | 158.5 | - 7.60 | (46.02) | 0.120 |
| 775.0224 | 40.29 | Qp | 2.49 | 27.00 | 28.02 | 0.00 | 41.76 | H | 1.01 | 249.0 | - 4.26 | (46.02) | 0.120 |
| V_12Vdc_X2_Ethernet terminated_ | | | RC 04_Mullion_ | | | | | | | | | | |
| 101.3157 | 44.22 | Qp | 0.89 | 16.79 | 27.95 | 0.00 | 33.96 | V | 1.00 | 208.8 | - 9.56 | (43.52) | 0.120 |
| 106.7692 | 47.02 | Qp | 0.93 | 18.05 | 27.92 | 0.00 | 38.08 | V | 1.00 | 141.9 | - 5.44 | (43.52) | 0.120 |
| H_12Vdc_X2_Ethernet terminated_ | | | RC 04_Mullion_ | | | | | | | | | | |
| 577.4039 | 37.68 | Qp | 2.15 | 24.85 | 28.36 | 0.00 | 36.32 | H | 1.21 | 161.4 | - 9.70 | (46.02) | 0.120 |
| V_POE_X1_ | | | RC 04_Mullion_ | | | | | | | | | | |
| 64.2837 | 46.52 | Qp | 0.73 | 13.80 | 28.09 | 0.00 | 32.96 | V | 1.49 | 360.0 | - 7.04 | (40.00) | 0.120 |
| 117.0862 | 41.58 | Qp | 0.98 | 19.40 | 27.87 | 0.00 | 34.09 | V | 1.00 | 73.0 | - 9.43 | (43.52) | 0.120 |
| 125.0032 | 41.10 | Qp | 1.01 | 19.60 | 27.83 | 0.00 | 33.88 | V | 1.00 | 76.0 | - 9.64 | (43.52) | 0.120 |
| 325.4359 | 49.98 | Qp | 1.61 | 20.11 | 27.18 | 0.00 | 44.52 | V | 1.00 | 221.0 | - 1.50 | (46.02) | 0.120 |
| 456.2292 | 45.02 | Qp | 1.91 | 23.02 | 28.12 | 0.00 | 41.83 | V | 1.00 | 17.0 | - 4.19 | (46.02) | 0.120 |
| 542.3958 | 39.94 | Qp | 2.11 | 24.15 | 28.35 | 0.00 | 37.85 | V | 1.00 | 117.0 | - 8.17 | (46.02) | 0.120 |
| H_POE_X1_ | | | RC 04_Mullion_ | | | | | | | | | | |
| 64.2869 | 34.43 | Qp | 0.73 | 13.80 | 28.09 | 0.00 | 20.87 | H | 2.38 | 72.0 | - 19.13 | (40.00) | 0.120 |
| 125.0048 | 34.24 | Qp | 1.01 | 19.60 | 27.83 | 0.00 | 27.02 | H | 1.50 | 260.0 | - 16.50 | (43.52) | 0.120 |

Intertek

Report Number: 102752932DEN-001

Issued: 11/11/2016

| FREQ | LEVEL | DET | CABLE | ANT | PREAMP | ATTEN | FINAL | POL | HGT | AZ | DELTA1 | Limit | RBW |
|-----------|-------|---|--------|----------|--------|--------|----------|-------|------|-------|--|-----------|-------|
| MHz | dBuV | $\frac{Q_p}{A_v}$ $\frac{P_k}{R_{ms}}$ | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m) | (DEG) | FCC 15.109 B & 209 < 1GHz Qp | Limit | (MHz) |
| 250.0064 | 44.71 | Qp | 1.41 | 17.60 | 27.10 | 0.00 | 36.62 | H | 1.23 | 299.0 | - 9.40 | (46.02) | 0.120 |
| 275.0064 | 47.27 | Qp | 1.49 | 19.30 | 27.04 | 0.00 | 41.02 | H | 1.17 | 121.0 | - 5.00 | (46.02) | 0.120 |
| 325.4359 | 48.09 | Qp | 1.61 | 20.11 | 27.18 | 0.00 | 42.63 | H | 1.00 | 360.0 | - 3.39 | (46.02) | 0.120 |
| 598.3526 | 38.07 | Qp | 2.20 | 24.80 | 28.36 | 0.00 | 36.71 | H | 1.87 | 116.0 | - 9.31 | (46.02) | 0.120 |
| V_POE_X2_ | | RC 04_Mullion_ | | | | | | | | | | | |
| 66.9407 | 44.52 | Qp | 0.75 | 13.90 | 28.08 | 0.00 | 31.09 | V | 1.00 | 0.0 | - 8.91 | (40.00) | 0.120 |
| 532.8622 | 42.60 | Qp | 2.07 | 24.20 | 28.34 | 0.00 | 40.54 | V | 1.00 | 32.0 | - 5.48 | (46.02) | 0.120 |
| H_POE_X2_ | | RC 04_Mullion_ | | | | | | | | | | | |
| 325.4359 | 49.49 | Qp | 1.61 | 20.11 | 27.18 | 0.00 | 44.03 | H | 1.00 | 0.0 | - 1.99 | (46.02) | 0.120 |
| 531.4151 | 42.55 | Qp | 2.07 | 24.20 | 28.33 | 0.00 | 40.48 | H | 1.67 | 131.0 | - 5.54 | (46.02) | 0.120 |

| FREQ | LEVEL | DET | CABLE | ANT | PREAMP | ATTEN | FINAL | POL | HGT | AZ | DELTA1 | Limit | RBW |
|---|---------|---|--------|----------|--------|--------|----------|-------|------|-------|---------------------|-----------|--------|
| MHz | dBuV | $\frac{Q_p}{A_v}$ $\frac{P_k}{R_{ms}}$ | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m) | (DEG) | FCC 15.209 Qp | Limit | (MHz) |
| Parallel_loop_POE_Axis_1_RC-04 Mullion | | | | | | | | | | | | | |
| 0.7442 | - 23.21 | Qp | 0.07 | 10.20 | 0.00 | 0.00 | - 12.93 | V | 1.00 | 0.0 | - 43.10 | (30.17) | 0.009 |
| 1.8764 | - 21.02 | Qp | 0.11 | 10.40 | 0.00 | 0.00 | - 10.52 | V | 1.00 | 0.0 | - 40.06 | (29.54) | 0.009 |
| 11.0562 | - 37.15 | Qp | 0.29 | 10.62 | 0.00 | 0.00 | - 26.24 | V | 1.00 | 0.0 | - 55.78 | (29.54) | 0.009 |
| 12.4363 | - 32.81 | Qp | 0.31 | 10.65 | 0.00 | 0.00 | - 21.85 | V | 1.00 | 0.0 | - 51.39 | (29.54) | 0.009 |
| Parallel_loop_POE_Axis_2_RC-04 Mullion | | | | | | | | | | | | | |
| 0.6635 | - 23.79 | Qp | 0.07 | 10.20 | 0.00 | 0.00 | - 13.52 | V | 1.00 | 0.0 | - 44.68 | (31.16) | 0.009 |
| 1.9311 | - 20.98 | Qp | 0.11 | 10.40 | 0.00 | 0.00 | - 10.48 | V | 1.00 | 0.0 | - 40.02 | (29.54) | 0.009 |
| 11.0369 | - 18.01 | Qp | 0.29 | 10.62 | 0.00 | 0.00 | - 7.10 | V | 1.00 | 0.0 | - 36.64 | (29.54) | 0.009 |
| 12.4055 | - 17.45 | Qp | 0.31 | 10.65 | 0.00 | 0.00 | - 6.49 | V | 1.00 | 0.0 | - 36.03 | (29.54) | 0.009 |
| Perpendicular_loop_RC-04 Mullion_Axis_1_RC-04 Mullion | | | | | | | | | | | | | |
| 0.1270 | - 54.47 | Qp | 0.04 | 10.27 | 0.00 | 0.00 | - 44.16 | V | 1.00 | 0.0 | - 69.68 | (25.52) | 0.0002 |
| 0.9934 | - 22.15 | Qp | 0.08 | 10.39 | 0.00 | 0.00 | - 11.67 | V | 1.00 | 0.0 | - 39.33 | (27.66) | 0.009 |
| 12.3406 | - 33.93 | Qp | 0.31 | 10.65 | 0.00 | 0.00 | - 22.98 | V | 1.00 | 0.0 | - 52.52 | (29.54) | 0.009 |
| 14.6461 | - 21.23 | Qp | 0.35 | 10.69 | 0.00 | 0.00 | - 10.18 | V | 1.00 | 0.0 | - 39.72 | (29.54) | 0.009 |
| Perpendicular_loop_RC-04 Mullion_Axis_2_RC-04 Mullion | | | | | | | | | | | | | |
| 0.1274 | - 54.83 | Qp | 0.04 | 10.27 | 0.00 | 0.00 | - 44.52 | V | 1.00 | 0.0 | - 70.01 | (25.49) | 0.0002 |
| 0.9933 | - 42.14 | Qp | 0.08 | 10.39 | 0.00 | 0.00 | - 31.67 | V | 1.00 | 0.0 | - 59.32 | (27.65) | 0.009 |
| 12.3395 | - 17.32 | Qp | 0.31 | 10.65 | 0.00 | 0.00 | - 6.37 | V | 1.00 | 0.0 | - 35.91 | (29.54) | 0.009 |



Intertek



Report Number: 102752932DEN-001



Issued: 11/11/2016



| FREQ | LEVEL | DET | CABLE | ANT | PREAMP | ATTEN | FINAL | POL | HGT | AZ | DELTA1 | Limit | RBW |
|---|---------|---|--------|----------|--------|--------|----------|-------|------|-------|---------------------|-----------|--------|
| MHz | dBuV | $\frac{Q_p}{A_v}$ $\frac{P_k}{R_{ms}}$ | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m) | (DEG) | FCC 15.209 Qp | Limit | (MHz) |
| Parallel_loop_12VDC_Axis_1_RC-04 Mullion | | | | | | | | | | | | | |
| 0.1303 | - 55.77 | Qp | 0.04 | 10.27 | 0.00 | 0.00 | - 45.46 | V | 1.00 | 0.0 | - 70.75 | (25.29) | 0.0002 |
| 0.3981 | - 27.14 | Qp | 0.06 | 10.10 | 0.00 | 0.00 | - 16.98 | V | 1.00 | 0.0 | - 32.57 | (15.59) | 0.009 |
| 10.8010 | - 17.19 | Qp | 0.29 | 10.62 | 0.00 | 0.00 | - 6.29 | V | 1.00 | 0.0 | - 35.83 | (29.54) | 0.009 |
| 12.6920 | - 13.37 | Qp | 0.31 | 10.65 | 0.00 | 0.00 | - 2.40 | V | 1.00 | 0.0 | - 31.94 | (29.54) | 0.009 |
| Parallel_loop_12VDC_Axis_2_RC-04 Mullion | | | | | | | | | | | | | |
| 0.1335 | - 54.89 | Qp | 0.04 | 10.27 | 0.00 | 0.00 | - 44.58 | V | 1.00 | 0.0 | - 69.66 | (25.08) | 0.0002 |
| 0.7377 | - 23.26 | Qp | 0.07 | 10.20 | 0.00 | 0.00 | - 12.99 | V | 1.00 | 0.0 | - 43.23 | (30.24) | 0.009 |
| 12.4042 | - 12.60 | Qp | 0.31 | 10.65 | 0.00 | 0.00 | - 1.64 | V | 1.00 | 0.0 | - 31.18 | (29.54) | 0.009 |
| 14.4881 | - 0.78 | Qp | 0.35 | 10.69 | 0.00 | 0.00 | 10.26 | V | 1.00 | 0.0 | - 19.28 | (29.54) | 0.009 |
| Perpendicular_loop_12VDC_Axis_1_RC-04 Mullion | | | | | | | | | | | | | |
| 0.1291 | - 55.36 | Qp | 0.04 | 10.27 | 0.00 | 0.00 | - 45.05 | V | 1.00 | 0.0 | - 70.42 | (25.37) | 0.0002 |
| 0.7725 | - 22.98 | Qp | 0.08 | 10.20 | 0.00 | 0.00 | - 12.71 | V | 1.00 | 0.0 | - 42.55 | (29.84) | 0.009 |
| 11.0570 | - 17.87 | Qp | 0.29 | 10.62 | 0.00 | 0.00 | - 6.96 | V | 1.00 | 0.0 | - 36.50 | (29.54) | 0.009 |
| Perpendicular_loop_12VDC_Axis_2_RC-04 Mullion | | | | | | | | | | | | | |
| 0.1292 | - 55.07 | Qp | 0.04 | 10.27 | 0.00 | 0.00 | - 44.76 | V | 1.00 | 0.0 | - 70.12 | (25.36) | 0.0002 |
| 0.7015 | - 23.46 | Qp | 0.07 | 10.20 | 0.00 | 0.00 | - 13.19 | V | 1.00 | 0.0 | - 43.87 | (30.68) | 0.009 |
| 12.3909 | - 15.26 | Qp | 0.31 | 10.65 | 0.00 | 0.00 | - 4.30 | V | 1.00 | 0.0 | - 33.84 | (29.54) | 0.009 |
| 14.7375 | 0.86 | Qp | 0.35 | 10.69 | 0.00 | 0.00 | 11.91 | V | 1.00 | 0.0 | - 17.63 | (29.54) | 0.009 |
| 14.6483 | - 0.17 | Qp | 0.35 | 10.69 | 0.00 | 0.00 | 10.87 | V | 1.00 | 0.0 | - 18.67 | (29.54) | 0.009 |



4.5 Plots:

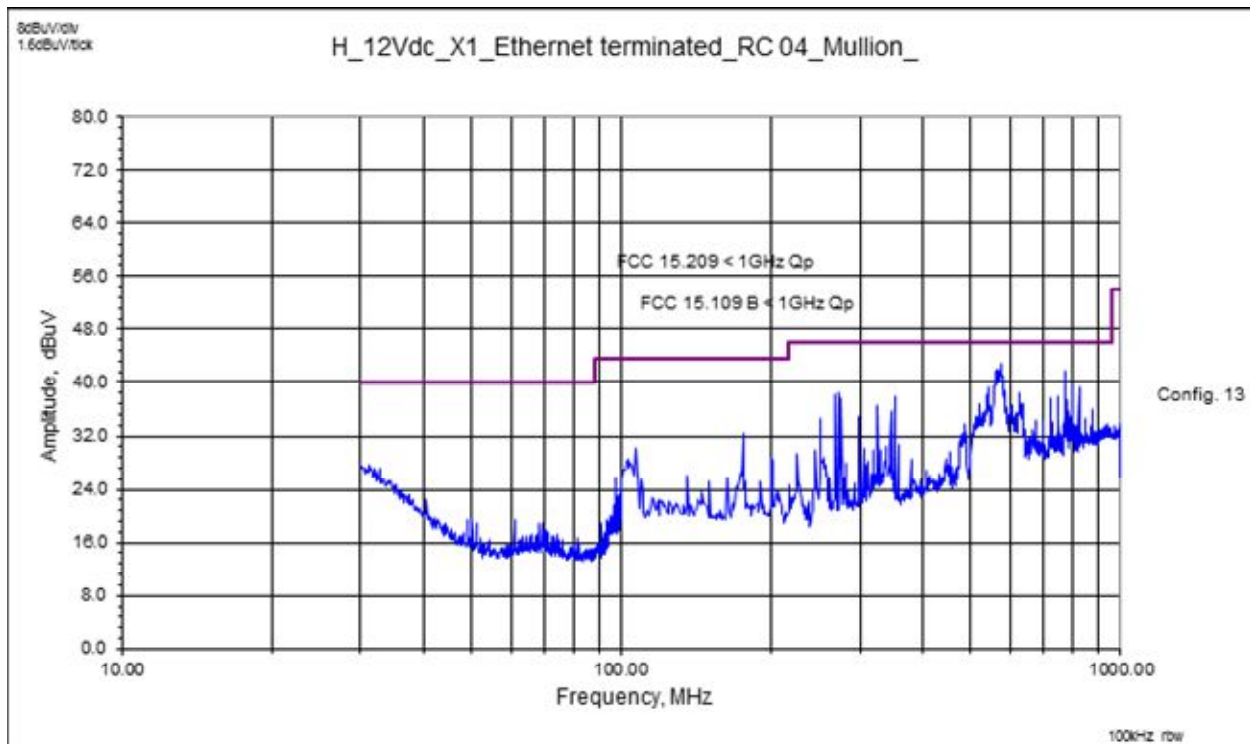
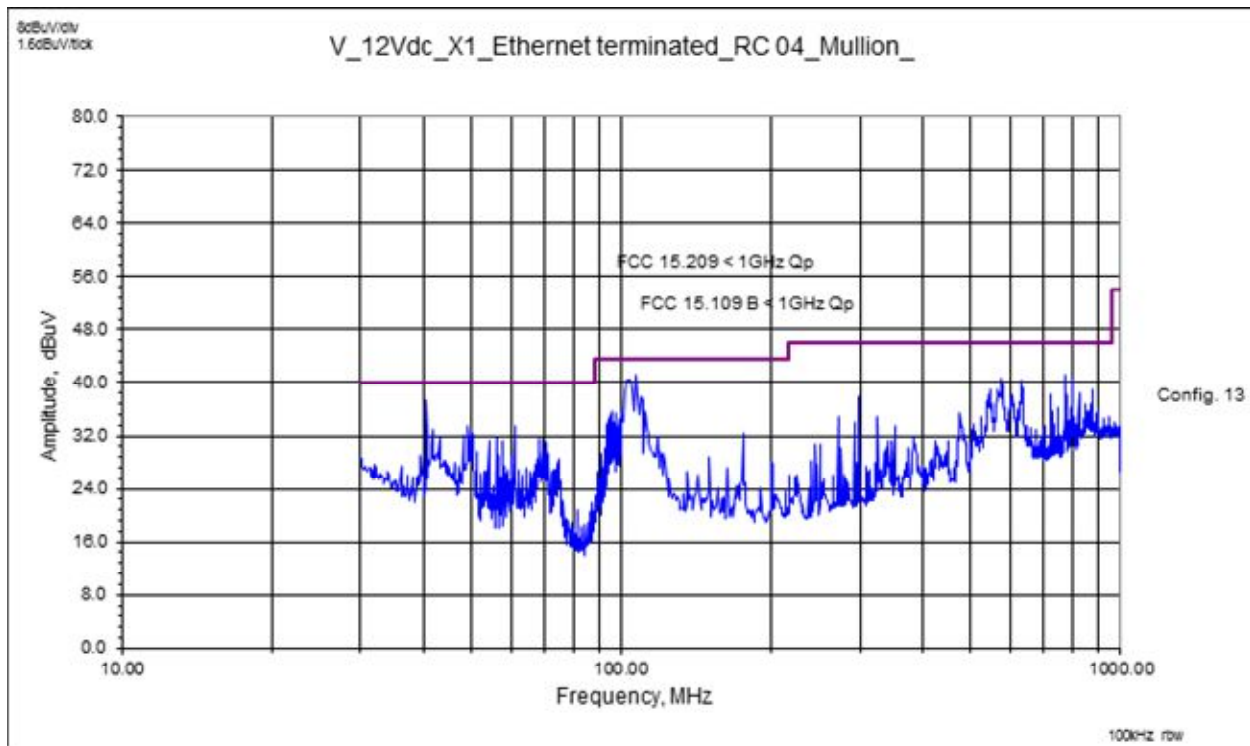


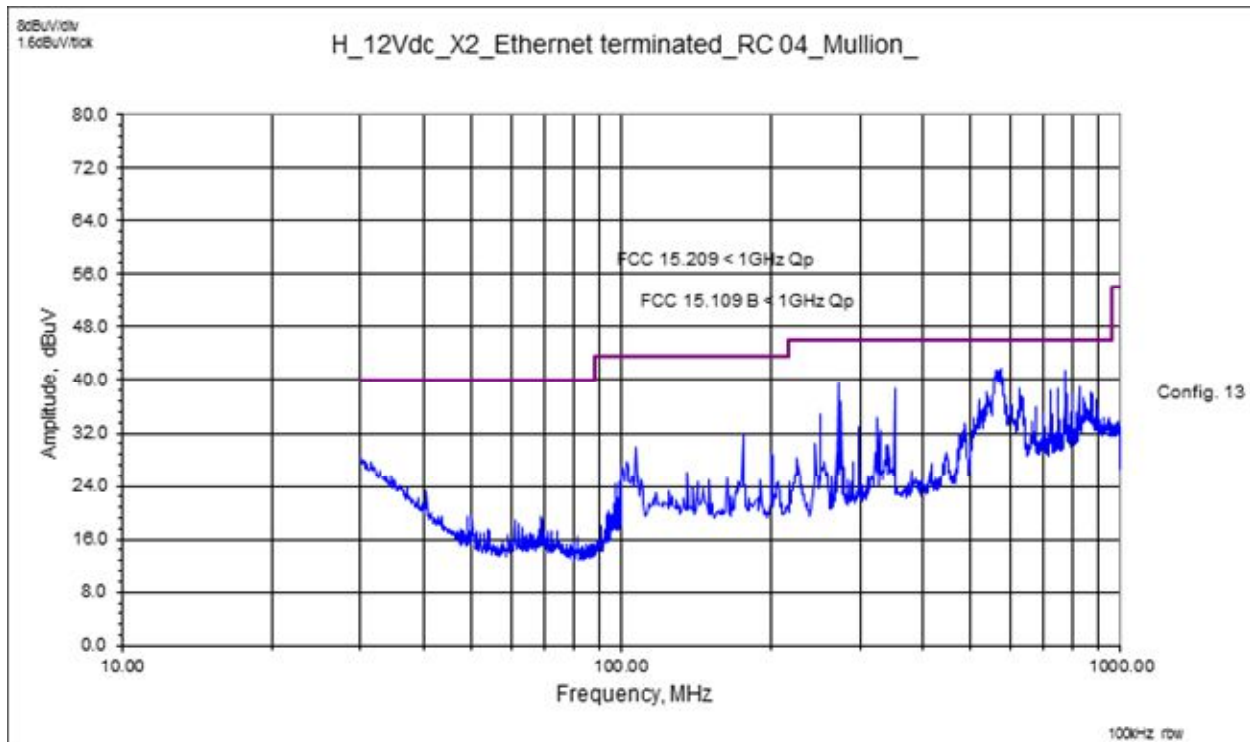
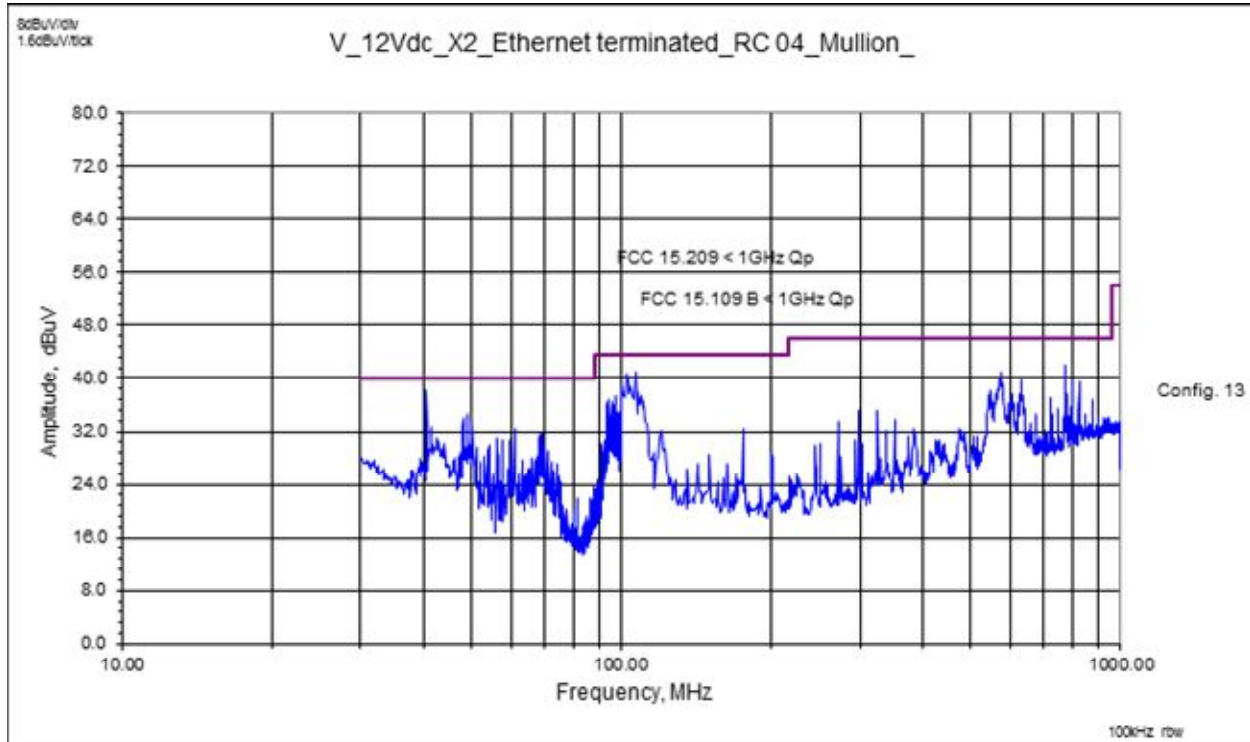


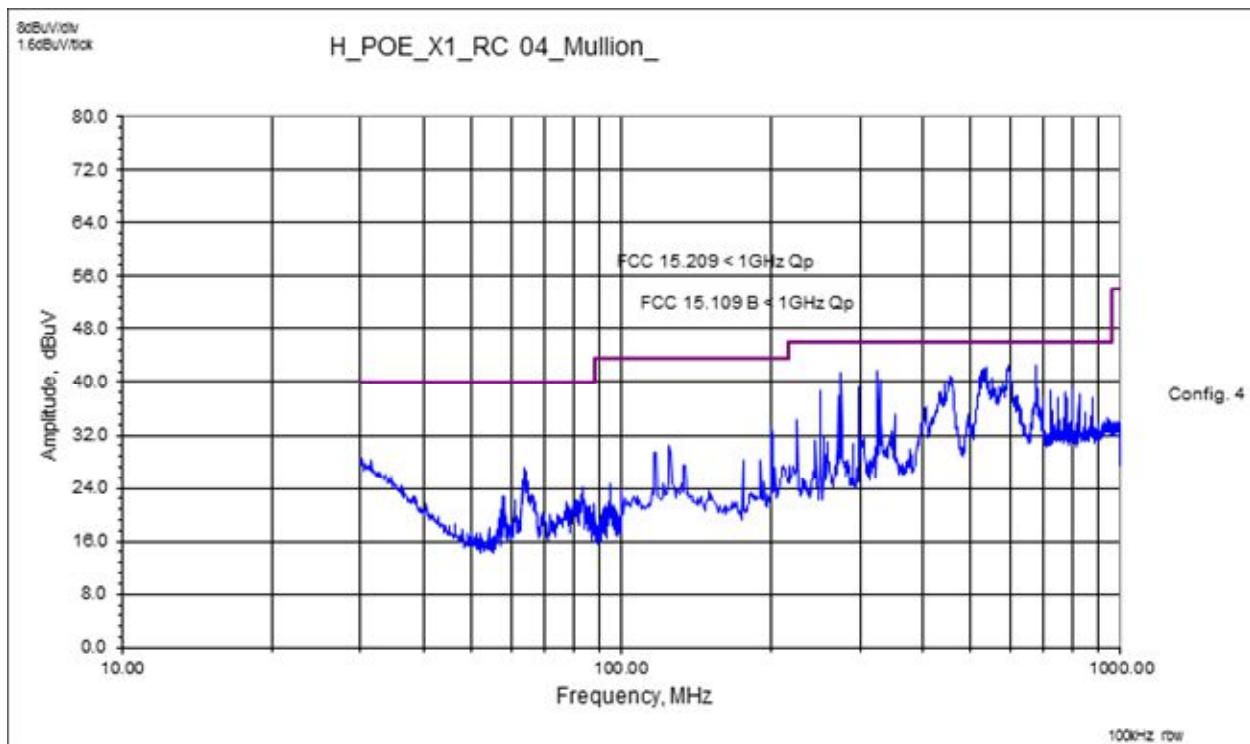
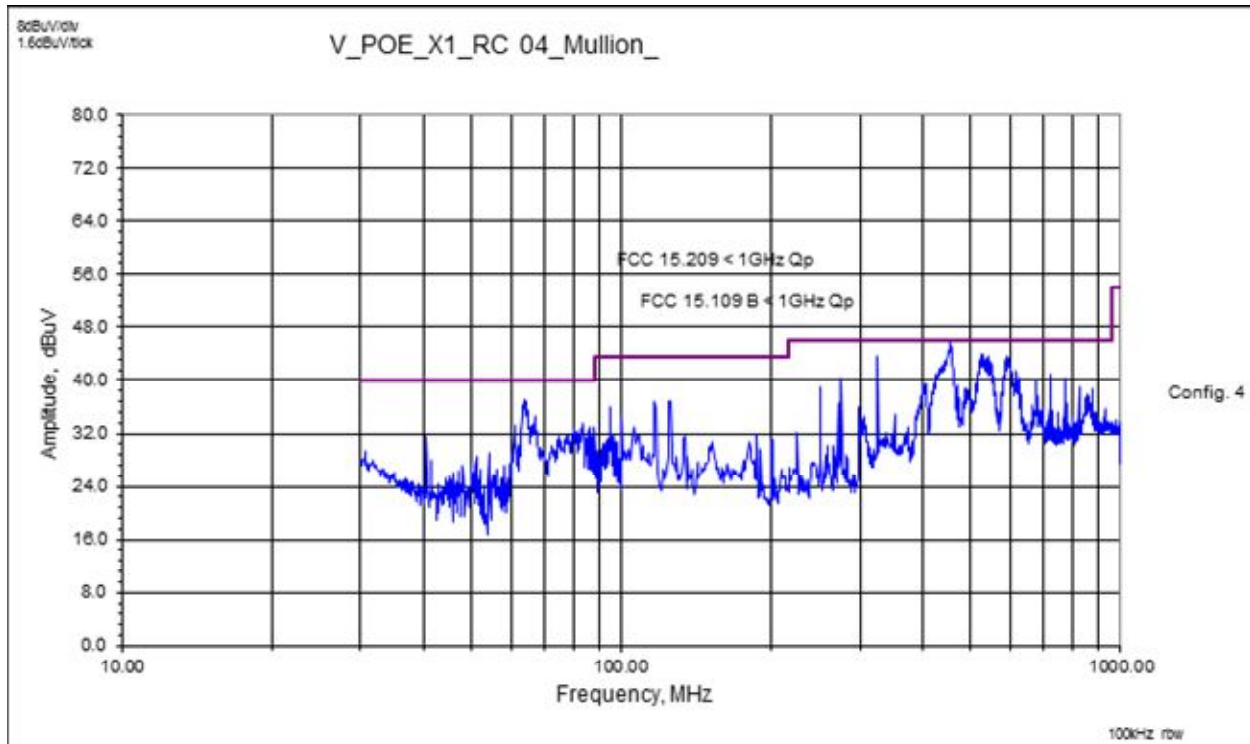


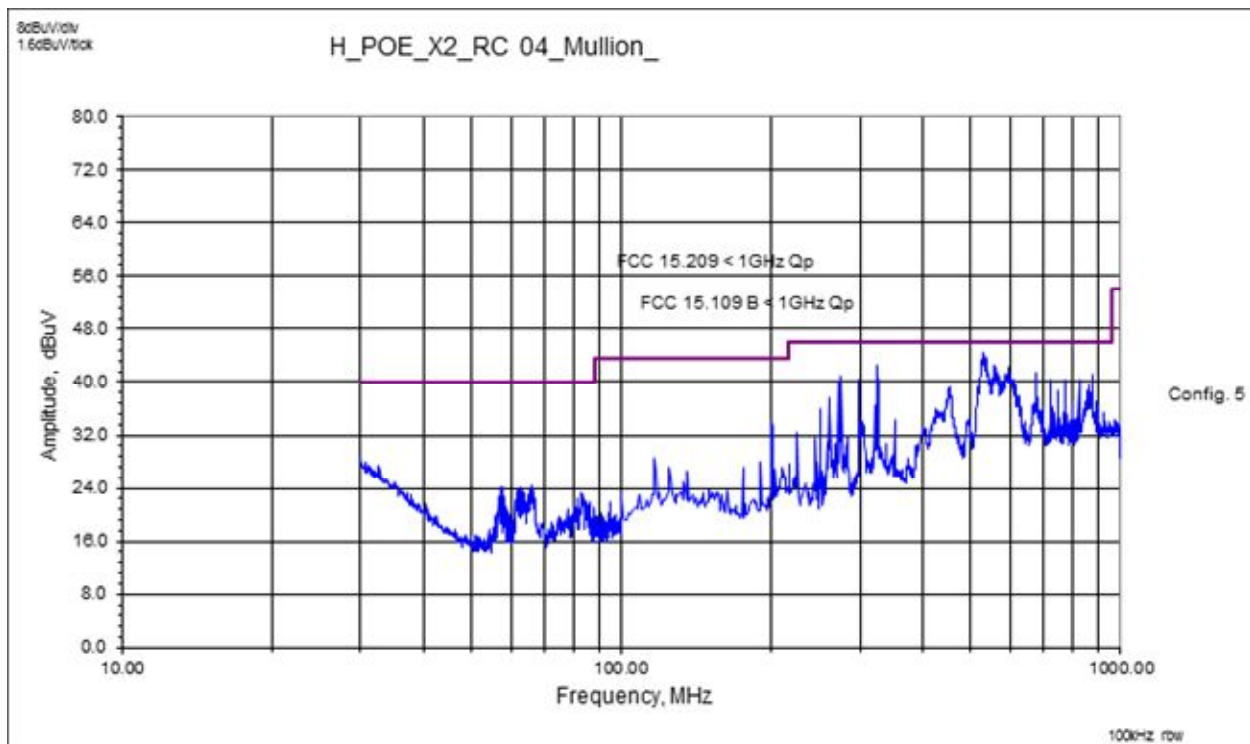
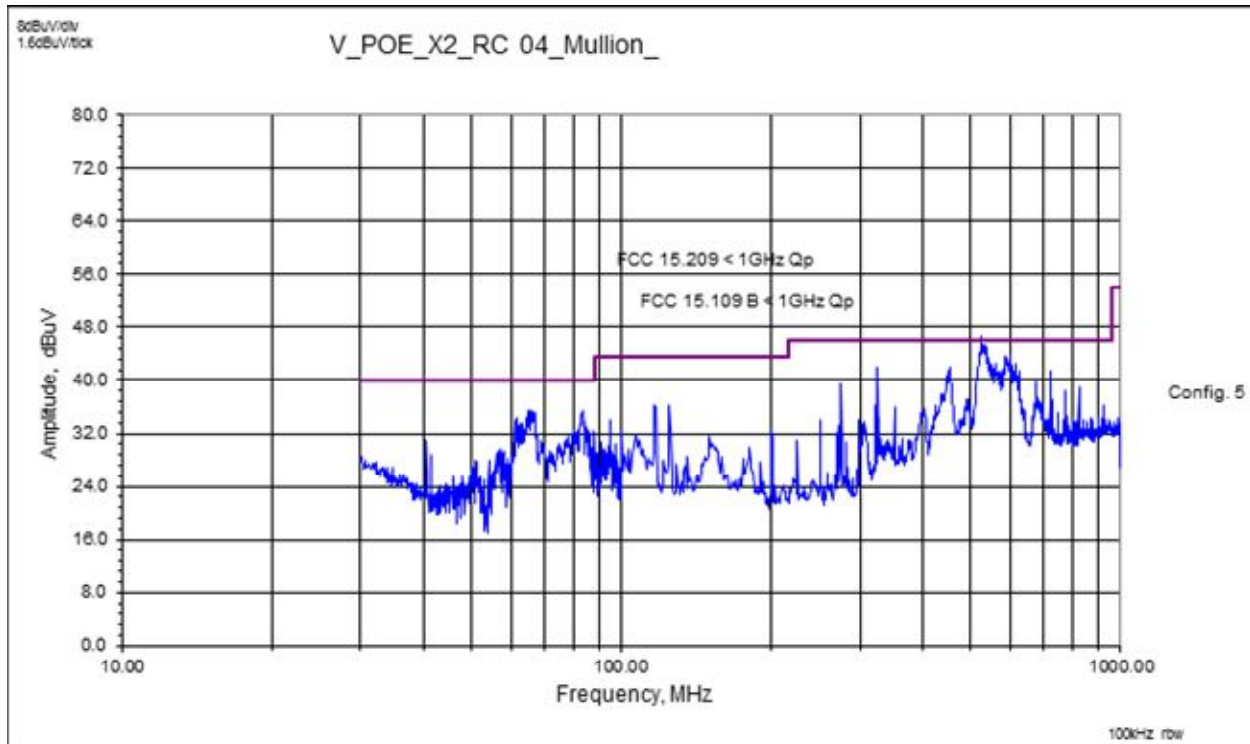


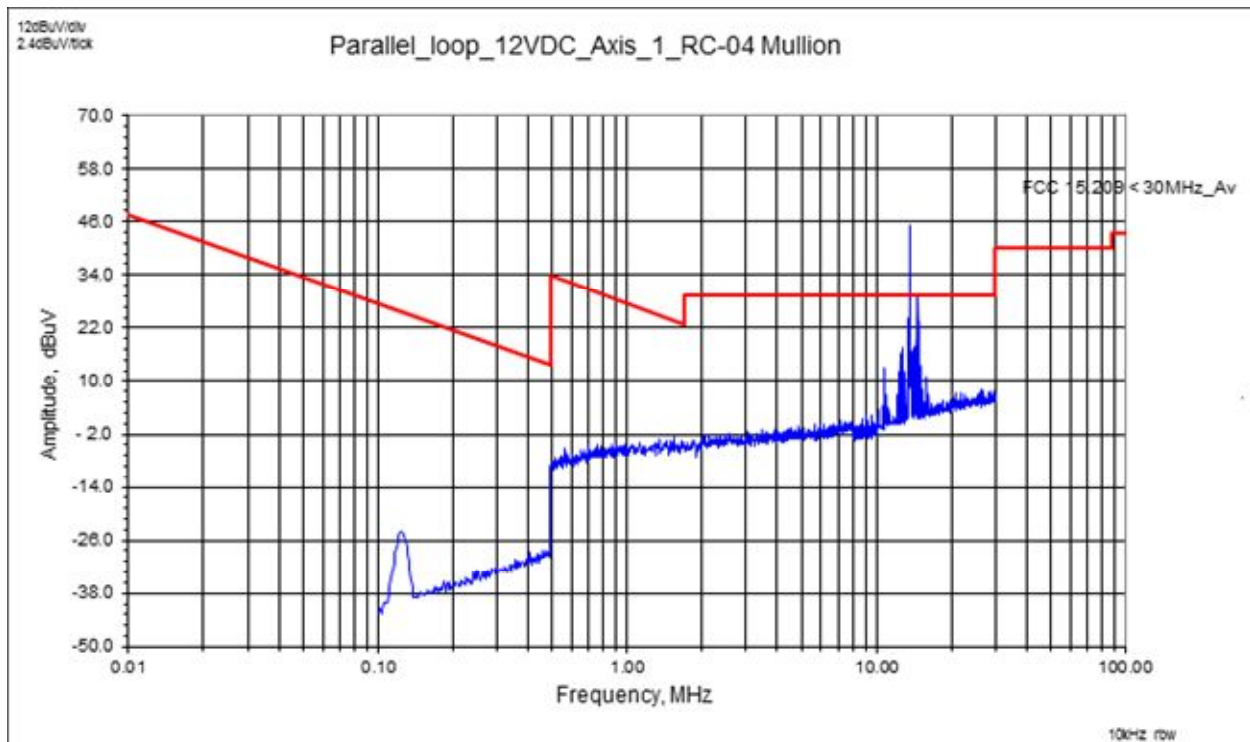
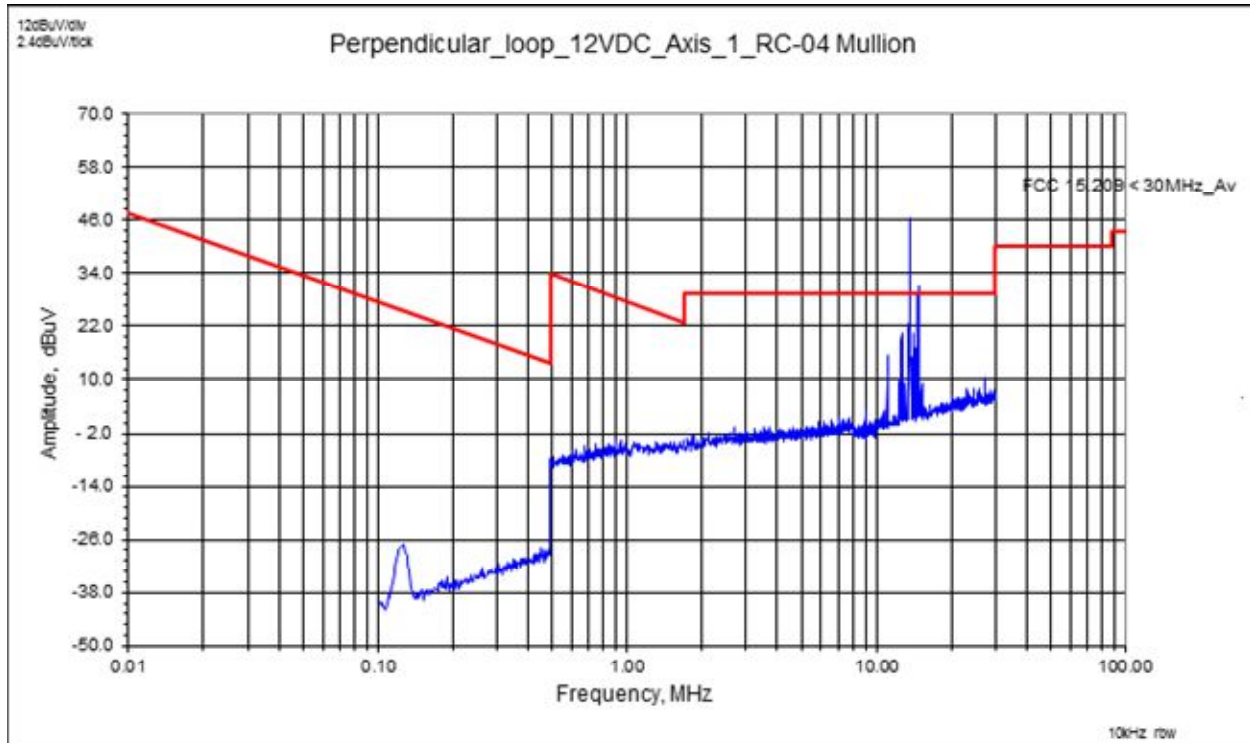


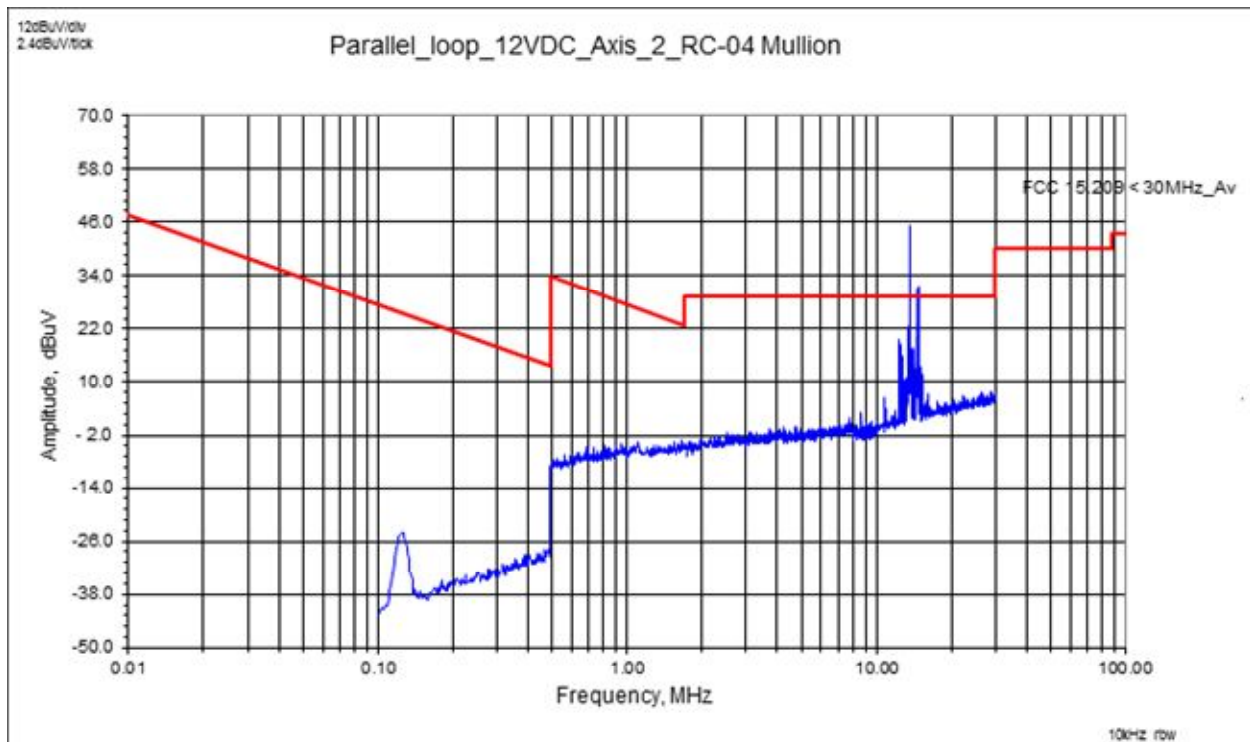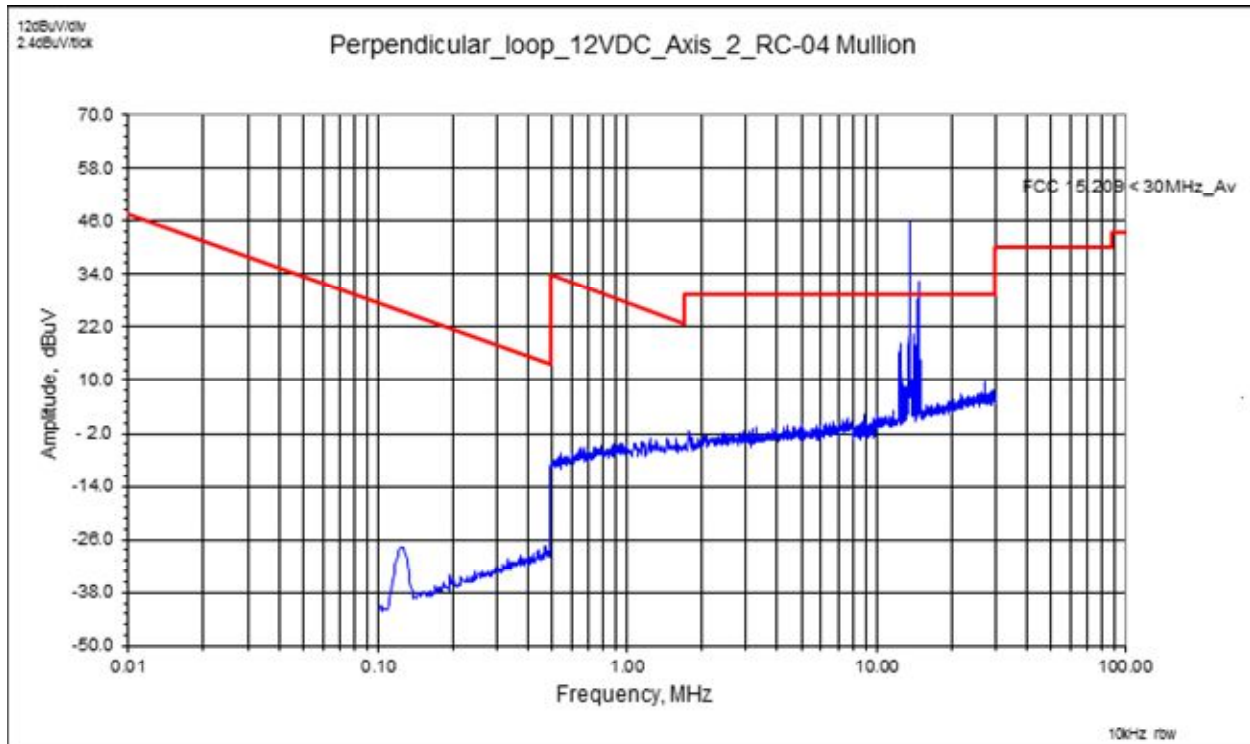

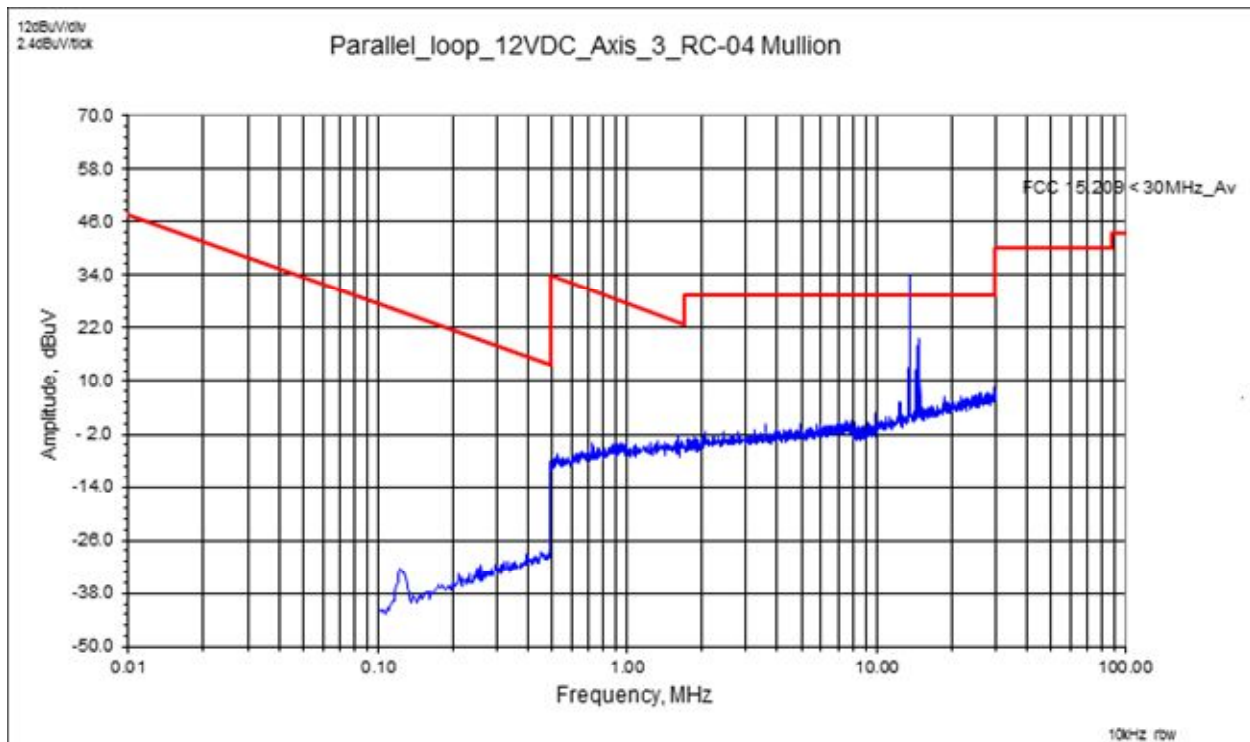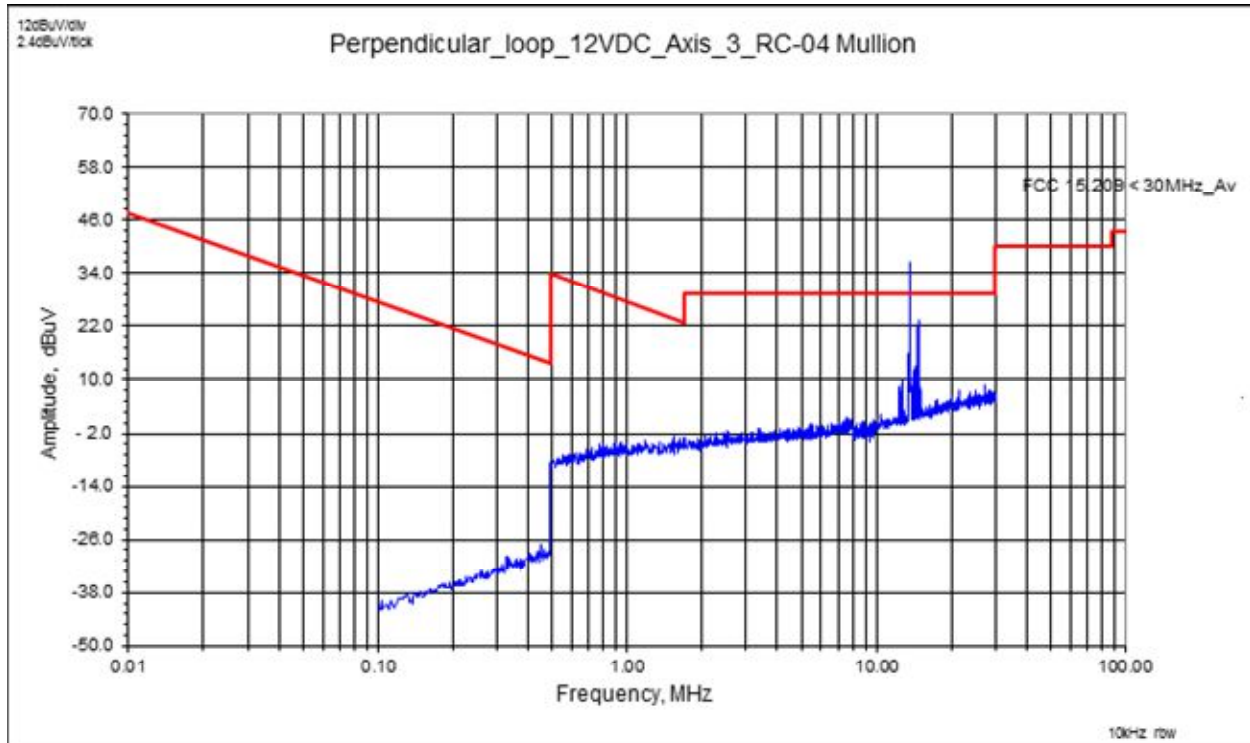

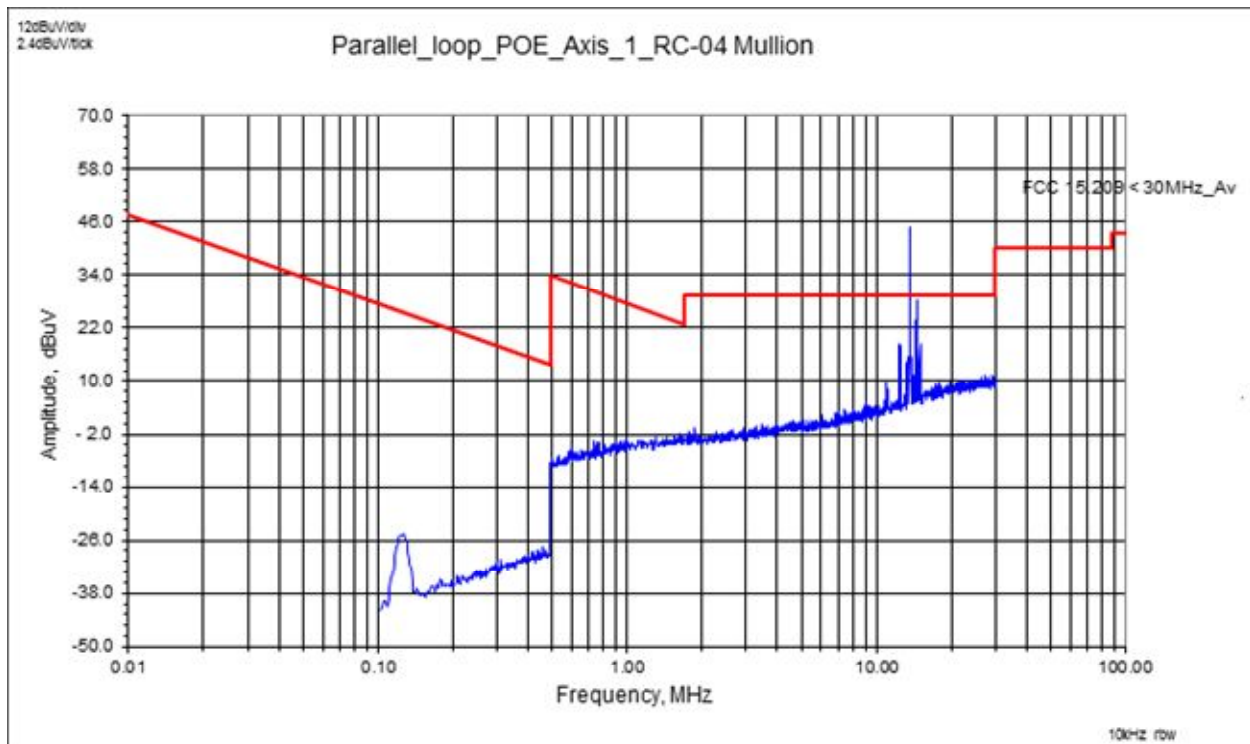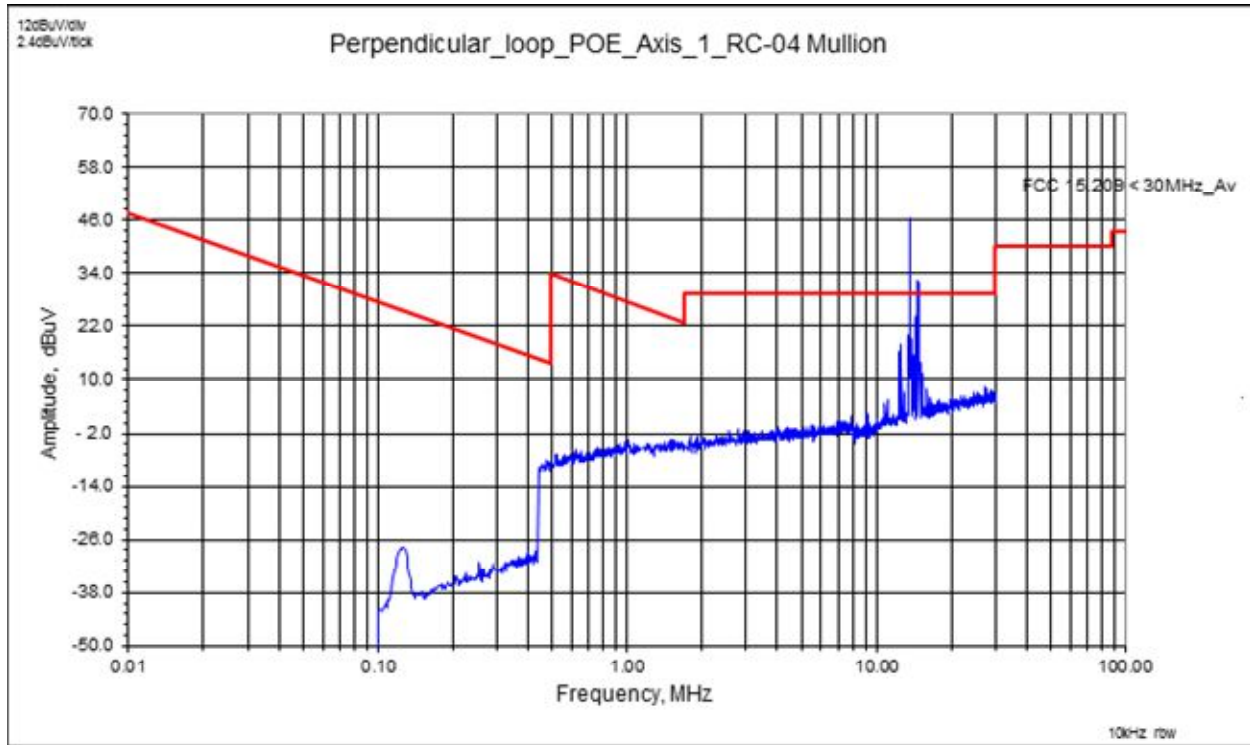

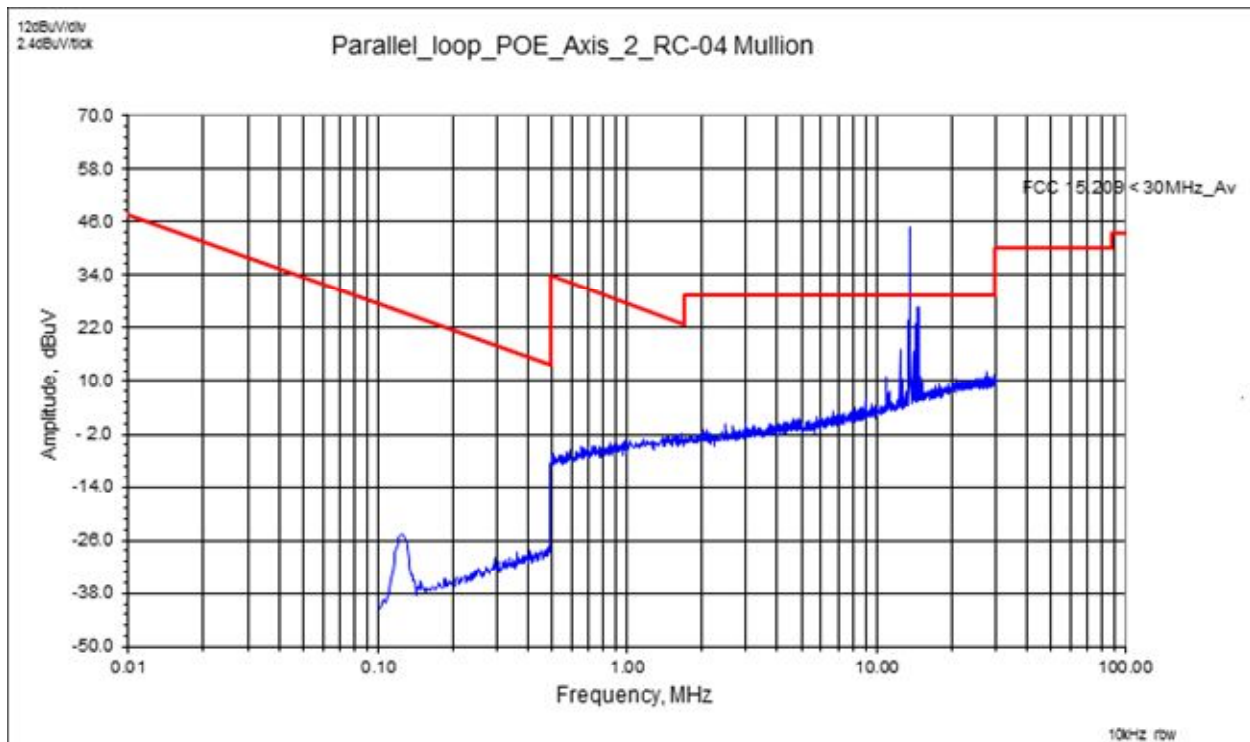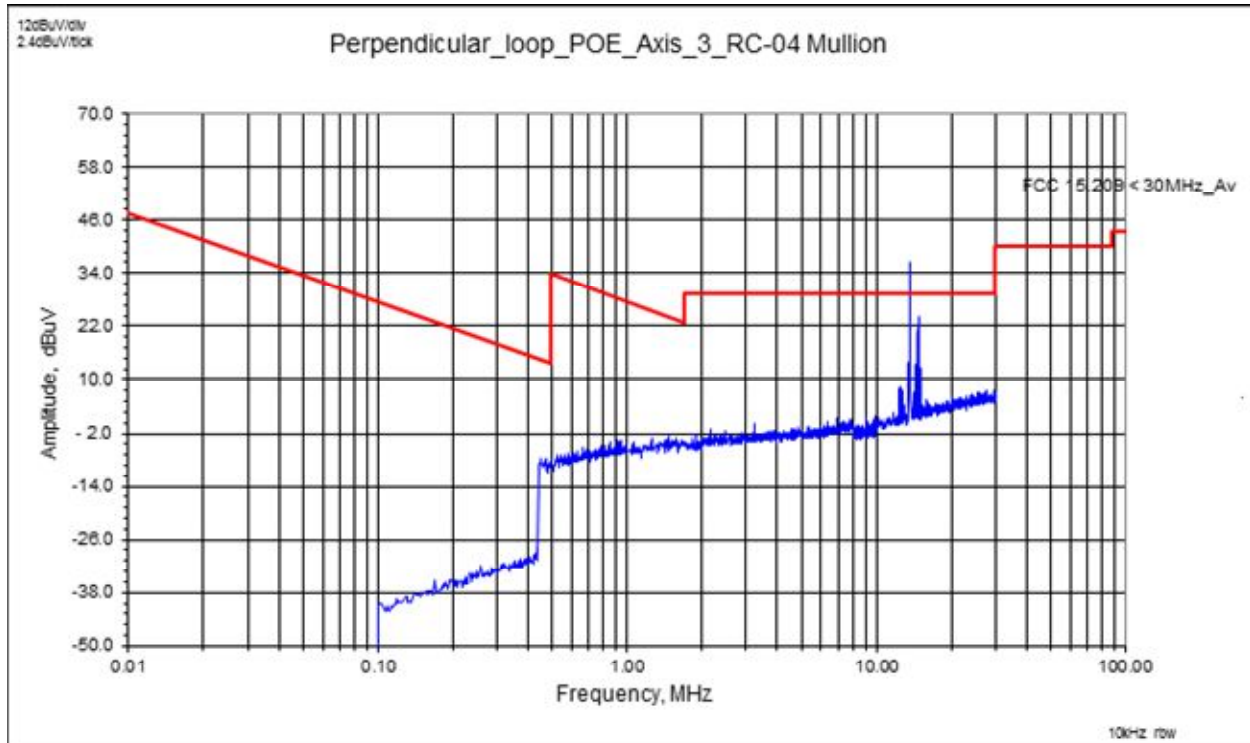

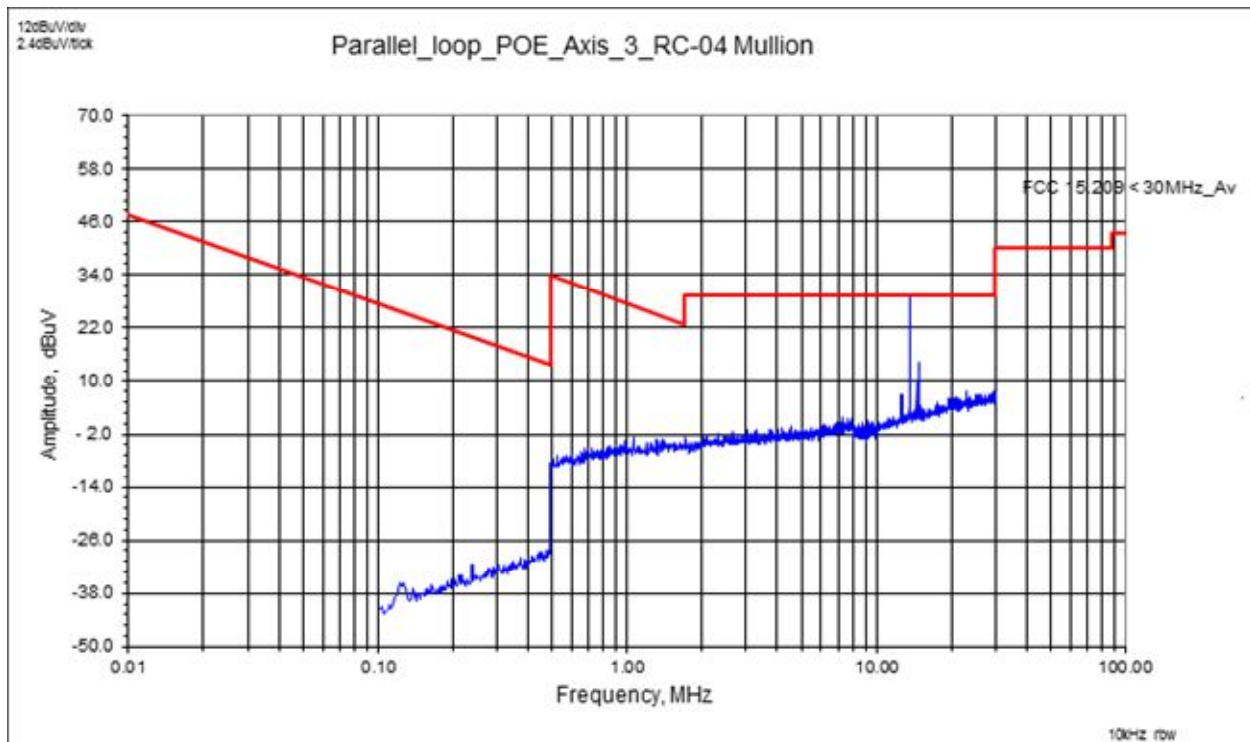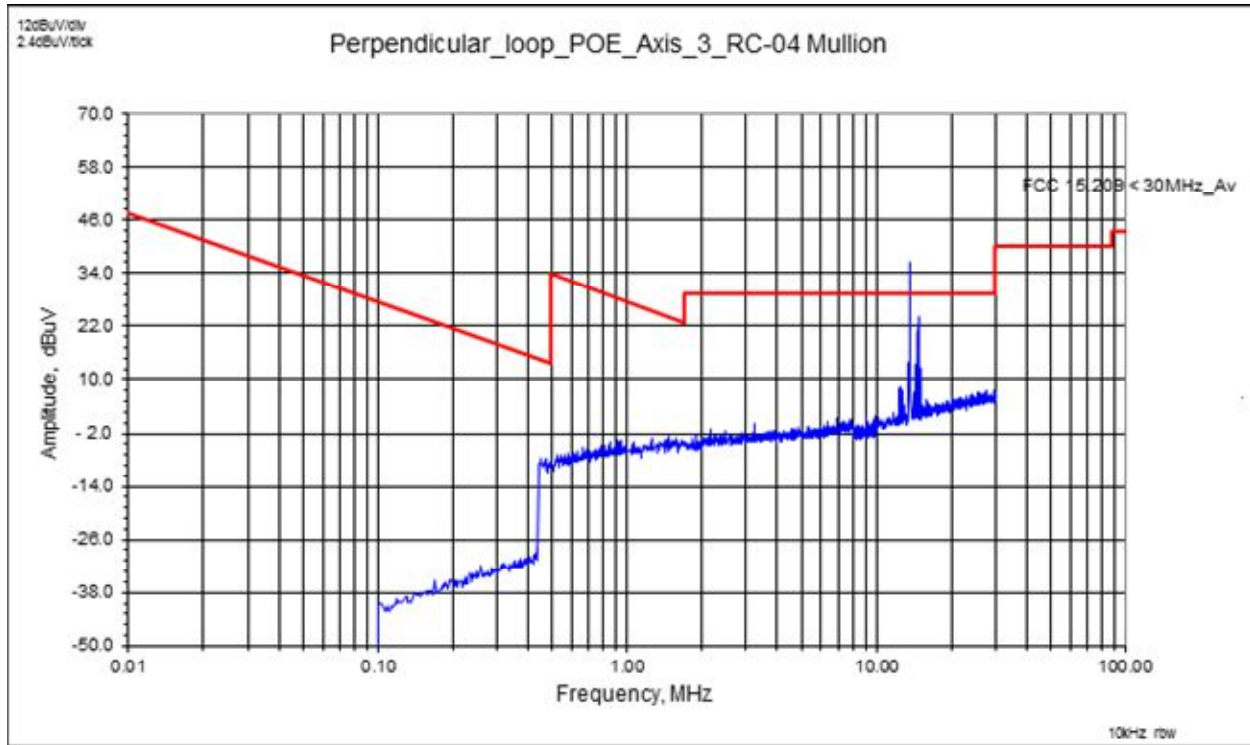

| Intertek | |
|---------------------------------|--------------------|
| Report Number: 102752932DEN-001 | Issued: 11/11/2016 |

5 Tx Voltage Variation – FCC 15.31

5.1 Method

Unless otherwise stated no deviations were made from FCC 15.31.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

5.2 Test Equipment Used:

| Asset | Description | Manufacturer | Model | Serial | Cal Date | Cal Due |
|---------|-------------------------------|--------------------|--|------------------------------|------------|------------|
| 19936 | Bilog Antenna 30MHz - 6GHz | Sunol Sciences | JB6 | A050707-1 | 6/22/2016 | 6/22/2017 |
| 18897 | Magnetic loop | EMCO | 6502 | 9205-2738 | 11/12/2015 | 11/12/2016 |
| 18912 | 9 kHz- 1.3GHz Pre Amp | Hewlett-Packard | HP | 5 | 3/31/2016 | 3/31/2017 |
| DEN-073 | EMI Receiver (10Hz – 26.5GHz) | RHODE & SCHWARZ | ESU 26 | 100265 | 12/19/2015 | 12/19/2016 |
| CC1-E2 | Radiated Cable | Teledyne | 90-206-300; PN:F-130-S1S1-100; 90-206-072; | E2-A; 5026702002; E2-C; E2-D | 11/17/2015 | 11/17/2016 |
| 260 | Humidity and Temp. Pen | Extech Instruments | 445580 | 958123 | 07/21/2016 | 07/21/2017 |

5.3 Test Results:

The sample tested was found to Comply.

5.4 Test Data:

Tx Voltage Variation

| | | | | | | | |
|------------------|--|------------|-------------------------|--|--------------------|-------|-----|
| Test Report #: | G102752932 | Test Area: | CC1 Radiated | | Temperature: | 23.9 | °C |
| Test Method: | FCC 15.209/ IC RSS-210 | Test Date: | 10/17/2016 – 10/20/2016 | | Relative Humidity: | 15.7 | % |
| EUT Model #: | RC-04-MCT-M | EUT Power: | POE, 12Vdc | | Air Pressure: | 835.7 | kPa |
| EUT Serial #: | Units under test were FCC Mullion #1 | | | | | | |
| Manufacturer: | Isonas | | | | Level Key | | |
| EUT Description: | RFID Security Access Reader Controller | | | | Pk – Peak | | |
| Notes: | | | | | Qp – Quasi Peak | | |
| | | | | | Av - Average | | |
| | | | | | | | |

| FREQ | LEVEL | DET | CABLE | ANT | PREAMP | ATTEN | FINAL | POL | HGT | AZ | DELTA1 | DELTA2 | RBW |
|---------------|-------|-----------------------|--------|----------|--------|--------|----------|-------|------|-------|--------|--------|--------|
| MHz | dBuV | Qp Av Pk Rms | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m) | (DEG) | NA | NA | (MHz) |
| Nominal 12Vdc | | | | | | | | | | | | | |
| 0.1253 | 37.19 | Pk | 0.04 | 10.27 | 0.00 | 0.00 | 47.50 | H | 1.00 | 247.4 | NA | NA | 0.0002 |
| 13.5599 | 43.33 | Pk | 0.33 | 10.67 | 0.00 | 0.00 | 54.33 | H | 1.00 | 247.4 | NA | NA | 0.009 |
| 85% : 10.2 V | | | | | | | | | | | | | |
| 0.1252 | 36.63 | Pk | 0.04 | 10.27 | 0.00 | 0.00 | 46.94 | H | 1.00 | 247.4 | NA | NA | 0.0002 |
| 13.5599 | 44.28 | Pk | 0.33 | 10.67 | 0.00 | 0.00 | 55.28 | H | 1.00 | 247.4 | NA | NA | 0.009 |
| 115%: 13.8 V | | | | | | | | | | | | | |
| 0.1252 | 36.18 | Pk | 0.04 | 10.27 | 0.00 | 0.00 | 46.49 | H | 1.00 | 247.4 | NA | NA | 0.0002 |
| 13.5599 | 43.20 | Pk | 0.33 | 10.67 | 0.00 | 0.00 | 54.20 | H | 1.00 | 247.4 | NA | NA | 0.009 |

6 Radiated Tx Intentional Emissions – Fundamental

6.1 Method:

Unless otherwise stated no deviations were made from FCC 15.209/ IC RSS-210.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

6.2 Test Equipment Used:

| Asset | Description | Manufacturer | Model | Serial | Cal Date | Cal Due |
|---------|-------------------------------|--------------------|--|------------------------------|------------|------------|
| 19936 | Bilog Antenna 30MHz - 6GHz | Sunol Sciences | JB6 | A050707-1 | 6/22/2016 | 6/22/2017 |
| 18897 | Magnetic loop | EMCO | 6502 | 9205-2738 | 11/12/2015 | 11/12/2016 |
| 18912 | 9 kHz- 1.3GHz Pre Amp | Hewlett-Packard | HP | 5 | 3/31/2016 | 3/31/2017 |
| DEN-073 | EMI Receiver (10Hz – 26.5GHz) | RHODE & SCHWARZ | ESU 26 | 100265 | 12/19/2015 | 12/19/2016 |
| CC1-E2 | Radiated Cable | Teledyne | 90-206-300; PN:F-130-S1S1-100; 90-206-072; | E2-A; 5026702002; E2-C; E2-D | 11/17/2015 | 11/17/2016 |
| 260 | Humidity and Temp. Pen | Extech Instruments | 445580 | 958123 | 07/21/2016 | 07/21/2017 |

6.3 Test Results:

The sample tested was found to Comply

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
 AF = 7.4 dB/m
 CF = 1.6 dB
 AG = 29.0 dB
 FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$



NF = Net Reading in dB μ V



Example:



$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$



$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

Plots:

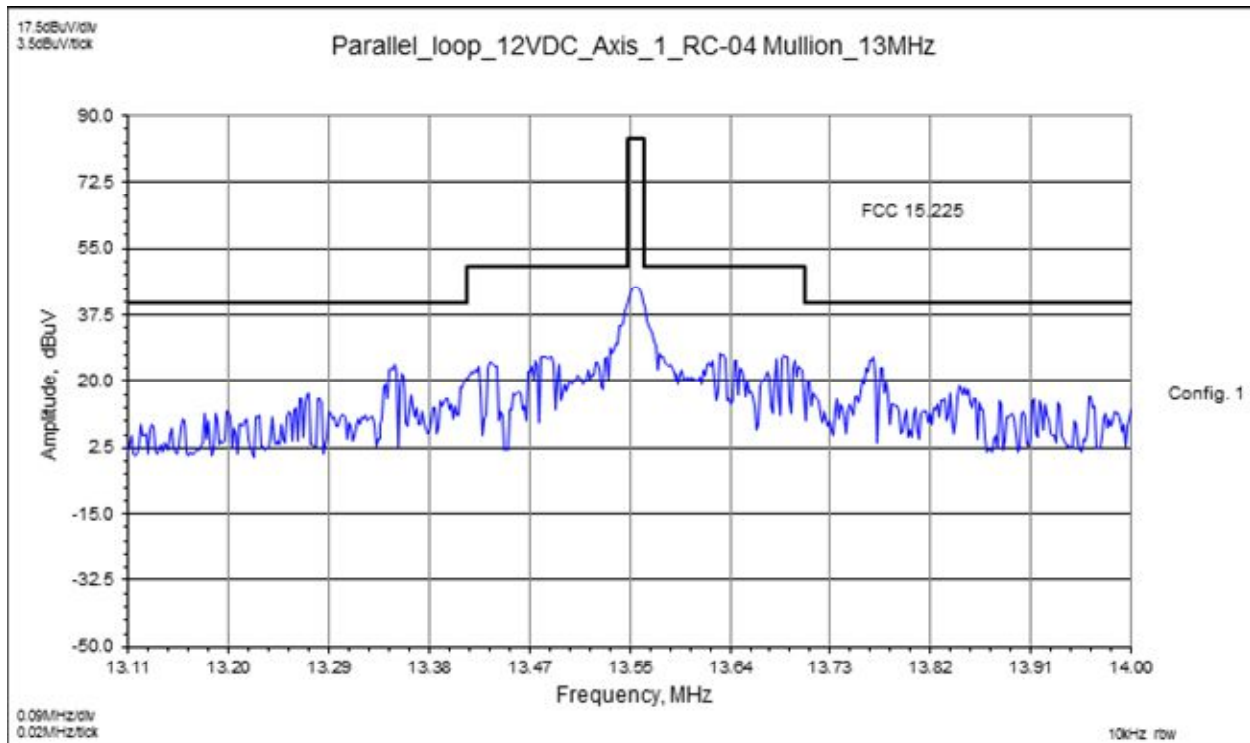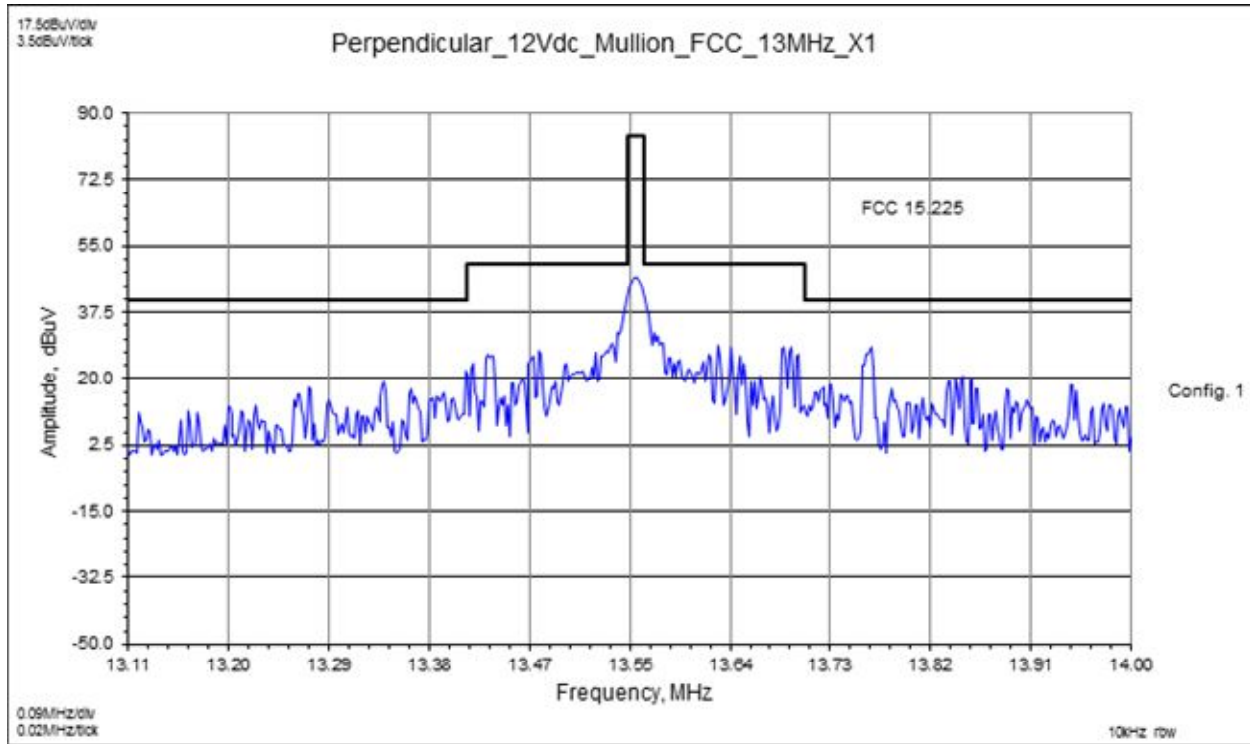

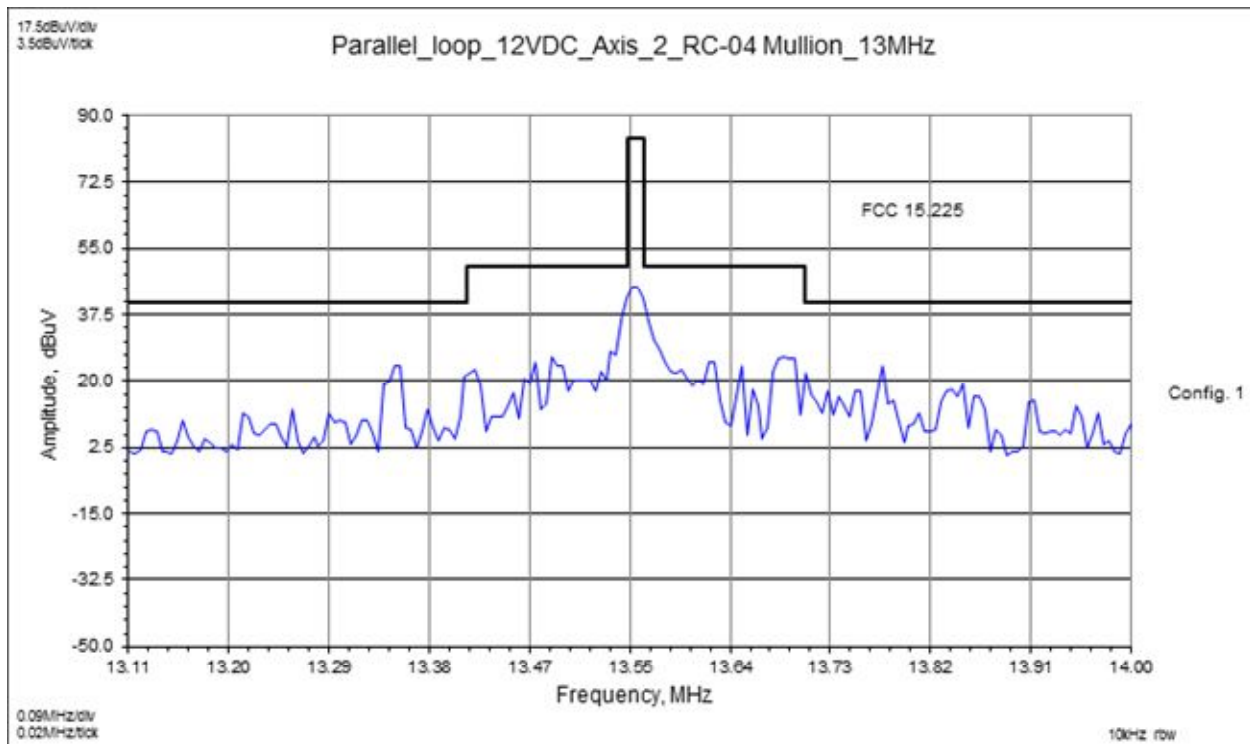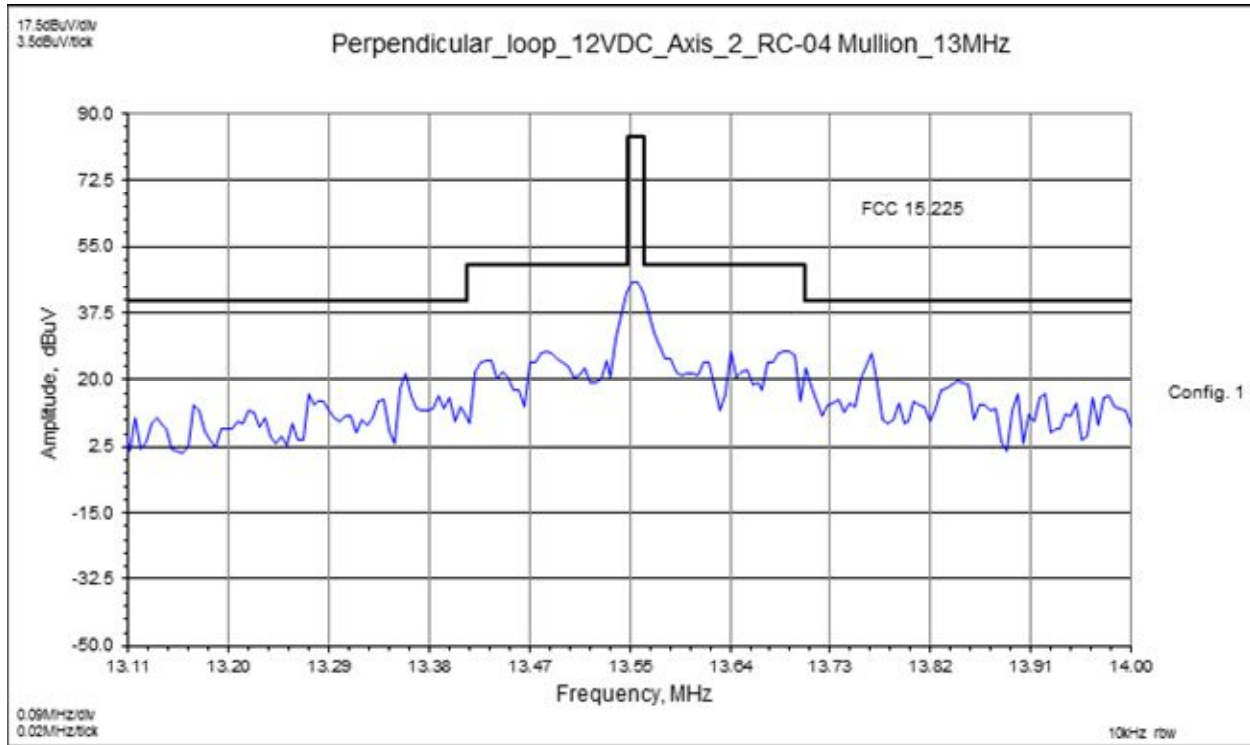

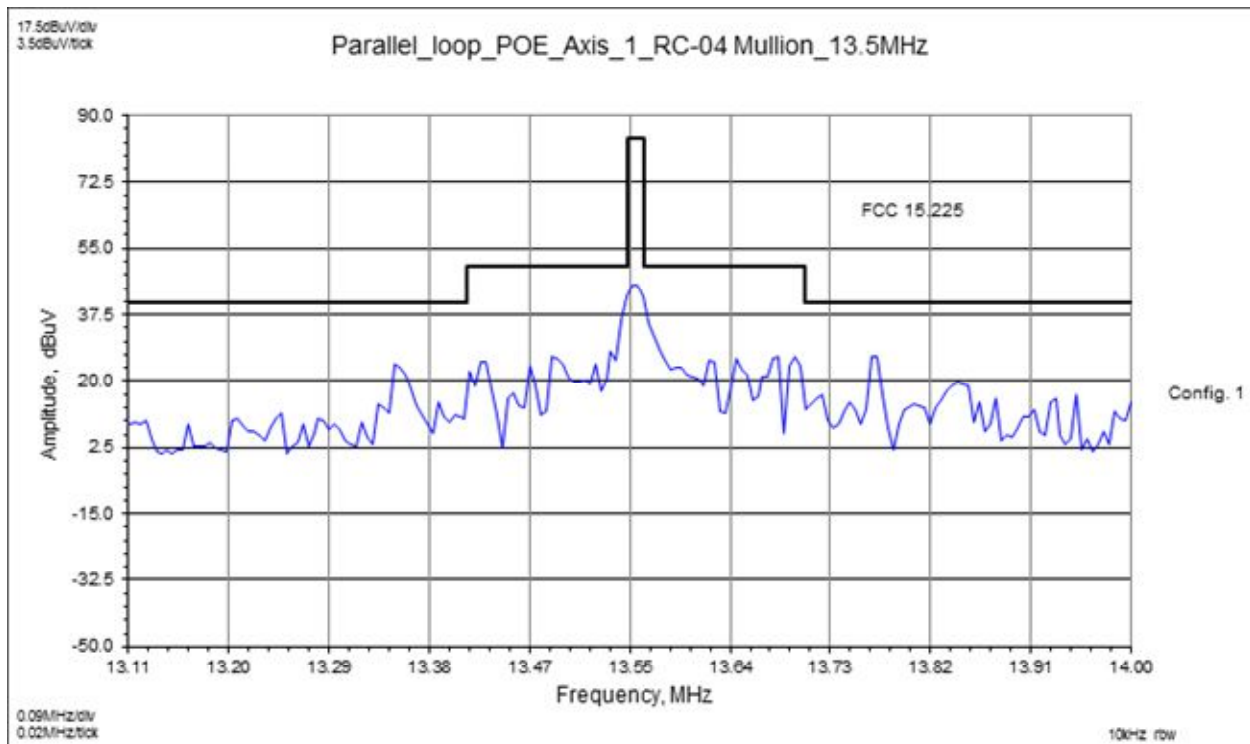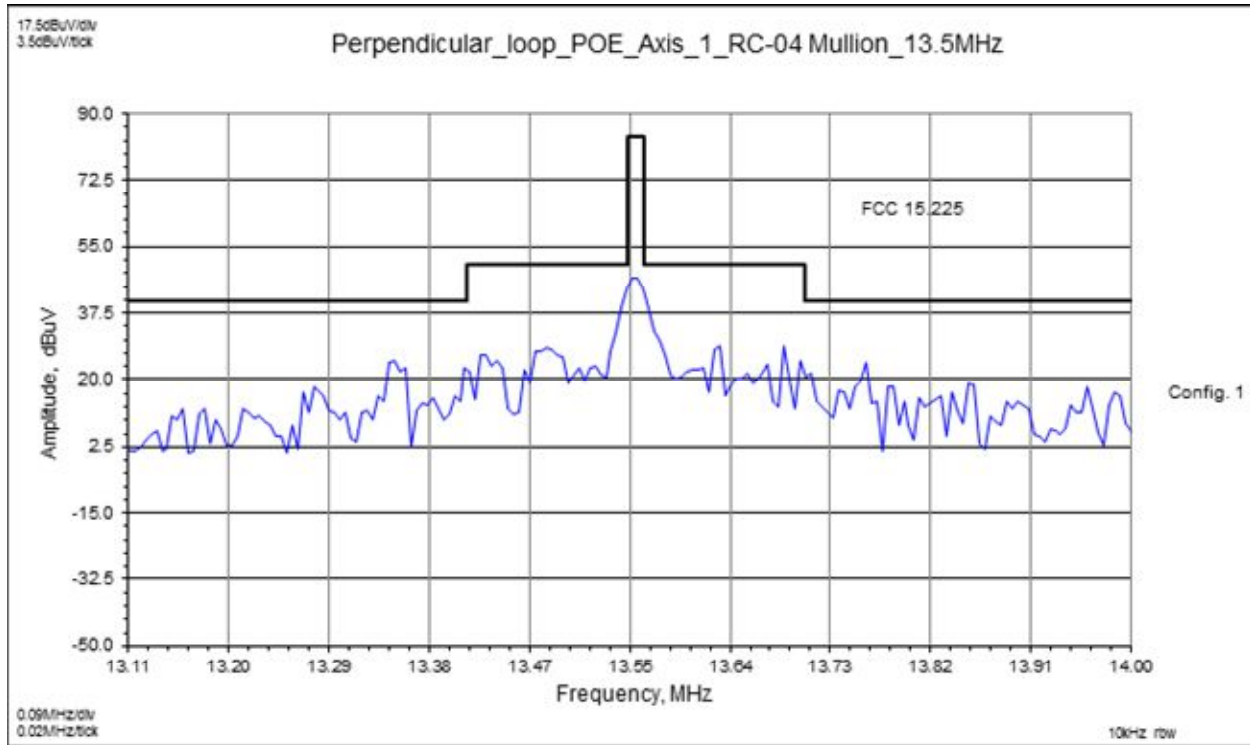

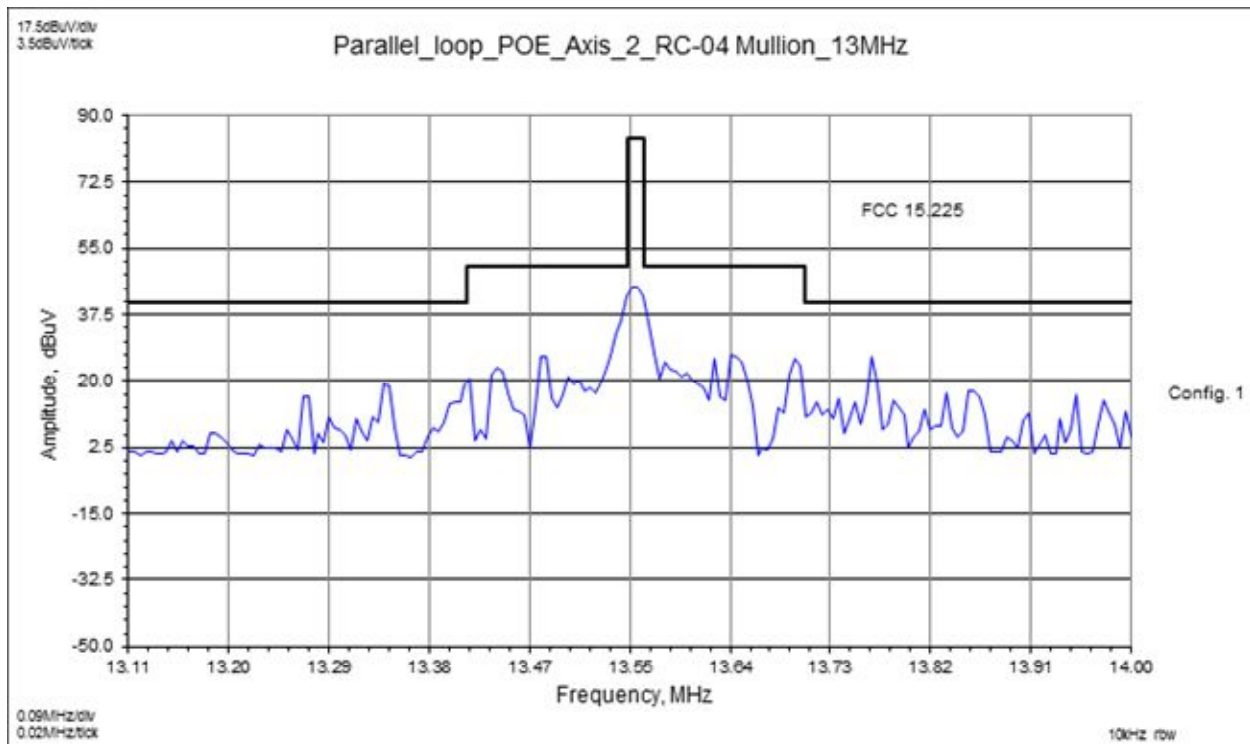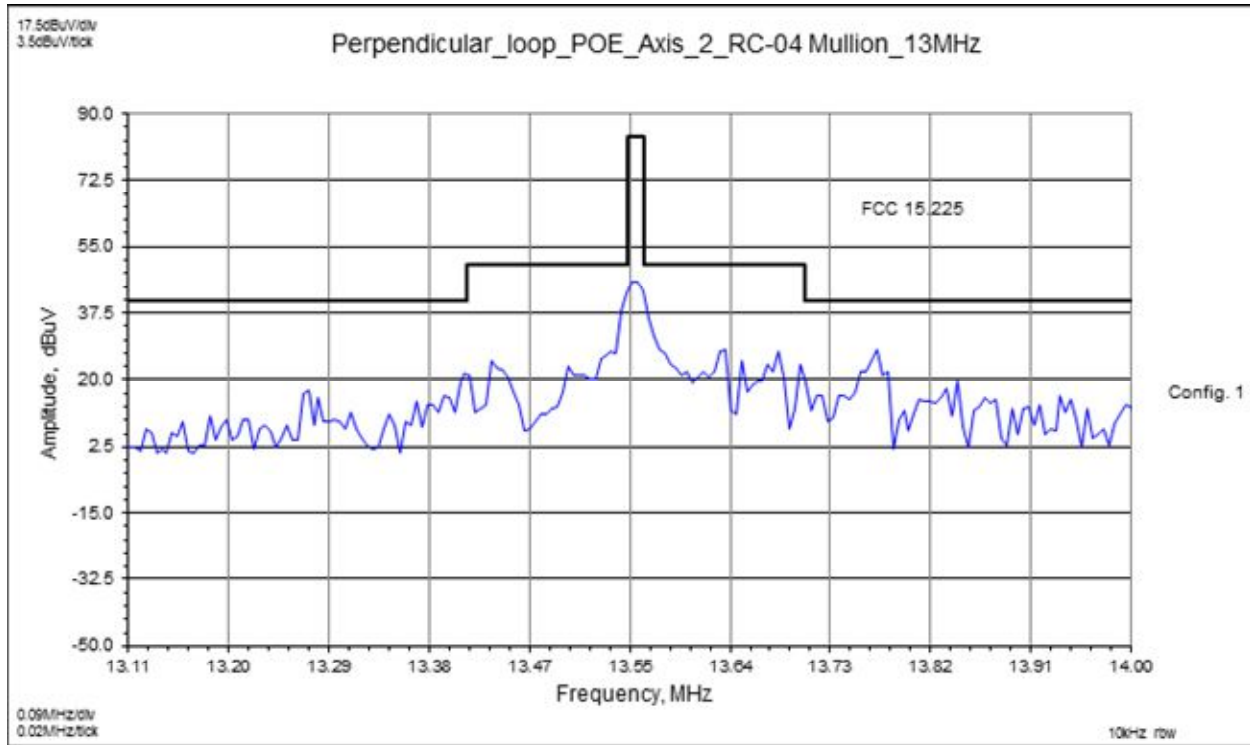

Intertek

Report Number: 102752932DEN-001

Issued: 11/11/2016

Radiated Electromagnetic Emissions

| | | | | | | | |
|------------------|--|------------|-------------------------|--|--------------------|-------|-----|
| Test Report #: | G102752932 | Test Area: | CC1 Radiated | | Temperature: | 23.9 | °C |
| Test Method: | FCC 15.209/ IC RSS-210 | Test Date: | 10/17/2016 – 10/20/2016 | | Relative Humidity: | 15.7 | % |
| EUT Model #: | RC-04-MCT-M | EUT Power: | POE, 12Vdc | | Air Pressure: | 835.7 | kPa |
| EUT Serial #: | Units under test were FCC Mullion #1 and FCC Single Gang KP #1 | | | | | | |
| Manufacturer: | Isonas | | | | Level Key | | |
| EUT Description: | RFID Security Access Reader Controller | | | | Pk – Peak | | |
| Notes: | | | | | Qp – Quasi Peak | | |
| | | | | | Av - Average | | |
| | | | | | | | |

| FREQ | LEVEL | DET | CABLE | ANT | PREAMP | ATTEN | FINAL | POL | HGT | AZ | DELTA1 | DELTA2 | RBW |
|---|--------|-----------------------|--------|----------|--------|--------|----------|-------|-----|-------|--------|--------|--------|
| MHz | dBuV | Qp Av Pk Rms | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m) | (DEG) | | Limit | (MHz) |
| Perpendicular_loop_12VDC_Axis_1_RC-04 Mullion | | | | | | | | | | | | | |
| 0.125 | -64.83 | Qp | 0.04 | 10.27 | 0 | 0 | -54.52 | H | 1 | 277.7 | -80.14 | 25.62 | 0.0002 |
| 13.56 | 34.22 | Qp | 0.33 | 10.67 | 0 | 0 | 45.22 | H | 1 | 283.2 | -38.78 | 84 | 0.009 |
| Parallel_loop_12VDC_Axis_1_RC-04 Mullion | | | | | | | | | | | | | |
| 0.125 | -49.48 | Qp | 0.04 | 10.27 | 0 | 0 | -39.17 | H | 1 | 245.6 | -64.79 | 25.62 | 0.0002 |
| 13.56 | 32.73 | Qp | 0.33 | 10.67 | 0 | 0 | 43.73 | H | 1 | 359.9 | -40.27 | 84 | 0.009 |
| Parallel_loop_12VDC_Axis_2_RC-04 Mullion | | | | | | | | | | | | | |
| 0.125 | -65.55 | Qp | 0.04 | 10.27 | 0 | 0 | -55.24 | H | 1 | 158.5 | -80.86 | 25.62 | 0.0002 |
| 13.56 | 32.38 | Qp | 0.33 | 10.67 | 0 | 0 | 43.38 | H | 1 | 180.3 | -40.62 | 84 | 0.009 |
| Perpendicular_loop_12VDC_Axis_2_RC-04 Mullion | | | | | | | | | | | | | |
| 0.1254 | -45.49 | Qp | 0.04 | 10.27 | 0 | 0 | -35.18 | H | 1 | 290.4 | -60.8 | 25.62 | 0.0002 |
| 13.56 | 33.6 | Qp | 0.33 | 10.67 | 0 | 0 | 44.6 | H | 1 | 266 | -39.4 | 84 | 0.009 |
| Parallel_loop_POE_Axis_1_RC-04 Mullion | | | | | | | | | | | | | |
| 0.1254 | -42.28 | Qp | 0.04 | 10.27 | 0 | 0 | -31.97 | H | 1 | 1.9 | -57.59 | 25.62 | 0.0002 |
| 13.56 | 32.82 | Qp | 0.33 | 10.67 | 0 | 0 | 43.82 | H | 1 | 150.4 | -40.18 | 84 | 0.009 |
| Perpendicular_loop_POE_Axis_1_RC-04 Mullion | | | | | | | | | | | | | |
| 0.1254 | -42.54 | Qp | 0.04 | 10.27 | 0 | 0 | -32.23 | H | 1 | 1.9 | -57.85 | 25.62 | 0.0002 |
| 13.56 | 34.35 | Qp | 0.33 | 10.67 | 0 | 0 | 45.35 | H | 1 | 249.6 | -38.65 | 84 | 0.009 |
| Perpendicular_loop_POE_Axis_2_RC-04 Mullion | | | | | | | | | | | | | |
| 0.1254 | -42.25 | Qp | 0.04 | 10.27 | 0 | 0 | -31.94 | H | 1 | 192.9 | -57.56 | 25.62 | 0.0002 |
| 13.5609 | 33 | Qp | 0.33 | 10.67 | 0 | 0 | 44 | H | 1 | 278.7 | -40 | 84 | 0.009 |
| Parallel_loop_POE_Axis_2_RC-04 Mullion | | | | | | | | | | | | | |
| 0.125 | -65.93 | Qp | 0.04 | 10.27 | 0 | 0 | -55.62 | H | 1 | 246.3 | -81.24 | 25.62 | 0.0002 |
| 13.5609 | 32.13 | Qp | 0.33 | 10.67 | 0 | 0 | 43.13 | H | 1 | 174.9 | -40.87 | 84 | 0.009 |

7 AC Mains Conducted Emissions - Transmitter

7.1 Method

Unless otherwise stated no deviations were made from FCC Part 15.207.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

7.2 Test Equipment Used:

| Asset | Description | Manufacturer | Model | Serial | Cal Date | Cal Due |
|---------|-------------------------------|----------------------|----------|------------|------------|------------|
| 18914 | Single Phase LISN | EMCO | 3816/NM | 9408-1003 | 3/17/2016 | 3/17/2017 |
| 18729 | Transient Limiter | Hewlett-Packard | 11947A | 3107A01975 | 5/11/2016 | 5/11/2017 |
| DEN-073 | EMI Receiver (10Hz – 26.5GHz) | RHODE & SCHWARZ | ESU 26 | 100265 | 12/19/2015 | 12/19/2016 |
| CC1-001 | 50 Ohm Cable | Pasternak Enterprise | RG-223/U | N/A | 5/23/2016 | 5/23/2017 |
| 260 | Humidity and Temp. Pen | Extech Instruments | 445580 | 958123 | 07/21/2016 | 07/21/2017 |

7.3 Test Requirement/ Specification:

The product must pass the AC Conducted average and quasi-peak Class B Limits defined in FCC Part 15.207. The product is operated with all radios enabled and active.

7.4 Test Procedure:

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at all frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Equipment setup for conducted disturbance tests followed the guidelines of:

- ANSI C63.10: 2009, Section 6.2.

7.5 Test Results:

The sample tested was found to Comply.

Sample Calculations

The following is how net line-conducted readings were determined:

$$NF = RF + LF + CF + AF$$

Where NF = Net Reading in dB μ V

RF = Reading from receiver in dB μ V

LF = LISN or ISN Correction Factor in dB

CF = Cable Correction Factor in dB

AF = Attenuator Loss Factor in dB

To convert from dB μ V to μ V or mV the following was used:



$$UF = 10^{(NF / 20)} \text{ where UF = Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$NF = RF + LF + CF + AF = 28.5 + 0.2 + 0.4 + 20.0 = 49.1 \text{ dB}\mu\text{V}$$

$$UF = 10^{(49.1 \text{ dB}\mu\text{V} / 20)} = 285.1 \mu\text{V/m}$$

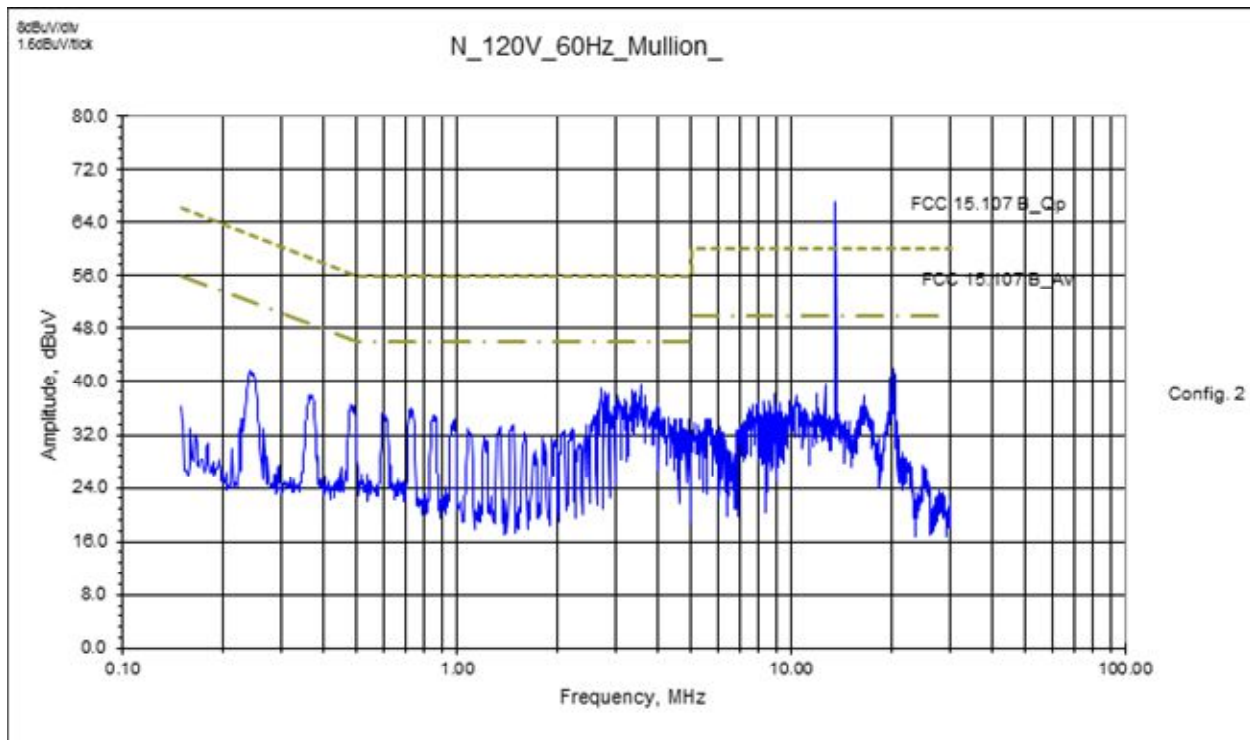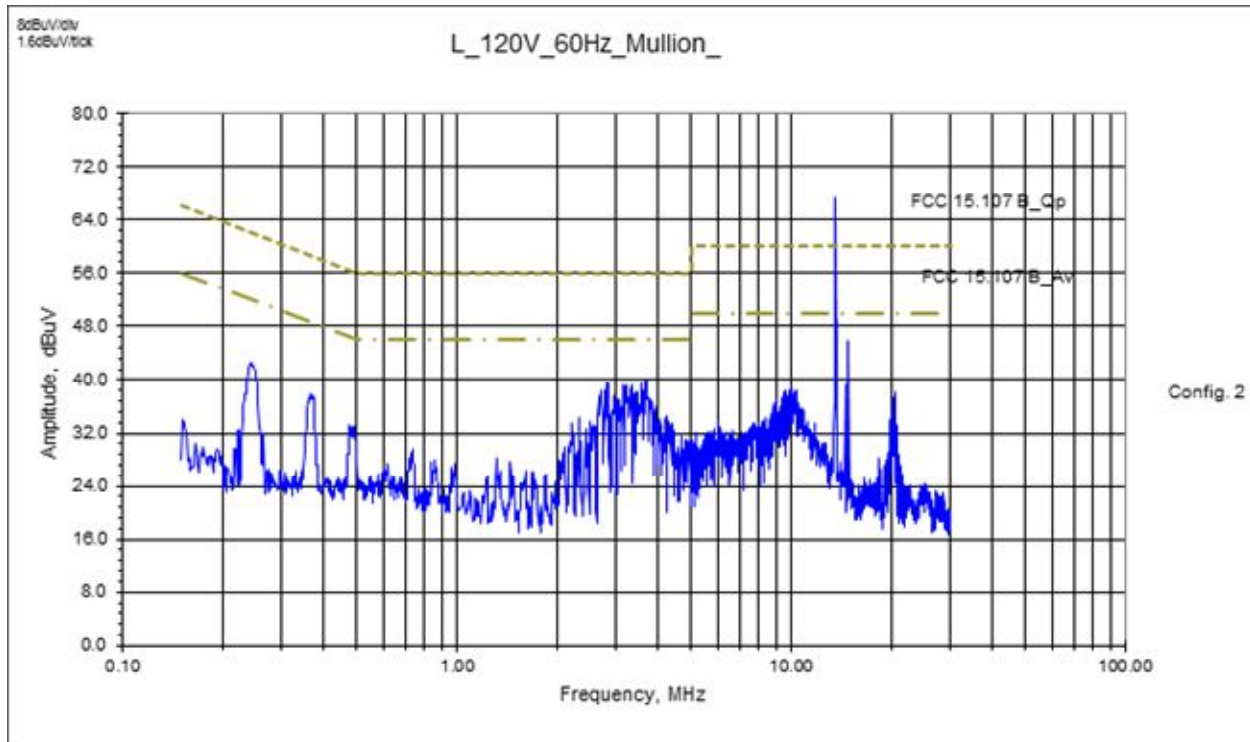7.6 Plots:

| Intertek | |
|---------------------------------|--------------------|
| Report Number: 102752932DEN-001 | Issued: 11/11/2016 |

8 Occupied Bandwidth (OBW) – RSS-GEN, Section 6.6

8.1 Method

Unless otherwise stated no deviations were made from RSS-GEN:2014, Section 6.6.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

8.2 Test Equipment Used:


| Asset | Description | Manufacturer | Model | Serial | Cal Date | Cal Due |
|---------|-------------------------------|--------------------|--|------------------------------|------------|------------|
| 19936 | Bilog Antenna 30MHz - 6GHz | Sunol Sciences | JB6 | A050707-1 | 6/22/2016 | 6/22/2017 |
| 18897 | Magnetic loop | EMCO | 6502 | 9205-2738 | 11/12/2015 | 11/12/2016 |
| 18912 | 9 kHz- 1.3GHz Pre Amp | Hewlett-Packard | HP | 5 | 3/31/2016 | 3/31/2017 |
| DEN-073 | EMI Receiver (10Hz – 26.5GHz) | RHODE & SCHWARZ | ESU 26 | 100265 | 12/19/2015 | 12/19/2016 |
| CC1-E2 | Radiated Cable | Teledyne | 90-206-300; PN:F-130-S1S1-100; 90-206-072; | E2-A; 5026702002; E2-C; E2-D | 11/17/2015 | 11/17/2016 |
| 260 | Humidity and Temp. Pen | Extech Instruments | 445580 | 958123 | 07/21/2016 | 07/21/2017 |

8.3 Results:

The product tested was found to comply.

8.4 Final Plots:


Occupied Bandwidth - (RSS-GEN, Section 6.6) – 125kHz Tx

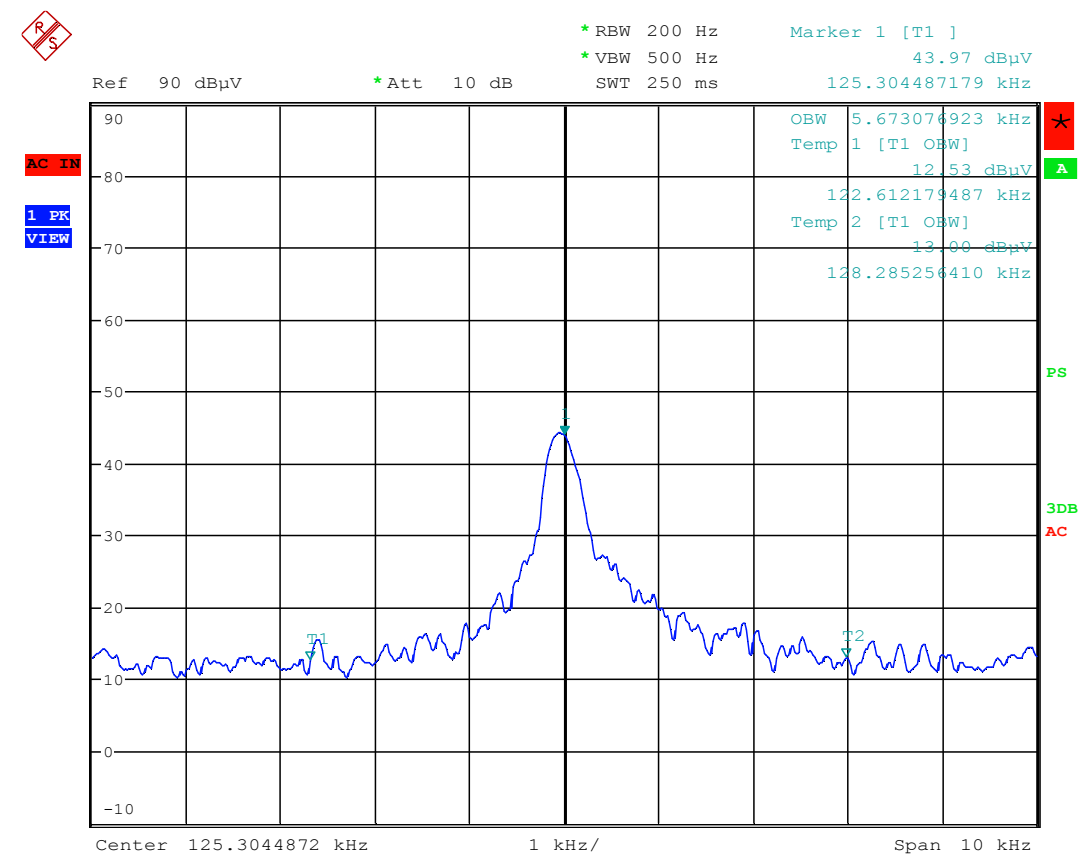

Occupied Bandwidth - (RSS-GEN, Section 6.6) – 13.56MHz Tx



1 PK
VIEW

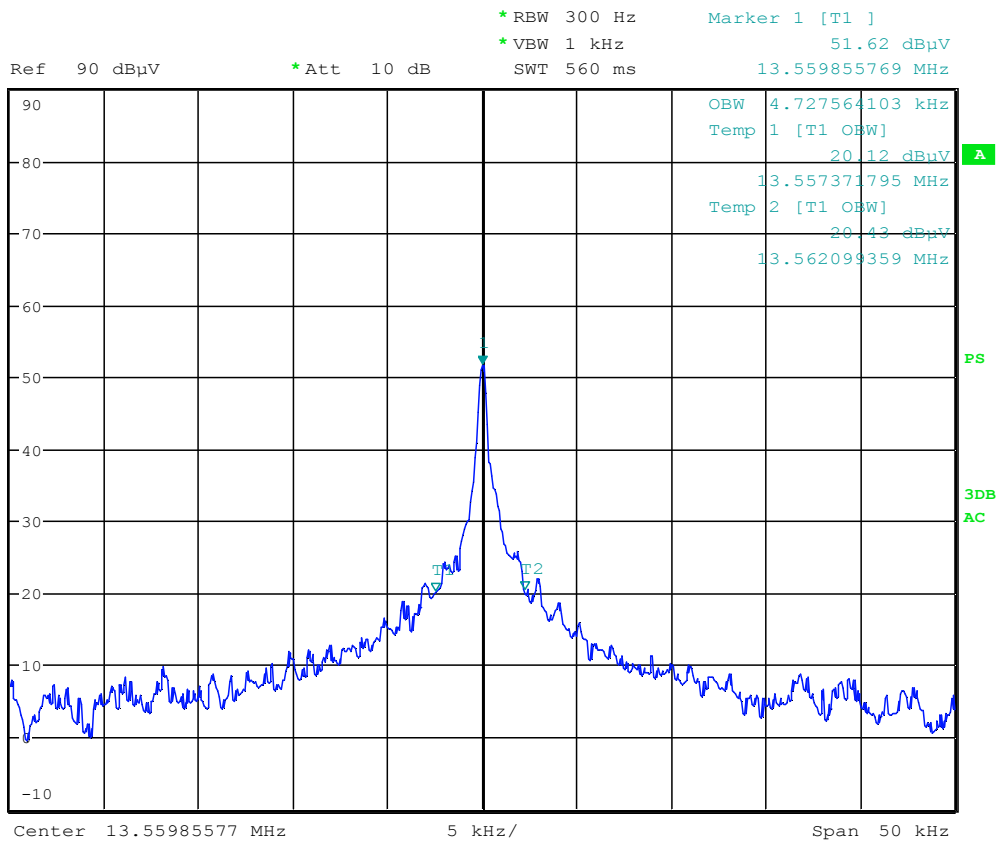

Date: 19.OCT.2016 14:48:28

Notes: Measured OBW for the Tx 125 kHz: 5.6kHz
 Measured OBW for the Tx 13 MHz: 4.72kHz

9 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of $k = 2$, providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement uncertainty Table

| Parameter | Uncertainty \pm | Notes |
|--|-------------------|-------|
| Radiated emissions, 10kHz to 30 MHz | 3.4 dB | |
| Radiated emissions, 30 to 200 MHz HP | 2.2 dB | |
| Radiated emissions, 30 to 200 MHz VP | 3.8 dB | |
| Radiated emissions, 200 to 1000 MHz HP | 2.8 dB | |
| Radiated emissions, 200 to 1000 MHz VP | 2.7 dB | |
| Radiated emissions, 1 to 18 GHz | 5.2 dB | |
| Conducted port emissions 10kHz to 1000 MHz | 1.0 dB | |
| Conducted port emissions 1 – 26.5 GHz | 1.6 dB | |
| AC mains Conducted emissions, 9kHz to 30 MHz | 3.14 dB | |

10 Revision History

| Revision Level | Date | Report Number | Notes |
|----------------|------------|------------------|----------------|
| 0 | 11/11/2016 | 102752932DEN-001 | Original Issue |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |