


**5. Speaker Phone operation:** When the call comes in during playing music, answer the call by touching the button [play/pause/Phone] on the touching panel and talk facing the top panel; or dial the receiver button on the mobile to use mobile to answer the call, for shut the call touch [play/pause/Phone] button for 3s .




**6. Repairing:** if you need to discount the current Bluetooth device and connect the new one, please follow the step 3.

**7. AUX input play:** Switch the device on, touch the INPUT button on the control panel, the indicator will turn red from blue, and the unit will be connected to the AUX channel play. The music in mobiles, MP3, PC, etc can be played through 3.5mm audio cable. You can adjust Volume by touch the VOL+ and VOL- on the left/right ears.

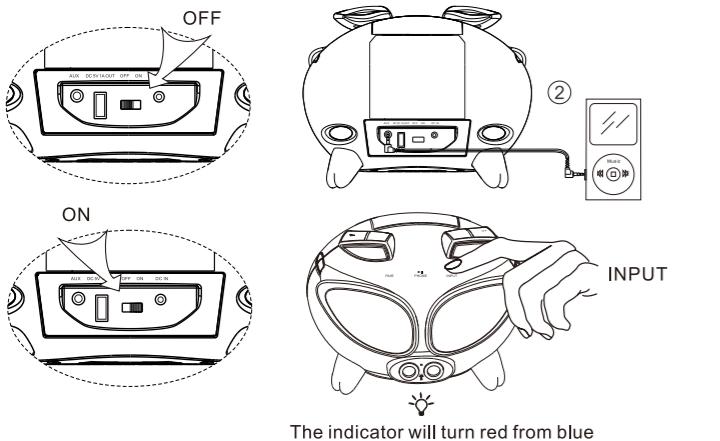

**8. Input:** Touch the Input on control panel to select between Bluetooth and AUX, the Blue indicator light on when select Bluetooth, the red indicator light on when select Aux



**9. USB charging port:** The device provide USB standard charging output 5V 1A, can recharge your mobile, Mp3.

**\* NOTE**

1. The Bluetooth device can't find the speaker, the speaker may still connect with last Blue tooth device or another device are searching and connecting with speaker at same time. Now you need to operate as Step 3 to re-connect it.
2. If you hear intermittent sound or no sound from speaker after connection. Please check if the distance from you and speaker are over 10M
3. Don't let Opposite close to speaker when you use speaker phone function to avoid Echo
4. Please use default music player with your blue tooth device system like, iPod, Samsung player, Windows media player. As lots of third party music player does not support smooth song change function, to avoid "pu"sound.
5. Some of music player software can not support play pause, preview and next
6. Please use power adaptor which provide from Lanchiya to avoid damage your speaker.
7. The Charging port provide 1A current, please don't plug the device over than 1a current or make it short out.
8. The device has touch control interface, don't press it with strength.
9. Please connect and disconnect adaptor when the switch is in OFF position

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**Caution:** The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference

in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help. This equipment complies with FCC's RF radiation exposure limits set forth for an uncontrolled environment. The antenna(s) used for this transmitter must be installed and operated to provide a separation distance of at least 20 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter. Installers must ensure that 20cm separation distance will be maintained between the device (excluding its handset) and users.

**FCC ID:P4L00Q7BT01**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**SPECIFICATIONS**


Product name	: Bluetooth Wireless Speaker
Product Model	: Q7-BT,
Frequency response	: 60Hz-20KHz
Amplifier output power	: 2.5W×2, subwoofer 5W×1
Amplifier input sensitivity	: <400mV
Amplifier SNR	: >75dB
Amplifier distortion	: <1%
Input Voltage	: DC12V === 2A
Power voltage	: AC100-240V,50/60Hz
Blue tooth transmission distance	: 8-10M whitout obstacle
Blue tooth working frequency	: 2.4GHz
Blue tooth version	: V3.0+EDR
Blue tooth audio playback format	: A2DP stereo



Manufacturer:Foshan LANCHIYA Digital Technology Co., Ltd China  
Address : hongtu RD,Songxia Industry Park,Songgang Nanhai District,Foshan, Guangdong Province,China  
MADE IN CHINA



Bluetooth Wireless Speaker



**User Manual**

Please read this guide carefully before use

### PROPERTY RIGHTS INFORMATION:

The trademark **amethyst<sup>®</sup>lanchiya<sup>®</sup>** and all the developed products with this label are registered patents, and belong to Foshan LANCHIYA digital Technology Co., Ltd. Our company reserves all rights, and not allow reprinting. Other concerned trademarks all belong to their proprietors. As to the constant update and development of the products, our company reserves the right to change and rework our products without notice.



### SAFETY INSTRUCTIONS:

To ensure your safety and enjoyment, read and follow the safety instructions and use in the directed manner. Keep this manual for future reference.

**WARNING: To prevent any fire or electrical hazards, do not remove or dissemble any parts from this unit. Please ensure that you use a qualified technician to service it.**


- Do not expose the unit to rain, water or moisture
- Do not place liquid on or close to unit
- Do not place unit on or near an open fire such as candles or light
- Keep away from heat and dust
- Place unit on a stable and level platform
- Do not place any items on top of unit
- Do not use excessive force when pushing the unit buttons
- Do not attempt to pull the power cord from a distance to shut the power
- Secure all cords and connections and do not use pinched or defective one
- Unplug the power cord if the unit is left unused for extended periods
- Clean with a damp cloth only
- Operating temperature 0°C-55°C (32°F~131°F)
- Blue tooth device can't be found: probably, the Speaker has been connected by other Blue tooth device. Press Pair button to search it again. If you still cannot find the speaker, please Turn Off the speaker for 5second then turn it on.
- Blue tooth signal intermittently: the effective distance between speaker and Device is 10M, the signal will be intermittent if the distance more than 10M.
- If there are more than 1 Speaker are switch on, the Bluetooth device will find more than 1 speaker, if you want to connect one of them please turn off the others
- If your Bluetooth device on searching and find many other Bluetooth device, please wait for the searching finished and select Speaker to pair.

### PACKAGE CONTENTS

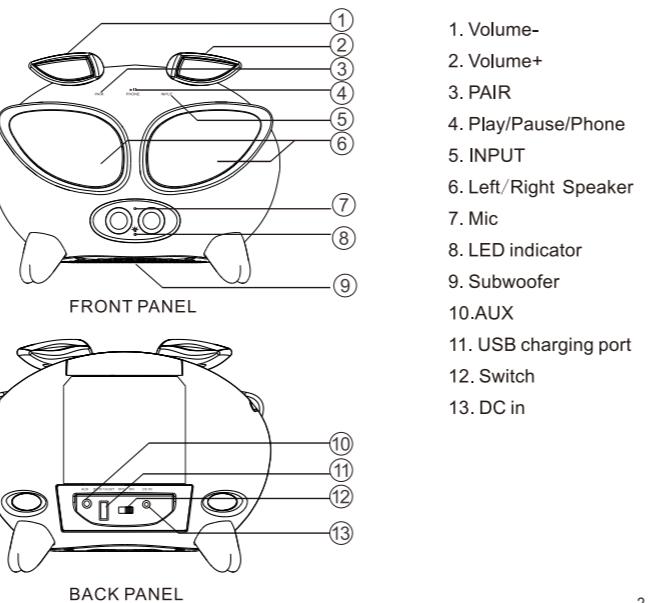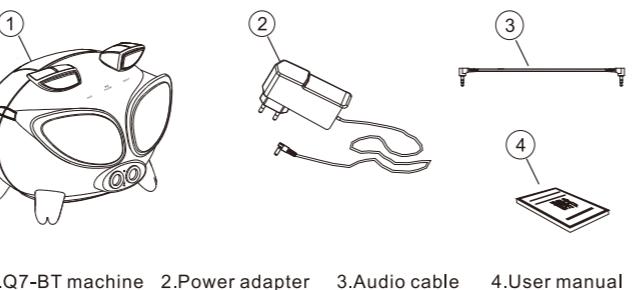


### Brief Operation Introduction

**1. Connection:** Switch the device OFF, and connect it to AC power.


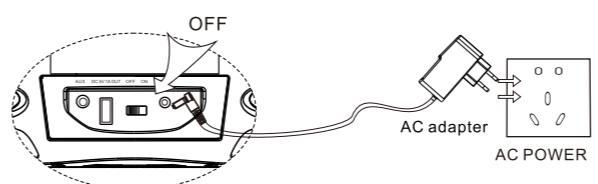


**2. Power-on Operation:** After switching device on, the blue indicate light on the front panel is on, and the voice prompt "Power ON" and device is defaulted as the Bluetooth channel; then starts to search the device that connected last time. If the searching is successful, device will connect automatically with the device, and voices prompt "Du...". Device will play the music through the device. If the searching is failed, Device will be in the status of being searched by other devices after 30 seconds.

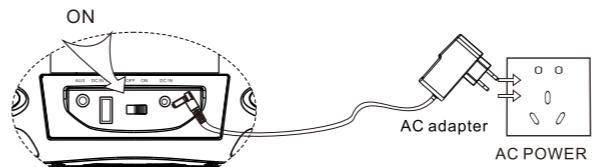


"Power ON"  
The Blue Indicate Light On

**3 Connecting to the Bluetooth device :** Press "PAIR" on the top of device, the indicate blue light is on, and voice prompt "pairing" (Pairing period is 30s, you won't hear voice prompt by touch Pair button during this period) Search and connect **[AMETHYST Q7-BT]** with your Bluetooth device.. The voice Prompt "pairing completed" then connected and voice prompt "DU...". Then you can play music from your Bluetooth device.




① The Blue Indicate Light On  
"pairing"



③ "pairing completed"

**4. Music-playing operation:** When device has successfully connected to the Bluetooth device properly, you can control the music-playing of the mobiles through touching the,PLAY/PAUSE button on the touching panel and adjust volume by touch left/right ears.

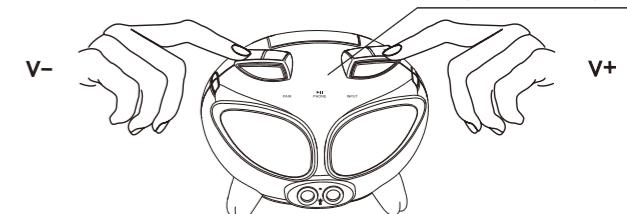

V- V+