


Schematics Diagram

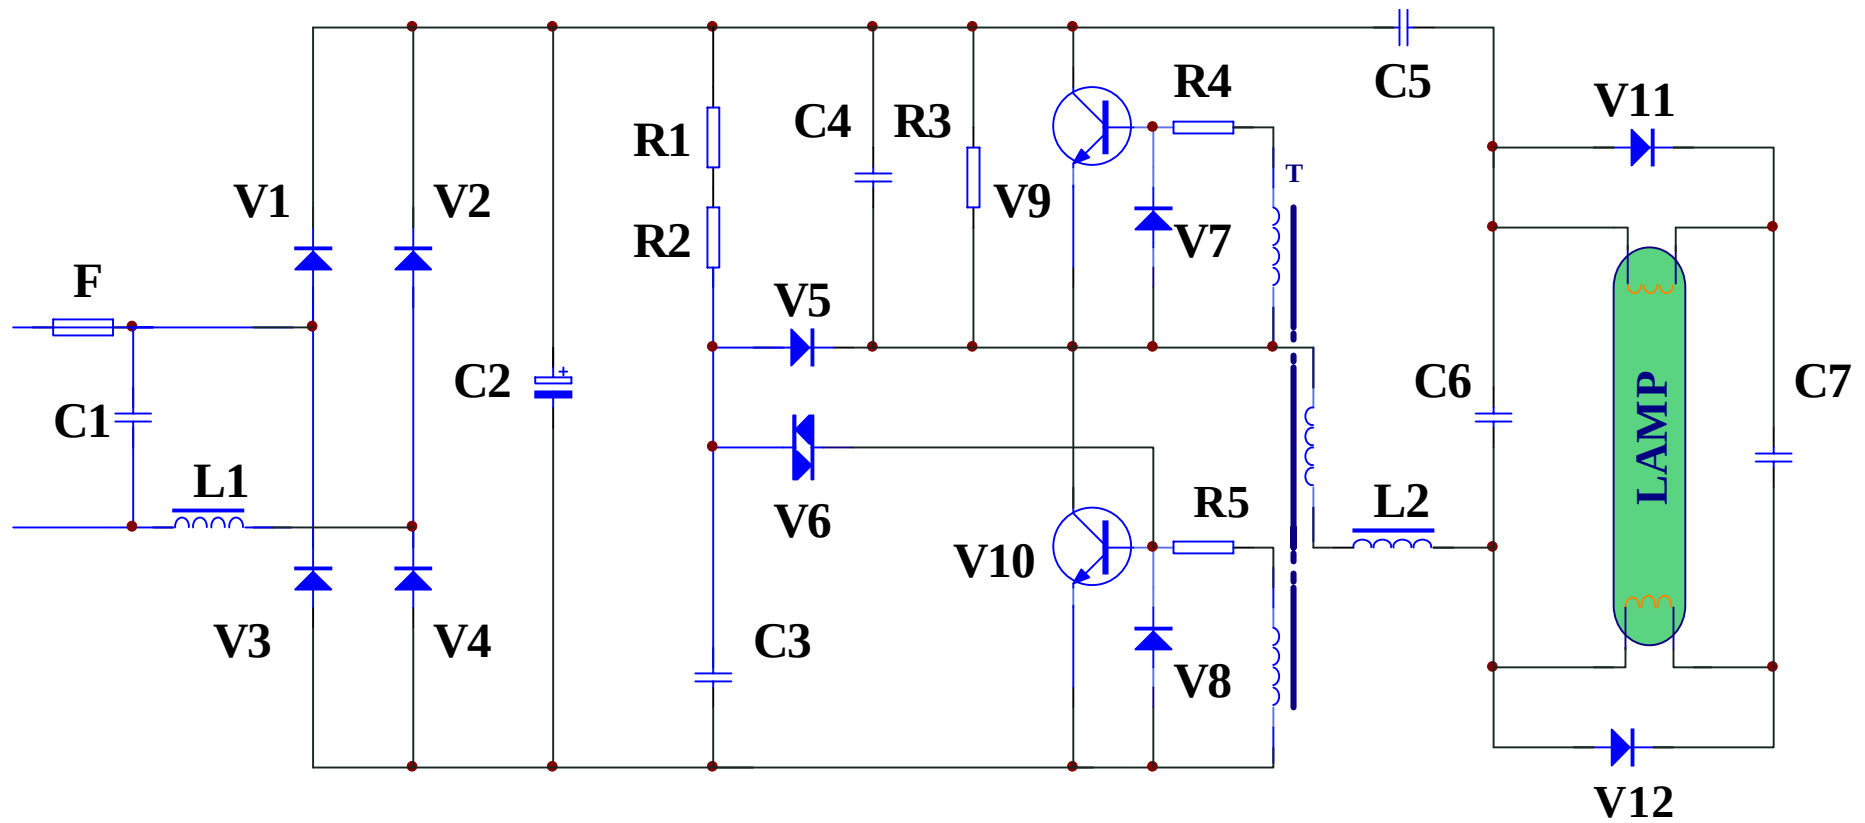

The Material List Of SEL-15 (15W)

No	Symbol	Type	Quantity	No	Symbol	Type	Quantity
1	R1.R2.R3	RT14-360K	3	13	V9.V10	DK53/DK43	2
2	R4.R5	RJ14-20/22 <i>f</i> ,	2	14	T	<i>f</i> 8*5*3 2.5K	1
3	C2	CD11D-22uF/250V	1	<i>i i</i>	<i>i i</i>	AVR1*1/ <i>f</i> 0.4mm	0.5m
4	C1	CL21-100n/250V	1	15	L1	1.1mH/ <i>f</i> 0.29mm	1
5	C3	CL11-47n/63V	1	16	L2	EE19 PC30/40	1
6	C4	CL11-560p/400V	1	<i>i i</i>	<i>i i</i>	QA-1/ <i>f</i> 0.12mm*7	4g
7	C5	CL11-100n/630V	1	<i>i i</i>	<i>i i</i>	EE19 BOBBINS	1
8	C6	<i>i i</i>	<i>i i</i>	<i>i i</i>	<i>i i</i>	POLYESTER TAPE	0.1m
9	C7	CL11-4n7/1KV	1	17	LAMP	SEL-15W	1
10	V1-V5. V11.V12	1N4007	7	19	PLASTIC CASE	PBT	1
11	V6	DB3	1	18	PWB	GREEN-59	1
12	V7.V8	FR102	2	20	WIRE	WHITE 1015-18	5"*2

The Material List Of SEL-20 (20W)

No	Symbol	Type	Quantity	No	Symbol	Type	Quantity
1	R1.R2.R3	RT14-360K	3	13	V9.V10	DK55/DK45	2
2	R4.R5	RJ14-20/22 f ,	2	14	T	f 8*5*3 2.5K	1
3	C2	CD11D-22uF/250V	1	i i	i i	AVR1*1/ f 0.4mm	0.5m
4	C1	CL21-100n/250V	1	15	L1	1.1mH/ f 0.29mm	1
5	C3	CL11-47n/63V	1	16	L2	EE19 PC30/40	1
6	C4	CL11-560p/400V	1	i i	i i	QA-1/ f 0.12mm*7	4g
7	C5	CL11-100n/630V	1	i i	i i	EE19 BOBBINS	1
8	C6	i i	i i	i i	i i	POLYESTER TAPE	0.1m
9	C7	CL11-4n7/1KV	1	17	LAMP	SEL-20W	1
10	V1-V5. V11.V12	1N4007	7	19	PLASTIC CASE	PBT	1
11	V6	DB3	1	18	PWB	GREEN-59	1
12	V7.V8	FR102	2	20	WIRE	WHITE 1015-18	5"*2

The Material List Of SEL-23 (23W)

No	Symbol	Type	Quantity	No	Symbol	Type	Quantity
1	R1.R2.R3	RT14-360K	3	13	V9.V10	DK55/DK45	2
2	R4.R5	RJ14-20/22 <i>f</i> ,	2	14	T	<i>f</i> 8*5*3 2.5K	1
3	C2	CD11D-22uF/250V	1	<i>i i</i>	<i>i i</i>	AVR1*1/ <i>f</i> 0.4mm	0.5m
4	C1	CL21-100n/250V	1	15	L1	1.1mH/ <i>f</i> 0.29mm	1
5	C3	CL11-47n/63V	1	16	L2	EE19 PC30/40	1
6	C4	CL11-560p/400V	1	<i>i i</i>	<i>i i</i>	QA-1/ <i>f</i> 0.12mm*7	4g
7	C5	CL11-100n/630V	1	<i>i i</i>	<i>i i</i>	EE19 BOBBINS	1
8	C6	CL11-2n2/1KV <i>i i</i>	1 <i>i i</i>	<i>i i</i>	<i>i i</i>	POLYESTER TAPE	0.1m
9	C7	CL11-4n7/1KV	1	17	LAMP	SEL-23W	1
10	V1-V5. V11.V12	1N4007	7	19	PLASTIC CASE	PBT	1
11	V6	DB3	1	18	PWB	GREEN-59	1
12	V7.V8	FR102	2	20	WIRE	WHITE 1015-18	5"*2

The Material List Of SEL-26 (26W)

No	Symbol	Type	Quantity	No	Symbol	Type	Quantity
1	R1.R2.R3	RT14-360K	3	13	V9.V10	DK55/DK45	2
2	R4.R5	RJ14-20/22 f ,	2	14	T	f 8*5*3 2.5K	1
3	C2	CD11D-22uF/250V	1	i i	i i	AVR1*1/ f 0.4mm	0.5m
4	C1	CL21-100n/250V	1	15	L1	1.1mH/ f 0.29mm	1
5	C3	CL11-47n/63V	1	16	L2	EE19 PC30/40	1
6	C4	CL11-560p/400V	1	i i	i i	QA-1/ f 0.12mm*7	4g
7	C5	CL11-100n/630V	1	i i	i i	EE19 BOBBINS	1
8	C6	CL11-2n2/1KV i i	1 i i	i i	i i	POLYESTER TAPE	0.1m
9	C7	CL11-4n7/1KV	1	17	LAMP	SEL-26W	1
10	V1-V5. V11.V12	1N4007	7	19	PLASTIC CASE	PBT	1
11	V6	DB3	1	18	PWB	GREEN-59	1
12	V7.V8	FR102	2	20	WIRE	WHITE 1015-18	5"*2