

TEST REPORT

Applicant: Foryou Multimedia Electronics Co., Ltd.

Address: No.1, North Shangxia Road, Dongjiang, Hi-tech Industry
Park, Huizhou, Guangdong, China

Product Name: WIRELESS CHARGER

FCC ID: PUZ-WAB13W026C

Standard(s): 47 CFR Part 15, Subpart C
ANSI C63.10-2020

Report Number: 2502S56504E-RF-00B

Report Date: 2025/5/17

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Pedro Yun

Gavin Xu

Reviewed By: Pedro Yun

Approved By: Gavin Xu

Title: Project Engineer

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	3
1. GENERAL INFORMATION	4
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	4
1.2 ACCESSORY INFORMATION	4
1.3 ANTENNA INFORMATION DETAIL▲	4
1.4 EQUIPMENT MODIFICATIONS	4
2. SUMMARY OF TEST RESULTS	5
3. DESCRIPTION OF TEST CONFIGURATION	6
3.1 EUT OPERATION CONDITION	6
3.2 EUT EXERCISE SOFTWARE	6
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	6
3.4 SUPPORT CABLE LIST AND DETAILS	6
3.5 BLOCK DIAGRAM OF TEST SETUP	6
3.6 TEST FACILITY	7
3.7 MEASUREMENT UNCERTAINTY	7
4. REQUIREMENTS AND TEST RESULTS	8
4.1 AC LINE CONDUCTED EMISSIONS	8
4.2 RADIATED SPURIOUS EMISSIONS	9
4.2.1 Applicable Standard	9
4.2.2 EUT Setup	9
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	10
4.2.4 Test Procedure	11
4.2.5 Corrected Result & Margin Calculation	11
4.2.6 Test Data	12
4.3 20 dB EMISSION BANDWIDTH	21
4.3.1 Applicable Standard	21
4.3.2 EUT Setup	21
4.3.3 Test Procedure	21
4.3.4 Test Data	23
4.4 ANTENNA REQUIREMENT	24
4.4.1 Applicable Standard	24
4.4.2 Judgment	24
EXHIBIT A - EUT PHOTOGRAPHS	25
EXHIBIT B - TEST SETUP PHOTOGRAPHS	26

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2502S56504E-RF-00B	Original Report	2025/5/17

1. GENERAL INFORMATION

1.1 General Description of Equipment under Test

EUT Name:	WIRELESS CHARGER
EUT Model:	WAB13W026C
Operation Frequency:	110.5-148kHz
Modulation Type:	ASK
Rated Input Voltage:	DC 8~16V
Serial Number:	325J-1
EUT Received Date:	2025/4/29
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.3 Antenna Information Detail ▲

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Loop	Unknown	110.5-148kHz	Unknown
The design of compliance with §15.203:			
<input checked="" type="checkbox"/> Unit uses a permanently attached antenna.			
<input type="checkbox"/> Unit uses a unique coupling to the intentional radiator.			
<input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.207 (a)	AC Line Conducted Emissions	Not Applicable
§15.209; §15.205	Radiated Spurious Emissions	Compliant
§15.215(c)	20 dB Bandwidth	Compliant
FCC§15.203	Antenna Requirement	Compliant
Not Applicable: the device was powered by vehicle system.		

3. DESCRIPTION OF TEST CONFIGURATION

3.1 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The device has 3 coil antennas, only one antenna can be use when charging, per pretest, the middle coil was the worst and reported.

3.2 EUT Exercise Software

No software was used in test.

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DK	DC Source	DK-60V50A	T-08-EE140
Unknown	Load	RX24-25W 40Ω	RX24-25W 40Ω

3.4 Support Cable List and Details

Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
DC Power Cable	NO	NO	2	DC Source	EUT

3.5 Block Diagram of Test Setup

Radiated Spurious Emissions:

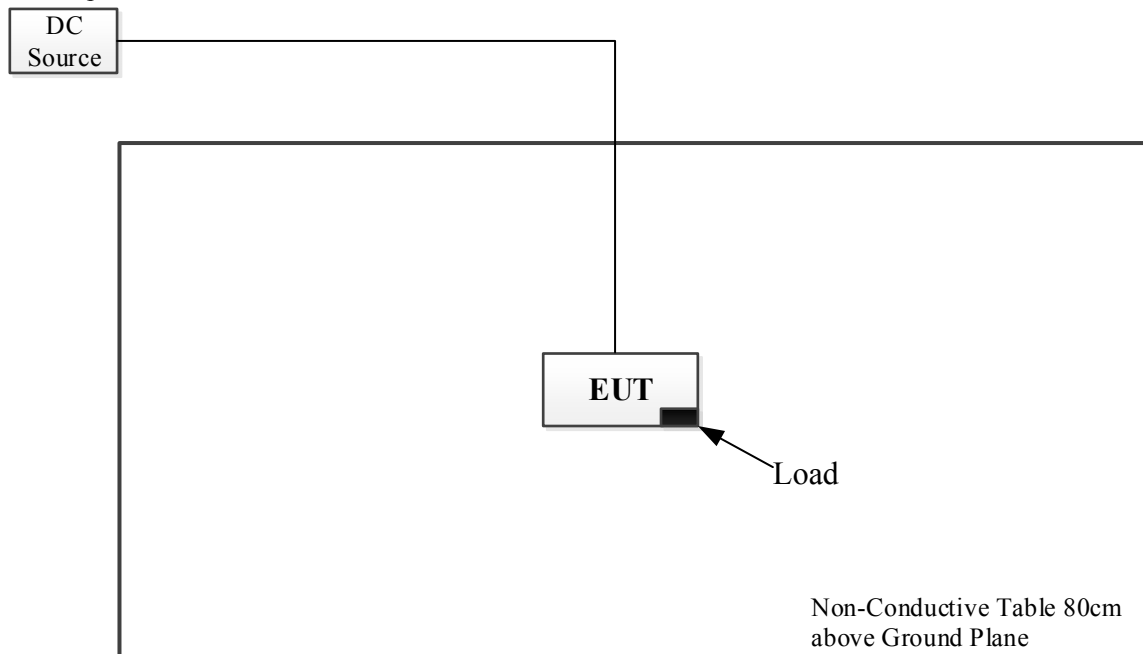

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST RESULTS

4.1 AC Line Conducted Emissions

Not Applicable, the device was powered by vehicle system.

4.2 Radiated Spurious Emissions

4.2.1 Applicable Standard


FCC Part 15.209


- (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

4.2.2 EUT Setup

9kHz~30MHz:

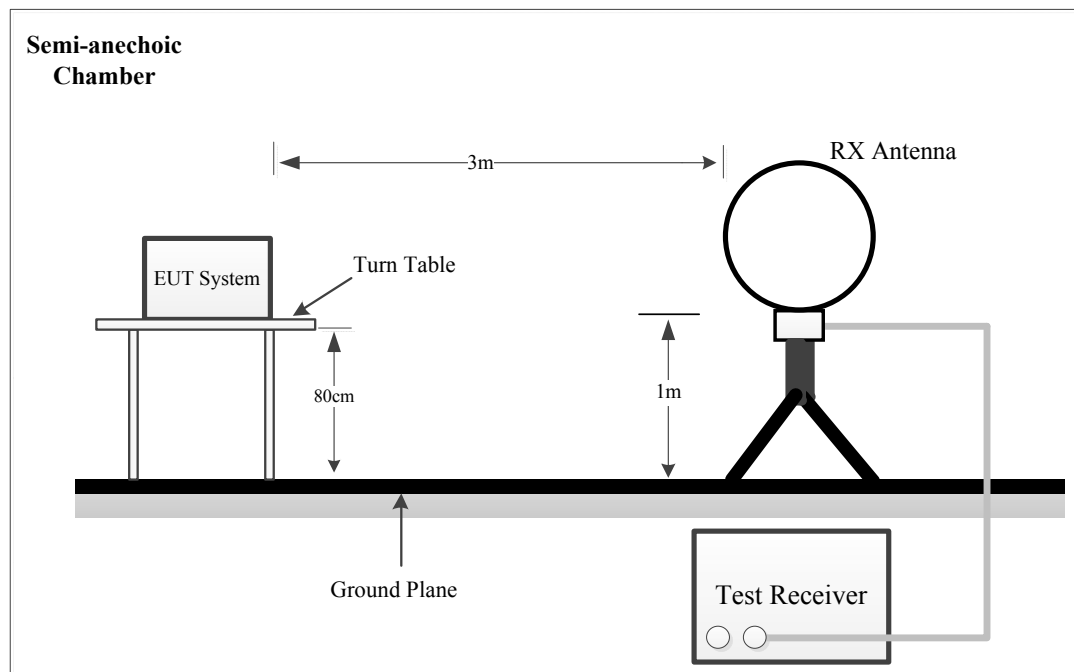

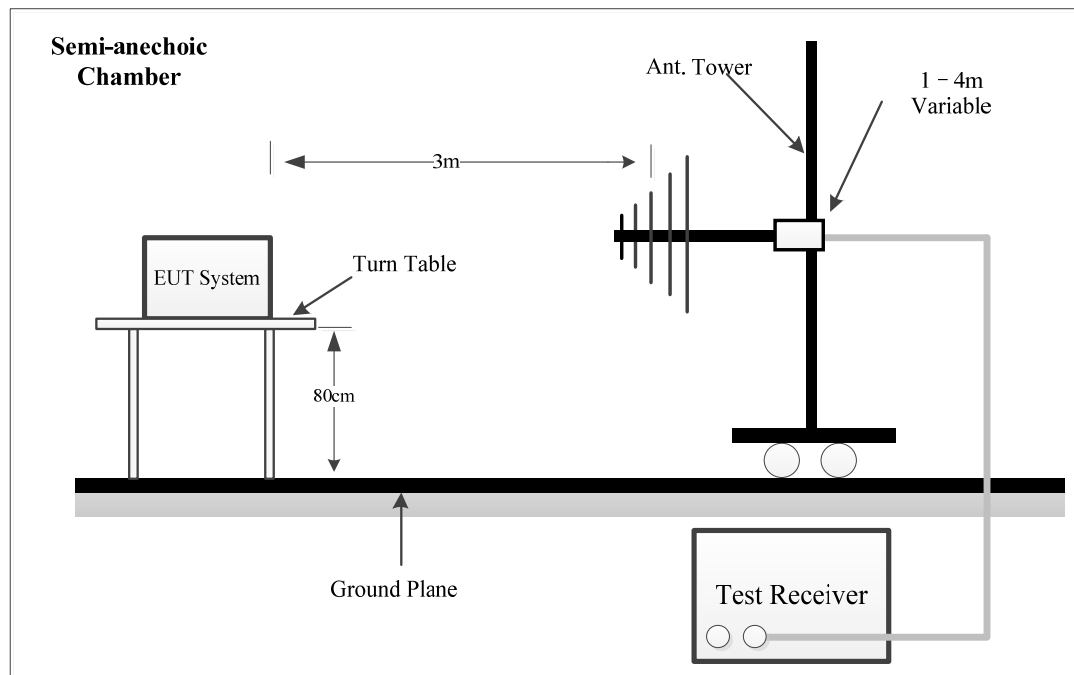30MHz~1GHz:

The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10-2020.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	10 kHz	30 kHz	9 kHz	QP/AV
30 MHz – 1000 MHz	100 kHz	300 kHz	/	PK
	/	/	120 kHz	QP

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP measurement

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9-90 kHz, 110-490 kHz, employing an average detector.

All emissions under the average limit and under the noise floor have not recorded in the report.

4.2.5 Corrected Result & Margin Calculation

$$E_{Log} = 20 \times \log_{10}(E_{Linear})$$

E_{Linear} is the field strength of the emission, in μ V/m

E_{Log} is the field strength of the emission, in dB μ V/m

For 9kHz-30MHz test, test distance is 3m, extrapolation limit shall be calculated using Equation:

$$E_{limit-measure} = E_{limit-Standard} + 40 \times \log_{10} (d_{standard}/d_{measure})$$

The basic equation is as follows:

$$\text{Result} = \text{Reading} + \text{Factor}$$

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

4.2.6 Test Data

Serial Number:	325J-1	Test Date:	2025/5/13
Test Site:	Chamber10m	Test Mode:	Transmitting
Tester:	Leesin Xiang	Test Result:	Pass

Environmental Conditions:			
Temperature: (°C)	25.4	Relative Humidity: (%)	47
		ATM Pressure: (kPa)	101.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to table and plots.

The test used DC 12V voltage.


Test under the maximum power.

1) 9kHz~30MHz

Project No.: 2502S56504E-RF
Polarization: Parallel
Test Mode: Transmitting
RBW:300Hz VBW:1kHz

Serial No.: 325J-1
Tester: Leesin Xiang


Date: 2025-05-13

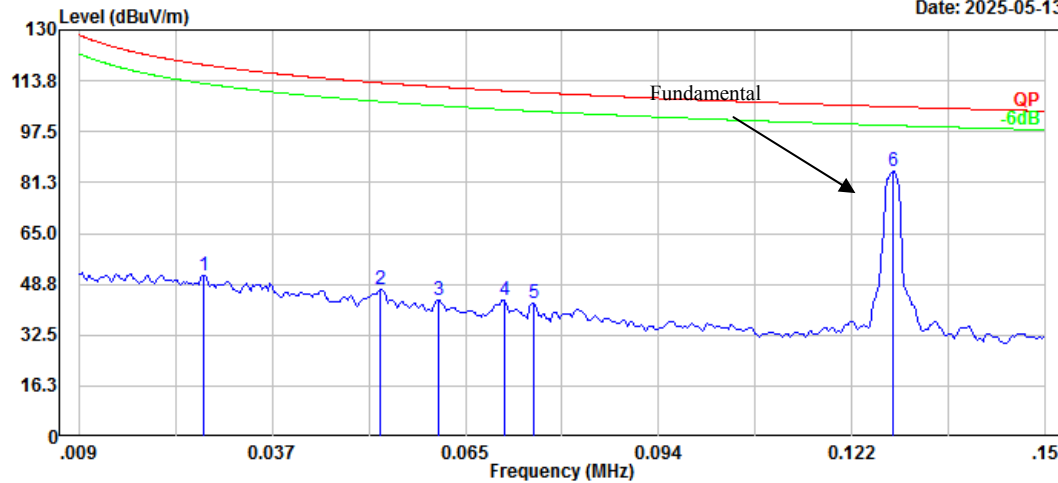

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.027	3.29	48.21	51.50	118.87	67.37	Peak
2	0.053	3.37	43.54	46.91	113.12	66.21	Peak
3	0.061	1.74	42.09	43.83	111.83	68.00	Peak
4	0.071	3.15	40.41	43.56	110.57	67.01	Peak
5	0.075	2.82	39.71	42.53	110.07	67.54	Peak
6	0.128	50.94	33.87	84.81	105.48	20.67	Peak

Project No.: 2502S56504E-RF
Polarization: Parallel
Test Mode: Transmitting
RBW:10kHz VBW:30kHz


Serial No.: 325J-1
Tester: Leesin Xiang

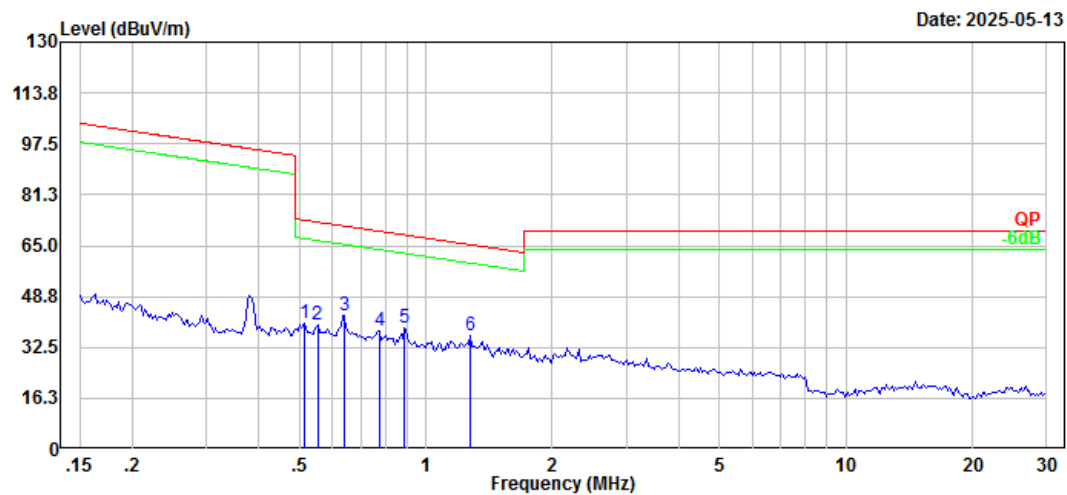

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.513	16.80	23.40	40.20	73.40	33.20	Peak
2	0.552	16.96	22.97	39.93	72.74	32.81	Peak
3	0.641	20.86	22.06	42.92	71.42	28.50	Peak
4	0.775	17.12	20.78	37.90	69.73	31.83	Peak
5	0.890	19.91	18.77	38.68	68.51	29.83	Peak
6	1.276	20.78	15.34	36.12	65.31	29.19	Peak

Project No.: 2502S56504E-RF
Polarization: Perpendicular
Test Mode: Transmitting
RBW:300Hz VBW:1kHz


Serial No.: 325J-1
Tester: Leesin Xiang

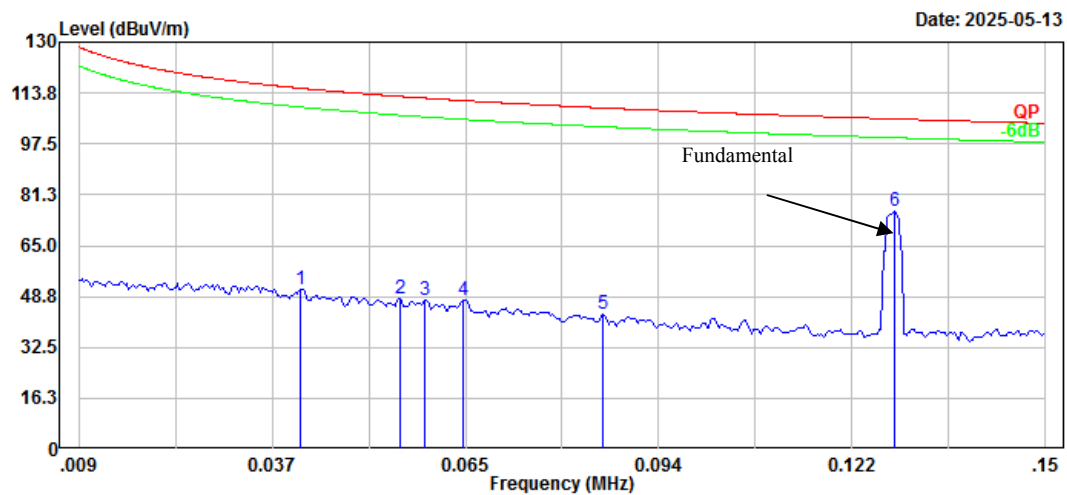

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.041	5.50	45.52	51.02	115.26	64.24	Peak
2	0.056	5.00	43.05	48.05	112.67	64.62	Peak
3	0.059	5.20	42.43	47.63	112.12	64.49	Peak
4	0.065	5.98	41.44	47.42	111.33	63.91	Peak
5	0.085	5.00	37.95	42.95	108.97	66.02	Peak
6	0.128	42.42	33.85	76.27	105.46	29.19	Peak

Project No.: 2502S56504E-RF
Polarization: Perpendicular
Test Mode: Transmitting
RBW:10kHz VBW:30kHz


Serial No.: 325J-1
Tester: Leesin Xiang

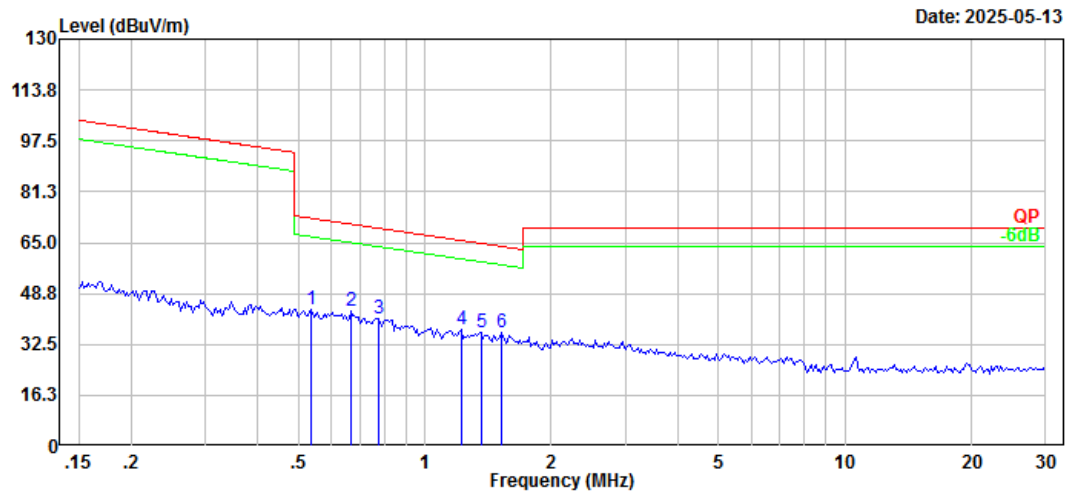

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.535	20.49	23.16	43.65	73.02	29.37	Peak
2	0.668	21.18	21.78	42.96	71.05	28.09	Peak
3	0.775	20.12	20.78	40.90	69.73	28.83	Peak
4	1.223	21.68	15.57	37.25	65.69	28.44	Peak
5	1.359	21.52	14.96	36.48	64.75	28.27	Peak
6	1.527	22.14	14.22	36.36	63.72	27.36	Peak

Project No.: 2502S56504E-RF
Polarization: Ground-parallel
Test Mode: Transmitting
RBW:300Hz VBW:1kHz


Serial No.: 325J-1
Tester: Leesin Xiang

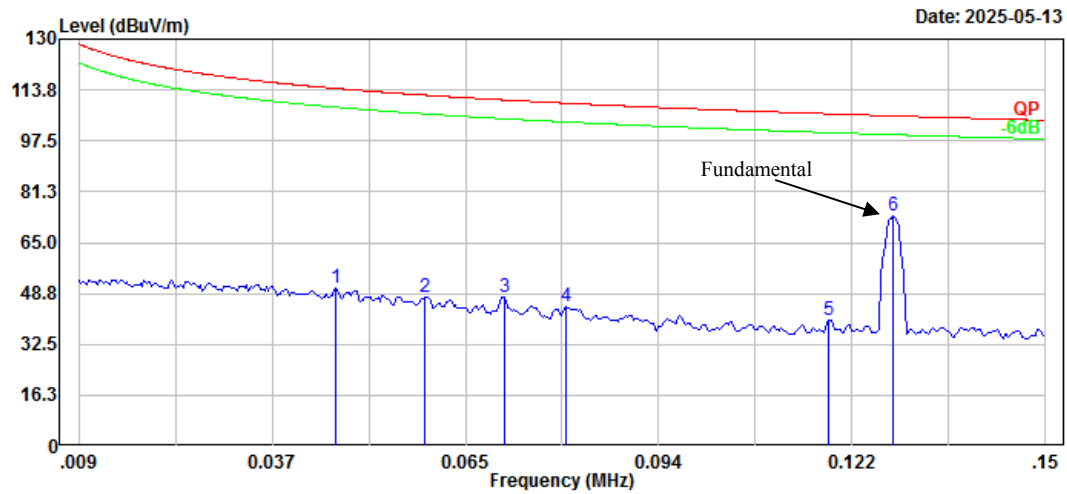

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.047	5.98	44.64	50.62	114.25	63.63	Peak
2	0.059	4.99	42.43	47.42	112.12	64.70	Peak
3	0.071	7.10	40.41	47.51	110.57	63.06	Peak
4	0.080	5.50	38.91	44.41	109.54	65.13	Peak
5	0.118	5.96	34.39	40.35	106.14	65.79	Peak
6	0.128	39.78	33.87	73.65	105.48	31.83	Peak

Project No.: 2502S56504E-RF
Polarization: Ground-parallel
Test Mode: Transmitting
RBW:10kHz VBW:30kHz

Serial No.: 325J-1
Tester: Leesin Xiang

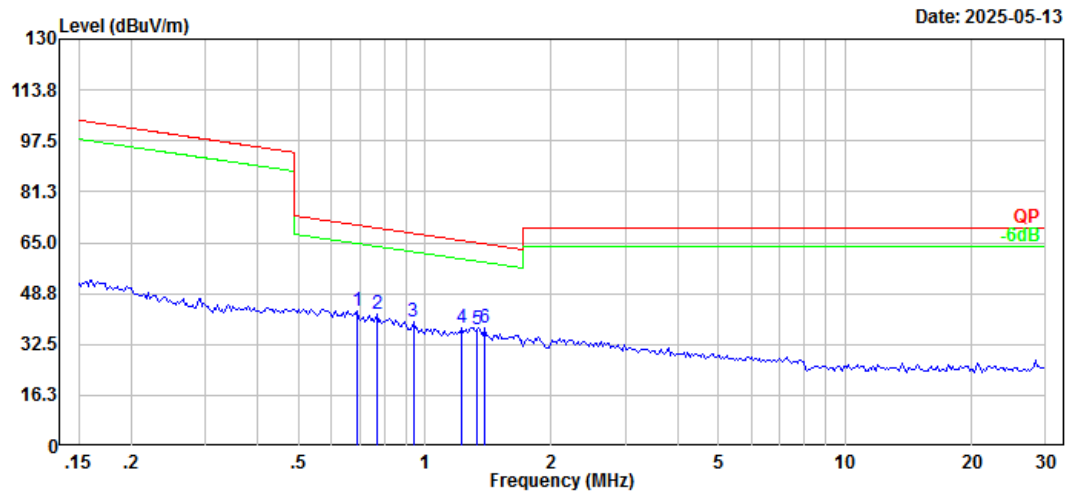


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	0.690	21.68	21.57	43.25	70.77	27.52	Peak
2	0.767	21.27	20.86	42.13	69.83	27.70	Peak
3	0.938	21.98	17.80	39.78	68.04	28.26	Peak
4	1.223	22.21	15.57	37.78	65.69	27.91	Peak
5	1.331	22.14	15.09	37.23	64.94	27.71	Peak
6	1.388	22.72	14.83	37.55	64.56	27.01	Peak

2) 30MHz-1GHz

Project No.: 2502S56504E-RF
Polarization: Horizontal
Test Mode: Transmitting
RBW:100kHz VBW:300kHz

Serial No.: 325J-1
Tester: Leesin Xiang

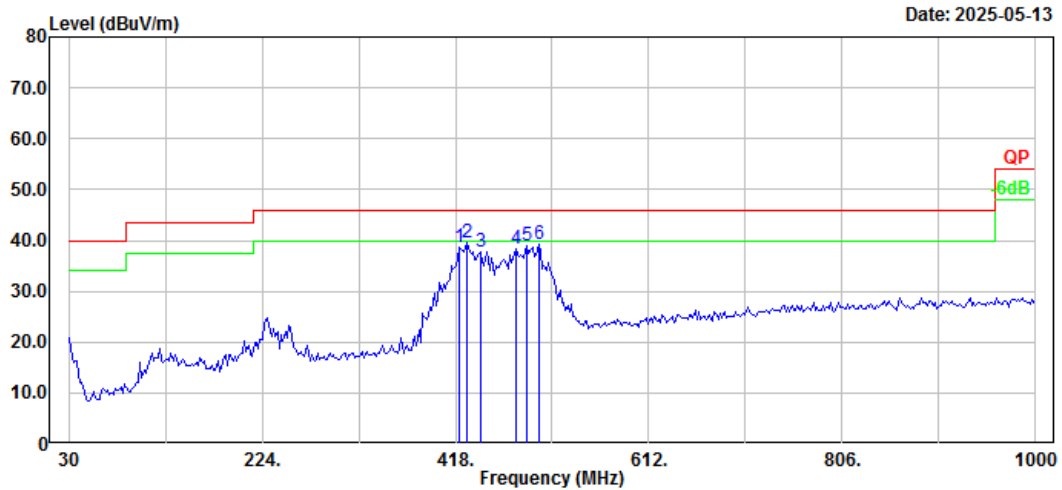


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	421.88	45.00	-6.43	38.57	46.00	7.43	Peak
2	429.64	45.71	-6.17	39.54	46.00	6.46	Peak
3	443.22	43.50	-5.70	37.80	46.00	8.20	Peak
4	478.14	43.02	-4.75	38.27	46.00	7.73	Peak
5	489.78	43.57	-4.50	39.07	46.00	6.93	Peak
6	501.42	43.59	-4.26	39.33	46.00	6.67	Peak

Project No.: 2502S56504E-RF
Polarization: Vertical
Test Mode: Transmitting
RBW:100kHz VBW:300kHz

Serial No.: 325J-1
Tester: Leesin Xiang

Date: 2025-05-13

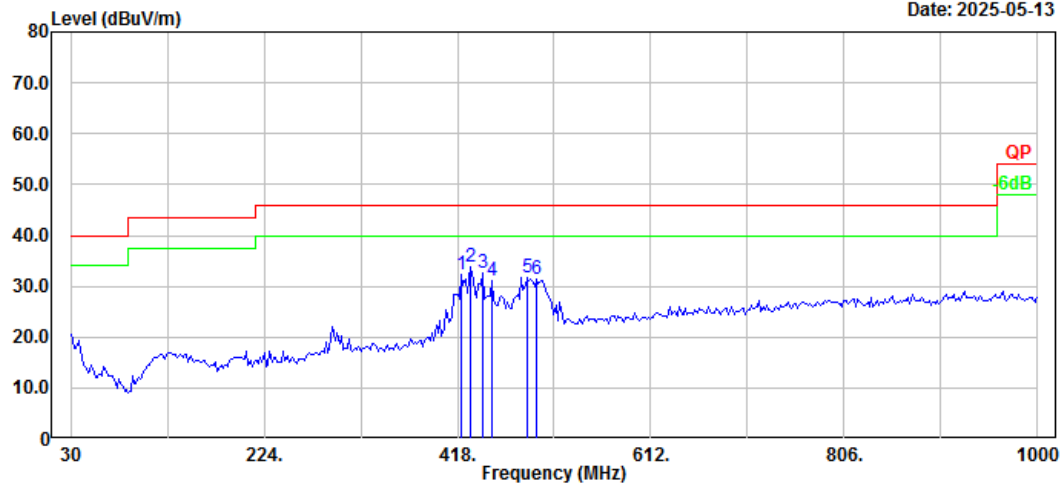

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	421.88	38.71	-6.43	32.28	46.00	13.72	Peak
2	431.58	39.79	-6.10	33.69	46.00	12.31	Peak
3	443.22	38.18	-5.70	32.48	46.00	13.52	Peak
4	452.92	36.41	-5.38	31.03	46.00	14.97	Peak
5	487.84	36.26	-4.54	31.72	46.00	14.28	Peak
6	497.54	35.67	-4.34	31.33	46.00	14.67	Peak


4.3 20 dB Emission Bandwidth

4.3.1 Applicable Standard

FCC §15.215

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of band operation.

4.3.2 EUT Setup

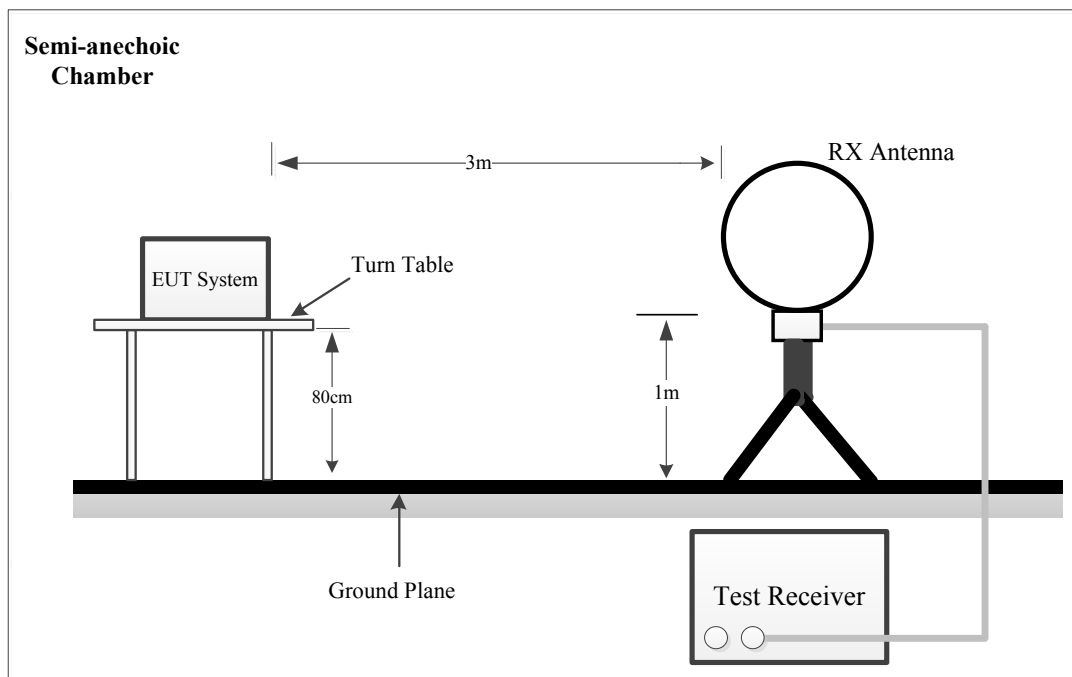

4.3.3 Test Procedure

According to ANSI C63.10-2020 Section 6.9.2

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2
- Steps a) through c) might require iteration to adjust within the specified tolerances.
- The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target

“-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.

f) Set detection mode to peak and trace mode to max hold.

g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).

h) Determine the “-xx dB down amplitude” using [(reference value) - xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument.

i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.3.4 Test Data

Serial Number:	325J-1	Test Date:	2025/5/13
Test Site:	Chamber10m	Test Mode:	Transmitting
Tester:	Leesin Xiang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	47	ATM Pressure: (kPa)	101.2
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25


** **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

The test used DC 12V voltage.

Test under the maximum power.

Test Frequency (MHz)	20 dB Emission Bandwidth (kHz)
0.128	1.9

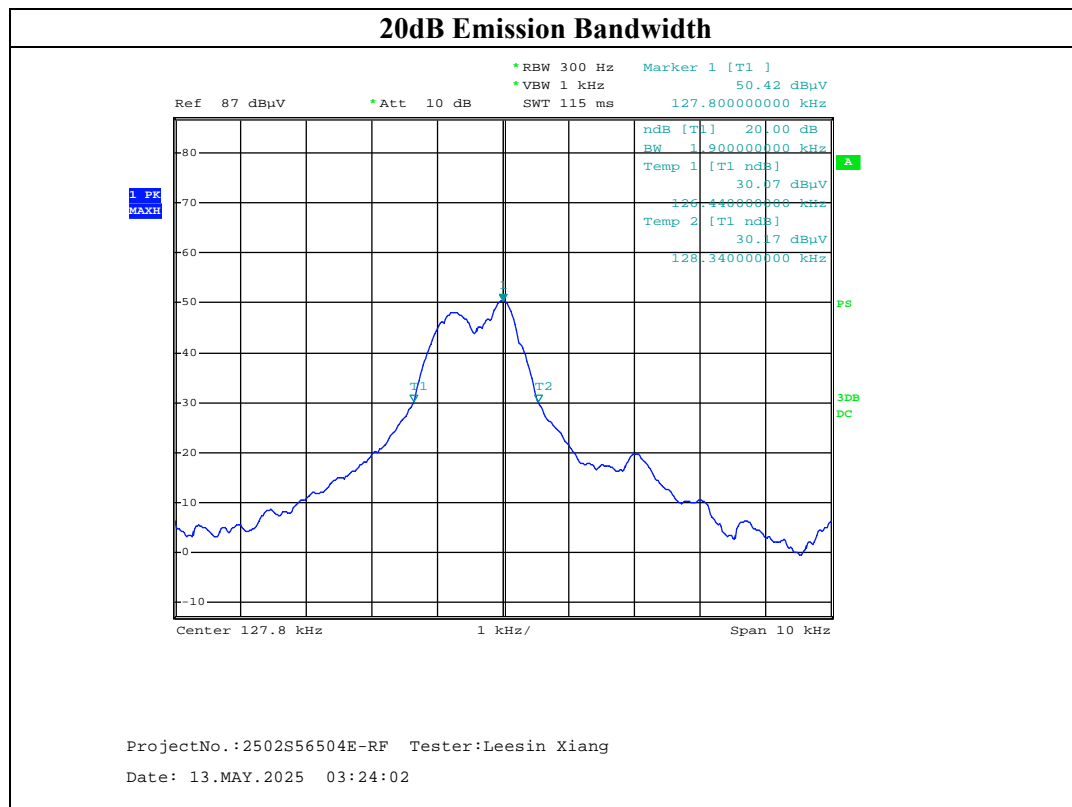

4.4 Antenna Requirement

4.4.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.4.2 Judgment

Please refer to the Antenna Information detail in Section 1.3.

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2502S56504E-RF-EXP EUT external photographs and 2502S56504E-RF-INP EUT internal photographs.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2502S56504E-RF-00B-TSP test setup photographs.

******* END OF REPORT *******