



Hereby, Westech Korea Inc, declares that this Bluetooth Handsfree is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Printed in Korea

Bluetooth Handsfree Carkits



WBT-3000SL


USER MANUAL

Contents

1. Illustration	
1-1. Included Accessories	1
1-2. Part Description	2
2. Features	3
3. How to use	3
3-1. Charging	3
3-2. Turning on & off	5
3-3. Paring with Bluetooth mobile phones	5
3-4. Making a call	6
3-5. Answering a call	7
3-6. Voice Adjustment	8
3-7. Installation	8
4. Specifications	9

1. Illustration.

1-1. Included Accessories

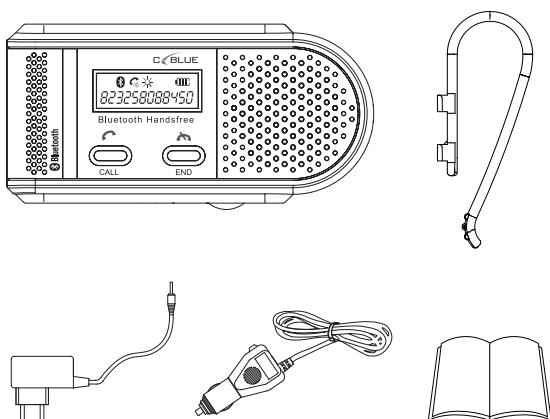


- ▷ C-Blue Unit
- ▷ Rechargeable Battery(Inserted in the unit)
- ▷ Sun visor clip
- ▷ Car charger
- ▷ AC/DC adaptor
- ▷ User's Guide


1

1-2. Part Description

a. C-Blue

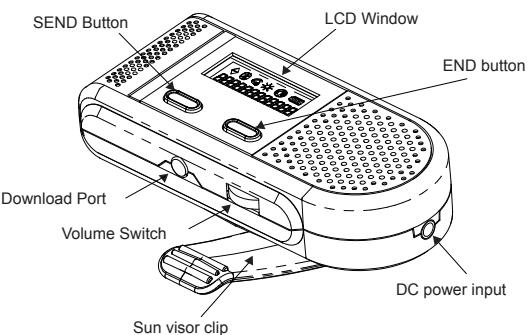

b. LCD Indicators

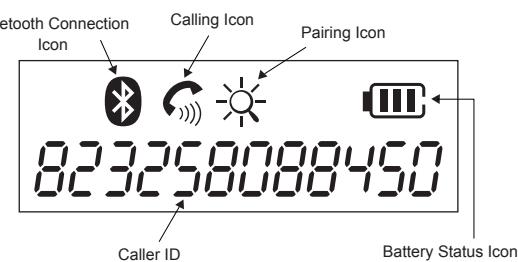


2

2. Features.


- ▷ Bluetooth Technology
- ▷ Small Size and Compact Design
- ▷ Portable Speaker-phone type using both in the Car and the Office.
- ▷ Rechargeable Built-in Battery
- ▷ Internal Speaker & Internal Microphone
- ▷ Full Duplex function
- ▷ Echo & Noise cancellation
- ▷ Private talking function
- ▷ Caller ID
- ▷ Voice Dialing
- ▷ Last Call Redialing
- ▷ Handsfree Speaker Volume Control function

** When battery mark is blinking after the battery status bar disappeared, battery needs to be recharged.*

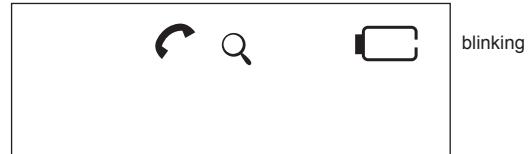

blinking

** When the charging is on battery mark will be displayed.*

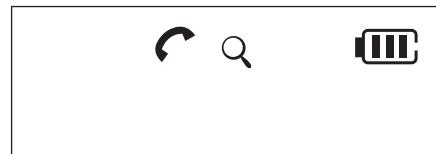


blinking

3. How to use C-Blue

3-1. Battery Charging

- a. C-Blue can be charged either at car or home by using car charger or AC/DC adaptor.
- b. Connect the charger's plug into the DC power input of C-Blue.
- c. When the battery status icon appears, battery starts charging.

** When the charging is completed the battery mark will disappear*

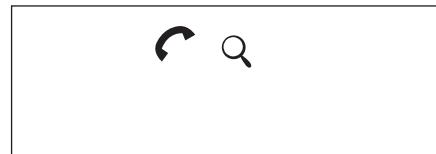


3-2. Turning on & off.

- a. To turn on the C-Blue, press and hold the "  " button for 3 seconds when the unit is off. Calling icon and Pairing icon will appear on the lightened LCD panel.
- b. To turn off the C-Blue, press and hold the "  " button for 3 seconds when the unit is on.


3-3. Paring with Bluetooth mobile phones

- a. Press "  " button for 3 seconds to do the "pairing" with bluetooth phones.
** If you want to cancel the pairing, press "  " button three times*
** Unless handsfree profile is not connected, press the "  " button one more time.*
** If you want to connect to the "smart phone" or "PDA" which has only headset profile, press the "  " button one more time.*
- b. When the search icon () is blinking in the LCD panel, please start pairing in your mobile phone.
(Please refer to your mobile phone user's manual for phone pairing procedure.)

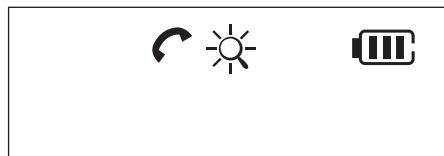

c. When the phone asks for pass code, enter "XXXX"

- d. When the pairing and connection to the phone is completed search icon blinking disappears and the bluetooth icon () will appear in the LCD panel.

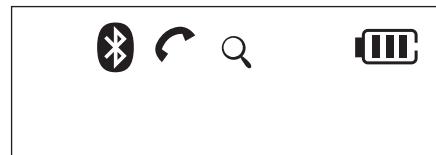

*** Bluetooth icon () indicates connection status between C-Blue and mobile phone. If the icon disappears, please press call button to connect again.**

3-4. Making a call.

- a. handset dialing
When the connection is on, press the "  " button and the handset wave mark () will appear in the LCD display, which means that you are ready to dial numbers with your handset.



b. Voice dialing (Available only when using voice dialing featured phones)

After the beep sound is heard, please say a voice name or voice tag of a person to call.

** Please refer to the voice dialing procedure in your phone manual*

c. Last call re-dialing

Press "CALL" button and the handset wave mark () will appear in the LCD display, which means that you are ready call

d. Ending a call

Press "END" button to end call conversation.

3-5. Answering a call

a. Answering a call

Press "CALL" button when it rings.

You can make a conversation through C-Blue unit.



7

b. Ending a call

Press "END" button to end call conversation.

c. Rejecting a call

Press "END" button while it rings.

d. Transferring audio

Handset → C-Blue : Press "CALL" button of the C-Blue during talking


C-Blue → Handset : Press "CALL" button of the C-Blue during talking

3-6. Volume adjustment

Rotate the volume switch to adjust the volume.

3-7. Installation

Insert the sun visor clip to the fixing groove of C-Blue unit before mounting on the sun visor in your car.




Fix the C-Blue on the sun visor at the proper position for more comfortable use.



8

Press end button for 3 seconds to check if the C-Blue is power-on.
If it is on, you are now ready to use it.

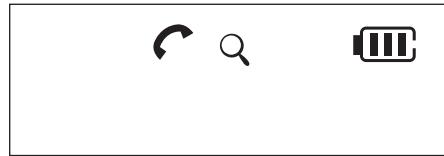

4. Specifications

- ▷ Operating voltage : DC 5V Free Voltage (DC10.8V ~ 28V)
- ▷ Battery : 3.7V Li-polymer
- ▷ Current Consumption : 100 mA Max.
- ▷ Operating Talk Time : 8 Hours
- ▷ Operating Stand-by Time : 500 Hours
- ▷ Charging Time : 3 Hours
- ▷ Bluetooth Profiles Supported : Headset & Handsfree Profile
- ▷ Bluetooth Power Class : Class 2 (Max. 10m)
- ▷ Weight : 120g
- ▷ Dimension : 104 x 51 x 25 mm
- ▷ Compatible Phones : All bluetooth Mobile Phones available
- ▷ Max Audio Power : 1W
- ▷ Microphone sensitivity : 44dB
- ▷ Operating Temperature : -10 ~ 60'C
- ▷ Storage Temperature : -20 ~ 70'C

Caution

Modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Compliance Information

This device complies with Part 15 of FCC Rules.
Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received.

Including interference that may cause undesired operation.

Information to User

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ tv technician for help.