

User manual

Working temperature 40° — -5°, don't put it at the moisture place.

Don't crash or no stack on it

Don't invade it by other article

Keep it away from the chemical or the water drop

Keep it away from the direct sunlight or other heating article

Keep it away from the dust

Backup the files or important information stored in it

Don't refurbish or repair without the authorization

Traffic safety

Don't listen to the music through earphone when driving the motor, or bicycle, otherwise you might break the law in some countries and it's dangerous especially when you set on high volume in the earphone, which cause you fail to hear outside surroundings

Don't use it on the airplane, at the gas station or the hospital.

Protect your hearing

the study conducted by the doctor indicates that it will damage your hearing if you listen to music for continuous long time through earphone and at the high volume. when you are feeling uncomfortable, stop the music or lower the volume.

Battery

the below icons indicate the different level of electricity left in the battery



no replacement of battery without authorization, or the explosion hazard might happen.

Recharge it for at least half of hour if it has been idle for long time and fails to start itself.

Regularly recharge it at least one time monthly

40° —5° is the optimum temperature for the battery recharging or the battery performance might deteriorate slightly

Disposal

the battery might contain the polluting material, please give it to the official recycling-station before disposing the tablet pc, and don't litter.

Menu

Brief introduction

Feature
Overview

Basic operation

Switch on/off
Install APK application
uninstall APK application
Video playback
Music playback
Settings
OTG
Connect with PC
Factory data reset
Firmware
Formatting

Other information


The frequent questions about android
Specification of the device
Accessories

Brief introduction

feature:

9.7inch 5-point touch capacitive panel(support 10-point touch)
WI-FI integrated
Support 2160P(3840 X2160p)Video: AVI, RM, RMVB, MP4, MKV, WMV, MOV, DAT, VOB, PMP, MPEG, MPG, FLV, ASF, TS, TP, 3GP, etc.
Support MP3,WMA,MP2,OGG,AAC,M4A,FLAC,APE,3GP,WAV , etc.
voice record: MP3/WMA format
Support JPG, BMP, PNG, GIF and other format, rotate/auto playback, and support 4096*4096 pixels.
Support TXT, LRC, PDF, HTML, HTM, EPUB, etc.
Built-in DVFS &Smart PMU power management system
HDMI
USB2.0

Overview

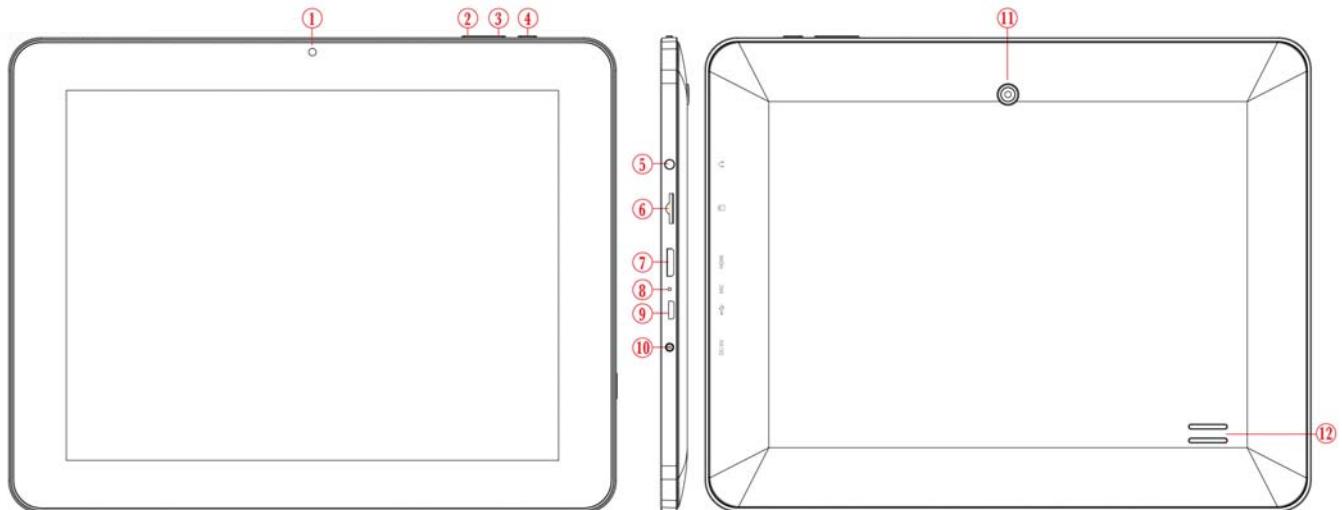

No	Name	function
1	Front camera	Front camera
2	Volume up	Press it to increase the audio volume
3	Volume down	Press it to reduce the audio volume
4	Power	Shortly press to sleep/awake mode, long press to switch on/off
5	Earphone jack	3.5mm audio output for earphone and other device
6	Micro-SD slot	Read Micro-SD(TF) card capable of maximum 32GB storage
7	HDMI	AV output
8	Microphone	Voice recording, video recording
9	USB & OTG	Battery-recharging, USB connection, external 3G & RJ45 converter interface, Process the data through OTG
10	DC-5V	Power-Charging jack
11	Rear camera	Rear camera
12	speaker	speaker

Basic operation

Switch on/off

Switch on the tablet pc

press the  button for continuous 3 seconds

switch off tablet pc

Press the  button for continuous 3 seconds,

Install APK application

1 copy the APK software onto the tablet pc or the micro-SD card

2 press the icon of file manager to select the APK application as allustrat below:



3 choose the application to start installing as illustrate below:




4 press install


uninstall APK application

1 press settings at the main menu, go to Apps

2 choose application to uninstall, then the interface change to:

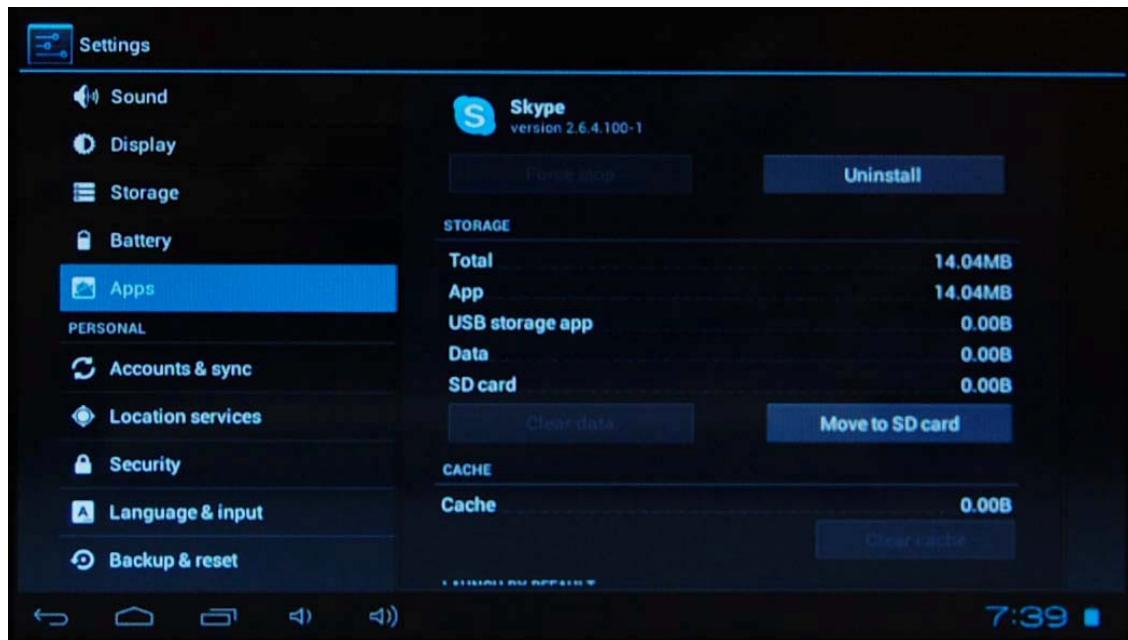

3 press uninstall then the interface turns to:

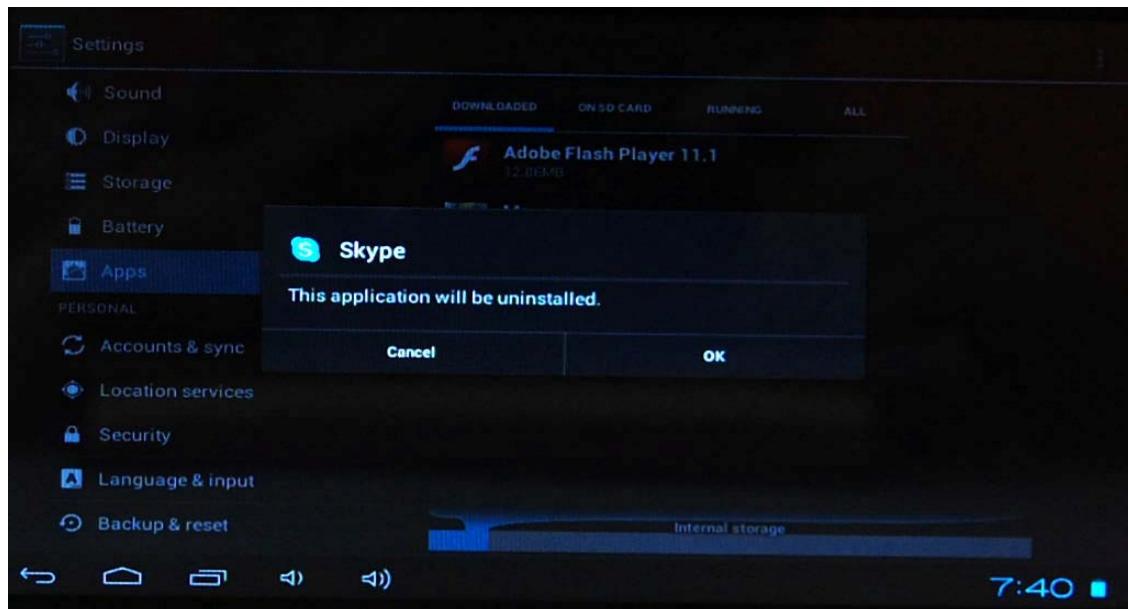

4 press ok.

Video playback

- 1 press super-HD player at the main menu, all the files will be listed
- 2 choose the video file and play back

remark: this device support video with 4k definition (3840 x 2160 pixel), 1080P, 720 P, RM, RMVB, AVI, MP4, MOV, VOB, PMP, ELV, WMV, H264, and there are possibility that this device can not playback all the video originated from the internet, since the video file are processed in the different formats, code, etc.

Music playback

- 1 press music icon at the main menu, then all the music files are listed
- 2 choose the music

remark:

this tablet pc supports lyrics synchronization. the lyrics file must be in *.LRC format and in the same folder with the music file, the names of both files must be same too.

Settings

All the settings are listed below, please operate the device with reference to this manual for the more details

1 Wireless & networks

WIFI : turn on or turn off WIFI

When WIFI turn on, it will automatically search all the WIFI signal available

2 sound

volume

ringtone & notification: choose the notification ringtone (9 models offered by the manufacturer)

Touch Sounds

screen lock sound

3 display

brightness change the brightness level

Wallpaper different options are available

auto-rotate screen choose or reject by pressing it

sleep from shortest 15 seconds to 30 minutes, 7 options are available then this device will sleep(screen-saving)

font size Small/Normal/Large/Huge option

accelerometer coordinate system

default coordinate system

special coordinate system, to support some other games

Screen adaption

This is for the some game in the low resolution.

5 Storage

Here show the occupied space and the available space both in the internal storage and external storage(micro SD card)

6 battery

it shows how long the battery will last

7 Apps(applications)

all the applications and its storage occupancy stored in different area of downloaded, on SD card, RUNNING, ALL

8 location services

this is about the google map application, it can locate where the tablet pc is when its wifi is working, also can offer other service like the restaurant, or gas station nearby.

9 Security

Screen lock we offer different options like password, PIN, pattern, slide.

Encrypt tablet require a numeric PIN or password to decrypt tablet each time you power it on

Make passwords visible

Unknown sources allow installations of non-market apps.

10 Language & input

We offer a lot of OS(operation system) languages being used nowadays, correspondingly keyboard-input languages are available

11 Backup & reset

Back up my data including application data, Wi-Fi password, other settings to the google servers

Factory data reset erase all data on tablet

12 Date & time

Automatic date & time

Automatic time zone

Both of these are network-provided, or you can set them manually .

13 Developer options

USB debugging, debug mode when USB is connected

Stay awake screen will never sleep while power-charging

Allow mock locations

User interface

Strict mode enabled flash screen when applications do long operations on main thread

Pointer location screen overlay showing current touch data

Show touches as how visual feedback for touches

Show screen updates flash areas of screen when they update

Show CPU usage screen overlay showing current CPU usage

Force GPU rendering use 2D hardware acceleration in applications

Window animation scale

Transition animation scale

APPS

Don't keep activities destroy every activity as soon as the user leaves it

Background process limit

Show all ANRS show app not responding dialog for background apps

14 About tablet

It is about the Model Number, Status of the battery, network, and other information, and OS version etc.

OTG

It is the abbreviation of on-the-go, it allows the data-transferring and data-sharing between this device and other one without "host".

1 connect this device with other one for example flash memory storage through OTG converter

2 press "file manager" after this device display "external devices in", then press the icon  all the files will be listed.

Remark:

The original OTG converter is recommended, if other USB storage is found incompatible , please download the firmware from the authorized homepage.

When OTG being used, make sure the sufficient battery power insides this device , if other USB storage has the independent power supply, please turn on the power.

OTG is compatible with the external keyboard, mouse and other device.

Connect with the PC

Connect this device with PC by USB cable,
PC will charge the tablet automatically, except that you can process the tablet as the mobile storage, you can stop by pressing “turn off USB storage”. vice versa

Factory data reset

If this device is infected with computer virus, or the applications by the third party cause it fail then please turn to “factory data reset” to delete the virus or applications and recover to the factory’s setting.

Firmware update.

please contact the manufacturer or the authorized local dealer for the new firmware available. when you are upgrading your tablet pc, ensure that:

- 1 the tablet pc must remain at least 60% battery electricity inside, or the insufficient battery probably cause the firmware upgrading fail and eventually this device can not work well.
- 2 When upgrading , don’t turn off or do other operations, otherwise the upgrading will fail

Remark: before upgrading firmware, please backup all the information stored in this tablet pc, otherwise it will be deleted .

Formatting

- 1 connect this device with pc by USB cable
- 2 double press the icon of my PC and select “mobile storage”
- 3 press the right button of mouse, select “format”
- 4 press “start”
- 5 press “yes”
- 6 press “sure” after formatting
- 7 revert from “formatting”

Remark: all the file or information stored inside is not recoverable after formatting

Other information

Q & A

Q: what's APK file, and its relationship with android tablet pc?

A: APK is the abbreviation of android package, it is operated under android OS.

Q: how to obtain APK applications?

A: usually go to android market to download, or other third-party source.

Q: Why some APK applications can not work well on this tablet pc?

A: most APK applications online are developed by the individual, probably require the special support by the hardware and software, for example some APK game developed under android OS 2.3, and then it can not run itself well under android OS 4.0.

Q: why WIFI pause automatically?

A: Screen timeout is settled on, then WIFI will shut automatically to save the battery power, when this device is resumed, WIFI will revert to connection automatically in 10 seconds.

Q: what kind of USB3G dongle it supports

Specification of the device

frequency:	1.2GHz
CPU:	Boxchip A10
SDRAM:	1GB DDRIII
Touch mode:	Capacitive 5-point touch(support 10-point touch)
Screen :	9.7" 1024x768
Internal storage:	4GB/8GB/16GB
Camera :	Dual camera
wireless:	Wi-Fi 802.11 b/g/n
Battery capacity :	7000Mah
External :	GPS
OS:	Google Android 4
Internet:	Internet-browsing, online entertainment, office work, game, etc.
Unit size	242.6*190*11.8mm
Net weight	583G

Accessories

OTG cable:	1 PC
USB cable:	1 PC
Earphone:	1 PC
Manual :	1 PC
Charger:	1 PC
Package:	1 PC

Remark:

We reserve the right to adjust the product without prior notification, and this manual is for your reference, in some case you need to operate the device to get more information.

When you take advantage of the third-party's sources, if the copyright or legal issue is involved, please stop or delete the mentioned sources.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radiofrequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However,

there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following

measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.