


3.6.4 Test Setup

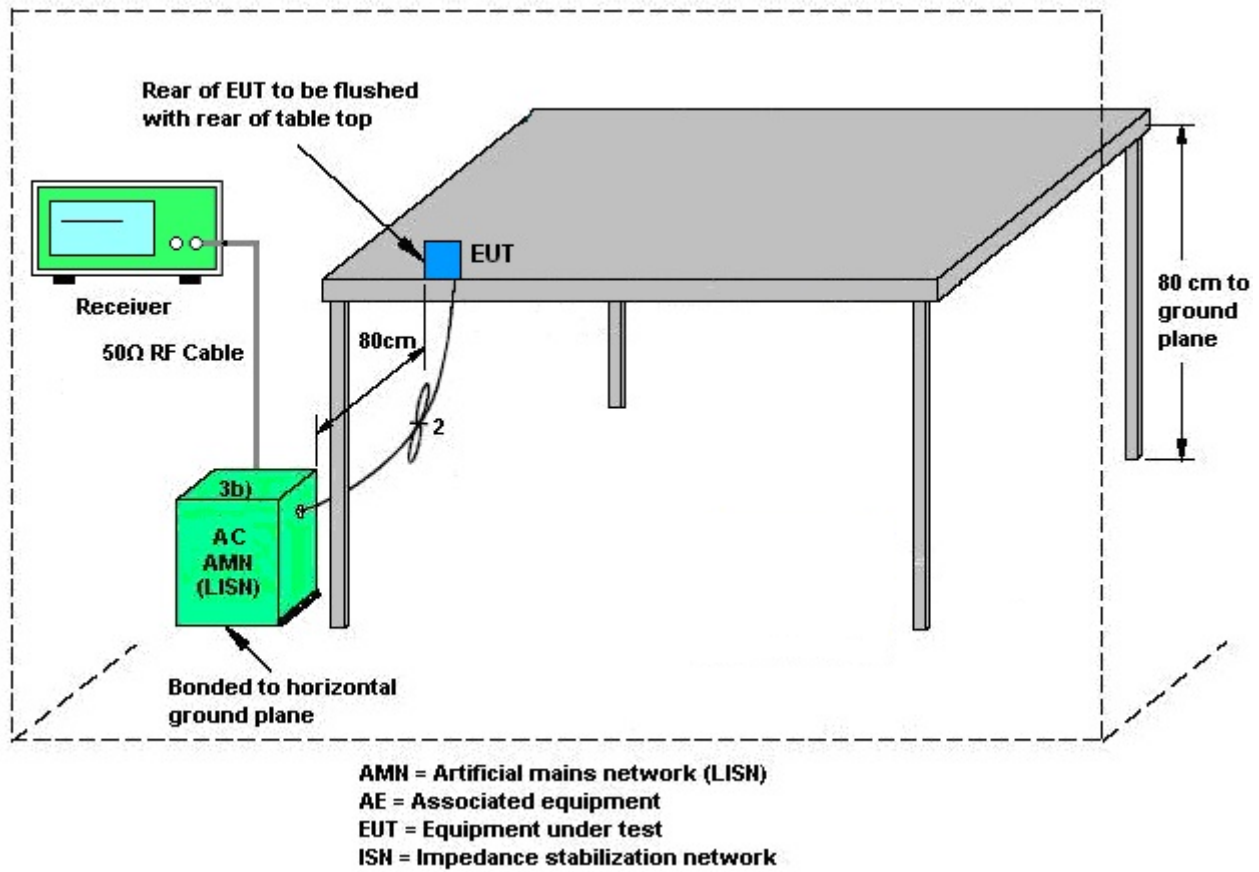

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 0 (dBi)	Ant. 1 (dBi)				
2.4 GHz	4.00	4.00	4.00	7.01	0.00	1.01

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Mar. 19, 2023~ Apr. 20, 2023	Apr. 06, 2023	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 05, 2023		Apr. 04, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	Mar. 19, 2023~ Apr. 20, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	Mar. 19, 2023~ Apr. 20, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Attenuator	MICROWAV	EMVE2214-10	2	30MHz~26.5GHz	Feb. 22, 2023	Mar. 19, 2023~ Apr. 20, 2023	Feb. 22, 2024	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Apr. 03, 2023~ Apr. 27, 2023	Jul. 06, 2023	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Apr. 03, 2023~ Apr. 27, 2023	Jul. 27, 2024	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2021	Apr. 03, 2023~ Apr. 27, 2023	Sep. 27, 2023	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Apr. 03, 2023~ Apr. 27, 2023	Jul. 06, 2023	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2022	Apr. 03, 2023~ Apr. 27, 2023	Jul. 06, 2023	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2022	Apr. 03, 2023~ Apr. 27, 2023	Apr. 08, 2023	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2023		Apr. 07, 2024	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 19, 2022	Apr. 03, 2023~ Apr. 27, 2023	Oct. 18, 2023	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Apr. 03, 2023~ Apr. 27, 2023	Oct. 18, 2023	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 19, 2022	Apr. 03, 2023~ Apr. 27, 2023	Oct. 18, 2023	Radiation (03CH02-SZ)
Attenuator	SolvangTech	STI02-3125-06	2	30MHz~26.5GHz	Jan. 27, 2023	Apr. 03, 2023~ Apr. 27, 2023	Jan. 26, 2024	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Nov. 10, 2022	Apr. 03, 2023~ Apr. 27, 2023	Nov. 10, 2023	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Apr. 03, 2023~ Apr. 27, 2023	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Apr. 03, 2023~ Apr. 27, 2023	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Aug. 31, 2023	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Aug. 31, 2023	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Aug. 31, 2023	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2023	Aug. 31, 2023	Jul. 06, 2024	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 1.34 dB
Conducted Emissions	± 1.34 dB
Occupied Channel Bandwidth	± 0.13 %
Conducted Power Spectral Density	± 1.32 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2023/3/19~2023/4/20	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1		
11b	1Mbps	2	1	2412	13.49	13.39	9.02	9.04	0.50	Pass
11b	1Mbps	2	6	2437	13.49	13.34	9.04	9.02	0.50	Pass
11b	1Mbps	2	11	2462	13.49	13.44	8.56	9.04	0.50	Pass
11b	1Mbps	2	12	2467	13.39	13.29	8.56	8.04	0.50	Pass
11b	1Mbps	2	13	2472	13.29	13.24	8.06	9.04	0.50	Pass
11g	6Mbps	2	1	2412	16.68	16.58	16.33	16.33	0.50	Pass
11g	6Mbps	2	6	2437	16.68	16.68	16.31	16.31	0.50	Pass
11g	6Mbps	2	11	2462	16.73	16.58	16.33	16.33	0.50	Pass
11g	6Mbps	2	12	2467	16.73	16.58	16.31	16.33	0.50	Pass
11g	6Mbps	2	13	2472	16.68	16.53	16.33	16.33	0.50	Pass
HT20	MCS0	2	1	2412	17.68	17.63	17.59	17.57	0.50	Pass
HT20	MCS0	2	6	2437	17.68	17.68	17.57	17.59	0.50	Pass
HT20	MCS0	2	11	2462	17.63	17.63	17.57	17.57	0.50	Pass
HT20	MCS0	2	12	2467	17.68	17.63	17.57	17.57	0.50	Pass
HT20	MCS0	2	13	2472	17.68	17.58	17.57	17.57	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band																
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11b	1Mbps	2	1	2412	17.70	17.40	20.56	30.00		3.00		23.56		36.00		Pass
11b	1Mbps	2	6	2437	17.90	17.50	20.71	30.00		3.00		23.71		36.00		Pass
11b	1Mbps	2	11	2462	17.70	17.50	20.61	30.00		3.00		23.61		36.00		Pass
11b	1Mbps	2	12	2467	12.10	11.80	14.96	30.00		3.00		17.96		36.00		Pass
11b	1Mbps	2	13	2472	11.80	11.50	14.66	30.00		3.00		17.66		36.00		Pass
11g	6Mbps	2	1	2412	15.50	15.40	18.46	30.00		3.00		21.46		36.00		Pass
11g	6Mbps	2	6	2437	18.00	17.90	20.96	30.00		3.00		23.96		36.00		Pass
11g	6Mbps	2	11	2462	15.40	15.30	18.36	30.00		3.00		21.36		36.00		Pass
11g	6Mbps	2	12	2467	11.20	11.10	14.16	30.00		3.00		17.16		36.00		Pass
11g	6Mbps	2	13	2472	6.10	6.10	9.11	30.00		3.00		12.11		36.00		Pass
HT20	MCS0	2	1	2412	15.70	15.50	18.61	30.00		3.00		21.61		36.00		Pass
HT20	MCS0	2	6	2437	15.30	15.20	18.26	30.00		3.00		21.26		36.00		Pass
HT20	MCS0	2	11	2462	15.50	15.30	18.41	30.00		3.00		21.41		36.00		Pass
HT20	MCS0	2	12	2467	11.10	11.10	14.11	30.00		3.00		17.11		36.00		Pass
HT20	MCS0	2	13	2472	9.60	9.70	12.66	30.00		3.00		15.66		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.


Setting	
Ant 0	Ant 1
18.00	
18.00	
18.00	
12.50	
12.00	
15.50	
18.00	
15.50	
11.50	
6.00	
15.50	
15.50	
11.50	
9.50	

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band												
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 0	Ant 1	Worse + 3.01	Ant 0	Ant 1	Ant 0	Ant 1	
11b	1Mbps	2	1	2412	-5.19	-5.21	-2.18	6.01		7.99		Pass
11b	1Mbps	2	6	2437	-4.44	-4.44	-1.43	6.01		7.99		Pass
11b	1Mbps	2	11	2462	-4.42	-4.72	-1.41	6.01		7.99		Pass
11b	1Mbps	2	12	2467	-9.80	-10.45	-6.79	6.01		7.99		Pass
11b	1Mbps	2	13	2472	-10.58	-10.76	-7.57	6.01		7.99		Pass
11g	6Mbps	2	1	2412	-6.67	-7.60	-3.66	6.01		7.99		Pass
11g	6Mbps	2	6	2437	-6.63	-6.43	-3.42	6.01		7.99		Pass
11g	6Mbps	2	11	2462	-9.18	-9.25	-6.17	6.01		7.99		Pass
11g	6Mbps	2	12	2467	-12.30	-12.31	-9.29	6.01		7.99		Pass
11g	6Mbps	2	13	2472	-15.44	-15.64	-12.43	6.01		7.99		Pass
HT20	MCS0	2	1	2412	-8.22	-8.52	-5.21	6.01		7.99		Pass
HT20	MCS0	2	6	2437	-6.97	-6.78	-3.77	6.01		7.99		Pass
HT20	MCS0	2	11	2462	-9.56	-9.52	-6.51	6.01		7.99		Pass
HT20	MCS0	2	12	2467	-12.89	-12.41	-9.40	6.01		7.99		Pass
HT20	MCS0	2	13	2472	-15.86	-15.66	-12.65	6.01		7.99		Pass

Measured power density (dBm) has offset with cable loss.


Appendix B. AC Conducted Emission Test Results

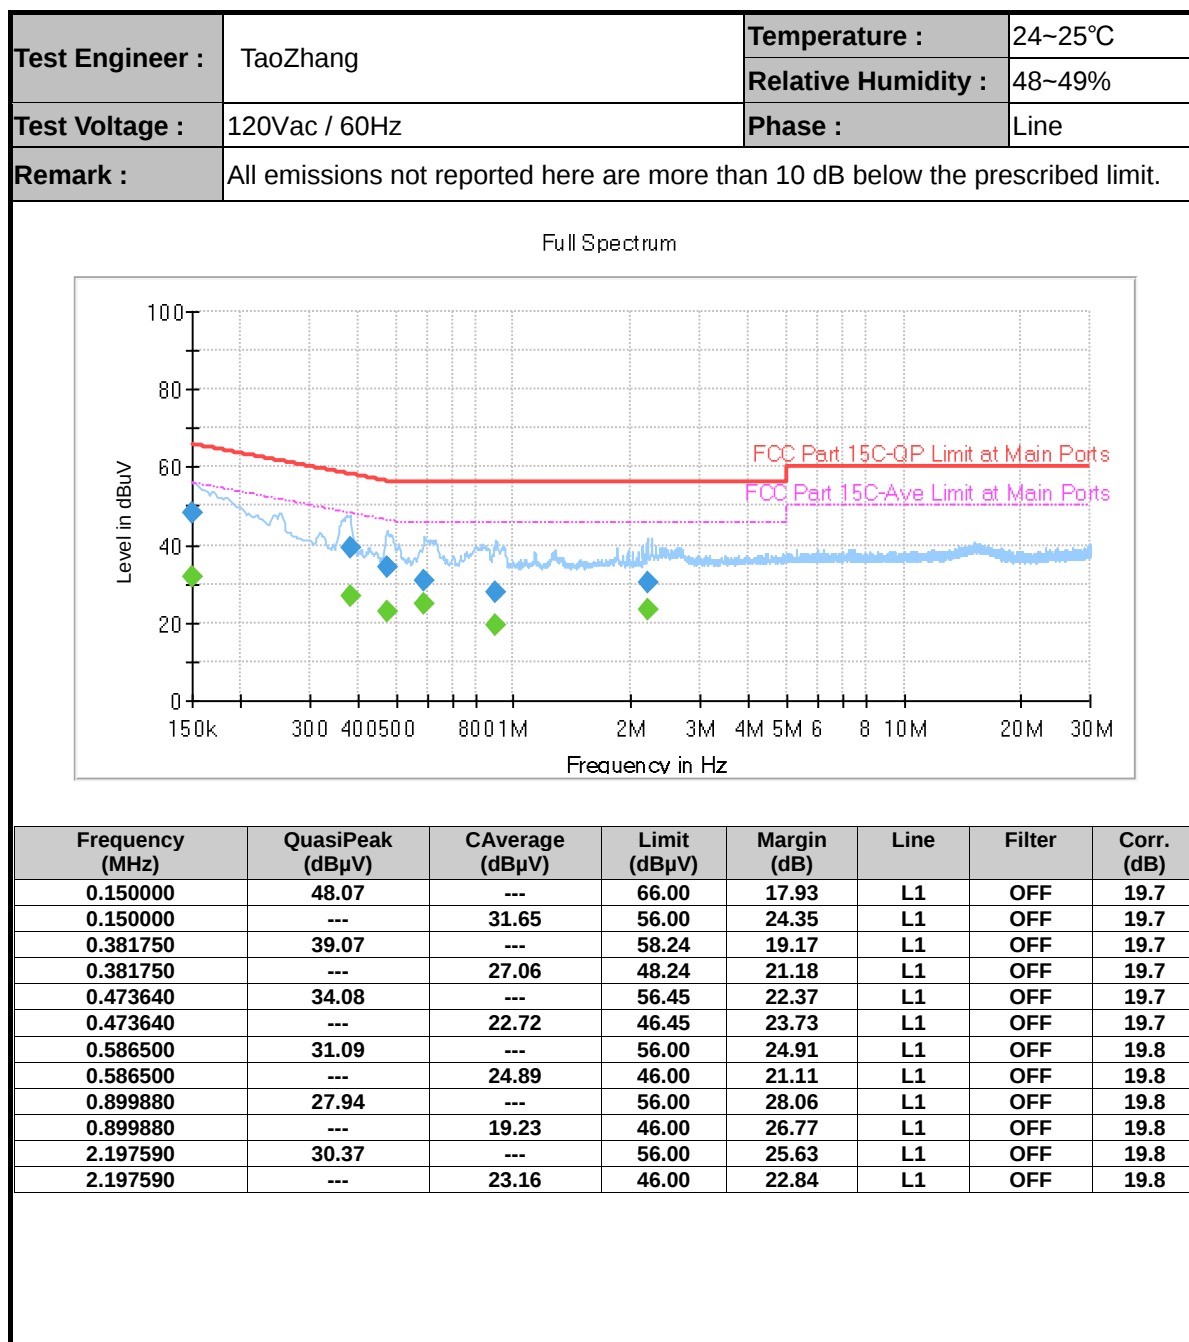



Test Engineer :	TaoZhang	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

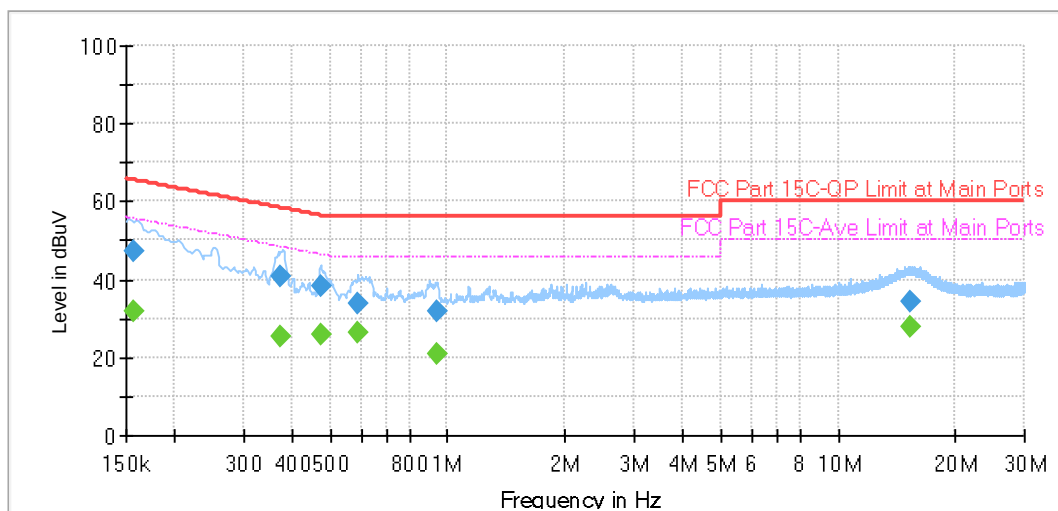

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	47.11	---	65.63	18.52	N	OFF	19.7
0.156750	---	31.69	55.63	23.95	N	OFF	19.7
0.372750	40.88	---	58.44	17.56	N	OFF	19.7
0.372750	---	25.30	48.44	23.14	N	OFF	19.7
0.473280	38.07	---	56.46	18.39	N	OFF	19.7
0.473280	---	25.99	46.46	20.46	N	OFF	19.7
0.587940	33.73	---	56.00	22.27	N	OFF	19.7
0.587940	---	26.51	46.00	19.49	N	OFF	19.7
0.939030	31.99	---	56.00	24.01	N	OFF	19.7
0.939030	---	20.77	46.00	25.23	N	OFF	19.7
15.398250	34.35	---	60.00	25.65	N	OFF	20.2
15.398250	---	27.67	50.00	22.33	N	OFF	20.2



Appendix C. Radiated Spurious Emission

Test Engineer :	Shun ping You	Temperature :	24~25°C
		Relative Humidity :	48~49%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2387.595	54.75	-19.25	74	47.68	32.36	6.44	31.73	378	346	P	H
		2387.49	46.76	-7.24	54	39.69	32.36	6.44	31.73	378	346	A	H
	*	2412	105.01	-	-	97.87	32.37	6.44	31.67	378	346	P	H
	*	2412	101.91	-	-	94.77	32.37	6.44	31.67	378	346	A	H
		2387.805	55.78	-18.22	74	48.71	32.36	6.44	31.73	140	97	P	V
		2385.285	48.01	-5.99	54	40.95	32.35	6.44	31.73	140	97	A	V
	*	2412	110.24	-	-	103.1	32.37	6.44	31.67	140	97	P	V
	*	2412	107.32	-	-	100.18	32.37	6.44	31.67	140	97	A	V
802.11b CH 06 2437MHz		2337.16	52.95	-21.05	74	46.16	32.34	6.3	31.85	167	198	P	H
		2386.44	41.57	-12.43	54	34.5	32.36	6.44	31.73	167	198	A	H
	*	2437	98.18	-	-	90.99	32.38	6.48	31.67	167	198	P	H
	*	2437	95.43	-	-	88.24	32.38	6.48	31.67	167	198	A	H
		2494.12	52.6	-21.4	74	45.17	32.4	6.53	31.5	167	198	P	H
		2499.16	42.09	-11.91	54	34.66	32.4	6.53	31.5	167	198	A	H
		2359	52.85	-21.15	74	45.93	32.34	6.37	31.79	142	331	P	V
		2359.42	42.26	-11.74	54	35.34	32.34	6.37	31.79	142	331	A	V
	*	2437	110.87	-	-	103.68	32.38	6.48	31.67	142	331	P	V
	*	2437	106.78	-	-	99.59	32.38	6.48	31.67	142	331	A	V
		2491.53	53.21	-20.79	74	45.78	32.4	6.53	31.5	142	331	P	V
		2483.9	42.54	-11.46	54	35.18	32.39	6.53	31.56	142	331	A	V



802.11b CH 11 2462MHz	*	2462	106.4	-	-	99.15	32.39	6.48	31.62	100	125	P	H
	*	2462	103.33	-	-	96.08	32.39	6.48	31.62	100	125	A	H
		2490.88	53.43	-20.57	74	46	32.4	6.53	31.5	100	125	P	H
		2484.08	42.76	-11.24	54	35.4	32.39	6.53	31.56	100	125	A	H
	*	2462	110.25	-	-	103	32.39	6.48	31.62	131	249	P	V
	*	2462	106.87	-	-	99.62	32.39	6.48	31.62	131	249	A	V
		2483.52	55.79	-18.21	74	48.43	32.39	6.53	31.56	131	249	P	V
		2487.76	48.64	-5.36	54	41.27	32.4	6.53	31.56	131	249	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 12 2467MHz	*	2467	98.91	-	-	91.55	32.39	6.53	31.56	100	123	P	H
	*	2467	96.05	-	-	88.69	32.39	6.53	31.56	100	123	A	H
		2483.64	53.38	-20.62	74	46.02	32.39	6.53	31.56	100	123	P	H
		2483.84	44.18	-9.82	54	36.82	32.39	6.53	31.56	100	123	A	H
	*	2467	103.87	-	-	96.51	32.39	6.53	31.56	174	93	P	V
	*	2467	99.56	-	-	92.2	32.39	6.53	31.56	174	93	A	V
		2483.8	56.33	-17.67	74	48.97	32.39	6.53	31.56	174	93	P	V
		2483.96	48.87	-5.13	54	41.51	32.39	6.53	31.56	174	93	A	V
802.11b CH 13 2472MHz	*	2472	95.33	-	-	87.97	32.39	6.53	31.56	100	127	P	H
	*	2472	92.61	-	-	85.25	32.39	6.53	31.56	100	127	A	H
		2483.76	55.1	-18.9	74	47.74	32.39	6.53	31.56	100	127	P	H
		2483.8	45.23	-8.77	54	37.87	32.39	6.53	31.56	100	127	A	H
	*	2472	104.02	-	-	96.66	32.39	6.53	31.56	114	342	P	V
	*	2472	100.91	-	-	93.55	32.39	6.53	31.56	114	342	A	V
		2487.48	56.95	-17.05	74	49.59	32.39	6.53	31.56	114	342	P	V
		2487.64	50.35	-3.65	54	42.98	32.4	6.53	31.56	114	342	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	45.07	-28.93	74	59.1	34.4	9.47	57.9	138	61	P	H
		4824	39.39	-14.61	54	53.42	34.4	9.47	57.9	138	61	A	H
		4824	47.28	-26.72	74	61.31	34.4	9.47	57.9	129	52	P	V
		4824	41.59	-12.41	54	55.62	34.4	9.47	57.9	129	52	A	V
802.11b CH 06 2437MHz		4874	45.78	-28.22	74	59.81	34.37	9.5	57.9	137	61	P	H
		4874	40.76	-13.24	54	54.79	34.37	9.5	57.9	137	61	A	H
		7311	49.45	-24.55	74	61.63	36.05	11.24	59.47	235	45	P	H
		7311	44.58	-9.42	54	56.76	36.05	11.24	59.47	235	45	A	H
		4874	46.66	-27.34	74	60.69	34.37	9.5	57.9	154	41	P	V
		4874	41.53	-12.47	54	55.56	34.37	9.5	57.9	154	41	A	V
		7311	48.98	-25.02	74	61.16	36.05	11.24	59.47	209	25	P	V
		7311	43.14	-10.86	54	55.32	36.05	11.24	59.47	209	25	A	V
802.11b CH 11 2462MHz		4924	44.09	-29.91	74	58.09	34.34	9.56	57.9	133	65	P	H
		4924	39.81	-14.19	54	53.81	34.34	9.56	57.9	133	65	A	H
		7386	49.52	-24.48	74	61.93	35.98	11.32	59.71	259	51	P	H
		7386	44.33	-9.67	54	56.74	35.98	11.32	59.71	259	51	A	H
		4924	45.11	-28.89	74	59.11	34.34	9.56	57.9	172	273	P	V
		4924	40.19	-13.81	54	54.19	34.34	9.56	57.9	172	273	A	V
		7386	49.33	-24.67	74	61.74	35.98	11.32	59.71	254	11	P	V
		7386	44.07	-9.93	54	56.48	35.98	11.32	59.71	254	11	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 12 2467MHz		4934	44.07	-29.93	74	58.07	34.34	9.56	57.9	235	45	P	H
		4934	37.66	-16.34	54	51.66	34.34	9.56	57.9	235	45	A	H
		7401	45.9	-28.1	74	58.37	35.97	11.32	59.76	185	52	P	H
		7401	38.95	-15.05	54	51.42	35.97	11.32	59.76	185	52	A	H
		4934	45.55	-28.45	74	59.55	34.34	9.56	57.9	180	156	P	V
		4934	38.04	-15.96	54	52.04	34.34	9.56	57.9	180	156	A	V
		7401	46.3	-27.7	74	58.77	35.97	11.32	59.76	214	26	P	V
		7401	39.69	-14.31	54	52.16	35.97	11.32	59.76	241	26	A	V
802.11b CH 13 2472MHz		4944	43.67	-30.33	74	57.68	34.33	9.56	57.9	141	62	P	H
		4944	36.21	-17.79	54	50.22	34.33	9.56	57.9	141	62	A	H
		7416	45.74	-28.26	74	58.24	35.97	11.29	59.76	259	72	P	H
		7416	39.34	-14.66	54	51.84	35.97	11.29	59.76	259	72	A	H
		4944	43.96	-30.04	74	57.97	34.33	9.56	57.9	155	21	P	V
		4944	37.06	-16.94	54	51.07	34.33	9.56	57.9	155	21	A	V
		7416	45.65	-28.35	74	58.15	35.97	11.29	59.76	206	28	P	V
		7416	38.97	-15.03	54	51.47	35.97	11.29	59.76	206	28	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.695	61.05	-12.95	74	53.98	32.36	6.44	31.73	368	338	P	H
		2390	48.85	-5.15	54	41.78	32.36	6.44	31.73	368	338	A	H
	*	2412	104.95	-	-	97.81	32.37	6.44	31.67	368	338	P	H
	*	2412	97.18	-	-	90.04	32.37	6.44	31.67	368	338	A	H
		2390	62.63	-11.37	74	55.56	32.36	6.44	31.73	229	84	P	V
		2390	50.94	-3.06	54	43.87	32.36	6.44	31.73	229	84	A	V
	*	2412	111.29	-	-	104.15	32.37	6.44	31.67	229	84	P	V
	*	2412	103.99	-	-	96.85	32.37	6.44	31.67	229	84	A	V
802.11g CH 06 2437MHz		2387.7	53.02	-20.98	74	45.95	32.36	6.44	31.73	380	355	P	H
		2389.38	43.09	-10.91	54	36.02	32.36	6.44	31.73	380	355	A	H
	*	2437	106.79	-	-	99.6	32.38	6.48	31.67	380	355	P	H
	*	2437	99.88	-	-	92.69	32.38	6.48	31.67	380	355	A	H
		2485.09	53.87	-20.13	74	46.51	32.39	6.53	31.56	380	355	P	H
		2483.5	42.99	-11.01	54	35.63	32.39	6.53	31.56	380	355	A	H
		2387.14	55.24	-18.76	74	48.17	32.36	6.44	31.73	230	72	P	V
		2387	44.72	-9.28	54	37.65	32.36	6.44	31.73	230	72	A	V
	*	2437	113.38	-	-	106.19	32.38	6.48	31.67	230	72	P	V
	*	2437	106.47	-	-	99.28	32.38	6.48	31.67	230	72	A	V
		2484.81	57.64	-16.36	74	50.28	32.39	6.53	31.56	230	72	P	V
		2484.95	45.97	-8.03	54	38.61	32.39	6.53	31.56	230	72	A	V



802.11g CH 11 2462MHz	*	2462	104.54	-	-	97.29	32.39	6.48	31.62	101	118	P	H
	*	2462	97.05	-	-	89.8	32.39	6.48	31.62	101	118	A	H
		2484.2	56.16	-17.84	74	48.8	32.39	6.53	31.56	101	118	P	H
		2483.52	45.02	-8.98	54	37.66	32.39	6.53	31.56	101	118	A	H
	*	2462	110.29	-	-	103.04	32.39	6.48	31.62	198	76	P	V
	*	2462	102.86	-	-	95.61	32.39	6.48	31.62	198	76	A	V
		2483.8	63.05	-10.95	74	55.69	32.39	6.53	31.56	198	76	P	V
		2483.52	50.96	-3.04	54	43.6	32.39	6.53	31.56	198	76	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 12 2467MHz	*	2467	101.08	-	-	93.72	32.39	6.53	31.56	100	121	P	H
	*	2467	93.87	-	-	86.51	32.39	6.53	31.56	100	121	A	H
		2483.88	55.84	-18.16	74	48.48	32.39	6.53	31.56	100	121	P	H
		2483.52	45.16	-8.84	54	37.8	32.39	6.53	31.56	100	121	A	H
	*	2467	107.7	-	-	100.34	32.39	6.53	31.56	244	82	P	V
	*	2467	99.96	-	-	92.6	32.39	6.53	31.56	244	82	A	V
		2483.72	62.47	-11.53	74	55.11	32.39	6.53	31.56	244	82	P	V
		2483.52	50.97	-3.03	54	43.61	32.39	6.53	31.56	244	82	A	V
802.11g CH 13 2472MHz	*	2472	95.32	-	-	87.96	32.39	6.53	31.56	100	126	P	H
	*	2472	87.68	-	-	80.32	32.39	6.53	31.56	100	126	A	H
		2484.04	55.45	-18.55	74	48.09	32.39	6.53	31.56	100	126	P	H
		2484.08	44.71	-9.29	54	37.35	32.39	6.53	31.56	100	126	A	H
	*	2472	103.09	-	-	95.73	32.39	6.53	31.56	246	74	P	V
	*	2472	95.73	-	-	88.37	32.39	6.53	31.56	246	74	A	V
		2484.28	62.06	-11.94	74	54.7	32.39	6.53	31.56	246	74	P	V
		2484.2	50.47	-3.53	54	43.11	32.39	6.53	31.56	246	74	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	42.62	-31.38	74	56.65	34.4	9.47	57.9	133	66	P	H
		4824	33.05	-20.95	54	47.08	34.4	9.47	57.9	133	66	A	H
		4824	43.8	-30.2	74	57.83	34.4	9.47	57.9	142	58	P	V
		4824	33.38	-20.62	54	47.41	34.4	9.47	57.9	142	58	A	V
802.11g CH 06 2437MHz		4874	43.82	-30.18	74	57.85	34.37	9.5	57.9	100	36	P	H
		4874	33.59	-20.41	54	47.62	34.37	9.5	57.9	100	36	A	H
		7311	50.54	-23.46	74	62.72	36.05	11.24	59.47	231	51	P	H
		7311	40.94	-13.06	54	53.12	36.05	11.24	59.47	231	51	A	H
		4874	44.34	-29.66	74	58.37	34.37	9.5	57.9	144	62	P	V
		4874	33.22	-20.78	54	47.25	34.37	9.5	57.9	144	62	A	V
		7311	50.48	-23.52	74	62.66	36.05	11.24	59.47	170	12	P	V
		7311	40.32	-13.68	54	52.5	36.05	11.24	59.47	170	12	A	V
802.11g CH 11 2462MHz		4924	43.36	-30.64	74	57.36	34.34	9.56	57.9	132	68	P	H
		4924	33.82	-20.18	54	47.82	34.34	9.56	57.9	132	68	A	H
		7386	46.79	-27.21	74	59.2	35.98	11.32	59.71	135	253	P	H
		7386	36.46	-17.54	54	48.87	35.98	11.32	59.71	135	253	A	H
		4924	43.03	-30.97	74	57.03	34.34	9.56	57.9	181	132	P	V
		4924	33.37	-20.63	54	47.37	34.34	9.56	57.9	181	132	A	V
		7386	46.38	-27.62	74	58.79	35.98	11.32	59.71	253	47	P	V
		7386	35.83	-18.17	54	48.24	35.98	11.32	59.71	253	47	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 12 2467MHz		4934	42.55	-31.45	74	56.55	34.34	9.56	57.9	214	233	P	H
		4934	33.03	-20.97	54	47.03	34.34	9.56	57.9	214	233	A	H
		7401	45.27	-28.73	74	57.74	35.97	11.32	59.76	242	46	P	H
		7401	35.44	-18.56	54	47.91	35.97	11.32	59.76	242	46	A	H
		4934	43.59	-30.41	74	57.59	34.34	9.56	57.9	158	241	P	V
		4934	33.42	-20.58	54	47.42	34.34	9.56	57.9	158	241	A	V
		7401	44.92	-29.08	74	57.39	35.97	11.32	59.76	148	125	P	V
		7401	35.09	-18.91	54	47.56	35.97	11.32	59.76	148	125	A	V
802.11g CH 13 2472MHz		4944	42.87	-31.13	74	56.88	34.33	9.56	57.9	152	66	P	H
		4944	32.21	-21.79	54	46.22	34.33	9.56	57.9	152	66	A	H
		7416	45.41	-28.59	74	57.91	35.97	11.29	59.76	123	233	P	H
		7416	35.31	-18.69	54	47.81	35.97	11.29	59.76	123	233	A	H
		4944	42.41	-31.59	74	56.42	34.33	9.56	57.9	100	32	P	V
		4944	32.21	-21.79	54	46.22	34.33	9.56	57.9	100	32	A	V
		7416	45.37	-28.63	74	57.87	35.97	11.29	59.76	209	258	P	V
		7416	34.93	-19.07	54	47.43	35.97	11.29	59.76	209	258	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2390	57.76	-16.24	74	50.69	32.36	6.44	31.73	100	117	P	H
		2389.17	44.85	-9.15	54	37.78	32.36	6.44	31.73	100	117	A	H
	*	2412	101.31	-	-	94.17	32.37	6.44	31.67	100	117	P	H
	*	2412	94.71	-	-	87.57	32.37	6.44	31.67	100	117	A	H
		2389.905	63.87	-10.13	74	56.8	32.36	6.44	31.73	225	83	P	V
		2390	50.99	-3.01	54	43.92	32.36	6.44	31.73	225	83	A	V
	*	2412	110.18	-	-	103.04	32.37	6.44	31.67	225	83	P	V
	*	2412	102.6	-	-	95.46	32.37	6.44	31.67	225	83	A	V
802.11n HT20 CH 06 2437MHz		2386.16	52.89	-21.11	74	45.82	32.36	6.44	31.73	101	114	P	H
		2389.24	42.34	-11.66	54	35.27	32.36	6.44	31.73	101	114	A	H
	*	2437	107.75	-	-	100.56	32.38	6.48	31.67	101	114	P	H
	*	2437	100.27	-	-	93.08	32.38	6.48	31.67	101	114	A	H
		2486.21	53.57	-20.43	74	46.21	32.39	6.53	31.56	101	114	P	H
		2483.55	42.78	-11.22	54	35.42	32.39	6.53	31.56	101	114	P	H
		2388.54	54.83	-19.17	74	47.76	32.36	6.44	31.73	100	344	P	V
		2389.8	45.52	-8.48	54	38.45	32.36	6.44	31.73	100	344	A	V
	*	2437	112.36	-	-	105.17	32.38	6.48	31.67	100	344	P	V
	*	2437	104.96	-	-	97.77	32.38	6.48	31.67	100	344	A	V
		2483.9	55.09	-18.91	74	47.73	32.39	6.53	31.56	100	344	P	V
		2484.04	44.34	-9.66	54	36.98	32.39	6.53	31.56	100	344	A	V



802.11n HT20 CH 11 2462MHz	*	2462	104.39	-	-	97.14	32.39	6.48	31.62	100	124	P	H
	*	2462	97.12	-	-	89.87	32.39	6.48	31.62	100	124	A	H
		2483.56	56.23	-17.77	74	48.87	32.39	6.53	31.56	100	124	P	H
		2483.52	45.49	-8.51	54	38.13	32.39	6.53	31.56	100	124	A	H
	*	2462	110.97	-	-	103.72	32.39	6.48	31.62	251	78	P	V
	*	2462	103.24	-	-	95.99	32.39	6.48	31.62	251	78	A	V
		2483.88	64.8	-9.2	74	57.44	32.39	6.53	31.56	251	78	P	V
		2483.76	50.89	-3.11	54	43.53	32.39	6.53	31.56	251	78	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 12 2467MHz	*	2467	100.17	-	-	92.81	32.39	6.53	31.56	100	117	P	H
	*	2467	92.77	-	-	85.41	32.39	6.53	31.56	100	117	A	H
		2483.56	56.57	-17.43	74	49.21	32.39	6.53	31.56	100	117	P	H
		2483.52	45.6	-8.4	54	38.24	32.39	6.53	31.56	100	117	A	H
	*	2467	106.38	-	-	99.02	32.39	6.53	31.56	307	72	P	V
	*	2467	98.92	-	-	91.56	32.39	6.53	31.56	307	72	A	V
		2484.28	64.28	-9.72	74	56.92	32.39	6.53	31.56	307	72	P	V
		2483.88	50.95	-3.05	54	43.59	32.39	6.53	31.56	307	72	A	V
802.11n HT20 CH 13 2472MHz	*	2472	97.55	-	-	90.19	32.39	6.53	31.56	100	131	P	H
	*	2472	89.94	-	-	82.58	32.39	6.53	31.56	100	131	A	H
		2483.8	57.85	-16.15	74	50.49	32.39	6.53	31.56	100	131	P	H
		2483.52	47.42	-6.58	54	40.06	32.39	6.53	31.56	100	131	A	H
	*	2472	104.52	-	-	97.16	32.39	6.53	31.56	258	77	P	V
	*	2472	96.5	-	-	89.14	32.39	6.53	31.56	258	77	A	V
		2483.52	62.64	-11.36	74	55.28	32.39	6.53	31.56	258	77	P	V
		2483.52	50.56	-3.44	54	43.2	32.39	6.53	31.56	258	77	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	43.76	-30.24	74	57.79	34.4	9.47	57.9	235	75	P	H
		4824	33.63	-20.37	54	47.66	34.4	9.47	57.9	235	75	A	H
		4824	43.49	-30.51	74	57.52	34.4	9.47	57.9	154	138	P	V
		4824	33.23	-20.77	54	47.26	34.4	9.47	57.9	154	138	A	V
802.11n HT20 CH 06 2437MHz		4874	42.76	-31.24	74	56.79	34.37	9.5	57.9	215	323	P	H
		4874	32.81	-21.19	54	46.84	34.37	9.5	57.9	215	323	A	H
		7311	50.76	-23.24	74	62.94	36.05	11.24	59.47	231	52	P	H
		7311	40.41	-13.59	54	52.59	36.05	11.24	59.47	231	52	A	H
		4874	42.94	-31.06	74	56.97	34.37	9.5	57.9	122	46	P	V
		4874	32.66	-21.34	54	46.69	34.37	9.5	57.9	122	46	A	V
		7311	50.32	-23.68	74	62.5	36.05	11.24	59.47	171	14	P	V
		7311	39.4	-14.6	54	51.58	36.05	11.24	59.47	171	14	A	V
802.11n HT20 CH 11 2462MHz		4924	43.52	-30.48	74	57.52	34.34	9.56	57.9	138	155	P	H
		4924	33.87	-20.13	54	47.87	34.34	9.56	57.9	138	155	A	H
		7386	46.79	-27.21	74	59.2	35.98	11.32	59.71	233	54	P	H
		7386	37.24	-16.76	54	49.65	35.98	11.32	59.71	233	54	A	H
		4924	43.89	-30.11	74	57.89	34.34	9.56	57.9	145	62	P	V
		4924	33.65	-20.35	54	47.65	34.34	9.56	57.9	145	62	A	V
		7386	48.25	-25.75	74	60.66	35.98	11.32	59.71	178	21	P	V
		7386	37.75	-16.25	54	50.16	35.98	11.32	59.71	178	21	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 12 2467MHz		4934	43.69	-30.31	74	57.69	34.34	9.56	57.9	235	56	P	H
		4934	33.74	-20.26	54	47.74	34.34	9.56	57.9	235	56	A	H
		7401	45.84	-28.16	74	58.31	35.97	11.32	59.76	154	241	P	H
		7401	35.48	-18.52	54	47.95	35.97	11.32	59.76	154	241	A	H
		4934	43.29	-30.71	74	57.29	34.34	9.56	57.9	100	251	P	V
		4934	33.6	-20.4	54	47.6	34.34	9.56	57.9	100	251	A	V
		7401	44.54	-29.46	74	57.01	35.97	11.32	59.76	165	22	P	V
		7401	34.9	-19.1	54	47.37	35.97	11.32	59.76	165	22	A	V
802.11n HT20 CH 13 2472MHz		4944	42.36	-31.64	74	56.37	34.33	9.56	57.9	154	73	P	H
		4944	32.97	-21.03	54	46.98	34.33	9.56	57.9	154	73	A	H
		7416	45.18	-28.82	74	57.68	35.97	11.29	59.76	174	55	P	H
		7416	35.26	-18.74	54	47.76	35.97	11.29	59.76	174	55	A	H
		4944	43.32	-30.68	74	57.33	34.33	9.56	57.9	100	167	P	V
		4944	33.73	-20.27	54	47.74	34.33	9.56	57.9	100	167	A	V
		7416	44.55	-29.45	74	57.05	35.97	11.29	59.76	146	233	P	V
		7416	34.95	-19.05	54	47.45	35.97	11.29	59.76	146	233	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

WIFI 802.11n HT20 (LF)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		89.17	23.04	-20.46	43.5	43.07	14.04	1.11	35.18	-	-	P	H
		196.84	24.96	-18.54	43.5	41.69	16.51	1.86	35.1	-	-	P	H
		317.12	29.61	-16.39	46	41.93	20.15	2.43	34.9	-	-	P	H
		532.46	22.99	-23.01	46	30	24.44	3.19	34.64	-	-	P	H
		681.84	24.59	-21.41	46	28.75	26.67	3.67	34.5	-	-	P	H
		893.3	26.85	-19.15	46	27.94	29.03	4.18	34.3	-	-	P	H
		36.79	27.28	-12.72	40	42.29	19.38	0.61	35	-	-	P	V
		90.14	27.95	-15.55	43.5	48.09	13.92	1.12	35.18	-	-	P	V
		196.84	28.13	-15.37	43.5	44.86	16.51	1.86	35.1	-	-	P	V
		325.85	25.59	-20.41	46	37.6	20.44	2.45	34.9	-	-	P	V
		577.08	26.49	-19.51	46	32.31	25.33	3.4	34.55	-	-	P	V
		792.42	27.91	-18.09	46	30.15	28.15	3.93	34.32	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



<Simultaneous transmission>

802.11b CH11 MIMO ANT0+1 & BLE CH39

BLE CH39 (Band Edge @ 3m)

	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH11 & BLE CH39 Co-location		2480	104.16	-	-	96.8	32.39	6.53	31.56	203	258	P	H
		2480	102.68	-	-	95.32	32.39	6.53	31.56	203	258	A	H
	*	2483.52	57.69	-16.31	74	50.33	32.39	6.53	31.56	203	258	P	H
	*	2483.52	50.48	-3.52	54	43.12	32.39	6.53	31.56	203	258	A	H
		2480	97.71	-	-	90.35	32.39	6.53	31.56	129	343	P	V
		2480	96.22	-	-	88.86	32.39	6.53	31.56	129	343	A	V
	*	2497.4	54.35	-19.65	74	46.92	32.4	6.53	31.5	129	343	P	V
	*	2483.52	45.19	-8.81	54	37.83	32.39	6.53	31.56	129	343	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

802.11b CH11 (Band Edge @ 3m)

	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH11 & BLE CH39 Co-location	*	2462	103.71	-	-	96.46	32.39	6.48	31.62	101	224	P	H
	*	2462	100.8	-	-	93.55	32.39	6.48	31.62	101	224	A	H
		2483.56	55.25	-18.75	74	47.89	32.39	6.53	31.56	101	224	P	H
		2483.52	45.6	-8.4	54	38.24	32.39	6.53	31.56	101	224	A	H
	*	2462	110.84	-	-	103.59	32.39	6.48	31.62	180	55	P	V
	*	2462	107.92	-	-	100.67	32.39	6.48	31.62	180	55	A	V
		2490.44	54.87	-19.13	74	47.44	32.4	6.53	31.5	180	55	P	V
		2483.52	44.8	-9.2	54	37.44	32.39	6.53	31.56	180	55	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11g CH11 MIMO ANT0+1 & BLE CH39

BLE CH39 (Band Edge @ 3m)

	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11gCH 11 & BLE CH39 Co-location	*	2480	103.94	-	-	96.58	32.39	6.53	31.56	248	254	P	H
	*	2480	102.32	-	-	94.96	32.39	6.53	31.56	248	254	A	H
		2484.96	64.48	-9.52	74	57.12	32.39	6.53	31.56	248	254	P	H
		2483.8	50.93	-3.07	54	43.57	32.39	6.53	31.56	248	254	A	H
	*	2480	99.14	-	-	91.78	32.39	6.53	31.56	110	343	P	V
	*	2480	97.62	-	-	90.26	32.39	6.53	31.56	110	343	A	V
		2483.84	57.01	-16.99	74	49.65	32.39	6.53	31.56	110	343	P	V
		2483.6	45.72	-8.28	54	38.36	32.39	6.53	31.56	110	343	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

802.11g CH11 (Band Edge @ 3m)

	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11gCH 11 & BLE CH39 Co-location	*	2462	108.12	-	-	100.87	32.39	6.48	31.62	302	87	P	H
	*	2462	100.67	-	-	93.42	32.39	6.48	31.62	302	87	A	H
		2483.52	58.67	-15.33	74	51.31	32.39	6.53	31.56	302	87	P	H
		2483.52	45.98	-8.02	54	38.62	32.39	6.53	31.56	302	87	A	H
	*	2462	105.25	-	-	98	32.39	6.48	31.62	100	284	P	V
	*	2462	101.68	-	-	94.43	32.39	6.48	31.62	100	284	A	V
		2485.12	60.41	-13.59	74	53.05	32.39	6.53	31.56	100	284	P	V
		2483.52	47.43	-6.57	54	40.07	32.39	6.53	31.56	100	284	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11n20CH01 MIMO ANT0+1&BLE CH39

BLE CH39 (Band Edge @ 3m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n20C H01 &BLE CH39 Co-location	*	2480	104.99	-	-	97.63	32.39	6.53	31.56	158	94	P	H
	*	2480	102.9	-	-	95.54	32.39	6.53	31.56	158	94	A	H
		2484.68	63.7	-10.3	74	56.34	32.39	6.53	31.56	158	94	P	H
		2485.64	50.35	-3.65	54	42.99	32.39	6.53	31.56	158	94	A	H
	*	2480	99.02	-	-	91.66	32.39	6.53	31.56	202	185	P	V
	*	2480	97.47	-	-	90.11	32.39	6.53	31.56	202	185	A	V
		2486.2	59.33	-14.67	74	51.97	32.39	6.53	31.56	202	185	P	V
		2485.8	47.28	-6.72	54	39.92	32.39	6.53	31.56	202	185	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

802.11n20 CH01 (Band Edge @ 3m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n20C H01 &BLE CH39 Co-location		2386.755	54.38	-19.62	74	47.31	32.36	6.44	31.73	150	64	P	H
		2386.65	43.87	-10.13	54	36.8	32.36	6.44	31.73	150	64	A	H
	*	2412	102.64	-	-	95.5	32.37	6.44	31.67	150	64	P	H
	*	2412	94.83	-	-	87.69	32.37	6.44	31.67	150	64	A	H
		2387.385	57.17	-16.83	74	50.1	32.36	6.44	31.73	122	345	P	V
		2386.965	46.41	-7.59	54	39.34	32.36	6.44	31.73	122	345	A	V
	*	2412	109.57	-	-	102.43	32.37	6.44	31.67	122	345	P	V
	*	2412	101.86	-	-	94.72	32.37	6.44	31.67	122	345	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



(Harmonic @ 3m)

802.11bCH11 MIMO ANT0+1&BLE CH39 Co-location (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11bCH 01 &BLE CH39 Co-location		4924	42.63	-31.37	74	56.63	34.34	9.56	57.9	100	95	P	H
		4924	33.95	-20.05	54	47.95	34.34	9.56	57.9	100	95	A	H
		4960	44.63	-29.37	74	58.62	34.32	9.59	57.9	124	65	P	H
		4960	34.69	-19.31	54	48.68	34.32	9.59	57.9	124	65	A	H
		7386	45.24	-28.76	74	57.65	35.98	11.32	59.71	103	54	P	H
		7386	36.25	-17.75	54	48.66	35.98	11.32	59.71	103	54	A	H
		7440	45.33	-28.67	74	57.96	35.94	11.29	59.86	136	48	P	H
		7440	36.05	-17.95	54	48.68	35.94	11.29	59.86	136	48	A	H
		4926	43.66	-30.34	74	57.66	34.34	9.56	57.9	132	62	P	V
		4926	36.26	-17.74	54	50.26	34.34	9.56	57.9	132	62	A	V
		4960	44.69	-29.31	74	58.68	34.32	9.59	57.9	100	85	P	V
		4960	35.64	-18.36	54	49.63	34.32	9.59	57.9	100	85	A	V
		7386	46.92	-27.08	74	59.33	35.98	11.32	59.71	100	72	P	V
		7386	38.22	-15.78	54	50.63	35.98	11.32	59.71	100	72	A	V
		7440	46	-28	74	58.63	35.94	11.29	59.86	106	25	P	V
		7440	37.01	-16.99	54	49.64	35.94	11.29	59.86	106	25	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11gCH11 MIMO ANT0+1 &BLE CH39 Co-location (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11gCH 11 &BLE CH39 Co-location		4926	44.62	-29.38	74	58.62	34.34	9.56	57.9	135	92	P	H
		4926	34.68	-19.32	54	48.68	34.34	9.56	57.9	135	92	A	H
		4960	44.64	-29.36	74	58.63	34.32	9.59	57.9	100	68	P	H
		4960	34.57	-19.43	54	48.56	34.32	9.59	57.9	100	68	A	H
		7386	46.21	-27.79	74	58.62	35.98	11.32	59.71	100	95	P	H
		7386	37.21	-16.79	54	49.62	35.98	11.32	59.71	100	95	A	H
		7440	47.02	-26.98	74	59.65	35.94	11.29	59.86	100	68	P	H
		7440	37	-17	54	49.63	35.94	11.29	59.86	100	68	A	H
		4924	45.62	-28.38	74	59.62	34.34	9.56	57.9	100	52	P	V
		4924	34.63	-19.37	54	48.63	34.34	9.56	57.9	100	52	A	V
		4960	44.63	-29.37	74	58.62	34.32	9.59	57.9	106	123	P	V
		4960	34.63	-19.37	54	48.62	34.32	9.59	57.9	106	123	A	V
		7386	47.21	-26.79	74	59.62	35.98	11.32	59.71	100	135	P	V
		7386	37.28	-16.72	54	49.69	35.98	11.32	59.71	100	135	A	V
		7440	46.02	-27.98	74	58.65	35.94	11.29	59.86	163	48	P	V
		7440	35.03	-18.97	54	47.66	35.94	11.29	59.86	163	48	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11n20CH01 MIMO ANT0+1 &BLE CH39 Co-location (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n20C H01 &BLE CH39 Co-location		4824	43.04	-30.96	74	57.07	34.4	9.47	57.9	100	84	P	H
		4824	32.95	-21.05	54	46.98	34.4	9.47	57.9	100	84	A	H
		4960	43.86	-30.14	74	57.85	34.32	9.59	57.9	252	134	P	H
		4960	33.54	-20.46	54	47.53	34.32	9.59	57.9	252	134	A	H
		7440	44.43	-29.57	74	57.06	35.94	11.29	59.86	133	286	P	H
		7440	34.94	-19.06	54	47.57	35.94	11.29	59.86	133	286	A	H
		4824	42.44	-31.56	74	56.47	34.4	9.47	57.9	138	64	P	V
		4824	32.14	-21.86	54	46.17	34.4	9.47	57.9	138	64	A	V
		4960	43.38	-30.62	74	57.37	34.32	9.59	57.9	181	174	P	V
		4960	33.67	-20.33	54	47.66	34.32	9.59	57.9	181	174	A	V
		7440	44.38	-29.62	74	57.01	35.94	11.29	59.86	244	135	P	V
		7440	34.27	-19.73	54	46.9	35.94	11.29	59.86	244	135	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Margin (dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Margin (dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																	
ANT	802.11b CH01 2412MHz																																																	
0+1	Horizontal	Fundamental																																																
Peak	Date: 1 Date: 2023-04-04 Site Condition: 03CH02-SZ, PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL, RSW: 1000 0000Hz VSW: 3000 0000Hz, Project: 2H2209-01, Mode: 11b_TX_CH01, SN: G052NMA033087000K, Plane: Y with Accessories, 1M power setting 15 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.00</td><td>54.75</td><td>-19.25</td><td>74.00</td><td>47.68</td><td>32.36</td><td>6.44 31.73 378 346 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2387.00	54.75	-19.25	74.00	47.68	32.36	6.44 31.73 378 346 Peak	Date: 3 Date: 2023-04-04 Site Condition: 03CH02-SZ, PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL, RSW: 1000 0000Hz VSW: 3000 0000Hz, Project: 2H2209-01, Mode: 11b_TX_CH01, SN: G052NMA033087000K, Plane: Y with Accessories, 1M power setting 15 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>185.81</td><td>31.01</td><td>74.00</td><td>97.87</td><td>32.37</td><td>6.44 31.67 378 346 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2412.00	185.81	31.01	74.00	97.87	32.37	6.44 31.67 378 346 Peak
	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																											
1	2387.00	54.75	-19.25	74.00	47.68	32.36	6.44 31.73 378 346 Peak																																											
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																											
1	2412.00	185.81	31.01	74.00	97.87	32.37	6.44 31.67 378 346 Peak																																											
Avg.	Date: 2 Date: 2023-04-04 Site Condition: 03CH02-SZ, AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL, RSW: 1000 0000Hz VSW: 0.0100Hz, Project: 2H2209-01, Mode: 11b_TX_CH01, SN: G052NMA033087000K, Plane: Y with Accessories, 1M power setting 15 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.49</td><td>46.76</td><td>-7.24</td><td>54.00</td><td>39.69</td><td>32.36</td><td>6.44 31.73 378 346 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2387.49	46.76	-7.24	54.00	39.69	32.36	6.44 31.73 378 346 Average	Date: 4 Date: 2023-04-04 Site Condition: 03CH02-SZ, AVG_54 3m HF_ANT_3117_0107 HORIZONTAL, RSW: 1000 0000Hz VSW: 0.0100Hz, Project: 2H2209-01, Mode: 11b_TX_CH01, SN: G052NMA033087000K, Plane: Y with Accessories, 1M power setting 15 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>181.91</td><td>47.91</td><td>54.00</td><td>94.77</td><td>32.37</td><td>6.44 31.67 378 346 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2412.00	181.91	47.91	54.00	94.77	32.37	6.44 31.67 378 346 Average
	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																											
1	2387.49	46.76	-7.24	54.00	39.69	32.36	6.44 31.73 378 346 Average																																											
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																											
1	2412.00	181.91	47.91	54.00	94.77	32.37	6.44 31.67 378 346 Average																																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																					
ANT	802.11b CH01 2412MHz																																																																					
0+1	Vertical					Fundamental																																																																
Peak	Date: 5 Level (dBuV/m) Date: 2023-04-04  Site Condition Project Mode SN Plane 1M power setting 10 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2387.81</td><td>55.78</td><td>-18.22</td><td>74.00</td><td>48.71</td><td>32.36</td><td>6.44</td><td>31.73</td><td>140 97 Peak</td></tr></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2387.81	55.78	-18.22	74.00	48.71	32.36	6.44	31.73	140 97 Peak	Date: 7 Level (dBuV/m) Date: 2023-04-04  Site Condition Project Mode SN Plane 1M power setting 10 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2412.00</td><td>118.24</td><td>56.24</td><td>74.00</td><td>185.18</td><td>32.37</td><td>6.44</td><td>31.67</td><td>140 97 Peak</td></tr></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2412.00	118.24	56.24	74.00	185.18	32.37	6.44	31.67	140 97 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1	2387.81	55.78	-18.22	74.00	48.71	32.36	6.44	31.73	140 97 Peak																																																													
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1 *	2412.00	118.24	56.24	74.00	185.18	32.37	6.44	31.67	140 97 Peak																																																													
Avg.	Date: 6 Level (dBuV/m) Date: 2023-04-04  Site Condition Project Mode SN Plane 1M power setting 10 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2385.29</td><td>48.81</td><td>-5.99</td><td>54.00</td><td>49.95</td><td>32.35</td><td>6.44</td><td>31.73</td><td>140 97 Average</td></tr></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2385.29	48.81	-5.99	54.00	49.95	32.35	6.44	31.73	140 97 Average	Date: 8 Level (dBuV/m) Date: 2023-04-04  Site Condition Project Mode SN Plane 1M power setting 10 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2412.00</td><td>187.32</td><td>53.32</td><td>54.00</td><td>180.18</td><td>32.37</td><td>6.44</td><td>31.67</td><td>140 97 Average</td></tr></table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2412.00	187.32	53.32	54.00	180.18	32.37	6.44	31.67	140 97 Average
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1	2385.29	48.81	-5.99	54.00	49.95	32.35	6.44	31.73	140 97 Average																																																													
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1 *	2412.00	187.32	53.32	54.00	180.18	32.37	6.44	31.67	140 97 Average																																																													



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11b CH06 2437MHz - L																																																													
0+1	Horizontal	Fundamental																																																												
Peak	Date: 1 Date: 2023-04-04 Site : 03CH02-S2 Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:3000.000kHz Mode : 2KZ209-01 SN : GSE2MMW33087000K Plane : Y with Accessories 1M power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2337.16</td><td>52.35</td><td>-21.85</td><td>74.00</td><td>46.16</td><td>52.34</td><td>6.30</td><td>53.85</td><td>167 198 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2337.16	52.35	-21.85	74.00	46.16	52.34	6.30	53.85	167 198 Peak	Date: 3 Date: 2023-04-04 Site : 03CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:3000.000kHz Mode : 2KZ209-01 SN : GSE2MMW33087000K Plane : Y with Accessories 1M power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2437.00</td><td>98.18</td><td>24.18</td><td>74.00</td><td>90.99</td><td>52.38</td><td>6.40</td><td>51.67</td><td>167 198 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1 *	2437.00	98.18	24.18	74.00	90.99	52.38	6.40	51.67	167 198 Peak
	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2337.16	52.35	-21.85	74.00	46.16	52.34	6.30	53.85	167 198 Peak																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1 *	2437.00	98.18	24.18	74.00	90.99	52.38	6.40	51.67	167 198 Peak																																																					
Avg.	Date: 2 Date: 2023-04-04 Site : 03CH02-S2 Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:0.0100kHz Mode : 2KZ209-01 SN : GSE2MMW33087000K Plane : Y with Accessories 1M power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2386.44</td><td>41.57</td><td>-12.43</td><td>54.00</td><td>34.58</td><td>32.56</td><td>6.44</td><td>51.73</td><td>167 198 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2386.44	41.57	-12.43	54.00	34.58	32.56	6.44	51.73	167 198 Average	Date: 4 Date: 2023-04-04 Site : 03CH02-S2 Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:0.0100kHz Mode : 2KZ209-01 SN : GSE2MMW33087000K Plane : Y with Accessories 1M power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2437.00</td><td>95.43</td><td>41.43</td><td>54.00</td><td>88.24</td><td>52.38</td><td>6.40</td><td>51.67</td><td>167 198 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1 *	2437.00	95.43	41.43	54.00	88.24	52.38	6.40	51.67	167 198 Average
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2386.44	41.57	-12.43	54.00	34.58	32.56	6.44	51.73	167 198 Average																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1 *	2437.00	95.43	41.43	54.00	88.24	52.38	6.40	51.67	167 198 Average																																																					





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																		
ANT	802.11b CH06 2437MHz - R																																		
0+1	Horizontal	Fundamental																																	
Peak	Date: 5 Level (dBuV/m) Date: 2023.04.04 Site : 03CH02-S2 Condition : PEAK_BE_T4 3m HF_ANT_3117_0107 HORIZONTAL Project : ZKZ209-01 Mode : Mode 18 SN : GSEMMMA33087000K Plane : Y with Accessories IM power setting 18 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.12</td><td>52.08</td><td>-21.48</td><td>74.08</td><td>45.17</td><td>52.40</td><td>6.53</td><td>53.58</td><td>167</td><td>108 Peak</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	dB	cm	deg	1	2494.12	52.08	-21.48	74.08	45.17	52.40	6.53	53.58	167	108 Peak	Left blank
		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	dB	cm	deg																									
1	2494.12	52.08	-21.48	74.08	45.17	52.40	6.53	53.58	167	108 Peak																									
Avg.	Date: 6 Level (dBuV/m) Date: 2023.04.04 Site : 03CH02-S2 Condition : AVG_BE_S4 3m HF_ANT_3117_0107 HORIZONTAL Project : ZKZ209-01 Mode : Mode 18 SN : GSEMMMA33087000K Plane : Y with Accessories IM power setting 18 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.16</td><td>42.89</td><td>-11.91</td><td>54.08</td><td>34.66</td><td>52.40</td><td>6.53</td><td>53.58</td><td>167</td><td>108 Average</td></tr></table>		Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	dB	cm	deg	1	2499.16	42.89	-11.91	54.08	34.66	52.40	6.53	53.58	167	108 Average	Left blank
	Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																									
	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	dB	cm	deg																									
1	2499.16	42.89	-11.91	54.08	34.66	52.40	6.53	53.58	167	108 Average																									



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11b CH06 2437MHz - L																																																													
0+1	Vertical	Fundamental																																																												
Peak	Date: 7 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000kHz VIEW 3000 000kHz Mode : 2K2209-01 SN : 11b_TX_CH06 Plane : GSEDMW033087000K Y with Accessories TM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2359.00</td><td>52.85</td><td>-23.15</td><td>74.00</td><td>45.93</td><td>32.34</td><td>6.37</td><td>31.79</td><td>342 331 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2359.00	52.85	-23.15	74.00	45.93	32.34	6.37	31.79	342 331 Peak	Date: 9 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000kHz VIEW 3000 000kHz Mode : 2K2209-01 SN : 11b_TX_CH06 Plane : GSEDMW033087000K Y with Accessories TM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2437.00</td><td>118.87</td><td>36.87</td><td>74.00</td><td>185.68</td><td>32.38</td><td>6.48</td><td>31.67</td><td>342 331 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2437.00	118.87	36.87	74.00	185.68	32.38	6.48	31.67	342 331 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2359.00	52.85	-23.15	74.00	45.93	32.34	6.37	31.79	342 331 Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 *	2437.00	118.87	36.87	74.00	185.68	32.38	6.48	31.67	342 331 Peak																																																					
Avg.	Date: 8 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000kHz VIEW 0 0100kHz Mode : 2K2209-01 SN : 11b_TX_CH06 Plane : GSEDMW033087000K Y with Accessories TM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2359.42</td><td>42.26</td><td>-11.74</td><td>54.00</td><td>35.34</td><td>32.34</td><td>6.37</td><td>31.79</td><td>342 331 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2359.42	42.26	-11.74	54.00	35.34	32.34	6.37	31.79	342 331 Average	Date: 10 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000kHz VIEW 0 0100kHz Mode : 2K2209-01 SN : 11b_TX_CH06 Plane : GSEDMW033087000K Y with Accessories TM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2437.00</td><td>186.78</td><td>52.78</td><td>74.00</td><td>99.59</td><td>32.38</td><td>6.48</td><td>31.67</td><td>342 331 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2437.00	186.78	52.78	74.00	99.59	32.38	6.48	31.67	342 331 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2359.42	42.26	-11.74	54.00	35.34	32.34	6.37	31.79	342 331 Average																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 *	2437.00	186.78	52.78	74.00	99.59	32.38	6.48	31.67	342 331 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																															
ANT	802.11b CH06 2437MHz - R																															
0+1	Vertical	Fundamental																														
Peak	Date: 11 Date: 2023.04.04  Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : 11b-TX-CH06 SN : GRESMAM033007000K Plane : Y with Accessories IM power setting 10 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.53</td><td>53.21</td><td>-28.79</td><td>74.00</td><td>45.78</td><td>32.40</td><td>6.53</td><td>31.50</td><td>342 331 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2437.53	53.21	-28.79	74.00	45.78	32.40	6.53	31.50	342 331 Peak	Left blank
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																								
1	2437.53	53.21	-28.79	74.00	45.78	32.40	6.53	31.50	342 331 Peak																							
Avg.	Date: 12 Date: 2023.04.04  Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : 11b-TX-CH06 SN : GRESMAM033007000K Plane : Y with Accessories IM power setting 10 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>42.54</td><td>-11.46</td><td>54.00</td><td>35.18</td><td>32.39</td><td>6.53</td><td>31.56</td><td>342 331 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2437.00	42.54	-11.46	54.00	35.18	32.39	6.53	31.56	342 331 Average	Left blank
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																								
1	2437.00	42.54	-11.46	54.00	35.18	32.39	6.53	31.56	342 331 Average																							







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11b CH11 2462MHz																																																													
0+1	Horizontal	Fundamental																																																												
Peak	Date: 3 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:3000.000kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories 1M power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2490.88</td><td>53.43</td><td>-28.57</td><td>74.00</td><td>46.00</td><td>32.40</td><td>6.53</td><td>31.50</td><td>100 125 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg		1	2490.88	53.43	-28.57	74.00	46.00	32.40	6.53	31.50	100 125 Peak	Date: 1 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:3000.000kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories 1M power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>106.40</td><td>32.40</td><td>74.00</td><td>99.15</td><td>32.39</td><td>6.48</td><td>31.62</td><td>100 125 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg		1	2462.00	106.40	32.40	74.00	99.15	32.39	6.48	31.62	100 125 Peak
	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg																																																						
1	2490.88	53.43	-28.57	74.00	46.00	32.40	6.53	31.50	100 125 Peak																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg																																																						
1	2462.00	106.40	32.40	74.00	99.15	32.39	6.48	31.62	100 125 Peak																																																					
Avg.	Date: 4 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:0.0100kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories 1M power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.08</td><td>42.76</td><td>-11.24</td><td>54.00</td><td>35.40</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100 125 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg		1	2484.08	42.76	-11.24	54.00	35.40	32.39	6.53	31.56	100 125 Average	Date: 2 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:0.0100kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories 1M power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>183.35</td><td>49.35</td><td>54.00</td><td>96.00</td><td>32.39</td><td>6.48</td><td>31.62</td><td>100 125 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg		1	2462.00	183.35	49.35	54.00	96.00	32.39	6.48	31.62	100 125 Average
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg																																																						
1	2484.08	42.76	-11.24	54.00	35.40	32.39	6.53	31.56	100 125 Average																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg																																																						
1	2462.00	183.35	49.35	54.00	96.00	32.39	6.48	31.62	100 125 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11b CH11 2462MHz																																																													
0+1	Vertical	Fundamental																																																												
Peak	Date: 7 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000KHz VIEW 3000 000KHz Mode : 2K2209-01 SN : Mode 19 Plane : GSEDMMA033087000K Y with Accessories TM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.52</td><td>55.79</td><td>-18.21</td><td>74.00</td><td>48.43</td><td>52.39</td><td>6.53</td><td>53.56</td><td>131 249 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2483.52	55.79	-18.21	74.00	48.43	52.39	6.53	53.56	131 249 Peak	Date: 5 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000KHz VIEW 3000 000KHz Mode : 2K2209-01 SN : Mode 19 Plane : GSEDMMA033087000K Y with Accessories TM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2462.00</td><td>118.25</td><td>56.25</td><td>74.00</td><td>185.00</td><td>52.39</td><td>6.48</td><td>31.62</td><td>131 249 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1 *	2462.00	118.25	56.25	74.00	185.00	52.39	6.48	31.62	131 249 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2483.52	55.79	-18.21	74.00	48.43	52.39	6.53	53.56	131 249 Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1 *	2462.00	118.25	56.25	74.00	185.00	52.39	6.48	31.62	131 249 Peak																																																					
Avg.	Date: 8 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000KHz VIEW 0 0100KHz Mode : 2K2209-01 SN : Mode 19 Plane : GSEDMMA033087000K Y with Accessories TM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2487.76</td><td>48.64</td><td>-5.36</td><td>54.00</td><td>41.27</td><td>52.40</td><td>6.53</td><td>53.56</td><td>131 249 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2487.76	48.64	-5.36	54.00	41.27	52.40	6.53	53.56	131 249 Average	Date: 6 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000KHz VIEW 0 0100KHz Mode : 2K2209-01 SN : Mode 19 Plane : GSEDMMA033087000K Y with Accessories TM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2462.00</td><td>186.87</td><td>52.87</td><td>54.00</td><td>99.62</td><td>52.39</td><td>6.48</td><td>31.62</td><td>131 249 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1 *	2462.00	186.87	52.87	54.00	99.62	52.39	6.48	31.62	131 249 Average
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2487.76	48.64	-5.36	54.00	41.27	52.40	6.53	53.56	131 249 Average																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1 *	2462.00	186.87	52.87	54.00	99.62	52.39	6.48	31.62	131 249 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																																																		
ANT	802.11b CH12 2467MHz																																																																																																																		
0+1	Horizontal	Fundamental																																																																																																																	
Peak	Date: 11 Level (dBuV/m) Date: 2023.04.04  Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 20 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>2483.04</td><td>53.58</td><td>-20.62</td><td>74.00</td><td>46.92</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>123 Peak</td></tr></table> Date: 9 Level (dBuV/m) Date: 2023.04.04  Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 20 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>2467.00</td><td>98.91</td><td>24.91</td><td>74.00</td><td>91.55</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>123 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 *	2483.04	53.58	-20.62	74.00	46.92	32.39	6.53	31.56	100	123 Peak	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 *	2467.00	98.91	24.91	74.00	91.55	32.39	6.53	31.56	100	123 Peak	Avg.	Date: 12 Level (dBuV/m) Date: 2023.04.04  Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 20 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.84</td><td>44.18</td><td>-9.82</td><td>54.00</td><td>36.82</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>123 Average</td></tr></table> Date: 10 Level (dBuV/m) Date: 2023.04.04  Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 20 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>2467.00</td><td>96.85</td><td>42.85</td><td>54.00</td><td>88.69</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>123 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.84	44.18	-9.82	54.00	36.82	32.39	6.53	31.56	100	123 Average	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 *	2467.00	96.85	42.85	54.00	88.69	32.39	6.53	31.56	100	123 Average
	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																											
1 *	2483.04	53.58	-20.62	74.00	46.92	32.39	6.53	31.56	100	123 Peak																																																																																																									
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																											
1 *	2467.00	98.91	24.91	74.00	91.55	32.39	6.53	31.56	100	123 Peak																																																																																																									
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2483.84	44.18	-9.82	54.00	36.82	32.39	6.53	31.56	100	123 Average																																																																																																									
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																											
1 *	2467.00	96.85	42.85	54.00	88.69	32.39	6.53	31.56	100	123 Average																																																																																																									



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11b CH12 2467MHz																																																													
0+1	Vertical	Fundamental																																																												
Peak	Date: 15 Date: 2023.04.04 PEAK_BE_74 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 20 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12.5 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.88</td><td>56.33</td><td>-17.67</td><td>74.00</td><td>48.97</td><td>32.39</td><td>6.53</td><td>31.56</td><td>174 93 Peak</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2483.88	56.33	-17.67	74.00	48.97	32.39	6.53	31.56	174 93 Peak	Date: 13 Date: 2023.04.04 PEAK_74 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 20 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12.5 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2467.88</td><td>183.87</td><td>29.87</td><td>74.00</td><td>96.51</td><td>32.39</td><td>6.53</td><td>31.56</td><td>174 93 Peak</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2467.88	183.87	29.87	74.00	96.51	32.39	6.53	31.56	174 93 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2483.88	56.33	-17.67	74.00	48.97	32.39	6.53	31.56	174 93 Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2467.88	183.87	29.87	74.00	96.51	32.39	6.53	31.56	174 93 Peak																																																					
Avg.	Date: 16 Date: 2023.04.04 AVG_BE_54 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 20 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12.5 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.96</td><td>48.87</td><td>-5.13</td><td>54.00</td><td>41.51</td><td>32.39</td><td>6.53</td><td>31.56</td><td>174 93 Average</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2483.96	48.87	-5.13	54.00	41.51	32.39	6.53	31.56	174 93 Average	Date: 14 Date: 2023.04.04 AVG_54 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 20 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12.5 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2467.88</td><td>99.56</td><td>45.56</td><td>54.00</td><td>92.28</td><td>32.39</td><td>6.53</td><td>31.56</td><td>174 93 Average</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2467.88	99.56	45.56	54.00	92.28	32.39	6.53	31.56	174 93 Average
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2483.96	48.87	-5.13	54.00	41.51	32.39	6.53	31.56	174 93 Average																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2467.88	99.56	45.56	54.00	92.28	32.39	6.53	31.56	174 93 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11b CH13 2472MHz																																																											
0+1	Horizontal	Fundamental																																																										
Peak	Date: 11 Level (dBuV/m) Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 21 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.76</td><td>55.18</td><td>-18.98</td><td>74.00</td><td>47.14</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>127 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.76	55.18	-18.98	74.00	47.14	32.39	6.53	31.56	100	127 Peak	Date: 9 Level (dBuV/m) Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 21 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2472.00</td><td>95.33</td><td>21.33</td><td>74.00</td><td>87.97</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>127 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2472.00	95.33	21.33	74.00	87.97	32.39	6.53	31.56	100	127 Peak
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2483.76	55.18	-18.98	74.00	47.14	32.39	6.53	31.56	100	127 Peak																																																		
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2472.00	95.33	21.33	74.00	87.97	32.39	6.53	31.56	100	127 Peak																																																		
Avg.	Date: 12 Level (dBuV/m) Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 21 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.88</td><td>45.23</td><td>-8.77</td><td>54.00</td><td>37.87</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>127 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.88	45.23	-8.77	54.00	37.87	32.39	6.53	31.56	100	127 Average	Date: 10 Level (dBuV/m) Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 21 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2472.00</td><td>92.61</td><td>38.61</td><td>54.00</td><td>85.25</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>127 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2472.00	92.61	38.61	54.00	85.25	32.39	6.53	31.56	100	127 Average
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2483.88	45.23	-8.77	54.00	37.87	32.39	6.53	31.56	100	127 Average																																																		
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2472.00	92.61	38.61	54.00	85.25	32.39	6.53	31.56	100	127 Average																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11b CH13 2472MHz																																																											
0+1	Vertical	Fundamental																																																										
Peak	Date: 15 Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 21 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.48</td><td>56.95</td><td>-17.85</td><td>74.00</td><td>49.59</td><td>32.39</td><td>6.53</td><td>31.56</td><td>114</td><td>342 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2487.48	56.95	-17.85	74.00	49.59	32.39	6.53	31.56	114	342 Peak	Date: 13 Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 21 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2472.00</td><td>104.02</td><td>39.02</td><td>74.00</td><td>96.66</td><td>32.39</td><td>6.53</td><td>31.56</td><td>114</td><td>342 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2472.00	104.02	39.02	74.00	96.66	32.39	6.53	31.56	114	342 Peak
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2487.48	56.95	-17.85	74.00	49.59	32.39	6.53	31.56	114	342 Peak																																																		
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2472.00	104.02	39.02	74.00	96.66	32.39	6.53	31.56	114	342 Peak																																																		
Avg.	Date: 16 Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 21 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.64</td><td>58.35</td><td>-3.65</td><td>54.00</td><td>42.98</td><td>32.40</td><td>6.53</td><td>31.56</td><td>114</td><td>342 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2487.64	58.35	-3.65	54.00	42.98	32.40	6.53	31.56	114	342 Average	Date: 14 Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 21 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2472.00</td><td>100.91</td><td>46.91</td><td>54.00</td><td>93.55</td><td>32.39</td><td>6.53</td><td>31.56</td><td>114</td><td>342 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2472.00	100.91	46.91	54.00	93.55	32.39	6.53	31.56	114	342 Average
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2487.64	58.35	-3.65	54.00	42.98	32.40	6.53	31.56	114	342 Average																																																		
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2472.00	100.91	46.91	54.00	93.55	32.39	6.53	31.56	114	342 Average																																																		







2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11g CH01 2412MHz																																																																			
0+1	Horizontal	Fundamental																																																																		
Peak	Date: 13 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 22 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.78</td><td>61.85</td><td>-12.95</td><td>74.80</td><td>53.98</td><td>32.36</td><td>6.44</td><td>31.73</td><td>368</td><td>538 Peak</td></tr></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2389.78	61.85	-12.95	74.80	53.98	32.36	6.44	31.73	368	538 Peak	Date: 15 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 22 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.80</td><td>184.95</td><td>58.95</td><td>74.80</td><td>97.81</td><td>32.37</td><td>6.44</td><td>31.67</td><td>368</td><td>538 Peak</td></tr></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2412.80	184.95	58.95	74.80	97.81	32.37	6.44	31.67	368	538 Peak
	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2389.78	61.85	-12.95	74.80	53.98	32.36	6.44	31.73	368	538 Peak																																																										
Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2412.80	184.95	58.95	74.80	97.81	32.37	6.44	31.67	368	538 Peak																																																										
Avg.	Date: 14 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 22 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2390.00</td><td>48.85</td><td>-5.15</td><td>54.00</td><td>41.78</td><td>32.36</td><td>6.44</td><td>31.73</td><td>368</td><td>338 Average</td></tr></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2390.00	48.85	-5.15	54.00	41.78	32.36	6.44	31.73	368	338 Average	Date: 16 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 22 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>97.18</td><td>43.18</td><td>54.00</td><td>98.04</td><td>32.37</td><td>6.44</td><td>31.67</td><td>368</td><td>338 Average</td></tr></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	97.18	43.18	54.00	98.04	32.37	6.44	31.67	368	338 Average
Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2390.00	48.85	-5.15	54.00	41.78	32.36	6.44	31.73	368	338 Average																																																										
Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1	2412.00	97.18	43.18	54.00	98.04	32.37	6.44	31.67	368	338 Average																																																										





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																							
ANT	802.11g CH01 2412MHz																																																							
0+1	Vertical	Fundamental																																																						
Peak	Date: 17  Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 22 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2398.00</td><td>62.65</td><td>-11.37</td><td>74.00</td><td>55.56</td><td>32.36</td><td>6.44</td><td>31.73</td><td>229 84 Peak</td></tr></table>	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg		1 * 2398.00	62.65	-11.37	74.00	55.56	32.36	6.44	31.73	229 84 Peak	Date: 19  Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 22 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2412.00</td><td>111.29</td><td>37.29</td><td>74.00</td><td>104.15</td><td>32.37</td><td>6.44</td><td>31.67</td><td>229 84 Peak</td></tr></table>	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg		1 * 2412.00	111.29	37.29	74.00	104.15	32.37	6.44	31.67	229 84 Peak
	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																	
1 * 2398.00	62.65	-11.37	74.00	55.56	32.36	6.44	31.73	229 84 Peak																																																
Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																	
1 * 2412.00	111.29	37.29	74.00	104.15	32.37	6.44	31.67	229 84 Peak																																																
Avg.	Date: 18  Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 22 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2398.00</td><td>58.94</td><td>-3.88</td><td>54.00</td><td>43.87</td><td>32.36</td><td>6.44</td><td>31.73</td><td>229 84 Average</td></tr></table>	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg		1 * 2398.00	58.94	-3.88	54.00	43.87	32.36	6.44	31.73	229 84 Average	Date: 20  Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 22 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2412.00</td><td>103.99</td><td>49.99</td><td>54.00</td><td>96.85</td><td>32.37</td><td>6.44</td><td>31.67</td><td>229 84 Average</td></tr></table>	Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg		1 * 2412.00	103.99	49.99	54.00	96.85	32.37	6.44	31.67	229 84 Average
Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																	
1 * 2398.00	58.94	-3.88	54.00	43.87	32.36	6.44	31.73	229 84 Average																																																
Freq	Level	Limit	Line	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																																																	
1 * 2412.00	103.99	49.99	54.00	96.85	32.37	6.44	31.67	229 84 Average																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																										
ANT	802.11g CH06 2437MHz - L																																																																										
0+1	Horizontal					Fundamental																																																																					
Peak	Date: 1 Date: 2023-04-04 Site : 03CH02-S2 Condition : PEAK_BE_74.3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:3000.000kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories GM power setting 18 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.78</td><td>53.82</td><td>-28.98</td><td>74.00</td><td>45.95</td><td>32.36</td><td>6.44</td><td>31.73</td><td>388</td><td>355</td><td>Peak</td></tr></tbody></table>										Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2387.78	53.82	-28.98	74.00	45.95	32.36	6.44	31.73	388	355	Peak	Date: 3 Date: 2023-04-04 Site : 03CH02-S2 Condition : PEAK_74.3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:3000.000kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories GM power setting 18 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>2437.00</td><td>386.79</td><td>32.79</td><td>74.00</td><td>99.68</td><td>32.38</td><td>6.48</td><td>31.67</td><td>388</td><td>355</td><td>Peak</td></tr></tbody></table>					Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 *	2437.00	386.79	32.79	74.00	99.68	32.38	6.48	31.67	388	355	Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																			
1	2387.78	53.82	-28.98	74.00	45.95	32.36	6.44	31.73	388	355	Peak																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																			
1 *	2437.00	386.79	32.79	74.00	99.68	32.38	6.48	31.67	388	355	Peak																																																																
Avg.	Date: 2 Date: 2023-04-04 Site : 03CH02-S2 Condition : AVG_BE_54.3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:0.0100kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories GM power setting 18 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.38</td><td>43.89</td><td>-18.91</td><td>54.00</td><td>36.82</td><td>32.36</td><td>6.44</td><td>31.73</td><td>388</td><td>355</td><td>Average</td></tr></tbody></table>										Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2389.38	43.89	-18.91	54.00	36.82	32.36	6.44	31.73	388	355	Average	Date: 4 Date: 2023-04-04 Site : 03CH02-S2 Condition : AVG_54.3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:0.0100kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories GM power setting 18 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>2437.00</td><td>99.88</td><td>45.88</td><td>54.00</td><td>92.69</td><td>32.38</td><td>6.48</td><td>31.67</td><td>388</td><td>355</td><td>Average</td></tr></tbody></table>					Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 *	2437.00	99.88	45.88	54.00	92.69	32.38	6.48	31.67	388	355	Average
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																			
1	2389.38	43.89	-18.91	54.00	36.82	32.36	6.44	31.73	388	355	Average																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																			
1 *	2437.00	99.88	45.88	54.00	92.69	32.38	6.48	31.67	388	355	Average																																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																															
ANT	802.11g CH06 2437MHz - R																															
0+1	Horizontal	Fundamental																														
Peak	Date: 5 Date: 2023-04-04  Site : 03CH02-SZ Condition : PEAK_BE_T4 3m HF_ANT_3117_0107 HORIZONTAL Project : ZKZ209-01 Mode : Mode 23 SN : GSEMMMA33087000K Plane : Y with Accessories GM power setting 10 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.89</td><td>53.87</td><td>-28.13</td><td>74.00</td><td>46.51</td><td>52.39</td><td>6.53</td><td>53.56</td><td>300 355 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	dB	cm	deg	1	2483.89	53.87	-28.13	74.00	46.51	52.39	6.53	53.56	300 355 Peak	Left blank
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																						
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	dB	cm	deg																							
1	2483.89	53.87	-28.13	74.00	46.51	52.39	6.53	53.56	300 355 Peak																							
Avg.	Date: 6 Date: 2023-04-04  Site : 03CH02-SZ Condition : AVG_BE_S4 3m HF_ANT_3117_0107 HORIZONTAL Project : ZKZ209-01 Mode : Mode 23 SN : GSEMMMA33087000K Plane : Y with Accessories GM power setting 10 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>42.99</td><td>-11.81</td><td>54.00</td><td>35.63</td><td>52.39</td><td>6.53</td><td>53.56</td><td>300 355 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	dB	cm	deg	1	2483.58	42.99	-11.81	54.00	35.63	52.39	6.53	53.56	300 355 Average	Left blank
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																							
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	dB	cm	deg																							
1	2483.58	42.99	-11.81	54.00	35.63	52.39	6.53	53.56	300 355 Average																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH06 2437MHz - L																																																													
0+1	Vertical	Fundamental																																																												
Peak	Date: 7 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000KHz VIEW 3000 000KHz Mode : 2KZ209-01 SN : 2KZ209-01 Plane : Mode 23 GSEMMMA33087000K Y with Accessories GM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2387.14</td><td>55.24</td><td>-18.76</td><td>74.00</td><td>48.17</td><td>52.36</td><td>6.44</td><td>51.73</td><td>230 72 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2387.14	55.24	-18.76	74.00	48.17	52.36	6.44	51.73	230 72 Peak	Date: 9 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000KHz VIEW 3000 000KHz Mode : 2KZ209-01 SN : 2KZ209-01 Plane : Mode 23 GSEMMMA33087000K Y with Accessories GM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2437.00</td><td>113.38</td><td>39.38</td><td>74.00</td><td>106.19</td><td>52.38</td><td>6.48</td><td>51.67</td><td>230 72 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2437.00	113.38	39.38	74.00	106.19	52.38	6.48	51.67	230 72 Peak
	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2387.14	55.24	-18.76	74.00	48.17	52.36	6.44	51.73	230 72 Peak																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 *	2437.00	113.38	39.38	74.00	106.19	52.38	6.48	51.67	230 72 Peak																																																					
Avg.	Date: 8 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000KHz VIEW 0 010KHz Mode : 2KZ209-01 SN : 2KZ209-01 Plane : Mode 23 GSEMMMA33087000K Y with Accessories GM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2387.00</td><td>44.72</td><td>-9.28</td><td>54.00</td><td>37.65</td><td>52.36</td><td>6.44</td><td>51.73</td><td>230 72 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2387.00	44.72	-9.28	54.00	37.65	52.36	6.44	51.73	230 72 Average	Date: 10 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : REW 1000 000KHz VIEW 0 010KHz Mode : 2KZ209-01 SN : 2KZ209-01 Plane : Mode 23 GSEMMMA33087000K Y with Accessories GM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2437.00</td><td>106.47</td><td>52.47</td><td>54.00</td><td>99.28</td><td>52.38</td><td>6.48</td><td>51.67</td><td>230 72 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2437.00	106.47	52.47	54.00	99.28	52.38	6.48	51.67	230 72 Average
	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2387.00	44.72	-9.28	54.00	37.65	52.36	6.44	51.73	230 72 Average																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 *	2437.00	106.47	52.47	54.00	99.28	52.38	6.48	51.67	230 72 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																															
ANT	802.11g CH06 2437MHz - R																															
0+1	Vertical	Fundamental																														
Peak	Date: 11 Date: 2023-04-04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : ZKZ209-01 Mode : Mode 23 SN : GSEMMMA33087000K Plane : Y with Accessories GM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.81</td><td>57.04</td><td>-16.36</td><td>74.00</td><td>58.28</td><td>32.39</td><td>6.53</td><td>31.56</td><td>230 72 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg		1	2484.81	57.04	-16.36	74.00	58.28	32.39	6.53	31.56	230 72 Peak	Left Blank
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																						
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg																								
1	2484.81	57.04	-16.36	74.00	58.28	32.39	6.53	31.56	230 72 Peak																							
Avg.	Date: 12 Date: 2023-04-04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : ZKZ209-01 Mode : Mode 23 SN : GSEMMMA33087000K Plane : Y with Accessories GM power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.95</td><td>45.97</td><td>-8.83</td><td>54.00</td><td>38.61</td><td>32.39</td><td>6.53</td><td>31.56</td><td>230 72 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg		1	2484.95	45.97	-8.83	54.00	38.61	32.39	6.53	31.56	230 72 Average	Left Blank
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																							
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB/m	dB	cm	deg																								
1	2484.95	45.97	-8.83	54.00	38.61	32.39	6.53	31.56	230 72 Average																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																							
ANT	802.11g CH11 2462MHz																																																							
0+1	Horizontal	Fundamental																																																						
Peak	Date: 15 Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 24 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>56.16</td><td>-17.84</td><td>74.00</td><td>48.00</td><td>32.39</td><td>6.53</td><td>31.56</td><td>181 118 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2462.00	56.16	-17.84	74.00	48.00	32.39	6.53	31.56	181 118 Peak	Date: 13 Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 24 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>104.54</td><td>30.54</td><td>74.00</td><td>97.29</td><td>32.39</td><td>6.48</td><td>31.62</td><td>181 118 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2462.00	104.54	30.54	74.00	97.29	32.39	6.48	31.62	181 118 Peak
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 * 2462.00	56.16	-17.84	74.00	48.00	32.39	6.53	31.56	181 118 Peak																																																
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 * 2462.00	104.54	30.54	74.00	97.29	32.39	6.48	31.62	181 118 Peak																																																
Avg.	Date: 16 Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 24 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2463.52</td><td>45.82</td><td>-8.98</td><td>54.00</td><td>37.66</td><td>32.39</td><td>6.53</td><td>31.56</td><td>181 118 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 2463.52	45.82	-8.98	54.00	37.66	32.39	6.53	31.56	181 118 Average	Date: 14 Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 24 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>97.85</td><td>43.85</td><td>54.00</td><td>89.88</td><td>32.39</td><td>6.48</td><td>31.62</td><td>181 118 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2462.00	97.85	43.85	54.00	89.88	32.39	6.48	31.62	181 118 Average
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 2463.52	45.82	-8.98	54.00	37.66	32.39	6.53	31.56	181 118 Average																																																
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 * 2462.00	97.85	43.85	54.00	89.88	32.39	6.48	31.62	181 118 Average																																																







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																							
ANT	802.11g CH11 2462MHz																																																							
0+1	Vertical	Fundamental																																																						
Peak	Date: 19 Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 24 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2463.00</td><td>65.05</td><td>-10.95</td><td>74.00</td><td>55.69</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100 76 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2463.00	65.05	-10.95	74.00	55.69	32.39	6.53	31.56	100 76 Peak	Date: 17 Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 24 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>110.29</td><td>36.29</td><td>74.00</td><td>105.04</td><td>32.39</td><td>6.48</td><td>31.62</td><td>100 76 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2462.00	110.29	36.29	74.00	105.04	32.39	6.48	31.62	100 76 Peak
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 * 2463.00	65.05	-10.95	74.00	55.69	32.39	6.53	31.56	100 76 Peak																																																
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 * 2462.00	110.29	36.29	74.00	105.04	32.39	6.48	31.62	100 76 Peak																																																
Avg.	Date: 20 Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 24 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2463.52</td><td>58.96</td><td>-3.04</td><td>54.00</td><td>43.68</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100 76 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 2463.52	58.96	-3.04	54.00	43.68	32.39	6.53	31.56	100 76 Average	Date: 18 Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 24 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>102.86</td><td>48.86</td><td>54.00</td><td>95.61</td><td>32.39</td><td>6.48</td><td>31.62</td><td>100 76 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2462.00	102.86	48.86	54.00	95.61	32.39	6.48	31.62	100 76 Average
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 2463.52	58.96	-3.04	54.00	43.68	32.39	6.53	31.56	100 76 Average																																																
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 * 2462.00	102.86	48.86	54.00	95.61	32.39	6.48	31.62	100 76 Average																																																







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11g CH12 2467MHz																																																											
0+1	Horizontal	Fundamental																																																										
Peak	Date: 15 Date: 2023.04.04 PEAK_BE_74 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 25 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 115 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.88</td><td>55.84</td><td>-18.16</td><td>74.00</td><td>48.48</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>121 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.88	55.84	-18.16	74.00	48.48	32.39	6.53	31.56	100	121 Peak	Date: 13 Date: 2023.04.04 PEAK_74 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 25 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 115 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2467.00</td><td>101.00</td><td>27.00</td><td>74.00</td><td>95.72</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>121 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2467.00	101.00	27.00	74.00	95.72	32.39	6.53	31.56	100	121 Peak
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2483.88	55.84	-18.16	74.00	48.48	32.39	6.53	31.56	100	121 Peak																																																		
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2467.00	101.00	27.00	74.00	95.72	32.39	6.53	31.56	100	121 Peak																																																		
Avg.	Date: 16 Date: 2023.04.04 AVG_BE_54 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 25 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 115 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>45.16</td><td>-8.84</td><td>54.00</td><td>37.88</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>121 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.52	45.16	-8.84	54.00	37.88	32.39	6.53	31.56	100	121 Average	Date: 14 Date: 2023.04.04 AVG_54 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 25 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 115 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2467.00</td><td>93.87</td><td>39.87</td><td>54.00</td><td>86.51</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>121 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2467.00	93.87	39.87	54.00	86.51	32.39	6.53	31.56	100	121 Average
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2483.52	45.16	-8.84	54.00	37.88	32.39	6.53	31.56	100	121 Average																																																		
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																				
1	2467.00	93.87	39.87	54.00	86.51	32.39	6.53	31.56	100	121 Average																																																		

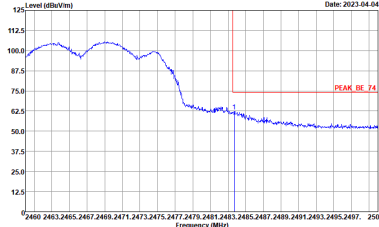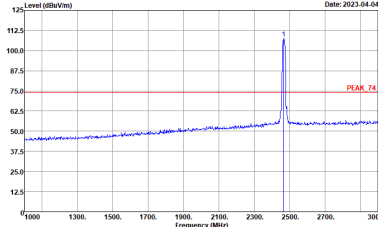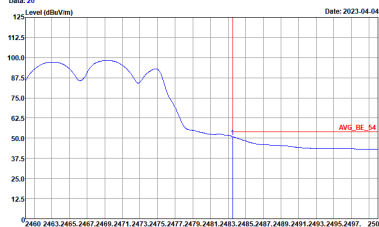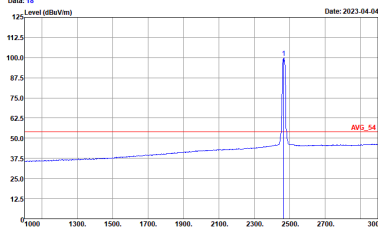

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH12 2467MHz																																																													
0+1	Vertical	Fundamental																																																												
Peak	Date: 19 Date: 2023.04.04  Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 25 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 115 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2463.72</td><td>62.47</td><td>-11.53</td><td>74.00</td><td>55.11</td><td>32.39</td><td>6.53</td><td>31.56</td><td>244</td><td>82 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 * 2463.72	62.47	-11.53	74.00	55.11	32.39	6.53	31.56	244	82 Peak	Date: 17 Date: 2023.04.04  Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 25 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 115 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2467.80</td><td>187.78</td><td>33.78</td><td>74.00</td><td>188.34</td><td>32.39</td><td>6.53</td><td>31.56</td><td>244</td><td>82 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 * 2467.80	187.78	33.78	74.00	188.34	32.39	6.53	31.56	244	82 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1 * 2463.72	62.47	-11.53	74.00	55.11	32.39	6.53	31.56	244	82 Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1 * 2467.80	187.78	33.78	74.00	188.34	32.39	6.53	31.56	244	82 Peak																																																					
Avg.	Date: 20 Date: 2023.04.04  Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 25 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 115 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2463.52</td><td>58.97</td><td>-3.83</td><td>54.00</td><td>43.61</td><td>32.39</td><td>6.53</td><td>31.56</td><td>244</td><td>82 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2463.52	58.97	-3.83	54.00	43.61	32.39	6.53	31.56	244	82 Average	Date: 18 Date: 2023.04.04  Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 25 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 115 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2467.80</td><td>99.96</td><td>45.96</td><td>54.00</td><td>92.68</td><td>32.39</td><td>6.53</td><td>31.56</td><td>244</td><td>82 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 * 2467.80	99.96	45.96	54.00	92.68	32.39	6.53	31.56	244	82 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1 2463.52	58.97	-3.83	54.00	43.61	32.39	6.53	31.56	244	82 Average																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1 * 2467.80	99.96	45.96	54.00	92.68	32.39	6.53	31.56	244	82 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH13 2472MHz																																																													
0+1	Horizontal	Fundamental																																																												
Peak	Date: 19  Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 26 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 6 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.84</td><td>55.45</td><td>-18.55</td><td>74.00</td><td>48.89</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100 126 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.84	55.45	-18.55	74.00	48.89	32.39	6.53	31.56	100 126 Peak	Date: 17  Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 26 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 6 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2472.80</td><td>95.32</td><td>21.32</td><td>74.00</td><td>87.96</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100 126 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2472.80	95.32	21.32	74.00	87.96	32.39	6.53	31.56	100 126 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2484.84	55.45	-18.55	74.00	48.89	32.39	6.53	31.56	100 126 Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2472.80	95.32	21.32	74.00	87.96	32.39	6.53	31.56	100 126 Peak																																																					
Avg.	Date: 20  Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 26 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 6 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.88</td><td>44.71</td><td>-9.29</td><td>54.00</td><td>37.35</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100 126 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.88	44.71	-9.29	54.00	37.35	32.39	6.53	31.56	100 126 Average	Date: 18  Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 26 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 6 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2472.80</td><td>87.68</td><td>33.68</td><td>54.00</td><td>88.32</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100 126 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2472.80	87.68	33.68	54.00	88.32	32.39	6.53	31.56	100 126 Average
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2484.88	44.71	-9.29	54.00	37.35	32.39	6.53	31.56	100 126 Average																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2472.80	87.68	33.68	54.00	88.32	32.39	6.53	31.56	100 126 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH13 2472MHz	
0+1	Vertical	Fundamental
Peak	Date: 23 Level (dBuV/m) <	







2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m											
ANT	802.11n HT20 CH01 2412MHz											
0+1	Horizontal						Fundamental					
Peak	Date: 14 Level (dBuV/m)											





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11n HT20 CH01 2412MHz																																																													
0+1	Vertical	Fundamental																																																												
Peak	Date: 17 Level (dBm/Vm) Date: 2023-04-03  Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 27 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2389.91</td><td>63.87</td><td>-18.13</td><td>74.00</td><td>56.00</td><td>32.36</td><td>6.44</td><td>31.73</td><td>225</td><td>83 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm	dBm	dB	cm	deg		1 * 2389.91	63.87	-18.13	74.00	56.00	32.36	6.44	31.73	225	83 Peak	Date: 19 Level (dBm/Vm) Date: 2023-04-03  Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 27 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2412.00</td><td>119.18</td><td>36.18</td><td>74.00</td><td>185.04</td><td>32.37</td><td>6.44</td><td>31.67</td><td>225</td><td>83 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm	dBm	dB	cm	deg		1 * 2412.00	119.18	36.18	74.00	185.04	32.37	6.44	31.67	225	83 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBm/Vm	dB	dBm/Vm	dBm	dBm	dB	cm	deg																																																						
1 * 2389.91	63.87	-18.13	74.00	56.00	32.36	6.44	31.73	225	83 Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBm/Vm	dB	dBm/Vm	dBm	dBm	dB	cm	deg																																																						
1 * 2412.00	119.18	36.18	74.00	185.04	32.37	6.44	31.67	225	83 Peak																																																					
Avg.	Date: 18 Level (dBm/Vm) Date: 2023-04-04  Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 27 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2398.00</td><td>58.99</td><td>-3.81</td><td>54.00</td><td>43.92</td><td>32.36</td><td>6.44</td><td>31.73</td><td>225</td><td>83 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm	dBm	dB	cm	deg		1 * 2398.00	58.99	-3.81	54.00	43.92	32.36	6.44	31.73	225	83 Peak	Date: 20 Level (dBm/Vm) Date: 2023-04-03  Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 27 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm</th><th>dBm</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2412.00</td><td>182.68</td><td>48.68</td><td>54.00</td><td>95.46</td><td>32.37</td><td>6.44</td><td>31.67</td><td>225</td><td>83 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm	dBm	dB	cm	deg		1 * 2412.00	182.68	48.68	54.00	95.46	32.37	6.44	31.67	225	83 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBm/Vm	dB	dBm/Vm	dBm	dBm	dB	cm	deg																																																						
1 * 2398.00	58.99	-3.81	54.00	43.92	32.36	6.44	31.73	225	83 Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBm/Vm	dB	dBm/Vm	dBm	dBm	dB	cm	deg																																																						
1 * 2412.00	182.68	48.68	54.00	95.46	32.37	6.44	31.67	225	83 Average																																																					







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11n HT20 CH06 2437MHz - L																																																													
0+1	Horizontal	Fundamental																																																												
Peak	Date: 1 Date: 2023-04-03 Site : 03CH02-S2 Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : REW 1000 000kHz VIEW 3000 000kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2386.16</td><td>52.89</td><td>-21.11</td><td>74.00</td><td>45.82</td><td>52.36</td><td>6.44</td><td>51.73</td><td>181 114 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2386.16	52.89	-21.11	74.00	45.82	52.36	6.44	51.73	181 114 Peak	Date: 3 Date: 2023-04-03 Site : 03CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : REW 1000 000kHz VIEW 3000 000kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2437.00</td><td>187.75</td><td>55.75</td><td>74.00</td><td>188.56</td><td>52.38</td><td>6.48</td><td>51.67</td><td>181 114 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1 *	2437.00	187.75	55.75	74.00	188.56	52.38	6.48	51.67	181 114 Peak
	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2386.16	52.89	-21.11	74.00	45.82	52.36	6.44	51.73	181 114 Peak																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1 *	2437.00	187.75	55.75	74.00	188.56	52.38	6.48	51.67	181 114 Peak																																																					
Avg.	Date: 2 Date: 2023-04-03 Site : 03CH02-S2 Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : REW 1000 000kHz VIEW 0 0100kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.24</td><td>42.34</td><td>-11.66</td><td>54.00</td><td>35.27</td><td>52.36</td><td>6.44</td><td>51.73</td><td>181 114 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2389.24	42.34	-11.66	54.00	35.27	52.36	6.44	51.73	181 114 Average	Date: 4 Date: 2023-04-03 Site : 03CH02-S2 Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : REW 1000 000kHz VIEW 0 0100kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2437.00</td><td>188.27</td><td>46.27</td><td>54.00</td><td>189.00</td><td>52.38</td><td>6.48</td><td>51.67</td><td>181 114 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1 *	2437.00	188.27	46.27	54.00	189.00	52.38	6.48	51.67	181 114 Average
	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2389.24	42.34	-11.66	54.00	35.27	52.36	6.44	51.73	181 114 Average																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1 *	2437.00	188.27	46.27	54.00	189.00	52.38	6.48	51.67	181 114 Average																																																					





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																														
ANT	802.11n HT20 CH06 2437MHz - R																														
0+1	Horizontal	Fundamental																													
Peak	Date: 5 Level (dBuV/m) Date: 2023.04.03  PEAK_BE_T4 Site : 03CH02-SZ Condition : PEAK_BE_T4 3m HF_ANT_3117_0107 HORIZONTAL Project : ZH2020-01 Mode : Mode 28 SN : GSEMMMA33087000K Plane : Y with Accessories MCS9 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable Presamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.21</td><td>55.57</td><td>-28.43</td><td>74.00</td><td>46.21</td><td>52.39</td><td>6.53</td><td>53.56</td><td>181</td><td>114 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	2486.21	55.57	-28.43	74.00	46.21	52.39	6.53	53.56	181	114 Peak	Left blank
	Freq	Level	Over	Line	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark																						
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																							
1	2486.21	55.57	-28.43	74.00	46.21	52.39	6.53	53.56	181	114 Peak																					
Avg.	Date: 6 Level (dBuV/m) Date: 2023.04.03  AVG_BE_T4 Site : 03CH02-SZ Condition : AVG_BE_T4 3m HF_ANT_3117_0107 HORIZONTAL Project : ZH2020-01 Mode : Mode 28 SN : GSEMMMA33087000K Plane : Y with Accessories MCS9 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable Presamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>42.78</td><td>-11.22</td><td>54.00</td><td>35.42</td><td>52.39</td><td>6.53</td><td>53.56</td><td>181</td><td>114 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	2483.55	42.78	-11.22	54.00	35.42	52.39	6.53	53.56	181	114 Peak	Left blank
Freq	Level	Over	Line	ReadAntenna	Cable Presamp	A/Pos	T/Pos	Remark																							
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																							
1	2483.55	42.78	-11.22	54.00	35.42	52.39	6.53	53.56	181	114 Peak																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11n HT20 CH06 2437MHz - L																																																													
0+1	Vertical	Fundamental																																																												
Peak	Date: 7 Level (dBuV/m)  Date: 2023.04.03 Site : 03CH02-S2 Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : REW:1000.000kHz VEW:3000.000kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2388.54</td><td>54.85</td><td>-19.17</td><td>74.00</td><td>47.76</td><td>52.36</td><td>6.44</td><td>31.73</td><td>100 344 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2388.54	54.85	-19.17	74.00	47.76	52.36	6.44	31.73	100 344 Peak	Date: 9 Level (dBuV/m)  Date: 2023.04.03 Site : 03CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : REW:1000.000kHz VEW:3000.000kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2437.00</td><td>112.36</td><td>56.36</td><td>74.00</td><td>105.17</td><td>32.38</td><td>6.48</td><td>31.67</td><td>100 344 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2437.00	112.36	56.36	74.00	105.17	32.38	6.48	31.67	100 344 Peak
	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2388.54	54.85	-19.17	74.00	47.76	52.36	6.44	31.73	100 344 Peak																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 *	2437.00	112.36	56.36	74.00	105.17	32.38	6.48	31.67	100 344 Peak																																																					
Avg.	Date: 8 Level (dBuV/m)  Date: 2023.04.03 Site : 03CH02-S2 Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : REW:1000.000kHz VEW:0.0100kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.00</td><td>45.52</td><td>-8.48</td><td>54.00</td><td>38.45</td><td>52.36</td><td>6.44</td><td>31.73</td><td>100 344 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2389.00	45.52	-8.48	54.00	38.45	52.36	6.44	31.73	100 344 Average	Date: 10 Level (dBuV/m)  Date: 2023.04.03 Site : 03CH02-S2 Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : REW:1000.000kHz VEW:0.0100kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2437.00</td><td>104.96</td><td>50.96</td><td>54.00</td><td>97.77</td><td>32.38</td><td>6.48</td><td>31.67</td><td>100 344 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2437.00	104.96	50.96	54.00	97.77	32.38	6.48	31.67	100 344 Average
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2389.00	45.52	-8.48	54.00	38.45	52.36	6.44	31.73	100 344 Average																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 *	2437.00	104.96	50.96	54.00	97.77	32.38	6.48	31.67	100 344 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																															
ANT	802.11n HT20 CH06 2437MHz - R																															
0+1	Vertical	Fundamental																														
Peak	Date: 11 Level (dBuV/m) Date: 2023-04-03  Site : 03CH02-SZ Condition : PEAK_BE_T4 3m HF_ANT_3117_0107 VERTICAL Project : ZKZ209-01 Mode : Mode 28 SN : GSEMMMA033087000K Plane : Y with Accessories MCS0 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.08</td><td>55.89</td><td>-18.91</td><td>74.00</td><td>47.73</td><td>32.39</td><td>6.53</td><td>31.56</td><td>180 344 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	dB	cm	deg	1	2437.08	55.89	-18.91	74.00	47.73	32.39	6.53	31.56	180 344 Peak	Left Blank
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	dB	cm	deg																							
1	2437.08	55.89	-18.91	74.00	47.73	32.39	6.53	31.56	180 344 Peak																							
Avg.	Date: 12 Level (dBuV/m) Date: 2023-04-03  Site : 03CH02-SZ Condition : AVG_BE_S4 3m HF_ANT_3117_0107 VERTICAL Project : ZKZ209-01 Mode : Mode 28 SN : GSEMMMA033087000K Plane : Y with Accessories MCS0 power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2434.04</td><td>44.34</td><td>-9.66</td><td>54.00</td><td>36.98</td><td>32.39</td><td>6.53</td><td>31.56</td><td>180 344 Average</td></tr></table>	Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	dB	cm	deg	1	2434.04	44.34	-9.66	54.00	36.98	32.39	6.53	31.56	180 344 Average	Left Blank
Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	dB	cm	deg																							
1	2434.04	44.34	-9.66	54.00	36.98	32.39	6.53	31.56	180 344 Average																							



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																							
ANT	802.11n HT20 CH11 2462MHz																																																							
0+1	Horizontal	Fundamental																																																						
Peak	Date: 15 Level (dBm/Vm) Date: 2023.04.03 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 29 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>56.23</td><td>-17.77</td><td>74.00</td><td>48.87</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>124 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	cm	deg	1 * 2462.00	56.23	-17.77	74.00	48.87	32.39	6.53	31.56	100	124 Peak	Date: 13 Level (dBm/Vm) Date: 2023.04.03 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 29 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>104.39</td><td>39.39</td><td>74.00</td><td>97.14</td><td>32.39</td><td>6.48</td><td>31.62</td><td>100</td><td>124 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	cm	deg	1 * 2462.00	104.39	39.39	74.00	97.14	32.39	6.48	31.62	100	124 Peak
	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	cm	deg																																																
1 * 2462.00	56.23	-17.77	74.00	48.87	32.39	6.53	31.56	100	124 Peak																																															
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																	
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	cm	deg																																																
1 * 2462.00	104.39	39.39	74.00	97.14	32.39	6.48	31.62	100	124 Peak																																															
Avg.	Date: 16 Level (dBm/Vm) Date: 2023.04.03 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 29 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2463.52</td><td>45.49</td><td>-8.51</td><td>54.00</td><td>38.13</td><td>32.39</td><td>6.53</td><td>31.56</td><td>100</td><td>124 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	cm	deg	1 2463.52	45.49	-8.51	54.00	38.13	32.39	6.53	31.56	100	124 Average	Date: 14 Level (dBm/Vm) Date: 2023.04.03 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 29 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.00</td><td>97.12</td><td>43.12</td><td>54.00</td><td>89.87</td><td>32.39</td><td>6.48</td><td>31.62</td><td>100</td><td>124 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	cm	deg	1 * 2462.00	97.12	43.12	54.00	89.87	32.39	6.48	31.62	100	124 Average
	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	cm	deg																																																
1 2463.52	45.49	-8.51	54.00	38.13	32.39	6.53	31.56	100	124 Average																																															
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																	
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	cm	deg																																																
1 * 2462.00	97.12	43.12	54.00	89.87	32.39	6.48	31.62	100	124 Average																																															







WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m																																																							
ANT	802.11n HT20 CH11 2462MHz																																																							
0+1	Vertical	Fundamental																																																						
Peak	Date: 19 Date: 2023.04.03 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 29 SN : 6082MM033087000K Plane : Y with Accessories : MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2463.88</td><td>64.88</td><td>-9.28</td><td>74.08</td><td>57.44</td><td>32.39</td><td>6.53</td><td>31.56</td><td>251 78 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dBm/Vm	dB	cm	deg	1 * 2463.88	64.88	-9.28	74.08	57.44	32.39	6.53	31.56	251 78 Peak	Date: 17 Date: 2023.04.03 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 29 SN : 6082MM033087000K Plane : Y with Accessories : MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.88</td><td>118.97</td><td>36.97</td><td>74.08</td><td>185.72</td><td>32.39</td><td>6.48</td><td>31.62</td><td>251 78 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dBm/Vm	dB	cm	deg	1 * 2462.88	118.97	36.97	74.08	185.72	32.39	6.48	31.62	251 78 Peak
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																															
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dBm/Vm	dB	cm	deg																																																
1 * 2463.88	64.88	-9.28	74.08	57.44	32.39	6.53	31.56	251 78 Peak																																																
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dBm/Vm	dB	cm	deg																																																
1 * 2462.88	118.97	36.97	74.08	185.72	32.39	6.48	31.62	251 78 Peak																																																
Avg.	Date: 20 Date: 2023.04.03 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 29 SN : 6082MM033087000K Plane : Y with Accessories : MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2463.76</td><td>58.89</td><td>-3.11</td><td>54.88</td><td>43.53</td><td>32.39</td><td>6.53</td><td>31.56</td><td>251 78 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dBm/Vm	dB	cm	deg	1 2463.76	58.89	-3.11	54.88	43.53	32.39	6.53	31.56	251 78 Average	Date: 18 Date: 2023.04.03 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 29 SN : 6082MM033087000K Plane : Y with Accessories : MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Vm</th><th>dB</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dBm/Vm</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2462.88</td><td>183.24</td><td>49.24</td><td>54.88</td><td>95.99</td><td>32.39</td><td>6.48</td><td>31.62</td><td>251 78 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dBm/Vm	dB	cm	deg	1 * 2462.88	183.24	49.24	54.88	95.99	32.39	6.48	31.62	251 78 Average
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																															
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dBm/Vm	dB	cm	deg																																																
1 2463.76	58.89	-3.11	54.88	43.53	32.39	6.53	31.56	251 78 Average																																																
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dBm/Vm	dB	cm	deg																																																
1 * 2462.88	183.24	49.24	54.88	95.99	32.39	6.48	31.62	251 78 Average																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH12 2467MHz	
0+1	Horizontal	Fundamental
Peak	Date: 15 Level (dBuV/m)	



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																							
ANT	802.11n HT20 CH12 2467MHz																																																							
0+1	Vertical	Fundamental																																																						
Peak	Date: 19 Date: 2023.04.04  Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 30 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 11.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2467.28</td><td>64.28</td><td>-9.72</td><td>74.00</td><td>56.92</td><td>32.39</td><td>6.53</td><td>31.56</td><td>387 72 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2467.28	64.28	-9.72	74.00	56.92	32.39	6.53	31.56	387 72 Peak	Date: 17 Date: 2023.04.04  Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 30 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 11.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2467.00</td><td>186.38</td><td>32.38</td><td>74.00</td><td>99.82</td><td>32.39</td><td>6.53</td><td>31.56</td><td>387 72 Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2467.00	186.38	32.38	74.00	99.82	32.39	6.53	31.56	387 72 Peak
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 * 2467.28	64.28	-9.72	74.00	56.92	32.39	6.53	31.56	387 72 Peak																																																
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 * 2467.00	186.38	32.38	74.00	99.82	32.39	6.53	31.56	387 72 Peak																																																
Avg.	Date: 20 Date: 2023.04.04  Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 30 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 11.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.88</td><td>58.95</td><td>-3.85</td><td>54.00</td><td>43.59</td><td>32.39</td><td>6.53</td><td>31.56</td><td>387 72 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 2483.88	58.95	-3.85	54.00	43.59	32.39	6.53	31.56	387 72 Average	Date: 18 Date: 2023.04.04  Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 30 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 11.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 2467.00</td><td>98.92</td><td>44.92</td><td>54.00</td><td>91.56</td><td>32.39</td><td>6.53</td><td>31.56</td><td>387 72 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1 * 2467.00	98.92	44.92	54.00	91.56	32.39	6.53	31.56	387 72 Average
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 2483.88	58.95	-3.85	54.00	43.59	32.39	6.53	31.56	387 72 Average																																																
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																
1 * 2467.00	98.92	44.92	54.00	91.56	32.39	6.53	31.56	387 72 Average																																																





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11n HT20 CH13 2472MHz																																																													
0+1	Horizontal	Fundamental																																																												
Peak	Date: 15 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-S2 Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:3000.000kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 9.5 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.08</td><td>57.85</td><td>-16.15</td><td>74.00</td><td>58.49</td><td>52.39</td><td>6.53</td><td>31.56</td><td>100 131 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2483.08	57.85	-16.15	74.00	58.49	52.39	6.53	31.56	100 131 Peak	Date: 13 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:3000.000kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 9.5 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2472.00</td><td>97.55</td><td>23.55</td><td>74.00</td><td>90.19</td><td>52.39</td><td>6.53</td><td>31.56</td><td>100 131 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1 *	2472.00	97.55	23.55	74.00	90.19	52.39	6.53	31.56	100 131 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2483.08	57.85	-16.15	74.00	58.49	52.39	6.53	31.56	100 131 Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1 *	2472.00	97.55	23.55	74.00	90.19	52.39	6.53	31.56	100 131 Peak																																																					
Avg.	Date: 16 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-S2 Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:0.0100kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 9.5 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.52</td><td>47.42</td><td>-6.58</td><td>54.00</td><td>48.86</td><td>52.39</td><td>6.53</td><td>31.56</td><td>100 131 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2483.52	47.42	-6.58	54.00	48.86	52.39	6.53	31.56	100 131 Average	Date: 16 Level (dBuV/m) Date: 2023-04-04 Site : 03CH02-S2 Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : REW:1000.000kHz VIEW:0.0100kHz Mode : 2KZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 9.5 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>2472.00</td><td>89.94</td><td>35.94</td><td>54.00</td><td>82.58</td><td>52.39</td><td>6.53</td><td>31.56</td><td>100 131 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1 *	2472.00	89.94	35.94	54.00	82.58	52.39	6.53	31.56	100 131 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2483.52	47.42	-6.58	54.00	48.86	52.39	6.53	31.56	100 131 Average																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1 *	2472.00	89.94	35.94	54.00	82.58	52.39	6.53	31.56	100 131 Average																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11n HT20 CH13 2472MHz																																																													
0+1	Vertical	Fundamental																																																												
Peak	Date: 19 Level (dBuV/m) Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL Project : REW: 1000.000kHz VBW: 3000.000kHz Mode : ZKZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 9.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>62.64</td><td>-11.36</td><td>74.00</td><td>55.28</td><td>32.39</td><td>6.53</td><td>31.56</td><td>258</td><td>77</td><td>Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	2483.52	62.64	-11.36	74.00	55.28	32.39	6.53	31.56	258	77	Peak	Date: 17 Level (dBuV/m) Date: 2023.04.04 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : REW: 1000.000kHz VBW: 3000.000kHz Mode : ZKZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 9.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2472.00</td><td>104.52</td><td>30.52</td><td>74.00</td><td>97.16</td><td>32.39</td><td>6.53</td><td>31.56</td><td>258</td><td>77</td><td>Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	2472.00	104.52	30.52	74.00	97.16	32.39	6.53	31.56	258	77	Peak
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2483.52	62.64	-11.36	74.00	55.28	32.39	6.53	31.56	258	77	Peak																																																			
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2472.00	104.52	30.52	74.00	97.16	32.39	6.53	31.56	258	77	Peak																																																			
Avg.	Date: 20 Level (dBuV/m) Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL Project : REW: 1000.000kHz VBW: 0.0100kHz Mode : ZKZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 9.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>58.56</td><td>-3.44</td><td>54.00</td><td>43.20</td><td>32.39</td><td>6.53</td><td>31.56</td><td>258</td><td>77</td><td>Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	2483.52	58.56	-3.44	54.00	43.20	32.39	6.53	31.56	258	77	Average	Date: 18 Level (dBuV/m) Date: 2023.04.04 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL Project : REW: 1000.000kHz VBW: 0.0100kHz Mode : ZKZ209-01 SN : GSEDMMA033087000K Plane : Y with Accessories MCS0 power setting 9.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2472.00</td><td>96.50</td><td>42.50</td><td>54.00</td><td>89.14</td><td>32.39</td><td>6.53</td><td>31.56</td><td>258</td><td>77</td><td>Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	2472.00	96.50	42.50	54.00	89.14	32.39	6.53	31.56	258	77	Average
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2483.52	58.56	-3.44	54.00	43.20	32.39	6.53	31.56	258	77	Average																																																			
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2472.00	96.50	42.50	54.00	89.14	32.39	6.53	31.56	258	77	Average																																																			



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																	
ANT	802.11b CH01 2412MHz																																																																	
0+1	Horizontal	Vertical																																																																
Peak Avg.	Date: 13  Site : 03CH02-02 Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2K2209-01 Mode : Mode 17 SN : G082MM033087000K Plane : Y with Accessories : 1M power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>45.87</td><td>-28.93</td><td>74.00</td><td>59.18</td><td>34.40</td><td>9.47 57.98 138 61 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>39.39</td><td>-34.61</td><td>54.00</td><td>53.42</td><td>34.40</td><td>9.47 57.98 138 61 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	cm	deg	1	4824.00	45.87	-28.93	74.00	59.18	34.40	9.47 57.98 138 61 Peak	2	4824.00	39.39	-34.61	54.00	53.42	34.40	9.47 57.98 138 61 Average	Date: 14  Site : 03CH02-02 Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2K2209-01 Mode : Mode 17 SN : G082MM033087000K Plane : Y with Accessories : 1M power setting 18 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Poss</th><th>T/Poss</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>47.28</td><td>-26.72</td><td>74.00</td><td>63.31</td><td>34.40</td><td>9.47 57.98 129 52 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>41.59</td><td>-32.41</td><td>54.00</td><td>55.62</td><td>34.40</td><td>9.47 57.98 129 52 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	cm	deg	1	4824.00	47.28	-26.72	74.00	63.31	34.40	9.47 57.98 129 52 Peak	2	4824.00	41.59	-32.41	54.00	55.62	34.40	9.47 57.98 129 52 Average
	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	cm	deg																																																											
1	4824.00	45.87	-28.93	74.00	59.18	34.40	9.47 57.98 138 61 Peak																																																											
2	4824.00	39.39	-34.61	54.00	53.42	34.40	9.47 57.98 138 61 Average																																																											
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Poss	T/Poss	Remark																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	cm	deg																																																											
1	4824.00	47.28	-26.72	74.00	63.31	34.40	9.47 57.98 129 52 Peak																																																											
2	4824.00	41.59	-32.41	54.00	55.62	34.40	9.47 57.98 129 52 Average																																																											



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																									
ANT	802.11b CH06 2437MHz																																																																																																																									
0+1	Horizontal	Vertical																																																																																																																								
Peak Avg.	Date: 17 Level (dBuV/m) Date: 2023-04-20 Site : 02CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2KZ209-01 Mode : Mode 18 SN : GSE2MM033087000K Plane : Y with Accessories : 1M power setting 18 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>45.78</td><td>-28.22</td><td>74.00</td><td>59.81</td><td>54.37</td><td>9.58</td><td>57.98</td><td>61 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>48.75</td><td>-31.24</td><td>54.00</td><td>54.79</td><td>54.37</td><td>9.58</td><td>57.98</td><td>61 Average</td></tr><tr><td>3</td><td>7311.00</td><td>49.45</td><td>-24.55</td><td>74.00</td><td>61.63</td><td>56.85</td><td>11.24</td><td>59.47</td><td>235 45 Peak</td></tr><tr><td>4</td><td>7311.00</td><td>44.58</td><td>-29.42</td><td>54.00</td><td>56.76</td><td>56.85</td><td>11.24</td><td>59.47</td><td>235 45 Average</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	4874.00	45.78	-28.22	74.00	59.81	54.37	9.58	57.98	61 Peak	2	4874.00	48.75	-31.24	54.00	54.79	54.37	9.58	57.98	61 Average	3	7311.00	49.45	-24.55	74.00	61.63	56.85	11.24	59.47	235 45 Peak	4	7311.00	44.58	-29.42	54.00	56.76	56.85	11.24	59.47	235 45 Average	Date: 18 Level (dBuV/m) Date: 2023-04-20 Site : 02CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2KZ209-01 Mode : Mode 18 SN : GSE2MM033087000K Plane : Y with Accessories : 1M power setting 18 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>46.66</td><td>-27.34</td><td>74.00</td><td>60.69</td><td>54.37</td><td>9.58</td><td>57.98</td><td>154 41 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>41.53</td><td>-32.47</td><td>54.00</td><td>55.56</td><td>54.37</td><td>9.58</td><td>57.98</td><td>154 41 Average</td></tr><tr><td>3</td><td>7311.00</td><td>48.98</td><td>-25.02</td><td>74.00</td><td>61.16</td><td>56.85</td><td>11.24</td><td>59.47</td><td>289 25 Peak</td></tr><tr><td>4</td><td>7311.00</td><td>43.14</td><td>-30.86</td><td>54.00</td><td>55.32</td><td>56.85</td><td>11.24</td><td>59.47</td><td>289 25 Average</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	4874.00	46.66	-27.34	74.00	60.69	54.37	9.58	57.98	154 41 Peak	2	4874.00	41.53	-32.47	54.00	55.56	54.37	9.58	57.98	154 41 Average	3	7311.00	48.98	-25.02	74.00	61.16	56.85	11.24	59.47	289 25 Peak	4	7311.00	43.14	-30.86	54.00	55.32	56.85	11.24	59.47	289 25 Average
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																		
1	4874.00	45.78	-28.22	74.00	59.81	54.37	9.58	57.98	61 Peak																																																																																																																	
2	4874.00	48.75	-31.24	54.00	54.79	54.37	9.58	57.98	61 Average																																																																																																																	
3	7311.00	49.45	-24.55	74.00	61.63	56.85	11.24	59.47	235 45 Peak																																																																																																																	
4	7311.00	44.58	-29.42	54.00	56.76	56.85	11.24	59.47	235 45 Average																																																																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																		
1	4874.00	46.66	-27.34	74.00	60.69	54.37	9.58	57.98	154 41 Peak																																																																																																																	
2	4874.00	41.53	-32.47	54.00	55.56	54.37	9.58	57.98	154 41 Average																																																																																																																	
3	7311.00	48.98	-25.02	74.00	61.16	56.85	11.24	59.47	289 25 Peak																																																																																																																	
4	7311.00	43.14	-30.86	54.00	55.32	56.85	11.24	59.47	289 25 Average																																																																																																																	



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																									
ANT	802.11b CH11 2462MHz																																																																																																																									
0+1	Horizontal	Vertical																																																																																																																								
Peak Avg.	Date: 13 Level (dBuV/m) Date: 2023.04.20 Site : 02CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2KZ209-01 Mode : Mode 19 SN : GSE2MM033007000K Plane : Y with Accessories : 1M power setting 10 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>44.89</td><td>-29.91</td><td>74.00</td><td>58.09</td><td>54.34</td><td>9.56</td><td>57.98</td><td>133 65 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>39.81</td><td>-34.10</td><td>54.00</td><td>53.81</td><td>54.34</td><td>9.56</td><td>57.98</td><td>133 65 Average</td></tr><tr><td>3</td><td>7386.00</td><td>49.52</td><td>-24.48</td><td>74.00</td><td>61.93</td><td>35.98</td><td>11.32</td><td>59.71</td><td>259 51 Peak</td></tr><tr><td>4</td><td>7386.00</td><td>44.33</td><td>-29.67</td><td>54.00</td><td>56.14</td><td>35.98</td><td>11.32</td><td>59.71</td><td>259 51 Average</td></tr></table> Date: 14 Level (dBuV/m) Date: 2023.04.20 Site : 02CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2KZ209-01 Mode : Mode 19 SN : GSE2MM033007000K Plane : Y with Accessories : 1M power setting 10 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>45.11</td><td>-28.89</td><td>74.00</td><td>59.11</td><td>54.34</td><td>9.56</td><td>57.98</td><td>172 275 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>40.10</td><td>-33.81</td><td>54.00</td><td>54.10</td><td>54.34</td><td>9.56</td><td>57.98</td><td>172 275 Average</td></tr><tr><td>3</td><td>7386.00</td><td>49.33</td><td>-24.67</td><td>74.00</td><td>61.74</td><td>35.98</td><td>11.32</td><td>59.71</td><td>254 11 Peak</td></tr><tr><td>4</td><td>7386.00</td><td>44.07</td><td>-29.93</td><td>54.00</td><td>56.48</td><td>35.98</td><td>11.32</td><td>59.71</td><td>254 11 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	4924.00	44.89	-29.91	74.00	58.09	54.34	9.56	57.98	133 65 Peak	2	4924.00	39.81	-34.10	54.00	53.81	54.34	9.56	57.98	133 65 Average	3	7386.00	49.52	-24.48	74.00	61.93	35.98	11.32	59.71	259 51 Peak	4	7386.00	44.33	-29.67	54.00	56.14	35.98	11.32	59.71	259 51 Average	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	4924.00	45.11	-28.89	74.00	59.11	54.34	9.56	57.98	172 275 Peak	2	4924.00	40.10	-33.81	54.00	54.10	54.34	9.56	57.98	172 275 Average	3	7386.00	49.33	-24.67	74.00	61.74	35.98	11.32	59.71	254 11 Peak	4	7386.00	44.07	-29.93	54.00	56.48	35.98	11.32	59.71	254 11 Average	
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																		
1	4924.00	44.89	-29.91	74.00	58.09	54.34	9.56	57.98	133 65 Peak																																																																																																																	
2	4924.00	39.81	-34.10	54.00	53.81	54.34	9.56	57.98	133 65 Average																																																																																																																	
3	7386.00	49.52	-24.48	74.00	61.93	35.98	11.32	59.71	259 51 Peak																																																																																																																	
4	7386.00	44.33	-29.67	54.00	56.14	35.98	11.32	59.71	259 51 Average																																																																																																																	
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																		
1	4924.00	45.11	-28.89	74.00	59.11	54.34	9.56	57.98	172 275 Peak																																																																																																																	
2	4924.00	40.10	-33.81	54.00	54.10	54.34	9.56	57.98	172 275 Average																																																																																																																	
3	7386.00	49.33	-24.67	74.00	61.74	35.98	11.32	59.71	254 11 Peak																																																																																																																	
4	7386.00	44.07	-29.93	54.00	56.48	35.98	11.32	59.71	254 11 Average																																																																																																																	



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																																					
ANT	802.11b CH12 2467MHz																																																																																																																																					
0+1	Horizontal	Vertical																																																																																																																																				
Peak Avg.	Date: 21 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 20 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4934.00</td><td>44.87</td><td>-29.93</td><td>74.00</td><td>58.67</td><td>34.34</td><td>9.56</td><td>57.98</td><td>235</td><td>45 Peak</td></tr><tr><td>2</td><td>4934.00</td><td>37.56</td><td>-36.34</td><td>54.00</td><td>51.66</td><td>34.34</td><td>9.56</td><td>57.98</td><td>235</td><td>45 Average</td></tr><tr><td>3 *</td><td>7481.00</td><td>45.98</td><td>-28.89</td><td>74.00</td><td>58.37</td><td>35.97</td><td>11.32</td><td>59.76</td><td>185</td><td>52 Peak</td></tr><tr><td>4</td><td>7481.00</td><td>38.09</td><td>-35.89</td><td>54.00</td><td>51.42</td><td>35.97</td><td>11.32</td><td>59.76</td><td>185</td><td>52 Average</td></tr></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4934.00	44.87	-29.93	74.00	58.67	34.34	9.56	57.98	235	45 Peak	2	4934.00	37.56	-36.34	54.00	51.66	34.34	9.56	57.98	235	45 Average	3 *	7481.00	45.98	-28.89	74.00	58.37	35.97	11.32	59.76	185	52 Peak	4	7481.00	38.09	-35.89	54.00	51.42	35.97	11.32	59.76	185	52 Average	Date: 22 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 20 SN : 6082MM033087000K Plane : Y with Accessories IM power setting 12.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4934.00</td><td>45.55</td><td>-28.45</td><td>74.00</td><td>59.55</td><td>34.34</td><td>9.56</td><td>57.98</td><td>188</td><td>156 Peak</td></tr><tr><td>2</td><td>4934.00</td><td>38.04</td><td>-35.96</td><td>54.00</td><td>52.04</td><td>34.34</td><td>9.56</td><td>57.98</td><td>188</td><td>156 Average</td></tr><tr><td>3 *</td><td>7481.00</td><td>46.30</td><td>-27.70</td><td>74.00</td><td>58.77</td><td>35.97</td><td>11.32</td><td>59.76</td><td>214</td><td>26 Peak</td></tr><tr><td>4</td><td>7481.00</td><td>39.49</td><td>-34.51</td><td>54.00</td><td>52.49</td><td>35.97</td><td>11.32</td><td>59.76</td><td>241</td><td>26 Average</td></tr></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4934.00	45.55	-28.45	74.00	59.55	34.34	9.56	57.98	188	156 Peak	2	4934.00	38.04	-35.96	54.00	52.04	34.34	9.56	57.98	188	156 Average	3 *	7481.00	46.30	-27.70	74.00	58.77	35.97	11.32	59.76	214	26 Peak	4	7481.00	39.49	-34.51	54.00	52.49	35.97	11.32	59.76	241	26 Average
	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	4934.00	44.87	-29.93	74.00	58.67	34.34	9.56	57.98	235	45 Peak																																																																																																																												
2	4934.00	37.56	-36.34	54.00	51.66	34.34	9.56	57.98	235	45 Average																																																																																																																												
3 *	7481.00	45.98	-28.89	74.00	58.37	35.97	11.32	59.76	185	52 Peak																																																																																																																												
4	7481.00	38.09	-35.89	54.00	51.42	35.97	11.32	59.76	185	52 Average																																																																																																																												
Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	4934.00	45.55	-28.45	74.00	59.55	34.34	9.56	57.98	188	156 Peak																																																																																																																												
2	4934.00	38.04	-35.96	54.00	52.04	34.34	9.56	57.98	188	156 Average																																																																																																																												
3 *	7481.00	46.30	-27.70	74.00	58.77	35.97	11.32	59.76	214	26 Peak																																																																																																																												
4	7481.00	39.49	-34.51	54.00	52.49	35.97	11.32	59.76	241	26 Average																																																																																																																												





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																																
ANT	802.11b CH13 2472MHz																																																																																																																																
0+1	Horizontal	Vertical																																																																																																																															
Peak Avg.	Date: 21 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 21 SN : 6082MM033087000K Plane : Y with Accessories IM power setting I2 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4944.00</td><td>43.67</td><td>-39.33</td><td>74.00</td><td>57.68</td><td>34.33</td><td>9.56</td><td>57.98</td><td>141</td><td>62 Peak</td></tr><tr><td>2</td><td>4944.00</td><td>36.31</td><td>-37.78</td><td>54.00</td><td>58.22</td><td>34.33</td><td>9.56</td><td>57.98</td><td>141</td><td>62 Average</td></tr><tr><td>3 *</td><td>7416.00</td><td>45.74</td><td>-28.26</td><td>74.00</td><td>58.24</td><td>35.97</td><td>11.29</td><td>59.76</td><td>259</td><td>72 Peak</td></tr><tr><td>4</td><td>7416.00</td><td>39.34</td><td>-34.66</td><td>54.00</td><td>51.84</td><td>35.97</td><td>11.29</td><td>59.76</td><td>259</td><td>72 Average</td></tr></table> Date: 22 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 21 SN : 6082MM033087000K Plane : Y with Accessories IM power setting I2 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4944.00</td><td>43.86</td><td>-39.04</td><td>74.00</td><td>57.97</td><td>34.33</td><td>9.56</td><td>57.98</td><td>155</td><td>21 Peak</td></tr><tr><td>2</td><td>4944.00</td><td>37.86</td><td>-35.94</td><td>54.00</td><td>53.87</td><td>34.33</td><td>9.56</td><td>57.98</td><td>155</td><td>21 Average</td></tr><tr><td>3 *</td><td>7416.00</td><td>45.45</td><td>-28.55</td><td>74.00</td><td>58.15</td><td>35.97</td><td>11.29</td><td>59.76</td><td>286</td><td>28 Peak</td></tr><tr><td>4</td><td>7416.00</td><td>38.97</td><td>-35.03</td><td>54.00</td><td>51.47</td><td>35.97</td><td>11.29</td><td>59.76</td><td>286</td><td>28 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	4944.00	43.67	-39.33	74.00	57.68	34.33	9.56	57.98	141	62 Peak	2	4944.00	36.31	-37.78	54.00	58.22	34.33	9.56	57.98	141	62 Average	3 *	7416.00	45.74	-28.26	74.00	58.24	35.97	11.29	59.76	259	72 Peak	4	7416.00	39.34	-34.66	54.00	51.84	35.97	11.29	59.76	259	72 Average	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	4944.00	43.86	-39.04	74.00	57.97	34.33	9.56	57.98	155	21 Peak	2	4944.00	37.86	-35.94	54.00	53.87	34.33	9.56	57.98	155	21 Average	3 *	7416.00	45.45	-28.55	74.00	58.15	35.97	11.29	59.76	286	28 Peak	4	7416.00	38.97	-35.03	54.00	51.47	35.97	11.29	59.76	286	28 Average
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4944.00	43.67	-39.33	74.00	57.68	34.33	9.56	57.98	141	62 Peak																																																																																																																							
2	4944.00	36.31	-37.78	54.00	58.22	34.33	9.56	57.98	141	62 Average																																																																																																																							
3 *	7416.00	45.74	-28.26	74.00	58.24	35.97	11.29	59.76	259	72 Peak																																																																																																																							
4	7416.00	39.34	-34.66	54.00	51.84	35.97	11.29	59.76	259	72 Average																																																																																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4944.00	43.86	-39.04	74.00	57.97	34.33	9.56	57.98	155	21 Peak																																																																																																																							
2	4944.00	37.86	-35.94	54.00	53.87	34.33	9.56	57.98	155	21 Average																																																																																																																							
3 *	7416.00	45.45	-28.55	74.00	58.15	35.97	11.29	59.76	286	28 Peak																																																																																																																							
4	7416.00	38.97	-35.03	54.00	51.47	35.97	11.29	59.76	286	28 Average																																																																																																																							



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																	
ANT	802.11g CH01 2412MHz																																																																																	
0+1	Horizontal	Vertical																																																																																
Peak Avg.	Date: 25 Level (dBuV/m) Date: 2023-04-20  Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 22 SN : 60828M033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>4824.00</td><td>42.62</td><td>-31.38</td><td>74.00</td><td>56.65</td><td>34.40</td><td>9.47</td><td>57.90</td><td>133 66 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>33.85</td><td>-20.95</td><td>54.00</td><td>47.68</td><td>34.40</td><td>9.47</td><td>57.90</td><td>133 66 Average</td></tr></table>	Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	4824.00	42.62	-31.38	74.00	56.65	34.40	9.47	57.90	133 66 Peak	2	4824.00	33.85	-20.95	54.00	47.68	34.40	9.47	57.90	133 66 Average	Date: 26 Level (dBuV/m) Date: 2023-04-20  Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 22 SN : 60828M033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 *</td><td>4824.00</td><td>43.89</td><td>-30.20</td><td>74.00</td><td>57.83</td><td>34.40</td><td>9.47</td><td>57.90</td><td>142 58 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>33.38</td><td>-20.62</td><td>54.00</td><td>47.41</td><td>34.40</td><td>9.47</td><td>57.90</td><td>142 58 Average</td></tr></table>	Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	4824.00	43.89	-30.20	74.00	57.83	34.40	9.47	57.90	142 58 Peak	2	4824.00	33.38	-20.62	54.00	47.41	34.40	9.47	57.90	142 58 Average
	Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																										
1 *	4824.00	42.62	-31.38	74.00	56.65	34.40	9.47	57.90	133 66 Peak																																																																									
2	4824.00	33.85	-20.95	54.00	47.68	34.40	9.47	57.90	133 66 Average																																																																									
Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																										
1 *	4824.00	43.89	-30.20	74.00	57.83	34.40	9.47	57.90	142 58 Peak																																																																									
2	4824.00	33.38	-20.62	54.00	47.41	34.40	9.47	57.90	142 58 Average																																																																									



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																																					
ANT	802.11g CH06 2437MHz																																																																																																																																					
0+1	Horizontal	Vertical																																																																																																																																				
Peak Avg.	Date: 17 Date: 2023-04-20 Site : 02CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2KZ209-01 Mode : Mode 23 SN : GSE2MM033007000K Plane : Y with Accessories GM power setting 10 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>43.82</td><td>-38.18</td><td>74.00</td><td>57.85</td><td>54.37</td><td>9.50</td><td>57.90</td><td>180</td><td>36 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>33.59</td><td>-38.41</td><td>54.00</td><td>47.62</td><td>34.37</td><td>9.50</td><td>57.90</td><td>180</td><td>36 Average</td></tr><tr><td>3</td><td>7311.00</td><td>58.54</td><td>-23.46</td><td>74.00</td><td>62.72</td><td>36.95</td><td>11.24</td><td>59.47</td><td>231</td><td>51 Peak</td></tr><tr><td>4</td><td>7311.00</td><td>48.04</td><td>-33.96</td><td>54.00</td><td>53.12</td><td>36.95</td><td>11.24</td><td>59.47</td><td>231</td><td>51 Average</td></tr></tbody></table>	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	4874.00	43.82	-38.18	74.00	57.85	54.37	9.50	57.90	180	36 Peak	2	4874.00	33.59	-38.41	54.00	47.62	34.37	9.50	57.90	180	36 Average	3	7311.00	58.54	-23.46	74.00	62.72	36.95	11.24	59.47	231	51 Peak	4	7311.00	48.04	-33.96	54.00	53.12	36.95	11.24	59.47	231	51 Average	Date: 18 Date: 2023-04-20 Site : 02CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2KZ209-01 Mode : Mode 23 SN : GSE2MM033007000K Plane : Y with Accessories GM power setting 10 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>44.34</td><td>-29.66</td><td>74.00</td><td>58.37</td><td>34.37</td><td>9.50</td><td>57.90</td><td>144</td><td>62 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>33.21</td><td>-29.79</td><td>54.00</td><td>47.23</td><td>34.37</td><td>9.50</td><td>57.90</td><td>144</td><td>62 Average</td></tr><tr><td>3</td><td>7311.00</td><td>58.40</td><td>-23.60</td><td>74.00</td><td>62.66</td><td>36.95</td><td>11.24</td><td>59.47</td><td>170</td><td>12 Peak</td></tr><tr><td>4</td><td>7311.00</td><td>48.31</td><td>-33.69</td><td>54.00</td><td>52.59</td><td>36.95</td><td>11.24</td><td>59.47</td><td>170</td><td>12 Average</td></tr></tbody></table>	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg		1	4874.00	44.34	-29.66	74.00	58.37	34.37	9.50	57.90	144	62 Peak	2	4874.00	33.21	-29.79	54.00	47.23	34.37	9.50	57.90	144	62 Average	3	7311.00	58.40	-23.60	74.00	62.66	36.95	11.24	59.47	170	12 Peak	4	7311.00	48.31	-33.69	54.00	52.59	36.95	11.24	59.47	170	12 Average
	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																																																																														
1	4874.00	43.82	-38.18	74.00	57.85	54.37	9.50	57.90	180	36 Peak																																																																																																																												
2	4874.00	33.59	-38.41	54.00	47.62	34.37	9.50	57.90	180	36 Average																																																																																																																												
3	7311.00	58.54	-23.46	74.00	62.72	36.95	11.24	59.47	231	51 Peak																																																																																																																												
4	7311.00	48.04	-33.96	54.00	53.12	36.95	11.24	59.47	231	51 Average																																																																																																																												
Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																												
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																																													
1	4874.00	44.34	-29.66	74.00	58.37	34.37	9.50	57.90	144	62 Peak																																																																																																																												
2	4874.00	33.21	-29.79	54.00	47.23	34.37	9.50	57.90	144	62 Average																																																																																																																												
3	7311.00	58.40	-23.60	74.00	62.66	36.95	11.24	59.47	170	12 Peak																																																																																																																												
4	7311.00	48.31	-33.69	54.00	52.59	36.95	11.24	59.47	170	12 Average																																																																																																																												



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																																				
ANT	802.11g CH11 2462MHz																																																																																																																																				
0+1	Horizontal	Vertical																																																																																																																																			
Peak Avg.	Date: 25 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 24 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.36</td><td>-38.64</td><td>74.00</td><td>57.36</td><td>34.34</td><td>9.56</td><td>57.98</td><td>132</td><td>68 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>33.82</td><td>-29.18</td><td>54.00</td><td>47.82</td><td>34.34</td><td>9.56</td><td>57.98</td><td>132</td><td>68 Average</td></tr><tr><td>3 *</td><td>7386.00</td><td>46.79</td><td>-27.21</td><td>74.00</td><td>59.28</td><td>35.98</td><td>11.32</td><td>59.71</td><td>135</td><td>253 Peak</td></tr><tr><td>4</td><td>7386.00</td><td>36.46</td><td>-37.54</td><td>54.00</td><td>48.87</td><td>35.98</td><td>11.32</td><td>59.71</td><td>135</td><td>253 Average</td></tr></table> Date: 26 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 24 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.83</td><td>-36.97</td><td>74.00</td><td>57.83</td><td>34.34</td><td>9.56</td><td>57.98</td><td>181</td><td>132 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>33.37</td><td>-30.63</td><td>54.00</td><td>47.37</td><td>34.34</td><td>9.56</td><td>57.98</td><td>181</td><td>132 Average</td></tr><tr><td>3 *</td><td>7386.00</td><td>46.38</td><td>-27.62</td><td>74.00</td><td>58.79</td><td>35.98</td><td>11.32</td><td>59.71</td><td>253</td><td>47 Peak</td></tr><tr><td>4</td><td>7386.00</td><td>35.85</td><td>-38.17</td><td>54.00</td><td>48.24</td><td>35.98</td><td>11.32</td><td>59.71</td><td>253</td><td>47 Average</td></tr></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	43.36	-38.64	74.00	57.36	34.34	9.56	57.98	132	68 Peak	2	4924.00	33.82	-29.18	54.00	47.82	34.34	9.56	57.98	132	68 Average	3 *	7386.00	46.79	-27.21	74.00	59.28	35.98	11.32	59.71	135	253 Peak	4	7386.00	36.46	-37.54	54.00	48.87	35.98	11.32	59.71	135	253 Average	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	43.83	-36.97	74.00	57.83	34.34	9.56	57.98	181	132 Peak	2	4924.00	33.37	-30.63	54.00	47.37	34.34	9.56	57.98	181	132 Average	3 *	7386.00	46.38	-27.62	74.00	58.79	35.98	11.32	59.71	253	47 Peak	4	7386.00	35.85	-38.17	54.00	48.24	35.98	11.32	59.71	253	47 Average
	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	4924.00	43.36	-38.64	74.00	57.36	34.34	9.56	57.98	132	68 Peak																																																																																																																											
2	4924.00	33.82	-29.18	54.00	47.82	34.34	9.56	57.98	132	68 Average																																																																																																																											
3 *	7386.00	46.79	-27.21	74.00	59.28	35.98	11.32	59.71	135	253 Peak																																																																																																																											
4	7386.00	36.46	-37.54	54.00	48.87	35.98	11.32	59.71	135	253 Average																																																																																																																											
Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	4924.00	43.83	-36.97	74.00	57.83	34.34	9.56	57.98	181	132 Peak																																																																																																																											
2	4924.00	33.37	-30.63	54.00	47.37	34.34	9.56	57.98	181	132 Average																																																																																																																											
3 *	7386.00	46.38	-27.62	74.00	58.79	35.98	11.32	59.71	253	47 Peak																																																																																																																											
4	7386.00	35.85	-38.17	54.00	48.24	35.98	11.32	59.71	253	47 Average																																																																																																																											



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																																					
ANT	802.11g CH12 2467MHz																																																																																																																																					
0+1	Horizontal	Vertical																																																																																																																																				
Peak Avg.	Date: 25 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 25 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 11.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4934.00</td><td>42.55</td><td>-31.45</td><td>74.00</td><td>56.55</td><td>34.34</td><td>9.56</td><td>57.00</td><td>214</td><td>233 Peak</td></tr><tr><td>2</td><td>4934.00</td><td>33.83</td><td>-30.97</td><td>54.00</td><td>47.83</td><td>34.34</td><td>9.56</td><td>57.00</td><td>214</td><td>233 Average</td></tr><tr><td>3 *</td><td>7481.00</td><td>45.27</td><td>-29.73</td><td>74.00</td><td>57.74</td><td>35.97</td><td>11.32</td><td>59.76</td><td>242</td><td>46 Peak</td></tr><tr><td>4</td><td>7481.00</td><td>35.44</td><td>-35.56</td><td>54.00</td><td>47.91</td><td>35.97</td><td>11.32</td><td>59.76</td><td>242</td><td>46 Average</td></tr></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4934.00	42.55	-31.45	74.00	56.55	34.34	9.56	57.00	214	233 Peak	2	4934.00	33.83	-30.97	54.00	47.83	34.34	9.56	57.00	214	233 Average	3 *	7481.00	45.27	-29.73	74.00	57.74	35.97	11.32	59.76	242	46 Peak	4	7481.00	35.44	-35.56	54.00	47.91	35.97	11.32	59.76	242	46 Average	Date: 26 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 25 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 11.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4934.00</td><td>43.59</td><td>-30.41</td><td>74.00</td><td>57.59</td><td>34.34</td><td>9.56</td><td>57.00</td><td>158</td><td>241 Peak</td></tr><tr><td>2</td><td>4934.00</td><td>33.42</td><td>-30.58</td><td>54.00</td><td>47.42</td><td>34.34</td><td>9.56</td><td>57.00</td><td>158</td><td>241 Average</td></tr><tr><td>3 *</td><td>7481.00</td><td>44.92</td><td>-29.08</td><td>74.00</td><td>57.39</td><td>35.97</td><td>11.32</td><td>59.76</td><td>148</td><td>125 Peak</td></tr><tr><td>4</td><td>7481.00</td><td>35.09</td><td>-35.91</td><td>54.00</td><td>47.56</td><td>35.97</td><td>11.32</td><td>59.76</td><td>148</td><td>125 Average</td></tr></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4934.00	43.59	-30.41	74.00	57.59	34.34	9.56	57.00	158	241 Peak	2	4934.00	33.42	-30.58	54.00	47.42	34.34	9.56	57.00	158	241 Average	3 *	7481.00	44.92	-29.08	74.00	57.39	35.97	11.32	59.76	148	125 Peak	4	7481.00	35.09	-35.91	54.00	47.56	35.97	11.32	59.76	148	125 Average
	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	4934.00	42.55	-31.45	74.00	56.55	34.34	9.56	57.00	214	233 Peak																																																																																																																												
2	4934.00	33.83	-30.97	54.00	47.83	34.34	9.56	57.00	214	233 Average																																																																																																																												
3 *	7481.00	45.27	-29.73	74.00	57.74	35.97	11.32	59.76	242	46 Peak																																																																																																																												
4	7481.00	35.44	-35.56	54.00	47.91	35.97	11.32	59.76	242	46 Average																																																																																																																												
Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	4934.00	43.59	-30.41	74.00	57.59	34.34	9.56	57.00	158	241 Peak																																																																																																																												
2	4934.00	33.42	-30.58	54.00	47.42	34.34	9.56	57.00	158	241 Average																																																																																																																												
3 *	7481.00	44.92	-29.08	74.00	57.39	35.97	11.32	59.76	148	125 Peak																																																																																																																												
4	7481.00	35.09	-35.91	54.00	47.56	35.97	11.32	59.76	148	125 Average																																																																																																																												



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																																	
ANT	802.11g CH13 2472MHz																																																																																																																																	
0+1	Horizontal	Vertical																																																																																																																																
Peak Avg.	Date: 29 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 26 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 6 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4944.00</td><td>42.87</td><td>-31.13</td><td>74.00</td><td>56.88</td><td>34.33</td><td>9.56</td><td>57.98</td><td>152</td><td>66 Peak</td></tr><tr><td>2</td><td>4944.00</td><td>32.31</td><td>-31.79</td><td>54.00</td><td>46.22</td><td>34.33</td><td>9.56</td><td>57.98</td><td>152</td><td>66 Average</td></tr><tr><td>3 *</td><td>7416.00</td><td>45.43</td><td>-28.59</td><td>74.00</td><td>57.91</td><td>35.97</td><td>11.29</td><td>59.76</td><td>123</td><td>233 Peak</td></tr><tr><td>4</td><td>7416.00</td><td>35.33</td><td>-38.69</td><td>54.00</td><td>47.81</td><td>35.97</td><td>11.29</td><td>59.76</td><td>123</td><td>233 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor		dB	cm	deg	1	4944.00	42.87	-31.13	74.00	56.88	34.33	9.56	57.98	152	66 Peak	2	4944.00	32.31	-31.79	54.00	46.22	34.33	9.56	57.98	152	66 Average	3 *	7416.00	45.43	-28.59	74.00	57.91	35.97	11.29	59.76	123	233 Peak	4	7416.00	35.33	-38.69	54.00	47.81	35.97	11.29	59.76	123	233 Average	Date: 30 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 26 SN : 6082MM033087000K Plane : Y with Accessories : 6M power setting 6 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4944.00</td><td>42.41</td><td>-31.59</td><td>74.00</td><td>56.42</td><td>34.33</td><td>9.56</td><td>57.98</td><td>160</td><td>32 Peak</td></tr><tr><td>2</td><td>4944.00</td><td>32.11</td><td>-31.79</td><td>54.00</td><td>46.22</td><td>34.33</td><td>9.56</td><td>57.98</td><td>160</td><td>32 Average</td></tr><tr><td>3 *</td><td>7416.00</td><td>45.37</td><td>-28.63</td><td>74.00</td><td>57.87</td><td>35.97</td><td>11.29</td><td>59.76</td><td>269</td><td>258 Peak</td></tr><tr><td>4</td><td>7416.00</td><td>34.93</td><td>-39.07</td><td>54.00</td><td>47.43</td><td>35.97</td><td>11.29</td><td>59.76</td><td>269</td><td>258 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor		dB	cm	deg	1	4944.00	42.41	-31.59	74.00	56.42	34.33	9.56	57.98	160	32 Peak	2	4944.00	32.11	-31.79	54.00	46.22	34.33	9.56	57.98	160	32 Average	3 *	7416.00	45.37	-28.63	74.00	57.87	35.97	11.29	59.76	269	258 Peak	4	7416.00	34.93	-39.07	54.00	47.43	35.97	11.29	59.76	269	258 Average
	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																								
MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor		dB	cm	deg																																																																																																																									
1	4944.00	42.87	-31.13	74.00	56.88	34.33	9.56	57.98	152	66 Peak																																																																																																																								
2	4944.00	32.31	-31.79	54.00	46.22	34.33	9.56	57.98	152	66 Average																																																																																																																								
3 *	7416.00	45.43	-28.59	74.00	57.91	35.97	11.29	59.76	123	233 Peak																																																																																																																								
4	7416.00	35.33	-38.69	54.00	47.81	35.97	11.29	59.76	123	233 Average																																																																																																																								
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																									
MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor		dB	cm	deg																																																																																																																									
1	4944.00	42.41	-31.59	74.00	56.42	34.33	9.56	57.98	160	32 Peak																																																																																																																								
2	4944.00	32.11	-31.79	54.00	46.22	34.33	9.56	57.98	160	32 Average																																																																																																																								
3 *	7416.00	45.37	-28.63	74.00	57.87	35.97	11.29	59.76	269	258 Peak																																																																																																																								
4	7416.00	34.93	-39.07	54.00	47.43	35.97	11.29	59.76	269	258 Average																																																																																																																								





2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																	
ANT	802.11n HT20 CH01 2412MHz																																																																	
0+1	Horizontal	Vertical																																																																
Peak Avg.	Date: 31 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 27 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 *</td><td>4824.00</td><td>43.76</td><td>-30.24</td><td>74.00</td><td>57.79</td><td>34.40</td><td>9.47</td><td>57.90</td><td>235</td><td>75 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>33.63</td><td>-20.37</td><td>54.00</td><td>47.66</td><td>34.40</td><td>9.47</td><td>57.90</td><td>235</td><td>75 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	dB	cm	deg	Remark	1 *	4824.00	43.76	-30.24	74.00	57.79	34.40	9.47	57.90	235	75 Peak	2	4824.00	33.63	-20.37	54.00	47.66	34.40	9.47	57.90	235	75 Average	Date: 32 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 27 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 *</td><td>4824.00</td><td>43.49</td><td>-30.51</td><td>74.00</td><td>57.52</td><td>34.40</td><td>9.47</td><td>57.90</td><td>154</td><td>138 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>33.23</td><td>-20.77</td><td>54.00</td><td>47.26</td><td>34.40</td><td>9.47</td><td>57.90</td><td>154</td><td>138 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	dB	cm	deg	Remark	1 *	4824.00	43.49	-30.51	74.00	57.52	34.40	9.47	57.90	154	138 Peak	2	4824.00	33.23	-20.77	54.00	47.26	34.40	9.47	57.90	154	138 Average
	Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	dB	cm	deg	Remark																																																								
1 *	4824.00	43.76	-30.24	74.00	57.79	34.40	9.47	57.90	235	75 Peak																																																								
2	4824.00	33.63	-20.37	54.00	47.66	34.40	9.47	57.90	235	75 Average																																																								
Freq	Level	Limit	ReadAntenna	Cable Preamp	Loss Factor	dB	cm	deg	Remark																																																									
1 *	4824.00	43.49	-30.51	74.00	57.52	34.40	9.47	57.90	154	138 Peak																																																								
2	4824.00	33.23	-20.77	54.00	47.26	34.40	9.47	57.90	154	138 Average																																																								



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																																																	
ANT	802.11n HT20 CH06 2437MHz																																																																																																																																																	
0+1	Horizontal	Vertical																																																																																																																																																
Peak Avg.	Date: 17 Level (dBuV/m)  Date: 2023-04-20 Site : 02CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2KZ209-01 Mode : Mode 20 SN : GSE2MM033007000K Plane : Y with Accessories MCS0 power setting 10 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>Hz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>42.76</td><td>-11.24</td><td>74.00</td><td>56.79</td><td>54.37</td><td>9.58</td><td>57.98</td><td>215</td><td>323</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>32.83</td><td>-21.19</td><td>54.00</td><td>46.84</td><td>54.37</td><td>9.58</td><td>57.98</td><td>215</td><td>323</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>59.76</td><td>-23.24</td><td>74.00</td><td>62.94</td><td>56.85</td><td>11.24</td><td>59.47</td><td>231</td><td>52</td><td>Peak</td></tr><tr><td>4</td><td>7311.00</td><td>49.41</td><td>-13.59</td><td>54.00</td><td>52.59</td><td>56.85</td><td>11.24</td><td>59.47</td><td>231</td><td>52</td><td>Average</td></tr></tbody></table>		Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		Hz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg		1	4874.00	42.76	-11.24	74.00	56.79	54.37	9.58	57.98	215	323	Peak	2	4874.00	32.83	-21.19	54.00	46.84	54.37	9.58	57.98	215	323	Average	3	7311.00	59.76	-23.24	74.00	62.94	56.85	11.24	59.47	231	52	Peak	4	7311.00	49.41	-13.59	54.00	52.59	56.85	11.24	59.47	231	52	Average	Date: 18 Level (dBuV/m)  Date: 2023-04-20 Site : 02CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2KZ209-01 Mode : Mode 20 SN : GSE2MM033007000K Plane : Y with Accessories MCS0 power setting 10 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>Hz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>42.84</td><td>-11.06</td><td>74.00</td><td>56.97</td><td>54.37</td><td>9.58</td><td>57.98</td><td>122</td><td>46</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>32.66</td><td>-21.34</td><td>54.00</td><td>46.69</td><td>54.37</td><td>9.58</td><td>57.98</td><td>122</td><td>46</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>59.32</td><td>-23.68</td><td>74.00</td><td>62.58</td><td>56.85</td><td>11.24</td><td>59.47</td><td>171</td><td>14</td><td>Peak</td></tr><tr><td>4</td><td>7311.00</td><td>49.40</td><td>-14.00</td><td>54.00</td><td>51.58</td><td>56.85</td><td>11.24</td><td>59.47</td><td>171</td><td>14</td><td>Average</td></tr></tbody></table>		Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		Hz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg		1	4874.00	42.84	-11.06	74.00	56.97	54.37	9.58	57.98	122	46	Peak	2	4874.00	32.66	-21.34	54.00	46.69	54.37	9.58	57.98	122	46	Average	3	7311.00	59.32	-23.68	74.00	62.58	56.85	11.24	59.47	171	14	Peak	4	7311.00	49.40	-14.00	54.00	51.58	56.85	11.24	59.47	171	14	Average
		Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																						
	Hz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																																																								
1	4874.00	42.76	-11.24	74.00	56.79	54.37	9.58	57.98	215	323	Peak																																																																																																																																							
2	4874.00	32.83	-21.19	54.00	46.84	54.37	9.58	57.98	215	323	Average																																																																																																																																							
3	7311.00	59.76	-23.24	74.00	62.94	56.85	11.24	59.47	231	52	Peak																																																																																																																																							
4	7311.00	49.41	-13.59	54.00	52.59	56.85	11.24	59.47	231	52	Average																																																																																																																																							
	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																							
	Hz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																																																																								
1	4874.00	42.84	-11.06	74.00	56.97	54.37	9.58	57.98	122	46	Peak																																																																																																																																							
2	4874.00	32.66	-21.34	54.00	46.69	54.37	9.58	57.98	122	46	Average																																																																																																																																							
3	7311.00	59.32	-23.68	74.00	62.58	56.85	11.24	59.47	171	14	Peak																																																																																																																																							
4	7311.00	49.40	-14.00	54.00	51.58	56.85	11.24	59.47	171	14	Average																																																																																																																																							





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																													
ANT	802.11n HT20 CH11 2462MHz																																																																																																																													
0+1	Horizontal	Vertical																																																																																																																												
Peak Avg.	Date: 25 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 29 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>RadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>43.52</td><td>-38.48</td><td>74.00</td><td>57.52</td><td>34.34</td><td>9.56</td><td>57.98</td><td>138</td><td>155 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>33.57</td><td>-28.13</td><td>54.00</td><td>47.87</td><td>34.34</td><td>9.56</td><td>57.98</td><td>138</td><td>155 Average</td></tr><tr><td>3 *</td><td>7386.00</td><td>46.79</td><td>-27.21</td><td>74.00</td><td>59.28</td><td>35.98</td><td>11.32</td><td>59.71</td><td>233</td><td>54 Peak</td></tr><tr><td>4</td><td>7386.00</td><td>37.34</td><td>-36.76</td><td>54.00</td><td>49.65</td><td>35.98</td><td>11.32</td><td>59.71</td><td>233</td><td>54 Average</td></tr></tbody></table> Date: 26 Level (dBuV/m) Date: 2023-04-20 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 29 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>RadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>43.89</td><td>-30.11</td><td>74.00</td><td>57.89</td><td>34.34</td><td>9.56</td><td>57.98</td><td>145</td><td>62 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>33.65</td><td>-29.35</td><td>54.00</td><td>47.85</td><td>34.34</td><td>9.56</td><td>57.98</td><td>145</td><td>62 Average</td></tr><tr><td>3 *</td><td>7386.00</td><td>48.25</td><td>-25.75</td><td>74.00</td><td>60.66</td><td>35.98</td><td>11.32</td><td>59.71</td><td>178</td><td>21 Peak</td></tr><tr><td>4</td><td>7386.00</td><td>37.75</td><td>-36.25</td><td>54.00</td><td>50.16</td><td>35.98</td><td>11.32</td><td>59.71</td><td>178</td><td>21 Average</td></tr></tbody></table>	Freq	Level	Limit	RadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	4924.00	43.52	-38.48	74.00	57.52	34.34	9.56	57.98	138	155 Peak	2	4924.00	33.57	-28.13	54.00	47.87	34.34	9.56	57.98	138	155 Average	3 *	7386.00	46.79	-27.21	74.00	59.28	35.98	11.32	59.71	233	54 Peak	4	7386.00	37.34	-36.76	54.00	49.65	35.98	11.32	59.71	233	54 Average	Freq	Level	Limit	RadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	4924.00	43.89	-30.11	74.00	57.89	34.34	9.56	57.98	145	62 Peak	2	4924.00	33.65	-29.35	54.00	47.85	34.34	9.56	57.98	145	62 Average	3 *	7386.00	48.25	-25.75	74.00	60.66	35.98	11.32	59.71	178	21 Peak	4	7386.00	37.75	-36.25	54.00	50.16	35.98	11.32	59.71	178	21 Average	
	Freq	Level	Limit	RadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																						
1	4924.00	43.52	-38.48	74.00	57.52	34.34	9.56	57.98	138	155 Peak																																																																																																																				
2	4924.00	33.57	-28.13	54.00	47.87	34.34	9.56	57.98	138	155 Average																																																																																																																				
3 *	7386.00	46.79	-27.21	74.00	59.28	35.98	11.32	59.71	233	54 Peak																																																																																																																				
4	7386.00	37.34	-36.76	54.00	49.65	35.98	11.32	59.71	233	54 Average																																																																																																																				
Freq	Level	Limit	RadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																						
1	4924.00	43.89	-30.11	74.00	57.89	34.34	9.56	57.98	145	62 Peak																																																																																																																				
2	4924.00	33.65	-29.35	54.00	47.85	34.34	9.56	57.98	145	62 Average																																																																																																																				
3 *	7386.00	48.25	-25.75	74.00	60.66	35.98	11.32	59.71	178	21 Peak																																																																																																																				
4	7386.00	37.75	-36.25	54.00	50.16	35.98	11.32	59.71	178	21 Average																																																																																																																				





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																													
ANT	802.11n HT20 CH12 2462MHz																																																																																																																													
0+1	Horizontal	Vertical																																																																																																																												
Peak Avg.	Date: 25 Level (dBuV/m) Date: 2023-04-20 PEAK_74 AVG_54 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2N2209-01 Mode : Mode 30 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 115 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4934.00</td><td>43.69</td><td>-30.31</td><td>74.00</td><td>57.69</td><td>34.34</td><td>9.56</td><td>57.90</td><td>235</td><td>56 Peak</td></tr><tr><td>2</td><td>4934.00</td><td>33.74</td><td>-30.26</td><td>54.00</td><td>47.74</td><td>34.34</td><td>9.56</td><td>57.90</td><td>235</td><td>56 Average</td></tr><tr><td>3 *</td><td>7481.00</td><td>45.84</td><td>-29.16</td><td>74.00</td><td>59.31</td><td>35.97</td><td>11.32</td><td>59.76</td><td>154</td><td>241 Peak</td></tr><tr><td>4</td><td>7481.00</td><td>35.48</td><td>-30.52</td><td>54.00</td><td>47.95</td><td>35.97</td><td>11.32</td><td>59.76</td><td>154</td><td>241 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	4934.00	43.69	-30.31	74.00	57.69	34.34	9.56	57.90	235	56 Peak	2	4934.00	33.74	-30.26	54.00	47.74	34.34	9.56	57.90	235	56 Average	3 *	7481.00	45.84	-29.16	74.00	59.31	35.97	11.32	59.76	154	241 Peak	4	7481.00	35.48	-30.52	54.00	47.95	35.97	11.32	59.76	154	241 Average	Date: 26 Level (dBuV/m) Date: 2023-04-20 PEAK_74 AVG_54 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2N2209-01 Mode : Mode 30 SN : 6082MM033087000K Plane : Y with Accessories MCSO power setting 115 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4934.00</td><td>43.20</td><td>-30.71</td><td>74.00</td><td>57.20</td><td>34.34</td><td>9.56</td><td>57.90</td><td>100</td><td>251 Peak</td></tr><tr><td>2</td><td>4934.00</td><td>33.08</td><td>-30.92</td><td>54.00</td><td>47.08</td><td>34.34</td><td>9.56</td><td>57.90</td><td>100</td><td>251 Average</td></tr><tr><td>3 *</td><td>7481.00</td><td>44.54</td><td>-29.46</td><td>74.00</td><td>57.01</td><td>35.97</td><td>11.32</td><td>59.76</td><td>165</td><td>22 Peak</td></tr><tr><td>4</td><td>7481.00</td><td>34.90</td><td>-30.10</td><td>54.00</td><td>47.17</td><td>35.97</td><td>11.32</td><td>59.76</td><td>165</td><td>22 Average</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	4934.00	43.20	-30.71	74.00	57.20	34.34	9.56	57.90	100	251 Peak	2	4934.00	33.08	-30.92	54.00	47.08	34.34	9.56	57.90	100	251 Average	3 *	7481.00	44.54	-29.46	74.00	57.01	35.97	11.32	59.76	165	22 Peak	4	7481.00	34.90	-30.10	54.00	47.17	35.97	11.32	59.76	165	22 Average
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																						
1	4934.00	43.69	-30.31	74.00	57.69	34.34	9.56	57.90	235	56 Peak																																																																																																																				
2	4934.00	33.74	-30.26	54.00	47.74	34.34	9.56	57.90	235	56 Average																																																																																																																				
3 *	7481.00	45.84	-29.16	74.00	59.31	35.97	11.32	59.76	154	241 Peak																																																																																																																				
4	7481.00	35.48	-30.52	54.00	47.95	35.97	11.32	59.76	154	241 Average																																																																																																																				
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																						
1	4934.00	43.20	-30.71	74.00	57.20	34.34	9.56	57.90	100	251 Peak																																																																																																																				
2	4934.00	33.08	-30.92	54.00	47.08	34.34	9.56	57.90	100	251 Average																																																																																																																				
3 *	7481.00	44.54	-29.46	74.00	57.01	35.97	11.32	59.76	165	22 Peak																																																																																																																				
4	7481.00	34.90	-30.10	54.00	47.17	35.97	11.32	59.76	165	22 Average																																																																																																																				



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																																																				
ANT	802.11n HT20 CH13 2472MHz																																																																																																																																				
0+1	Horizontal	Vertical																																																																																																																																			
Peak Avg.	Date: 25 Level (dBuV/m)  Date: 2023-04-20 Site : 02CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2KZ209-01 Mode : Mode 31 SN : GSE2MM033087000K Plane : Y with Accessories MCS0 power setting 9.5 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4944.00</td><td>42.36</td><td>-11.64</td><td>74.00</td><td>56.37</td><td>54.33</td><td>9.56</td><td>57.98</td><td>154</td><td>73 Peak</td></tr><tr><td>2</td><td>4944.00</td><td>33.97</td><td>-12.03</td><td>54.00</td><td>46.98</td><td>34.33</td><td>9.56</td><td>57.98</td><td>154</td><td>73 Average</td></tr><tr><td>3</td><td>7416.00</td><td>45.18</td><td>-28.82</td><td>74.00</td><td>57.68</td><td>35.97</td><td>11.29</td><td>59.76</td><td>174</td><td>55 Peak</td></tr><tr><td>4</td><td>7416.00</td><td>35.35</td><td>-18.74</td><td>54.00</td><td>47.76</td><td>35.97</td><td>11.29</td><td>59.76</td><td>174</td><td>55 Average</td></tr></tbody></table> Date: 26 Level (dBuV/m)  Date: 2023-04-20 Site : 02CH02-S2 Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 2KZ209-01 Mode : Mode 31 SN : GSE2MM033087000K Plane : Y with Accessories MCS0 power setting 9.5 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4944.00</td><td>43.32</td><td>-30.68</td><td>74.00</td><td>57.33</td><td>34.33</td><td>9.56</td><td>57.98</td><td>180</td><td>167 Peak</td></tr><tr><td>2</td><td>4944.00</td><td>33.73</td><td>-28.27</td><td>54.00</td><td>47.74</td><td>34.33</td><td>9.56</td><td>57.98</td><td>180</td><td>167 Average</td></tr><tr><td>3</td><td>7416.00</td><td>44.55</td><td>-29.45</td><td>74.00</td><td>57.85</td><td>35.97</td><td>11.29</td><td>59.76</td><td>146</td><td>233 Peak</td></tr><tr><td>4</td><td>7416.00</td><td>34.95</td><td>-19.05</td><td>54.00</td><td>47.45</td><td>35.97</td><td>11.29</td><td>59.76</td><td>146</td><td>233 Average</td></tr></tbody></table>	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4944.00	42.36	-11.64	74.00	56.37	54.33	9.56	57.98	154	73 Peak	2	4944.00	33.97	-12.03	54.00	46.98	34.33	9.56	57.98	154	73 Average	3	7416.00	45.18	-28.82	74.00	57.68	35.97	11.29	59.76	174	55 Peak	4	7416.00	35.35	-18.74	54.00	47.76	35.97	11.29	59.76	174	55 Average	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4944.00	43.32	-30.68	74.00	57.33	34.33	9.56	57.98	180	167 Peak	2	4944.00	33.73	-28.27	54.00	47.74	34.33	9.56	57.98	180	167 Average	3	7416.00	44.55	-29.45	74.00	57.85	35.97	11.29	59.76	146	233 Peak	4	7416.00	34.95	-19.05	54.00	47.45	35.97	11.29	59.76	146	233 Average
	Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	4944.00	42.36	-11.64	74.00	56.37	54.33	9.56	57.98	154	73 Peak																																																																																																																											
2	4944.00	33.97	-12.03	54.00	46.98	34.33	9.56	57.98	154	73 Average																																																																																																																											
3	7416.00	45.18	-28.82	74.00	57.68	35.97	11.29	59.76	174	55 Peak																																																																																																																											
4	7416.00	35.35	-18.74	54.00	47.76	35.97	11.29	59.76	174	55 Average																																																																																																																											
Freq	Level	Over	Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																												
1	4944.00	43.32	-30.68	74.00	57.33	34.33	9.56	57.98	180	167 Peak																																																																																																																											
2	4944.00	33.73	-28.27	54.00	47.74	34.33	9.56	57.98	180	167 Average																																																																																																																											
3	7416.00	44.55	-29.45	74.00	57.85	35.97	11.29	59.76	146	233 Peak																																																																																																																											
4	7416.00	34.95	-19.05	54.00	47.45	35.97	11.29	59.76	146	233 Average																																																																																																																											



Emission below 1GHz
2.4GHz WIFI 802.11n HT20 (LF)

WIFI	2.4GHz 2400~2483.5MHz																																																																																																																																																																									
ANT	802.11n HT20 LF																																																																																																																																																																									
0+1	Horizontal	Vertical																																																																																																																																																																								
QP / Peak	Data: 1  Site : 03CH02-SZ Condition : FCC CLASS-B 3m VULB9168-01001 HORIZONTAL Project : 2N2209-01 Mode : Mode 32 IMEI : 60823AM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>89.17</td><td>23.84</td><td>-28.46</td><td>43.50</td><td>43.07</td><td>14.04</td><td>1.11</td><td>35.18</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>196.84</td><td>34.56</td><td>-18.54</td><td>43.50</td><td>41.69</td><td>16.51</td><td>1.86</td><td>35.18</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>317.12</td><td>29.61</td><td>-16.39</td><td>46.00</td><td>41.93</td><td>28.35</td><td>2.43</td><td>34.90</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>532.40</td><td>22.59</td><td>-23.81</td><td>46.00</td><td>39.80</td><td>24.44</td><td>1.32</td><td>34.64</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>681.84</td><td>24.59</td><td>-21.43</td><td>46.00</td><td>28.75</td><td>26.87</td><td>3.67</td><td>34.58</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>893.38</td><td>26.85</td><td>-19.15</td><td>46.00</td><td>27.94</td><td>29.63</td><td>4.38</td><td>34.38</td><td>---</td><td>Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1	89.17	23.84	-28.46	43.50	43.07	14.04	1.11	35.18	---	Peak	2	196.84	34.56	-18.54	43.50	41.69	16.51	1.86	35.18	---	Peak	3	317.12	29.61	-16.39	46.00	41.93	28.35	2.43	34.90	---	Peak	4	532.40	22.59	-23.81	46.00	39.80	24.44	1.32	34.64	---	Peak	5	681.84	24.59	-21.43	46.00	28.75	26.87	3.67	34.58	---	Peak	6	893.38	26.85	-19.15	46.00	27.94	29.63	4.38	34.38	---	Peak	Data: 2  Site : 03CH02-SZ Condition : FCC CLASS-B 3m VULB9168-01001 VERTICAL Project : 2N2209-01 Mode : Mode 32 IMEI : 60823AM033087000K Plane : Y with Accessories MCSO power setting 15.5 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>36.79</td><td>27.28</td><td>-12.72</td><td>40.00</td><td>42.29</td><td>19.38</td><td>0.61</td><td>35.80</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>90.14</td><td>27.35</td><td>-15.55</td><td>43.50</td><td>46.89</td><td>15.32</td><td>1.12</td><td>35.18</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>196.84</td><td>28.13</td><td>-15.37</td><td>43.50</td><td>44.86</td><td>16.51</td><td>1.86</td><td>35.18</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>325.85</td><td>25.59</td><td>-20.41</td><td>46.00</td><td>37.60</td><td>26.44</td><td>2.43</td><td>34.90</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>577.88</td><td>26.49</td><td>-19.51</td><td>46.00</td><td>32.31</td><td>25.33</td><td>3.48</td><td>34.55</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>792.42</td><td>27.91</td><td>-18.09</td><td>46.00</td><td>28.15</td><td>28.33</td><td>3.93</td><td>34.32</td><td>---</td><td>Peak</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1	36.79	27.28	-12.72	40.00	42.29	19.38	0.61	35.80	---	Peak	2	90.14	27.35	-15.55	43.50	46.89	15.32	1.12	35.18	---	Peak	3	196.84	28.13	-15.37	43.50	44.86	16.51	1.86	35.18	---	Peak	4	325.85	25.59	-20.41	46.00	37.60	26.44	2.43	34.90	---	Peak	5	577.88	26.49	-19.51	46.00	32.31	25.33	3.48	34.55	---	Peak	6	792.42	27.91	-18.09	46.00	28.15	28.33	3.93	34.32	---	Peak
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																																																																																																			
1	89.17	23.84	-28.46	43.50	43.07	14.04	1.11	35.18	---	Peak																																																																																																																																																																
2	196.84	34.56	-18.54	43.50	41.69	16.51	1.86	35.18	---	Peak																																																																																																																																																																
3	317.12	29.61	-16.39	46.00	41.93	28.35	2.43	34.90	---	Peak																																																																																																																																																																
4	532.40	22.59	-23.81	46.00	39.80	24.44	1.32	34.64	---	Peak																																																																																																																																																																
5	681.84	24.59	-21.43	46.00	28.75	26.87	3.67	34.58	---	Peak																																																																																																																																																																
6	893.38	26.85	-19.15	46.00	27.94	29.63	4.38	34.38	---	Peak																																																																																																																																																																
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																																																																																																			
1	36.79	27.28	-12.72	40.00	42.29	19.38	0.61	35.80	---	Peak																																																																																																																																																																
2	90.14	27.35	-15.55	43.50	46.89	15.32	1.12	35.18	---	Peak																																																																																																																																																																
3	196.84	28.13	-15.37	43.50	44.86	16.51	1.86	35.18	---	Peak																																																																																																																																																																
4	325.85	25.59	-20.41	46.00	37.60	26.44	2.43	34.90	---	Peak																																																																																																																																																																
5	577.88	26.49	-19.51	46.00	32.31	25.33	3.48	34.55	---	Peak																																																																																																																																																																
6	792.42	27.91	-18.09	46.00	28.15	28.33	3.93	34.32	---	Peak																																																																																																																																																																







<Simultaneous transmission>

802.11b CH11 & BLE CH39

BLE CH39 (Band Edge @ 3m)

	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	802.11b CH11 & BLE CH39 Co-location	
	Horizontal	Fundamental
Peak	Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2H2209-01 Mode : 33 SN : G02DMA033087000K Plane : X with Accessories WFI : 1M power setting 18 BLE2M : power setting 6/11 1 2483.52 57.69 -16.31 74.00 50.33 32.39 6.53 31.56 203 258 Peak	Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 2H2209-01 Mode : 33 SN : G02DMA033087000K Plane : X with Accessories WFI : 1M power setting 18 BLE2M : power setting 6/11 1 * 2480.00 104.16 30.16 74.00 96.80 32.39 6.53 31.56 203 250 Peak
Avg.	Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2H2209-01 Mode : 33 SN : G02DMA033087000K Plane : X with Accessories WFI : 1M power setting 18 BLE2M : power setting 6/11 1 2483.52 50.48 -13.52 54.00 43.12 32.39 6.53 31.56 203 250 Average	Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project : 2H2209-01 Mode : 33 SN : G02DMA033087000K Plane : X with Accessories WFI : 1M power setting 18 BLE2M : power setting 6/11 1 * 2480.00 102.68 48.68 54.00 95.32 32.39 6.53 31.56 203 250 Average



		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																												
		802.11b CH11 &BLE CH39 Co-location																																																												
		Vertical	Fundamental																																																											
Peak	Date: 7 Level (dBuV/m) Date: 2023-04-26  Site Condition Project Mode SN Plane WFI BLE2M 03CH02-SZ PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL REBW:1000.000kHz VBW:3000.000kHz 2KZ209-01 Mode 33 GSEZMA033087000K X with Accessories 1M power setting 18 power setting 6/11 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.48</td><td>54.35</td><td>-19.65</td><td>74.00</td><td>46.92</td><td>32.48</td><td>6.53</td><td>31.58</td><td>129 343 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2497.48	54.35	-19.65	74.00	46.92	32.48	6.53	31.58	129 343 Peak	Date: 5 Level (dBuV/m) Date: 2023-04-26  Site Condition Project Mode SN Plane WFI BLE2M 03CH02-SZ PEAK_74 3m HF_ANT_3117_0107 VERTICAL REBW:1000.000kHz VBW:3000.000kHz 2KZ209-01 Mode 33 GSEZMA033087000K X with Accessories 1M power setting 18 power setting 6/11 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.71</td><td>23.71</td><td>74.00</td><td>98.35</td><td>32.39</td><td>6.53</td><td>31.56</td><td>129 343 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.71	23.71	74.00	98.35	32.39	6.53	31.56	129 343 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2497.48	54.35	-19.65	74.00	46.92	32.48	6.53	31.58	129 343 Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2480.00	97.71	23.71	74.00	98.35	32.39	6.53	31.56	129 343 Peak																																																					
Avg.	Date: 8 Level (dBuV/m) Date: 2023-04-26  Site Condition Project Mode SN Plane WFI BLE2M 03CH02-SZ AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL REBW:1000.000kHz VBW:1.000kHz 2KZ209-01 Mode 33 GSEZMA033087000K X with Accessories 1M power setting 18 power setting 6/11 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>45.19</td><td>-8.81</td><td>54.00</td><td>37.63</td><td>32.39</td><td>6.53</td><td>31.56</td><td>129 343 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	45.19	-8.81	54.00	37.63	32.39	6.53	31.56	129 343 Average	Date: 6 Level (dBuV/m) Date: 2023-04-26  Site Condition Project Mode SN Plane WFI BLE2M 03CH02-SZ AVG_54 3m HF_ANT_3117_0107 VERTICAL REBW:1000.000kHz VBW:1.000kHz 2KZ209-01 Mode 33 GSEZMA033087000K X with Accessories 1M power setting 18 power setting 6/11 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>96.22</td><td>42.22</td><td>54.00</td><td>88.86</td><td>32.39</td><td>6.53</td><td>31.56</td><td>129 343 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.22	42.22	54.00	88.86	32.39	6.53	31.56	129 343 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2483.52	45.19	-8.81	54.00	37.63	32.39	6.53	31.56	129 343 Average																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2480.00	96.22	42.22	54.00	88.86	32.39	6.53	31.56	129 343 Average																																																					



11b CH11 (Band Edge @ 3m)

		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																												
		802.11b CH11 &BLE CH39 Co-location																																																												
		Horizontal	Fundamental																																																											
Peak	Date: 3 Level (dBuV/m) Date: 2023-04-26 Site Condition : 03CH02-S2 PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL REW:1000.000kHz VIEW:3000.000kHz Project : 2KZ209-01 Mode : Mode 33 SN : G82MM033087000K Plane : Y with Accessories WFI : 1M power setting 18 BLE2M : power setting 6/11 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.56</td><td>55.25</td><td>-18.75</td><td>74.00</td><td>47.89</td><td>32.39</td><td>6.53</td><td>31.56</td><td>181 224 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2483.56	55.25	-18.75	74.00	47.89	32.39	6.53	31.56	181 224 Peak	Date: 1 Level (dBuV/m) Date: 2023-04-26 Site Condition : 03CH02-S2 PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL REW:1000.000kHz VIEW:3000.000kHz Project : 2KZ209-01 Mode : Mode 33 SN : G82MM033087000K Plane : Y with Accessories WFI : 1M power setting 18 BLE2M : power setting 6/11 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>183.71</td><td>29.71</td><td>74.00</td><td>96.46</td><td>32.39</td><td>6.48</td><td>31.62</td><td>181 224 Peak</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2462.00	183.71	29.71	74.00	96.46	32.39	6.48	31.62	181 224 Peak
	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2483.56	55.25	-18.75	74.00	47.89	32.39	6.53	31.56	181 224 Peak																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2462.00	183.71	29.71	74.00	96.46	32.39	6.48	31.62	181 224 Peak																																																					
Avg.	Date: 4 Level (dBuV/m) Date: 2023-04-26 Site Condition : 03CH02-S2 AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL REW:1000.000kHz VIEW:0.010kHz Project : 2KZ209-01 Mode : Mode 33 SN : G82MM033087000K Plane : Y with Accessories WFI : 1M power setting 18 BLE2M : power setting 6/11 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.52</td><td>45.00</td><td>-8.48</td><td>54.00</td><td>38.24</td><td>32.39</td><td>6.53</td><td>31.56</td><td>181 224 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2483.52	45.00	-8.48	54.00	38.24	32.39	6.53	31.56	181 224 Average	Date: 2 Level (dBuV/m) Date: 2023-04-26 Site Condition : 03CH02-S2 AVG_54 3m HF_ANT_3117_0107 HORIZONTAL REW:1000.000kHz VIEW:0.010kHz Project : 2KZ209-01 Mode : Mode 33 SN : G82MM033087000K Plane : Y with Accessories WFI : 1M power setting 18 BLE2M : power setting 6/11 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>180.88</td><td>46.88</td><td>54.00</td><td>93.55</td><td>32.39</td><td>6.48</td><td>31.62</td><td>181 224 Average</td></tr></table>	Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2462.00	180.88	46.88	54.00	93.55	32.39	6.48	31.62	181 224 Average
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2483.52	45.00	-8.48	54.00	38.24	32.39	6.53	31.56	181 224 Average																																																					
Freq	Level	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2462.00	180.88	46.88	54.00	93.55	32.39	6.48	31.62	181 224 Average																																																					

2.4GHz 2400~2483.5MHz Band Edge @ 3m	
802.11b CH11 &BLE CH39 Co-location	



802.11g CH11 & BLE CH39


BLE CH39 (Band Edge @ 3m)

2.4GHz 2400~2483.5MHz Band Edge @ 3m										
802.11g CH11 &BLE CH39 Co-location										



11g CH11 (Band Edge @ 3m)

		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																		
		802.11g CH11 &BLE CH39 Co-location																																																																		
		Horizontal	Fundamental																																																																	
Peak	Date: 3 Date: 2023-04-26 Site Condition 03CH02-S2 PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL REW: 1000.000kHz VIEW: 3000.000kHz Project Mode 2KZ209-01 Mode 34 SN G82NMA033087000K Plane X with Accessories WFI 6Mpower setting 15.5 BLE2M power setting 67/1 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Line1</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>58.67</td><td>-15.33</td><td>74.00</td><td>51.31</td><td>32.39</td><td>6.53</td><td>31.56</td><td>302</td><td>87 Peak</td></tr></tbody></table>		Freq	Level	Over	Line1	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2483.52	58.67	-15.33	74.00	51.31	32.39	6.53	31.56	302	87 Peak	Date: 1 Date: 2023-04-26 Site Condition 03CH02-S2 PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL REW: 1000.000kHz VIEW: 3000.000kHz Project Mode 2KZ209-01 Mode 34 SN G82NMA033087000K Plane X with Accessories WFI 6Mpower setting 15.5 BLE2M power setting 67/1 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Line1</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 *</td><td>2462.00</td><td>100.12</td><td>34.12</td><td>74.00</td><td>100.87</td><td>32.39</td><td>6.48</td><td>31.62</td><td>302</td><td>87 Peak</td></tr></tbody></table>		Freq	Level	Over	Line1	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2462.00	100.12	34.12	74.00	100.87	32.39	6.48	31.62	302	87 Peak
		Freq	Level	Over	Line1	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																									
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																											
1	2483.52	58.67	-15.33	74.00	51.31	32.39	6.53	31.56	302	87 Peak																																																										
	Freq	Level	Over	Line1	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																											
1 *	2462.00	100.12	34.12	74.00	100.87	32.39	6.48	31.62	302	87 Peak																																																										
Avg.	Date: 4 Date: 2023-04-26 Site Condition 03CH02-S2 AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL REW: 1000.000kHz VIEW: 0.010kHz Project Mode 2KZ209-01 Mode 34 SN G82NMA033087000K Plane X with Accessories WFI 6Mpower setting 15.5 BLE2M power setting 67/1 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Line1</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>45.98</td><td>-8.82</td><td>54.00</td><td>38.62</td><td>32.39</td><td>6.53</td><td>31.56</td><td>302</td><td>87 Average</td></tr></tbody></table>		Freq	Level	Over	Line1	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2483.52	45.98	-8.82	54.00	38.62	32.39	6.53	31.56	302	87 Average	Date: 2 Date: 2023-04-26 Site Condition 03CH02-S2 AVG_54 3m HF_ANT_3117_0107 HORIZONTAL REW: 1000.000kHz VIEW: 0.010kHz Project Mode 2KZ209-01 Mode 34 SN G82NMA033087000K Plane X with Accessories WFI 6Mpower setting 15.5 BLE2M power setting 67/1 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Line1</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 *</td><td>2462.00</td><td>100.67</td><td>46.67</td><td>54.00</td><td>93.42</td><td>32.39</td><td>6.48</td><td>31.62</td><td>302</td><td>87 Average</td></tr></tbody></table>		Freq	Level	Over	Line1	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 *	2462.00	100.67	46.67	54.00	93.42	32.39	6.48	31.62	302	87 Average
	Freq	Level	Over	Line1	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																											
1	2483.52	45.98	-8.82	54.00	38.62	32.39	6.53	31.56	302	87 Average																																																										
	Freq	Level	Over	Line1	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																											
1 *	2462.00	100.67	46.67	54.00	93.42	32.39	6.48	31.62	302	87 Average																																																										

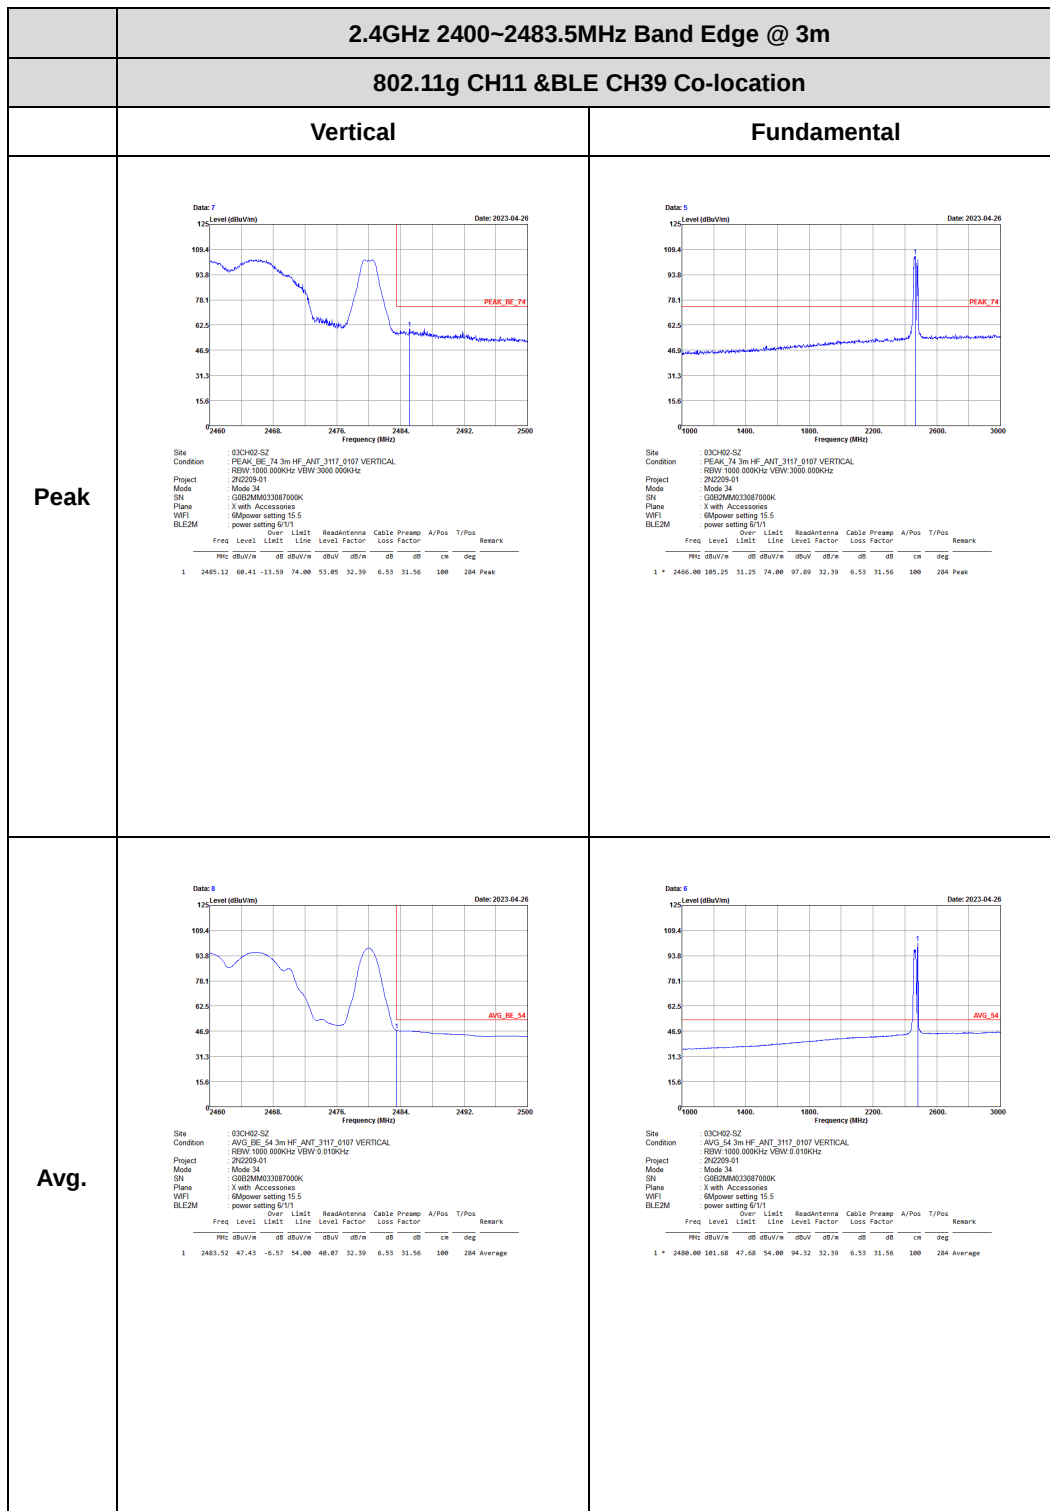







802.11n20CH01 & BLE CH39

BLE CH39 (Band Edge @ 3m)

		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																												
		802.11n20CH01 &BLE CH39 Co-location																																																												
		Horizontal	Fundamental																																																											
Peak	Date: 15 Level (dBuV/m) Date: 2023-04-07 Site Condition: 03CH02-SZ PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL REBW 1000 000kHz VSW 3000 000kHz Project Mode: 2H2209-01 Mode 35 SN C082MM033087000K Plane X with Accessories WIFI MCS0 power setting 15.5 BLE2M power setting 6/1/1 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.68</td><td>63.78</td><td>-18.30</td><td>74.00</td><td>56.34</td><td>32.39</td><td>6.53</td><td>31.56</td><td>158 94 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2484.68	63.78	-18.30	74.00	56.34	32.39	6.53	31.56	158 94 Peak	Date: 13 Level (dBuV/m) Date: 2023-04-07 Site Condition: 03CH02-SZ PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL REBW 1000 000kHz VSW 3000 000kHz Project Mode: 2H2209-01 Mode 35 SN C082MM033087000K Plane X with Accessories WIFI MCS0 power setting 15.5 BLE2M power setting 6/1/1 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.00</td><td>104.99</td><td>30.99</td><td>74.00</td><td>97.63</td><td>32.39</td><td>6.53</td><td>31.56</td><td>158 94 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2488.00	104.99	30.99	74.00	97.63	32.39	6.53	31.56	158 94 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2484.68	63.78	-18.30	74.00	56.34	32.39	6.53	31.56	158 94 Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2488.00	104.99	30.99	74.00	97.63	32.39	6.53	31.56	158 94 Peak																																																					
Avg.	Date: 16 Level (dBuV/m) Date: 2023-04-07 Site Condition: 03CH02-SZ AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL REBW 1000 000kHz VSW 1.000kHz Project Mode: 2H2209-01 Mode 35 SN C082MM033087000K Plane Y with Accessories WIFI MCS0 power setting 15.5 BLE2M power setting 6/1/1 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2485.64</td><td>58.35</td><td>-3.65</td><td>54.00</td><td>42.99</td><td>32.39</td><td>6.53</td><td>31.56</td><td>158 94 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2485.64	58.35	-3.65	54.00	42.99	32.39	6.53	31.56	158 94 Average	Date: 14 Level (dBuV/m) Date: 2023-04-07 Site Condition: 03CH02-SZ AVG_54 3m HF_ANT_3117_0107 HORIZONTAL REBW 1000 000kHz VSW 1.000kHz Project Mode: 2H2209-01 Mode 35 SN C082MM033087000K Plane Y with Accessories WIFI MCS0 power setting 15.5 BLE2M power setting 6/1/1 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.00</td><td>102.90</td><td>48.90</td><td>54.00</td><td>95.54</td><td>32.39</td><td>6.53</td><td>31.56</td><td>158 94 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	2488.00	102.90	48.90	54.00	95.54	32.39	6.53	31.56	158 94 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2485.64	58.35	-3.65	54.00	42.99	32.39	6.53	31.56	158 94 Average																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																						
1	2488.00	102.90	48.90	54.00	95.54	32.39	6.53	31.56	158 94 Average																																																					



802.11n20 CH01 (Band Edge @ 3m)

		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																														
		802.11n20CH01 &BLE CH39 Co-location																																																														
		Horizontal	Fundamental																																																													
Peak	Date: 1 Level (dBuV/m) Date: 2023.04.07  Site Condition : 03CH02-S2 PEAK BE 74.3m HF_ANT_3117_0107 HORIZONTAL REVIEW 1000.000kHz VIEW 3000.000kHz Project : 2K2209-01 Mode 35 SN : G8E2MMA033087000K Plane : Y with Accessories WFI : MCS0 power setting 15.5 BLE2M : power setting 6/U1 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2386.76</td><td>54.38</td><td>-19.62</td><td>74.00</td><td>47.31</td><td>32.36</td><td>6.44</td><td>31.73</td><td>150</td><td>64 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2386.76	54.38	-19.62	74.00	47.31	32.36	6.44	31.73	150	64 Peak	Date: 3 Level (dBuV/m) Date: 2023.04.07  Site Condition : 03CH02-S2 PEAK 74.3m HF_ANT_3117_0107 HORIZONTAL REVIEW 1000.000kHz VIEW 3000.000kHz Project : 2K2209-01 Mode 35 SN : G8E2MMA033087000K Plane : Y with Accessories WFI : MCS0 power setting 15.5 BLE2M : power setting 6/U1 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>58.64</td><td>-18.64</td><td>74.00</td><td>47.31</td><td>32.37</td><td>6.44</td><td>31.67</td><td>150</td><td>64 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2412.00	58.64	-18.64	74.00	47.31	32.37	6.44	31.67	150	64 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																								
1	2386.76	54.38	-19.62	74.00	47.31	32.36	6.44	31.73	150	64 Peak																																																						
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																								
1	2412.00	58.64	-18.64	74.00	47.31	32.37	6.44	31.67	150	64 Peak																																																						
Avg.	Date: 2 Level (dBuV/m) Date: 2023.04.07  Site Condition : 03CH02-S2 AVG BE 54.3m HF_ANT_3117_0107 HORIZONTAL REVIEW 1000.000kHz VIEW 0.010kHz Project : 2K2209-01 Mode 35 SN : G8E2MMA033087000K Plane : Y with Accessories WFI : MCS0 power setting 15.5 BLE2M : power setting 6/U1 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2386.65</td><td>43.87</td><td>-18.13</td><td>54.00</td><td>36.88</td><td>32.36</td><td>6.44</td><td>31.73</td><td>150</td><td>64 Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2386.65	43.87	-18.13	54.00	36.88	32.36	6.44	31.73	150	64 Average	Date: 4 Level (dBuV/m) Date: 2023.04.07  Site Condition : 03CH02-S2 AVG 54.3m HF_ANT_3117_0107 HORIZONTAL REVIEW 1000.000kHz VIEW 0.010kHz Project : 2K2209-01 Mode 35 SN : G8E2MMA033087000K Plane : Y with Accessories WFI : MCS0 power setting 15.5 BLE2M : power setting 6/U1 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>48.83</td><td>-18.83</td><td>54.00</td><td>47.69</td><td>32.37</td><td>6.44</td><td>31.67</td><td>150</td><td>64 Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	2412.00	48.83	-18.83	54.00	47.69	32.37	6.44	31.67	150	64 Peak
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																								
1	2386.65	43.87	-18.13	54.00	36.88	32.36	6.44	31.73	150	64 Average																																																						
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																								
1	2412.00	48.83	-18.83	54.00	47.69	32.37	6.44	31.67	150	64 Peak																																																						





802.11bCH11 &BLE CH39 Harmonic (Harmonic @ 3m)

		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																																																																																																																																																													
		802.11b CH11 &BLE CH39 Co-location																																																																																																																																																																																																																													
		Horizontal	Vertical																																																																																																																																																																																																																												
Peak	Avg	Date: 6 Level (dBuV/m) Date: 2023-04-26 Frequency (MHz) PEAK_74 AVG_54 Site: 03CH02-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project: 262209-01 Mode: Mode 33 SN: G8EDMAM33087000K Plane: Y with Accessories WPT: 1M power setting 18 BLE2M: power setting 6/71 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>42.63</td><td>-31.37</td><td>74.00</td><td>56.63</td><td>34.34</td><td>9.56</td><td>57.00</td><td>100</td><td>95 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>33.99</td><td>-30.01</td><td>54.00</td><td>47.99</td><td>34.34</td><td>9.56</td><td>57.00</td><td>100</td><td>95 Average</td></tr><tr><td>3</td><td>4968.00</td><td>44.63</td><td>-29.37</td><td>74.00</td><td>56.62</td><td>34.32</td><td>9.59</td><td>57.00</td><td>124</td><td>65 Peak</td></tr><tr><td>4</td><td>4968.00</td><td>34.69</td><td>-29.31</td><td>54.00</td><td>48.68</td><td>34.32</td><td>9.59</td><td>57.00</td><td>124</td><td>65 Average</td></tr><tr><td>5</td><td>7386.00</td><td>45.24</td><td>-28.76</td><td>74.00</td><td>57.65</td><td>35.98</td><td>11.32</td><td>59.71</td><td>100</td><td>54 Peak</td></tr><tr><td>6</td><td>7386.00</td><td>36.25</td><td>-27.75</td><td>54.00</td><td>48.68</td><td>35.98</td><td>11.32</td><td>59.71</td><td>100</td><td>54 Average</td></tr><tr><td>7</td><td>7440.00</td><td>45.35</td><td>-28.67</td><td>74.00</td><td>57.96</td><td>35.94</td><td>11.29</td><td>59.86</td><td>106</td><td>48 Peak</td></tr><tr><td>8</td><td>7440.00</td><td>36.85</td><td>-27.95</td><td>54.00</td><td>48.68</td><td>35.94</td><td>11.29</td><td>59.86</td><td>106</td><td>48 Average</td></tr></tbody></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	4924.00	42.63	-31.37	74.00	56.63	34.34	9.56	57.00	100	95 Peak	2	4924.00	33.99	-30.01	54.00	47.99	34.34	9.56	57.00	100	95 Average	3	4968.00	44.63	-29.37	74.00	56.62	34.32	9.59	57.00	124	65 Peak	4	4968.00	34.69	-29.31	54.00	48.68	34.32	9.59	57.00	124	65 Average	5	7386.00	45.24	-28.76	74.00	57.65	35.98	11.32	59.71	100	54 Peak	6	7386.00	36.25	-27.75	54.00	48.68	35.98	11.32	59.71	100	54 Average	7	7440.00	45.35	-28.67	74.00	57.96	35.94	11.29	59.86	106	48 Peak	8	7440.00	36.85	-27.95	54.00	48.68	35.94	11.29	59.86	106	48 Average	Date: 7 Level (dBuV/m) Date: 2023-04-27 Frequency (MHz) PEAK_74 AVG_54 Site: 03CH02-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project: 262209-01 Mode: Mode 33 SN: G8EDMAM33087000K Plane: Y with Accessories WPT: 1M power setting 18 BLE2M: power setting 6/71 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4926.00</td><td>43.66</td><td>-30.34</td><td>74.00</td><td>57.66</td><td>34.34</td><td>9.56</td><td>57.00</td><td>132</td><td>62 Peak</td></tr><tr><td>2</td><td>4926.00</td><td>36.26</td><td>-27.74</td><td>54.00</td><td>50.26</td><td>34.34</td><td>9.56</td><td>57.00</td><td>132</td><td>62 Average</td></tr><tr><td>3</td><td>4968.00</td><td>44.69</td><td>-29.31</td><td>74.00</td><td>56.68</td><td>34.32</td><td>9.59</td><td>57.00</td><td>100</td><td>85 Peak</td></tr><tr><td>4</td><td>4968.00</td><td>35.64</td><td>-28.36</td><td>54.00</td><td>49.63</td><td>34.32</td><td>9.59</td><td>57.00</td><td>100</td><td>85 Average</td></tr><tr><td>5</td><td>7386.00</td><td>46.92</td><td>-27.08</td><td>74.00</td><td>59.93</td><td>35.98</td><td>11.32</td><td>59.71</td><td>100</td><td>72 Peak</td></tr><tr><td>6</td><td>7386.00</td><td>38.12</td><td>-25.88</td><td>54.00</td><td>50.93</td><td>35.98</td><td>11.32</td><td>59.71</td><td>100</td><td>72 Average</td></tr><tr><td>7</td><td>7440.00</td><td>46.00</td><td>-28.00</td><td>74.00</td><td>58.63</td><td>35.94</td><td>11.29</td><td>59.86</td><td>106</td><td>25 Peak</td></tr><tr><td>8</td><td>7440.00</td><td>37.81</td><td>-26.99</td><td>54.00</td><td>49.64</td><td>35.94</td><td>11.29</td><td>59.86</td><td>106</td><td>25 Average</td></tr></tbody></table>	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1	4926.00	43.66	-30.34	74.00	57.66	34.34	9.56	57.00	132	62 Peak	2	4926.00	36.26	-27.74	54.00	50.26	34.34	9.56	57.00	132	62 Average	3	4968.00	44.69	-29.31	74.00	56.68	34.32	9.59	57.00	100	85 Peak	4	4968.00	35.64	-28.36	54.00	49.63	34.32	9.59	57.00	100	85 Average	5	7386.00	46.92	-27.08	74.00	59.93	35.98	11.32	59.71	100	72 Peak	6	7386.00	38.12	-25.88	54.00	50.93	35.98	11.32	59.71	100	72 Average	7	7440.00	46.00	-28.00	74.00	58.63	35.94	11.29	59.86	106	25 Peak	8	7440.00	37.81	-26.99	54.00	49.64	35.94	11.29	59.86	106	25 Average
		Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																																																																																																																																							
1	4924.00	42.63	-31.37	74.00	56.63	34.34	9.56	57.00	100	95 Peak																																																																																																																																																																																																																					
2	4924.00	33.99	-30.01	54.00	47.99	34.34	9.56	57.00	100	95 Average																																																																																																																																																																																																																					
3	4968.00	44.63	-29.37	74.00	56.62	34.32	9.59	57.00	124	65 Peak																																																																																																																																																																																																																					
4	4968.00	34.69	-29.31	54.00	48.68	34.32	9.59	57.00	124	65 Average																																																																																																																																																																																																																					
5	7386.00	45.24	-28.76	74.00	57.65	35.98	11.32	59.71	100	54 Peak																																																																																																																																																																																																																					
6	7386.00	36.25	-27.75	54.00	48.68	35.98	11.32	59.71	100	54 Average																																																																																																																																																																																																																					
7	7440.00	45.35	-28.67	74.00	57.96	35.94	11.29	59.86	106	48 Peak																																																																																																																																																																																																																					
8	7440.00	36.85	-27.95	54.00	48.68	35.94	11.29	59.86	106	48 Average																																																																																																																																																																																																																					
Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																																																																																																																																							
1	4926.00	43.66	-30.34	74.00	57.66	34.34	9.56	57.00	132	62 Peak																																																																																																																																																																																																																					
2	4926.00	36.26	-27.74	54.00	50.26	34.34	9.56	57.00	132	62 Average																																																																																																																																																																																																																					
3	4968.00	44.69	-29.31	74.00	56.68	34.32	9.59	57.00	100	85 Peak																																																																																																																																																																																																																					
4	4968.00	35.64	-28.36	54.00	49.63	34.32	9.59	57.00	100	85 Average																																																																																																																																																																																																																					
5	7386.00	46.92	-27.08	74.00	59.93	35.98	11.32	59.71	100	72 Peak																																																																																																																																																																																																																					
6	7386.00	38.12	-25.88	54.00	50.93	35.98	11.32	59.71	100	72 Average																																																																																																																																																																																																																					
7	7440.00	46.00	-28.00	74.00	58.63	35.94	11.29	59.86	106	25 Peak																																																																																																																																																																																																																					
8	7440.00	37.81	-26.99	54.00	49.64	35.94	11.29	59.86	106	25 Average																																																																																																																																																																																																																					

802.11gCH11 & BLE CH39 Harmonic (Harmonic @ 3m)

Horizontal

Peak Avg

Vertical

Site: 03CH02-SZ
Condition: PEAK_74.3m HF_ANT_3117_0107 HORIZONTAL
Project: 2H2209-01
Mode: 74
SN: G8E2M033087000K
Plane: X with Accessories
WiFi: 0Mpower setting 15.5
BLE2M: power setting 6/11

Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
MHz	dBm/Hz	dB	dBm/Hz	dBm/Hz	dB	dB	cm	deg	
1	4926.00	44.62	-29.38	74.00	58.62	34.34	9.56	57.00	135 92 Peak
2	4926.00	34.63	-39.37	54.00	48.63	34.34	9.56	57.00	135 92 Average
3	4960.00	44.64	-29.36	74.00	58.63	34.32	9.59	57.00	100 68 Peak
4	4960.00	34.63	-39.43	54.00	48.65	34.32	9.59	57.00	100 68 Average
5	7386.00	46.21	-27.79	74.00	58.62	35.08	11.32	59.71	100 95 Peak
6	7386.00	37.23	-36.79	54.00	49.62	35.08	11.32	59.71	100 95 Average
7	7440.00	47.82	-26.88	74.00	59.65	35.94	11.29	59.86	100 68 Peak
8	7440.00	37.80	-36.80	54.00	49.65	35.94	11.29	59.86	100 68 Average

Site: 03CH02-SZ
Condition: PEAK_74.3m HF_ANT_3117_0107 VERTICAL
Project: 2H2209-01
Mode: 74
SN: G8E2M033087000K
Plane: X with Accessories
WiFi: 0Mpower setting 15.5
BLE2M: power setting 6/11

Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
MHz	dBm/Hz	dB	dBm/Hz	dBm/Hz	dB	dB	cm	deg	
1	4924.00	45.62	-28.38	74.00	59.62	34.34	9.56	57.00	100 52 Peak
2	4924.00	34.63	-39.37	54.00	48.63	34.34	9.56	57.00	100 52 Average
3	4960.00	44.63	-29.37	74.00	58.62	34.32	9.59	57.00	100 123 Peak
4	4960.00	34.63	-39.37	54.00	48.62	34.32	9.59	57.00	100 123 Average
5	7386.00	47.21	-26.79	74.00	59.62	35.08	11.32	59.71	100 150 Peak
6	7386.00	37.28	-36.78	54.00	49.69	35.08	11.32	59.71	100 135 Average
7	7440.00	46.82	-27.88	74.00	59.65	35.94	11.29	59.86	103 48 Peak
8	7440.00	35.83	-38.97	54.00	47.66	35.94	11.29	59.86	103 48 Average




802.11n20CH01 & BLE CH39 Harmonic (Harmonic @ 3m)

		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																																																																																																																																																																																
		802.11n20CH01 &BLE CH39 Co-location																																																																																																																																																																																																																																
		Horizontal	Vertical																																																																																																																																																																																																																															
Peak Avg	Date: 5 Date: 2023-04-07 Site: 03CH02-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project: 262209-01 Mode: Mode 35 SN: G8EDMA033087000K Plane: X with Accessories WIFI: MCS0 power setting 15.5 BLE2M: power setting 6/1/1 <table><thead><tr><th>Line</th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>43.04</td><td>-38.00</td><td>74.00</td><td>57.07</td><td>34.40</td><td>9.47</td><td>57.00</td><td>180</td><td></td><td></td><td></td><td>84 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>32.95</td><td>-32.00</td><td>54.00</td><td>46.00</td><td>34.40</td><td>9.47</td><td>57.00</td><td>180</td><td></td><td></td><td></td><td>64 Average</td></tr><tr><td>3</td><td>4960.00</td><td>43.86</td><td>-38.14</td><td>74.00</td><td>57.85</td><td>34.32</td><td>9.59</td><td>57.00</td><td>252</td><td></td><td></td><td></td><td>134 Peak</td></tr><tr><td>4</td><td>4960.00</td><td>33.54</td><td>-38.44</td><td>54.00</td><td>47.53</td><td>34.32</td><td>9.59</td><td>57.00</td><td>252</td><td></td><td></td><td></td><td>134 Average</td></tr><tr><td>5</td><td>7440.00</td><td>44.43</td><td>-29.57</td><td>74.00</td><td>57.86</td><td>35.94</td><td>11.29</td><td>59.86</td><td>133</td><td></td><td></td><td></td><td>206 Peak</td></tr><tr><td>6</td><td>7440.00</td><td>34.34</td><td>-29.86</td><td>54.00</td><td>47.57</td><td>35.94</td><td>11.29</td><td>59.86</td><td>133</td><td></td><td></td><td></td><td>206 Average</td></tr></tbody></table>	Line	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	Loss	Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm							1	4824.00	43.04	-38.00	74.00	57.07	34.40	9.47	57.00	180				84 Peak	2	4824.00	32.95	-32.00	54.00	46.00	34.40	9.47	57.00	180				64 Average	3	4960.00	43.86	-38.14	74.00	57.85	34.32	9.59	57.00	252				134 Peak	4	4960.00	33.54	-38.44	54.00	47.53	34.32	9.59	57.00	252				134 Average	5	7440.00	44.43	-29.57	74.00	57.86	35.94	11.29	59.86	133				206 Peak	6	7440.00	34.34	-29.86	54.00	47.57	35.94	11.29	59.86	133				206 Average	Date: 6 Date: 2023-04-07 Site: 03CH02-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project: 262209-01 Mode: Mode 35 SN: G8EDMA033087000K Plane: X with Accessories WIFI: MCS0 power setting 15.5 BLE2M: power setting 6/1/1 <table><thead><tr><th>Line</th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>42.44</td><td>-31.56</td><td>74.00</td><td>56.47</td><td>34.40</td><td>9.47</td><td>57.00</td><td>138</td><td></td><td></td><td></td><td>64 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>32.14</td><td>-31.86</td><td>54.00</td><td>46.17</td><td>34.40</td><td>9.47</td><td>57.00</td><td>138</td><td></td><td></td><td></td><td>64 Average</td></tr><tr><td>3</td><td>4960.00</td><td>43.38</td><td>-38.62</td><td>74.00</td><td>57.37</td><td>34.32</td><td>9.59</td><td>57.00</td><td>181</td><td></td><td></td><td></td><td>174 Peak</td></tr><tr><td>4</td><td>4960.00</td><td>33.47</td><td>-38.33</td><td>54.00</td><td>47.56</td><td>34.32</td><td>9.59</td><td>57.00</td><td>181</td><td></td><td></td><td></td><td>174 Average</td></tr><tr><td>5</td><td>7440.00</td><td>44.38</td><td>-29.62</td><td>74.00</td><td>57.81</td><td>35.94</td><td>11.29</td><td>59.86</td><td>244</td><td></td><td></td><td></td><td>135 Peak</td></tr><tr><td>6</td><td>7440.00</td><td>34.27</td><td>-29.73</td><td>54.00</td><td>46.90</td><td>35.94</td><td>11.29</td><td>59.86</td><td>244</td><td></td><td></td><td></td><td>135 Average</td></tr></tbody></table>	Line	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	Loss	Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm							1	4824.00	42.44	-31.56	74.00	56.47	34.40	9.47	57.00	138				64 Peak	2	4824.00	32.14	-31.86	54.00	46.17	34.40	9.47	57.00	138				64 Average	3	4960.00	43.38	-38.62	74.00	57.37	34.32	9.59	57.00	181				174 Peak	4	4960.00	33.47	-38.33	54.00	47.56	34.32	9.59	57.00	181				174 Average	5	7440.00	44.38	-29.62	74.00	57.81	35.94	11.29	59.86	244				135 Peak	6	7440.00	34.27	-29.73	54.00	46.90	35.94	11.29	59.86	244				135 Average
	Line	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	Loss	Factor	A/Pos	T/Pos	Remark																																																																																																																																																																																																																				
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm																																																																																																																																																																																																																											
1	4824.00	43.04	-38.00	74.00	57.07	34.40	9.47	57.00	180				84 Peak																																																																																																																																																																																																																					
2	4824.00	32.95	-32.00	54.00	46.00	34.40	9.47	57.00	180				64 Average																																																																																																																																																																																																																					
3	4960.00	43.86	-38.14	74.00	57.85	34.32	9.59	57.00	252				134 Peak																																																																																																																																																																																																																					
4	4960.00	33.54	-38.44	54.00	47.53	34.32	9.59	57.00	252				134 Average																																																																																																																																																																																																																					
5	7440.00	44.43	-29.57	74.00	57.86	35.94	11.29	59.86	133				206 Peak																																																																																																																																																																																																																					
6	7440.00	34.34	-29.86	54.00	47.57	35.94	11.29	59.86	133				206 Average																																																																																																																																																																																																																					
Line	Freq	Level	Limit	Over	Line	ReadAntenna	Cable	Preamp	Loss	Factor	A/Pos	T/Pos	Remark																																																																																																																																																																																																																					
	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm																																																																																																																																																																																																																											
1	4824.00	42.44	-31.56	74.00	56.47	34.40	9.47	57.00	138				64 Peak																																																																																																																																																																																																																					
2	4824.00	32.14	-31.86	54.00	46.17	34.40	9.47	57.00	138				64 Average																																																																																																																																																																																																																					
3	4960.00	43.38	-38.62	74.00	57.37	34.32	9.59	57.00	181				174 Peak																																																																																																																																																																																																																					
4	4960.00	33.47	-38.33	54.00	47.56	34.32	9.59	57.00	181				174 Average																																																																																																																																																																																																																					
5	7440.00	44.38	-29.62	74.00	57.81	35.94	11.29	59.86	244				135 Peak																																																																																																																																																																																																																					
6	7440.00	34.27	-29.73	54.00	46.90	35.94	11.29	59.86	244				135 Average																																																																																																																																																																																																																					

Appendix E. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz

802.11b

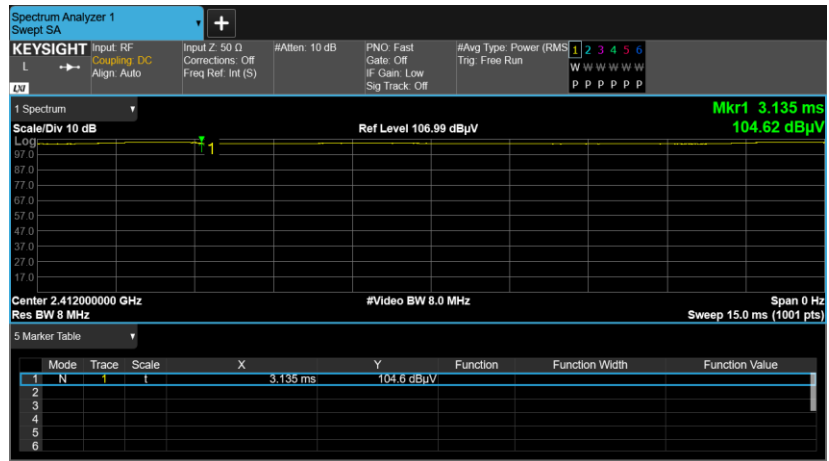



802.11g

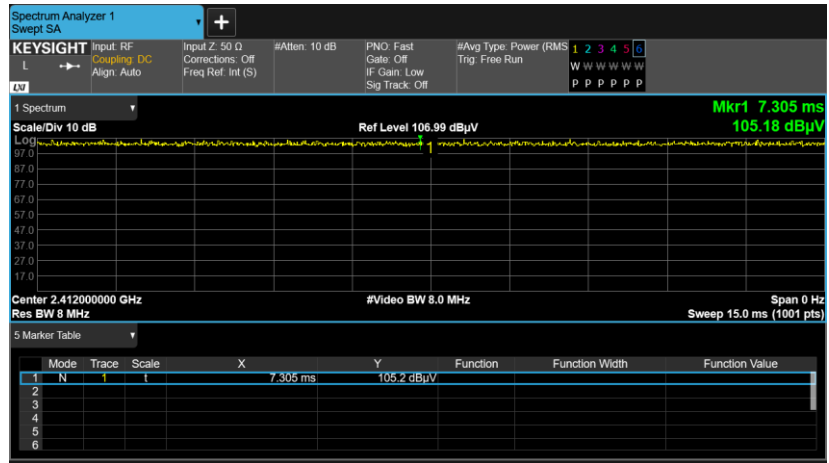

802.11n HT20

