


EnglishStreaming Music Receiver

Buttons and Ports Labeled

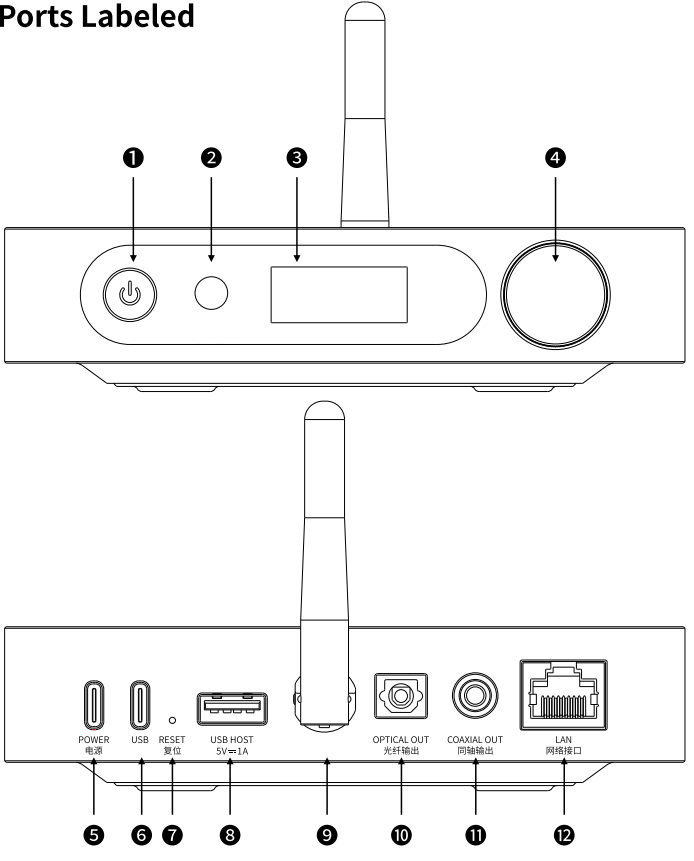

● Power/lockscreen: Short press to turn on, lock/wake up screen; hold to turn off

● Infrared receiving port (please do not cover it)

● Display

● Knob/OK button: Short press to confirm or enter working mode; hold to enter settings menu or exit current menu

● Power Input

● USB port

● Reset port: Short press to reset

● USB HOST port


● Antenna

● Optical output

● Coaxial output

● Ethernet port

EnglishStreaming Music Receiver



● RGB indicator light

EnglishStreaming Music Receiver

Operation Explained

1. Power on/off

Plug in a 5V power supply through the USB port, and short press the power button to turn on the device. When the device is on, hold the power button to turn it off.

2. Knob operation

1) Switch working mode
Turn on the device. On the homepage, short press the knob to enter the working mode menu. Rotate the knob to successively switch between MIX, Room and AirPlay. After selecting the desired mode, short press the knob to complete the switch and return to the homepage.
If no mode is selected, hold the knob for about 2s to return to the homepage.

2) Settings menu
Turn on the device. On the homepage, hold the knob for about 2s to enter the Settings menu. Rotate the knob to switch between different settings. When the current setting needs to be changed, short press the knob, and there will be flashing characters showing up on the menu. At this time, rotate the knob to switch between different settings, and short press the knob to confirm the setting. Then, the new setting will take effect with no character flashing anymore. Other settings can still be changed.
On the settings menu, hold the knob for about 2s to return to the homepage.

3) Adjust volume
On the homepage, rotate the knob to turn the volume up and down.

3. Introduction to Settings menu

Settings menu	Introduction
OUT: Switch output	USB: USB out SPD: Optical and coaxial out
DSD: DSD output	D2P: D2P out DOP: DOP out
VOL: Volume	MAX: Maximum ADJ: Adjustable
LCD T: Screen timeout	1/2/5/10/30 minutes adjustable, "0" means constantly on


EnglishStreaming Music Receiver

4. Network connections

The SR11 supports wired Ethernet and wireless WiFi network connections. Choose either of them when using the device.

1) Ethernet connection

Plug the Ethernet cable into the Ethernet port of the SR11 to realize a wired network connection. After a successful connection, a letter "G" icon will show on the upper left corner of the status bar of the display, as shown below.




EnglishStreaming Music Receiver


2) Wireless connection

When connecting the SR11 to WiFi for the first time, the network needs to be configured before connecting. On the homepage, hold the knob to enter the Settings menu, and rotate to switch between different settings until the display shows "NETWORK". Short press the knob and the display will show "Y" and "N" options. Rotate the knob to select "Y", short press the knob again, and the display will show "CONNECT". At this time, turn on WiFi on the mobile phone, search for "FIO SR11", and tap to connect. After a successful connection, go to the browser on the mobile phone to input "192.168.1.1" on the address bar, or scan the QR code for network connection, see the picture:

Confirm to jump to the network connecting page, as shown below:

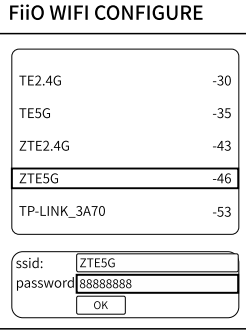

Select the corresponding hotspot and enter the password, and then tap OK to confirm the connection. After a successful connection through WiFi, a WiFi signal icon will show on the status bar, as shown below:




5. Firmware upgrade

The SR11 supports local upgrades. Please download the firmware on our official website and follow the instruction to complete the upgrade.
Download link: <https://www.fio.com/supports>

EnglishStreaming Music Receiver

6. Introduction to remote control

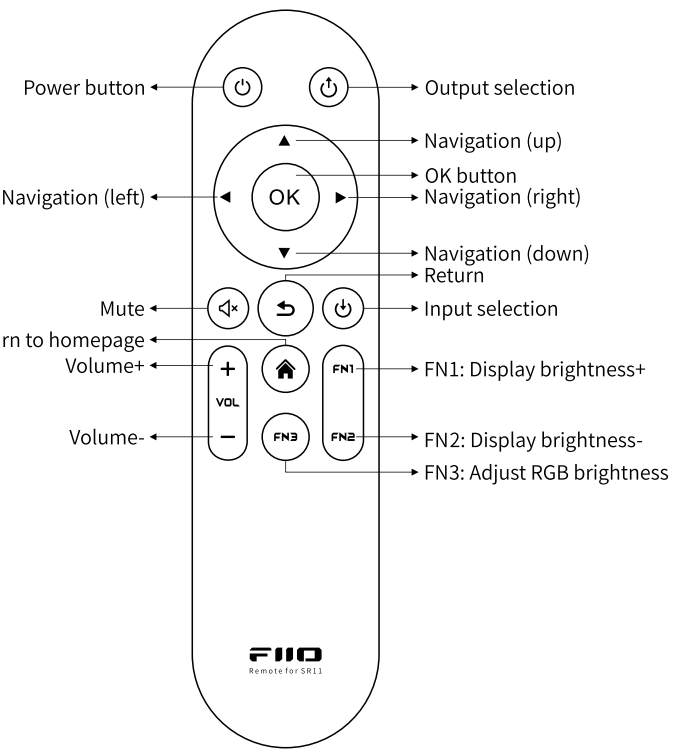

Notes:

1. Please use 2 triple-A batteries for the remote control.
2. The self-defined PK function will be available in future firmware.

EnglishStreaming Music Receiver

Notes and Precautions

★Please use the power adapter included in the accessory to power the SR11. If using other power supplies, please make sure they are standard 5V.
★In case of system errors, please try to either unplug and plug in the power cable, or use an ejector pin to short press the reset hole at the back of the device to restore it to a normal state.
★Please do not cover the infrared receiving part of the SR11; otherwise, the remote control's function may be affected.
★Please do not place the device in circumstances of excessive high/low temperatures (above 45°C or below 0°C).
★Please do not repair or disassemble the device on your own and please keep it away from water.

List of items included (please check if the following items are included)

● SR11

● USB cable

● Power adapter

● Quick start guide



● Remote control

● Warranty card

To Learn More


● For related video instructions of the SR11 and FAQ (Frequently Asked Questions), please scan the QR code below.

● To learn more about the product, please visit our website: www.fio.com

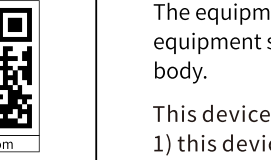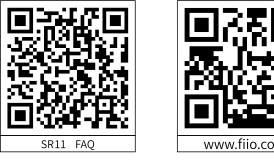

EnglishStreaming Music Receiver

WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be handed as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

FCC NOTICE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
● Relocate or reorient the receiving antenna.
● Increase the separation between the equipment and receiver.
● Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
● Consult the dealer or an experienced radio/TV technician for help.

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. The equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.
This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
1) this device may not cause harmful interference, and
2) this device must accept any interference received, including interference that may cause undesired operation.
Caution: Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

EnglishStreaming Music Receiver

Hereby, Guangzhou FIO Electronics Technology Co., Ltd declares that this device is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at: www.fio.com/dsc

Function	Frequency	Maximum output power
WIFI	2412-2472MHz	14dBm
	5180-5700MHz	20dBm
	5745-5825MHz	14dBm
Bluetooth	2402-2480MHz	10dBm

