

# USER MANUAL FOR TWV-203 CAR-KIT

PLEASE READ THE FOLLOWING USER MANUAL FOR TWV-203 CAR-KIT. THE FUNCTION MIGHT BE SLIGHTLY DIFFERENT DUE TO DIFFERENT MODELS OF CELLULAR PHONE

## KEY FUNCTIONS

BUTTONS  
ANSWER/PAIRING/HANG UP  
STATUS INDICATORS

## CONNECTING YOUR CAR-KIT WITH CELLULAR PHONE

BEFORE YOU CONNECT TO CAR-KIT, YOUR CELLULAR PHONE MUST BE ENSURE TO HAVE COMPLETED CONNECTION AND PAIRING WITH CAR-KIT. THE CAR-KIT WILL THEN MEMORIZE YOUR CELLULAR PHONE CODE. BEFORE YOU OPERATE THE CAR-KIT, THE BEEP SOULD WOULD BE ACTIVATED AS STARTING AND AUTOMATICALLY SEARCHING FOR THE CONNECTION WITH CELLULAR PHONE. THE CAR-KIT WILL ONLY SEARCH FOR CONNECTION WITH CELLULAR PHONE WITHIN 30 SECONDS. IF THE SEARCHING TIME IS OVER 30 SECONDS, IT MEANS THE CONNECTION BETWEEN CAR-KIT AND CELLULAR PHONE IS FAILED.

**NOTED:** IF THE CAR-KIT NEVER BE PAIRING WITH ANY CELLULAR PHONES, THEN THE INDICATOR WOULD BE RED LIGHT WITHOUT BEEP SOUND AS THE CAR-KIT TURNED ON AS STARTING.

## PAIRING

THE CAR-KIT WITH CELLULAR PHONE WITHIN SHORT DISTANCE

OPERATEION	STATUS
SET UP THE CAR-KIT IN PAIRING MODE. PRESS "ANSWER/PAIRING/ HANG UP " KEY FOR 3 SECONDS TO ENTER PAIRING MODE. IF THE ABOVE ACTION WERE REPEATED, THEN THE PAIRING WOULD BE CANCELLED IMMEDIATELY. USER WILL HAVE 5 MINUTES TO SET UP THE WIRELESS CONNECTION BETWEEN CAR-KIT AND CELLULAR PHONE. IF USER LIKES TO CANCEL THE PAIRING, PLEASE REPEAT THE OPERATION AS SAME AS PAIRING SET UP, THEN THE CANCELLATION OF PAIRING WOULD BE ACTIVAED IMMEDIATELY.	DURING THE PAIRING, THE STATUS INDICATOR WOULD BE FLASH BETWEEN RED LIGHT AND GREEN LIGHT SLOWLY.

## SET UP THE SEARCHING OF CELLULAR PHONE AND CONNECTION OF CAR-KIT

PLEASE USE THE CAR-KIT CELLULAR PHONE FOR SEARCHING THE CAR-KIT (THE DETAILED OPERATION, PLEASE REFER TO CELLULAR PHONE USER MANUAL)

1. AFTER SEARCHING, THE CELLULAR PHONE WILL DISPLAY THE MODEL OF CAR-KIT AS TWV-203.
2. PLEASE SELECT TWV-203 AS PAIRING.
3. ENTER THE ID CODE "**0000**".
4. AFTER THE PAIRING IS COMPLETED, THE DISPLAY OF CELLULAR PHONE WILL JUMP BACK TO ORIGIN AS THE CELLULAR PHONE TURN ON.
5. WHEN THE PAIRING IS COMPLETED, THE STATUS INDICATOR WOULD BE TURNED TO GREEN STEADY.

## CONNECTION

OPERATION	STATUS
WHEN THE POWER OF CAR-KIT IS TURNED ON, THE BEEP SOUND WOULD BE ACTIVATED AND AUTOMATICALLY SEARCHING FOR CELLULAR PHONE. IF THE CONNECTION IS FAILED, PLEASE PRESS "ANSWER/PAIRING/HANG UP" BUTTON FOR ANOTHER 30 SECONDS SEARCHING. IF THE CONNECTION IS STILL FAILED WITHIN 30 SECONDS SEARCHING, IT MEANS THE CAR-KIT HAS GIVEN UP THE SEARCHING AND CONNECTION FOR CELLULAR PHONE.	AFTER THE POWER IS ON OR PRESS THE "ANSWER/PAIRING/HANG UP" BUTTON, THE CAR-KIT HAS BEEN STARTED THE CONNECTION WITH CELLULAR PHONE. AT THIS MOMENT, THE STATUS INDICATOR WOULD BE FLASHED FASTLY. IF THE CONNECTION IS COMPLETED, THE STATUS INDICATOR WOULD BE TURNED ON TO GREEN STEADY.

## DISCONNECT THE CAR-KIT AND CELLULAR PHONE

PRESS "ANSWER/PAIRING/HANG UP" BUTTON FOR 3 SECONDS, THEN THE DISCONNECTION WOULD BE ACTIVATED BETWEEN CAR-KIT AND CELLULAR PHONE.  
IF THE POWER OF CAR-KIT IS SWITCH OFF, THE DISCONNECTION WOULD ALSO BE ACTIVATED AUTOMATICALLY BETWEEN CAR-KIT AND CELLULAR PHONE.

## ANSWER FOR INCOMING CALL

WHEN THE CELLULAR PHONE RECEIVE INCOMING CALL, THE STATUS INDICATOR WOULD BE FLASHED. PRESS THE "ANSWER/PAIRING/HANG UP" BUTTON FOR PICKING UP THE CALL.


## HANG UP THE PHONE

DURING THE PHONE CONVERSATION, PRESS "ANSWER/PAIRING/HANG UP" BUTTON FOR HANG UP THE PHONE CALL.

## VOICE DIAL

DURING THE CONNECTION (NOT CONVERSATION), PRESS "ANSWER/PAIRING/HANG UP" BUTTON FOR ACTIVATING THE VOICE DIAL OF CELLULAR PHONE.

## OVERVIEW

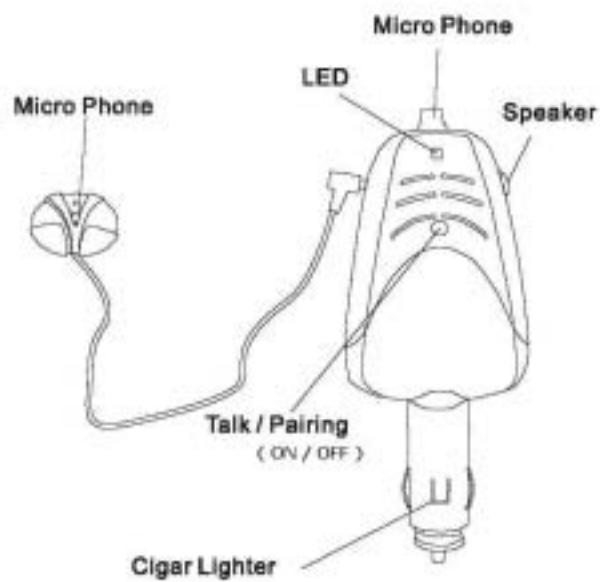

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications (including the antennas) made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement: This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.