

Bluetooth Headset User Guide



HCC03

Index

1. Notice before using
2. Package List
3. Product Introduction
4. Charging HCC03
5. Power On/ Off
6. Pairing HCC03 (or any Bluetooth Device)
7. Settling HCC03
8. Answering calls
9. Refusing calls
10. Ending calls
11. Voice Dialing
12. Redialing
13. Transferring calls
14. Maintaining calls
15. Holding Call 1 and answering Call 2
16. Triple Phone Conversation
17. Adjusting the Volume
18. Safety Instruction
19. Specifications
20. Excluding Problems
21. Storage of HCC03
22. Q & A
23. Declaration of Conformity

1. Notice before using

Thank you for purchasing our Bluetooth Headset HCC03. First of all, please check to find everything in your package and carefully study the user guide to know the function details. HCC03 is developed by the innovative Bluetooth wireless technology, enabled to connect the Bluetooth mobile phone, PDA, desktop and notebook with the USB Bluetooth Dongle plugged-in, etc. Before using it, please confirm your mobile phone complies with Bluetooth V1.1/ V1.2/ V2.0 and supports the Bluetooth Headset or Handsfree Profile.

2. Package List

Please inspect the product you purchased. Refer to the below package list to make sure there is no shortage or defect inside.

The complete package includes the following items:

- ▶ HCC03 Bluetooth Carkit 1
- ▶ User Guide..... 1
- ▶ Warranty Card 1
- ▶ Car Charger (INPUT: AC100-240V, 50/ 60Hz, OUTPUT: DC5.1V, 300mA) 1

If you find any shortage, please contact the retailer shop where you purchased this product.

- ▶ A travel charger is available (sold separately)

3. Product Introduction

Function (Answering/ Ending/ On/ Off) Button 3

LED (Indicator) Light


Receiver (Speaker)

Microphone

Power Interface adapter (charging)

Decrease Volume key (-) 1

Increase Volume key (+) 2

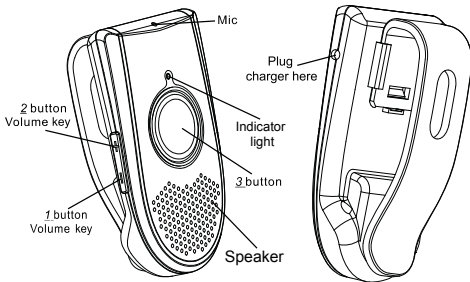

Note:

- For first time use, make sure to fully recharge HCC03 battery.


4. Charging HCC03

HCC03 comes with a Lithium Polymer battery built-in.

1. Plug the car charger into the car lighter.
2. Plug the end of the car charger into the power interface adapter of HCC03.
3. While charging, the indicator will turn red; when charging is completed, the red indicator will shut off or flashes red.

Note: Charging time is around 90~120 minutes.

- For first time use, make sure to fully recharge HCC03 up to 4 hours. After a long time of not using it (around one month), while recharging, it takes a while for the indicator to turn red.
- While charging, please do not use HCC03.
- Please use the original charger to recharge HCC03.
- When the indicator flashes the red light, it means the battery is low, please recharge HCC03 right away.



Plug in
charger here

- Please recharge HCC03 within the temperature range of -10 °C (+14°F) +45°C (+113°F).

5. Power On/ Off

1. Press and hold the function button for 2~3 seconds, the power will turn on after the indicator flashes the blue light 3 times.
2. To turn the power off, press and hold the function button for 2~3 seconds until you see the red indicator flash 3 times.

Note:

- While turning HCC03 on, you will hear the “Du Du” sound from the receiver. The blue indicator light will flash 5 times, then 2 times, and after repeating this for 5 times, the indicator will flash the blue light every 3 seconds to come into a standby mode.
- While HCC03 is turned on, it will automatically search for the paired device. Under “ON” mode and within the effective range of 10 meters from HCC03, the indicator will flash the blue light to indicate that it entered the connecting mode.
- When turning HCC03 off, you will hear one “Bi” sound followed by two “Du” sounds, then the indicator will shut off after flashing the red light for a few times.

6. Pairing HCC03 (or any Bluetooth Device)

You must pair HCC03 with your Bluetooth phone or any Bluetooth device before you use HCC03 for the first time.

1. Ensure HCC03 is off.
2. Press and hold the function button for 5 seconds until the blue indicator light flashes with the red indicator light to enter the

pairing mode.

3. Ensure your mobile phone has the Bluetooth function and start the Bluetooth new device searching function. Please follow the instructions of your mobile phone to proceed the operation.
4. When your mobile phone is in the stage of searching a new Bluetooth device, it will find HCC03.
5. Please choose and confirm HCC03.
6. Key in HCC03 Password “0000” and press YES. If the pairing is successful, the indicator turns to flash the blue light only. For some mobile phones, after pairing you may have to select and confirm HCC03 again to start the connection. (Please read your mobile phone manual carefully to take the right steps.)
7. HCC03 is in the standby mode, you can start to receive and make call.

Note:

- If the pairing is not successful, HCC03 will return to the standby mode, please repeat the pairing process to try the pairing again.
- While pairing, it is better to keep the distance between the mobile phone and Headset around 10 cm to 1m and make sure no metal objects are between.
- While pairing HCC03 with other Bluetooth device, when the device asks for the Password, please key-in “0000”. For more details, please check the manual of your Bluetooth device to

proceed the operation.

7. Settling HCC03



Please clipping HCC03 above the speaker vertically to keep HCC03 at the best working position

8. Answering the calls

1. While there is a call coming, wait until you hear the ringing from HCC03 receiver to press the function button to answer the call.
2. If the mobile phone is ringing first, wait until HCC03 is ringing, then press the function button.

3. While answering the calls, the blue indicator light flashes 4 times each second.
4. If the mobile phone is ringing and HCC03 is off, turn on HCC03 first, then press the function button to answer the call.
5. If your mobile phone has the function of automatically receiving calls and you already set it up, while the call is coming, HCC03 can receive the call automatically without pressing the function button.

Note:

- HCC03 is with the function of passing the same ringing sound as the mobile phone if the mobile phone is with this function, such as Nokia.

9. Refusing calls

Wait to hear the ringing from your receiver, then press and hold the function button for 2~3 seconds until you hear the “Du” sound to refuse the calls.

10. Ending calls

1. When the conversation is over, press the function button to end calls.
2. Wait until the other end hangs up the phone to end calls.

11. Voice dialing

1. If your mobile phone supports the voice dialing function, you can use this function with HCC03 too.
2. Under the standby or connecting mode, press the function button of HCC03 and follow the mobile phone instructions to proceed with the voice dialing.

Note:

- The activation of the voice dialing function will depend on the design and also the setting of your mobile phone.
- The working range of the Bluetooth Headset is 5 meters indoors and 5~10 meters outdoors, however, the distance might be shortened called by different environment.

12. Redialing

1. If your mobile phone supports the redialing function, you can use this function with HCC03 too.
2. Under the standby or connecting mode, press the function button of HCC03 for 2~3 seconds until you hear the “Du” sound to redial the last call.

13. Transferring calls

1. When you are answering the call with HCC03, press the increase (+) volume key for 2~3 seconds until you hear one “Du” sound, then the call will be transferred to your mobile phone.
2. When you are answering the call with the mobile phone,

press the function button of the mobile phone to transfer the call to HCC03. For some mobile phones, the phone LCD will show the transferring sign, some will not.

Note:

- To activate this function, your mobile phone must support the Handsfree mode. For more details, please check the manual of your mobile phone.

14. Maintaining calls

1. When you are answering the call with HCC03, press the decrease (-) volume key for 2~3 seconds until you hear one “Du” sound, then the call will be maintained. If there is an interrupting call coming, HCC03 will answer it automatically.
2. Press the decrease (-) volume key for 2~3 seconds until you hear one “Du” sound to end the maintaining call function. Also do this to renew the call.

Note:

- To activate this function, please make sure the assigned telecommunications agent provides this service.
- To activate this function, please refer to the instructions of your mobile phones manual to make sure your phone program supports this function.

15. Holding Call 1 and answering Call 2

While you are answering Call 1 from HCC03, and having the interrupting call, you will hear the notifying “Du Du” sound. Press and hold the decrease (-) volume button for 2~3 seconds until you hear one “Du” sound followed by the music, Call 1 will be Hold and the interrupting call (Call 2) will be answered automatically.

Note:

- To activate this function, please make sure the assigned telecommunications agent provides this service.
- To activate this function, please refer to the instructions of your mobile phones manual to make sure your phone program supports this function.

16. Triple phone conversation

1. While you are answering Call 1 from HCC03 and having the interrupting call, you will hear the notifying “Du Du” sound. Press the decrease (-) volume key for 2~3 seconds until you hear the “Du” sound, Call 1 will be maintained and the interrupting call (Call 2) will be answered automatically.
2. To proceed the triple phone conversation while you are answering the interrupting call (Call 2), press the increase (+) volume key for 2~3 seconds until you hear the “Du” sound, the maintained Call 1 will be renewed, then the three ends can talk together.
3. To end the triple phone conversation, press the function but-

ton, then Call 1 and Call 2 will be hanged up together.

Note:

- To activate this function, you must make sure the assigned telecommunications agent supports this service.
- To activate this function, please refer to the instructions of your mobile phones manual to make sure your phone program supports this function.
- When the triple phone conversation is on board, it can not return to the mode of having only Call 1 or Call 2.
- When the triple phone conversation has not been activated, you can press the decrease (-) volume key for 2~3 seconds to easily transfer the calls between Call 1 and Call 2.
- If Call 1 is maintained and Call 2 is on line, quickly press the function button to end Call 2 and renew Call 1.

17. Adjusting the Volume

During a call, you may adjust the volume of HCC03.

1. To increase the volume, press the increase (+) volume key.
2. To decrease the volume, press the decrease (-) volume key.

Note:

- You will hear the “Du Du” sound while adjusting the volume up to the loudest or lowest.

18. Safety instruction

1. Read the manual of HCC03 carefully and use HCC03 correctly by following the instructions.
2. Do not use the cleaning liquid or spray to clean HCC03.
3. Do not disassemble HCC03. If you encounter a problem, contact the retailer shop.



● Urgent handling

-If you encounter a problem, turn off HCC03 first.

-If the inside components breakdown, please contact the repairing center to ask for immediate support and service.

19. Specification

Product Model No.	HCC03
Standard Convention/ Signal Output	Bluetooth V2.0 + EDR, Class II
Frequency Band	2.4GHz ~ 2.4835GHz, ISM Band
Talk/ Standby Time	Up to 5 hours / Up to 250 hours
Supporting Profile	Headset & Handsfree
Connection	Peer to Peer
Data Encryption	128 bits encrypted
Power Capacity	Rechargeable Li-Polymer

Power Supply	5V DC, 100~240V AC adapter
Operation Temperature	-10 ~ 55 °C
Facility Saving Temperature	-20 ~ 60 °C
Operation Moisture	10% ~ 90% (non-concrete status)
Weight	42 g (battery included)
Size	89x50x18 mm
Safety Regulation	CE, FCC

20. Excluding Problems

1. You hear no sound coming from HCC03:

- Make sure HCC03 has been paired with the other Bluetooth device.
- Make sure HCC03 is on.
- Make sure the distance between HCC03 and the paired Bluetooth device is within 10 meters.
- Make sure your mobile phone has a good signal.
- Some Bluetooth mobile phones support only one Headset, if you pair it with more than one Headset, it may cause the other Headsets being cut off.

21. Storage of HCC03

- Do not disassemble HCC03, it may damage HCC03 accidentally or cause the warranty invalidation.

- Put HCC03 away from places full of dust.
- Use clean and soft fabric to clean the surface HCC03.
- Be aware not to let Children play with HCC03, avoiding accidents from happening or damaging the product.
- Avoid storing HCC03 in high or extra low temperature.

22. Q & A

Q : Why does HCC03 under the “On” mode not work with the Bluetooth mobile phone?

A : You must activate the Bluetooth function of your mobile phone and finish the pairing between your mobile phone and HCC03.

Q : Can HCC03 work with any of the mobile phones?

A : No, this Headset works only with Bluetooth mobile phones.

Q : How far is the working distance between HCC03 and the mobile phone?

A : Since HCC03 is certificated by BQB, compliable with Bluetooth V2.0 + EDR, Class II, the longest working distance is 10 meters. But, this working distance may be shortened by the interference existed in the surroundings and due to the insufficient Bluetooth function of the mobile phone.

Q : Why does my Bluetooth mobile phone find many Bluetooth devices while searching for the new Bluetooth device?

A : Most of the mobile phones are allowed to find more than one Bluetooth device within the working range. When the searching is finished, your mobile phone's LCD will show HCC03 or some Unknown Devices. Please select and confirm HCC03.

Q : Why my mobile phone could not find HCC03?

A : Only while HCC03 is under the pairing mode, your mobile phone can find HCC03. Please follow the instructions of HCC03 manual to proceed the pairing process.

Q : Shall we pair HCC03 every time while using it?

A : No. The paired devices remain paired regardless of turning the power off, or reopening the devices.

Q : Why is the voice from HCC03 not clear?

A : It may be the following two reasons:

- (1) Your location has a bad signal, please move to a location with a better signal.
- (2) The working range between HCC03 and the mobile phone has been exceeded. Please make sure HCC03 and mobile phone are within the working range of 10 meters and there is no obvious interference between.

Q : What can I do if the voice from HCC03 is not clear?

A : Make sure your mobile phone is in a location with a better sig-

nal and increase the volume of the mobile phone or HCC03.

Q : Why is HCC03 suddenly not working?

A : (1) HCC03 might suffer a bad connection get.

(2) The Bluetooth function of your mobile phone gets crashed or hanged. It happens occasionally, please turn the Bluetooth function of the mobile phone off, and renew it or turn off your Bluetooth mobile phone and turn it on again.

Q : Why could the voice dialing function of HCC03 not be switched on?

A : (1) Please re-record the voice tag.

(2) Some mobile phones do not support the voice dialing function. Please refer to the manual of your mobile phone.

23. Declaration of Conformity

FCC:

HCC03 is FCC certificated as this device complies with part 15 of the FCC rules.

European CE:

HCC03 has been manufactured in accordance with the European R& TTE directive. It complies with the European Low Voltage Directive 73/23/EEC and the European EMC Directive 89/336/EEC.

BQB Qualification:

HCC03 Bluetooth Headset, a BQB Qualified Bluetooth product is listed as qualified End Product in accordance to section 6.2.4 of the PRD.

Federal Communications Commission (FCC) Statement

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Operation is subject to the following two conditions:

- 1) this device may not cause interference and
- 2) this device must accept any interference, including interference that may cause undesired operation of the device.

FCC RF Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

