

ENGLISH

USER GUIDE




1. Before you use this device, please make sure that you

1. Fully charge the device at least 3 hours before you use it the first time. Afterward it takes approximate 2 hours to fully recharge power. (Please refer to 3.1 showed below for details.)
2. To pair the speakers with a Bluetooth mobile handset or other Bluetooth devices before you making calls. The Bluetooth audio connection between the speakers and your phone can be established by setting up a paired link. (Please refer to 3.2 showed below for details.)

2. Introduction

- 2.1 Features
 - a. In-built DSP cancellation circuit to reduce echo and background noise.
 - b. Wireless connection of stereo steaming with your Bluetooth MP3 player, laptop, Discman, CD/DVD other audio players
 - c. Associated microphone to direct talk via Skype.
 - d. Rear line-in jack to possibly connect audio players by 3.5mm cable directly.
 - e. Crystal stereo sound effect and powerful bass reflection designs.
 - f. First answering to the mobile phone call automatically while using other functions and will be returned automatically as soon as conversation is over

Disassembly

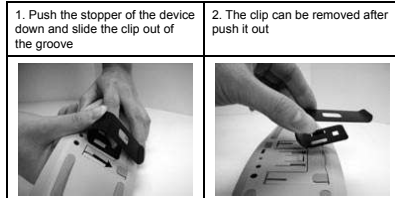

4. Indications: Amber (A), Blue (B), Green (G)


Pairing	(B) Blink rapidly
During Communication	(B) Rapidly blink 3 times per second
Playing Music	(B) Rapidly blink 2 times per second
Connected and Standby	(B) Blink tardily once per second
Standby without Connected	(B) Blink rapidly once every 2 second
Low Battery	(A) continuing blinking, the lower the faster
Charging	(A) light on
Completed re-charging	(G) light on

- a. Ideal for Handsfree Car Kit, Con-Call Device, Amplified Speakers etc. Portability for car to car to office to home.
- b. Rear Mic-in jack to possibly connect an external microphone to collect better voice output.
- c. Compact design and easy to carry and storage.

2.2 Product Specification

Bluetooth Specification	Bluetooth v1.2 Class2
Bluetooth Profiles	HSP / HFP / A2DP / AVRCP
Frequency Band	2.4GHz~2.4835GHz ISM Band
Working Distance	10 meters
Standby Time	48 hours
Playing Time	10 hours / 65dB
Battery	3.7V rechargeable battery
Weight	210g
Packing Contents	1. One Bluetooth Stereo Handsfree 2. One 100-240V AC adapter. 3. One 3.5mm Audio cable 4. One User manual

2.2 Product Outlook



3. Prepare to use the product

- 3.1 Power Supply and Charging
 - a. As soon as power jack have been connected, the device

5. Operation Button and Symbol Definition

- 5.1 Six Buttons:
 - a. Short Click: Clip and release less than 1 second
 - b. Long Press: Press and release for 2 seconds
 - c. Double Click: Click twice within 0.5 second
 - d. Press and Hold: Press and hold the key for more than 6 seconds

5.2 Function Matrix

Feature	Button	Operation	Conditions
Pairing	▶▶	+++	Standby
Cancel Pairing	▶▶	+++	During Pairing
Pick Up	☎	+	To Telephone
Hang Up	☎	+	During Communication
Voice Dialing	☎	+	Standby
Cancel Voice Dialing	☎	+	During Voice Dialing
Refuse Answering	☎	++	Receive Calling
Last Call Redial	☎	vv	Standby
Switch to Handset	☎	++	During Communication
Connect To Handset	☎	+	Disconnected
Volume Up	+	+	During Communication

- a. charging can be progressed under □N or □FF circumstance.
- b. The battery must be charged with the appropriate charger, one AC/DC adapter has been enclosed in the package.
- c. While charging, the amber indicator will stay on and the green indicator will remained to instead as soon as it is completed. It takes you 2 hours to re-charge every time. (It takes 3 hours to fully charge power at the very first time)

3.2 Pairing and establish a connection

Please make sure you have paired the product with Bluetooth AV sources before you start to use. Kindly following the pairing procedure shows hereunder:

- a. Turn your Bluetooth stereo headphone on by press and hold the ▶▶ button till indication blinks rapidly. At this moment, the product is in the pairing mode.
- b. To activate Bluetooth devices searching from your Bluetooth AV sources by follow their original instruction. Please choose the device name and enter the pass key .1234 to establish a pairing connection.
- c. The speaker supports two audio connections. Please select HEADSET/HANDSFREE profile if you like to connect to the mobile phone. Or A2DP/AVRCP profile for stereo sound effect to your audio sourcing.

Note: If the pairing can not be established within 60 seconds, the blue indicator turns to regular blinking once every 2 second automatically. A re-pairing procedure is needed. Please repeat pairing procedure listed above.

3.3 Audio Streaming via Bluetooth

- a. To play music via a Bluetooth AV Transmitter, please make sure the Bluetooth Wireless Speaker has been connected with the transmitter, blue indicator will be blinked rapidly 2 times per second.

Feature	Button	Operation	Conditions
Volume Down	—	+	During Communication
Play	▶▶	+	Stop or Pause
Pause	▶▶	+	Playing
Stop	▶▶	++	Playing
Backward	◀◀	+	Playing
Forward	▶▶	+	Playing

Note: The above functionalities may vary depending on the model of mobile handsets. Please refer to your mobile handset user manual for additional information.

6. Certification and Safety Approvals/General Information

- 6.1 The device is CE · FCC and BQB approved.

6.2 Federal Communication Commission(FCC) Statement:

- a. Rule15.21: You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.
- b. Rule15.105 (b): This equipment has been tested and found to comply with limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there

Note: The device did not support remote control function when connecting with a Bluetooth AV Transmitter; ▶▶ button will act as mute function.

- b. To play music via a Bluetooth USB Dongle, please complete AV pairing and then activate intended audio player interface afterward, the music will be transmitted to the speaker automatically.

Note: The Bluetooth USB Dongle should support AVRCP profile to activate remote control function.

3.4 Cellphone Operation

- a. Check your mobile phone's user guide, find out the paragraphs of Bluetooth Connectivity and follow the instruction to complete pairing with the speaker.
- b. If your cellphone support only Hands Free profile, please activate connection from the cellphone. (Please refer to your mobile phone's manual for operation details)
- c. Cellphone will always be the top priority, since an incoming/outgoing has been progressed, it interrupts actively and the on-going music will be muted. As soon as the call has been hangs up, the music rebound afterward.

3.5 Connecting Audio players directly by 3.5mm AV cable

- a. Equipped a rear line-in jack to directly connect to audio sources; for instance; MP3 player, Discman, laptop or other audio players. Please disconnect Bluetooth Connection with audio sources firstly. Simply plug the 3.5mm AV cable into the line-in jack and the other end to audio sources. All functional buttons on the device will be disable as soon as line-in jack has been connected, please operate function from the audio sources directly.

Note: Cellphone will always be the top priority, since an incoming/

is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

6.3 European Union Directives Conformance Statement

We, Global Target enterprise declares that this product: Bluetooth portable speaker with hands free function (CK817) is conformity with the appropriate standards EN300328, EN301489-1, EN301489-17, EN60950, EN50371.
In accordance with the council directive 1999/5/EC. For more information, please visit:
<http://www.globaltarget.com.tw>

6.4 Bluetooth is a trade mark owned by Bluetooth SIG, Inc.

7. Caution

- 7.1 Important information regarding safe and efficient operation. Read this information before using the product. Users are not permitted to make changes or modify the device in any way. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

outgoing has been progressed, it interrupts actively and the on-going music will be muted. As soon as the call has been hangs up, the music rebound afterward.

3.6 Use with an External Microphone (Optional)

Equipped a Mic-in jack for external microphone, simply plug the connector into the jack and turn the Mic on. Please adjust microphone tube and position according to locality to increase sound sensitivity.

3.7 Pin code : "1234"

3.8 Steps to associate sun visor clip with the device

Assembly

1. Please follow the direction to place the clip and the device as the picture showed and aim the cog of the clip into the rear groove on the device
2. Gently slide the clip forward into the groove



7.2 Operation is subject to the following two conditions

- a. this device may not cause harmful interference, and
- b. this device must accept any interference received, including interference that may cause undesired operation of the device.

7.3 FCC RF Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operation instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operation in conjunction with any other antenna or transmitter.

