

# Antenna Specification

Specifications  
Summary

| ITEM             | SPEC.    |          |
|------------------|----------|----------|
| Center Frequency | 1880 MHz | 0.48 dBi |
|                  | 1900 MHz | 0.96 dBi |
|                  | 1920 MHz | 1.60dBi  |
|                  | 1930 MHz | 1.71dBi  |
| MAX. GAIN        | 1.71 dBi |          |

天线类型/  
ANT Type:

PIFA

天线型号/  
ANT Model:

1.9G-ANT1

制造商/  
Manufactory:

YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.  
No.666 Hu'an Rd,Huli District Ximen City, Fujian, P.R. China





天线图/ANT Photo



1880MHz

3D Antenna pattern





2D Antenna pattern (X->Y;X->Z;Y->Z)

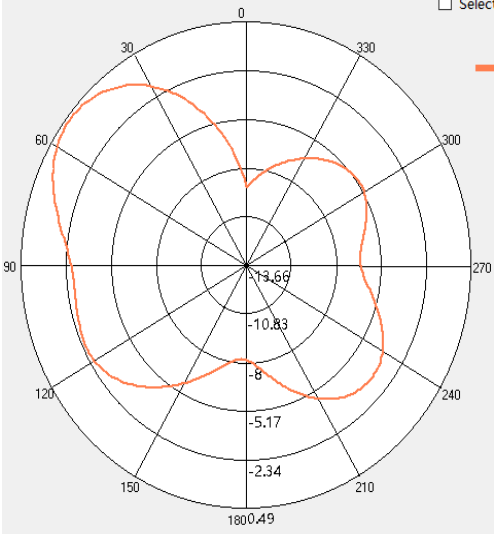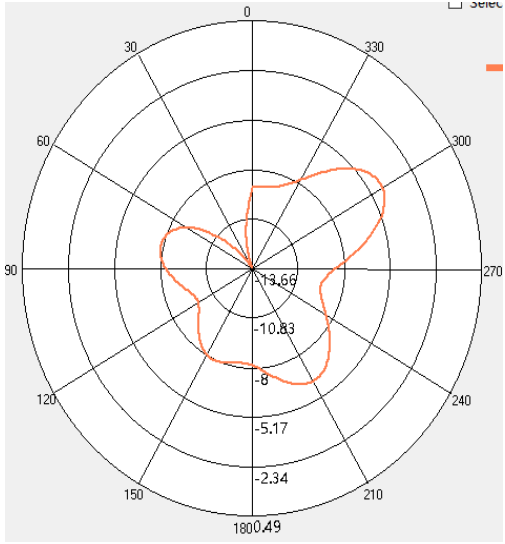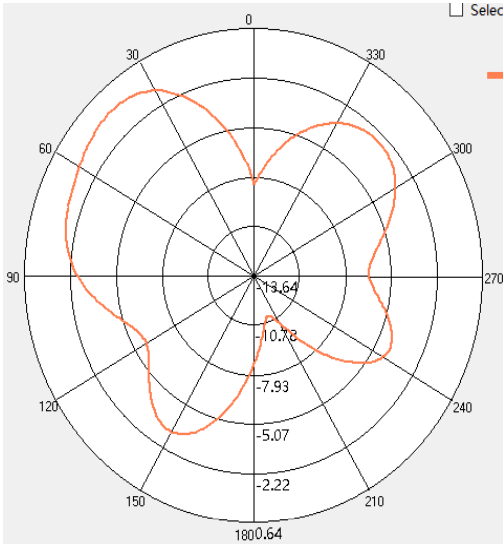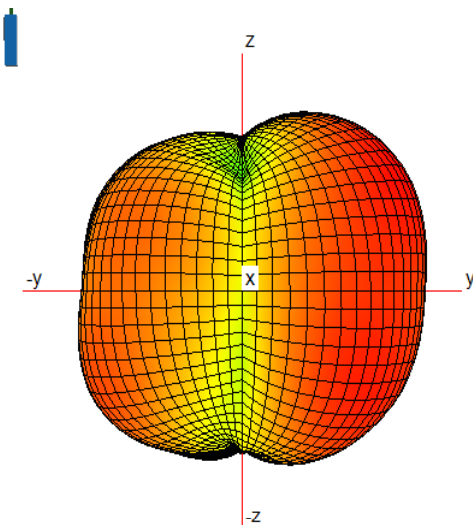

1900MHz


3D Antenna pattern

2D Antenna pattern (X->Y;X->Z;Y->Z)

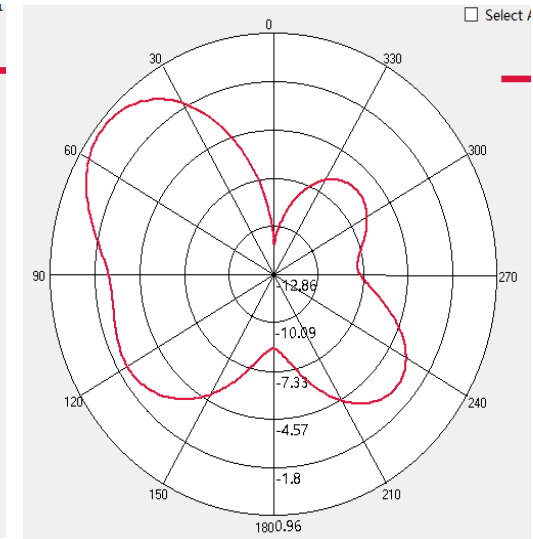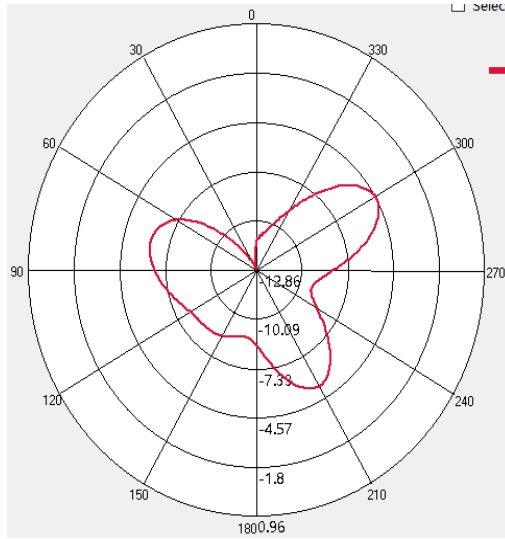
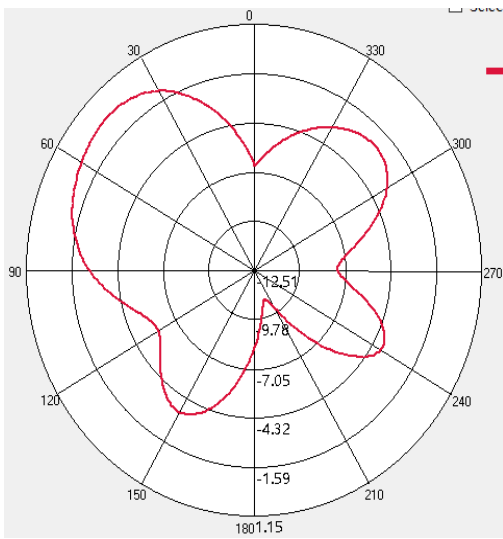
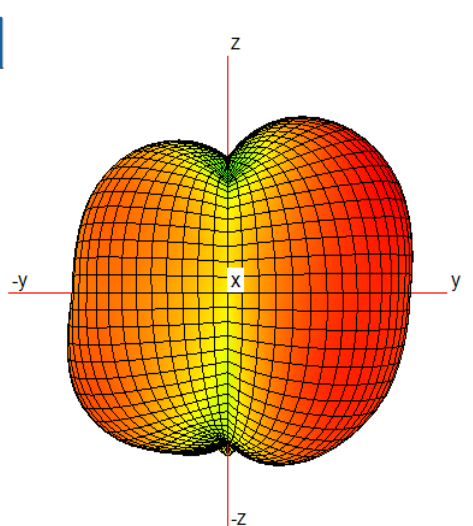


1920MHz

3D Antenna pattern

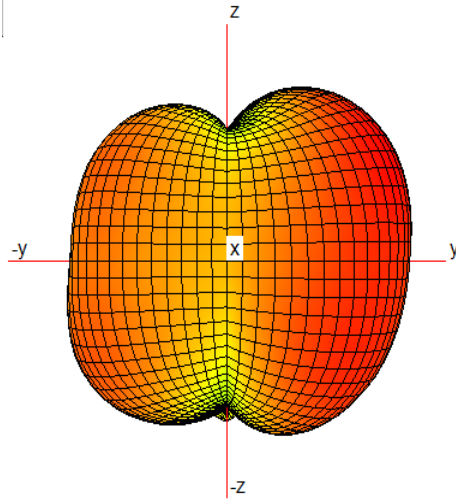


2D Antenna pattern (X->Y;X->Z;Y->Z)

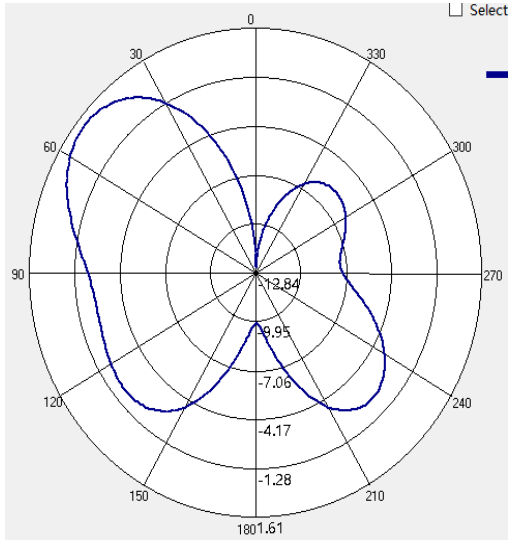
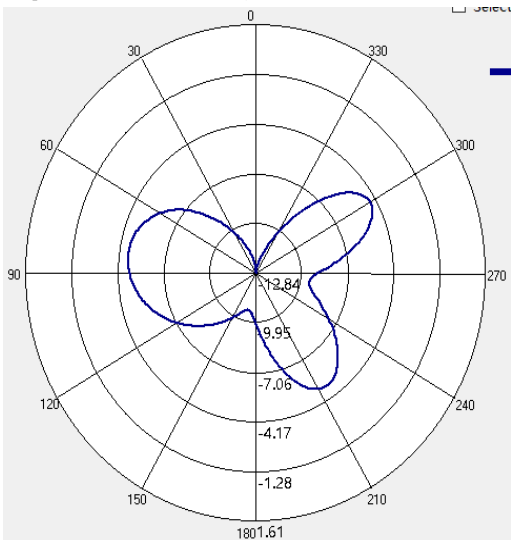
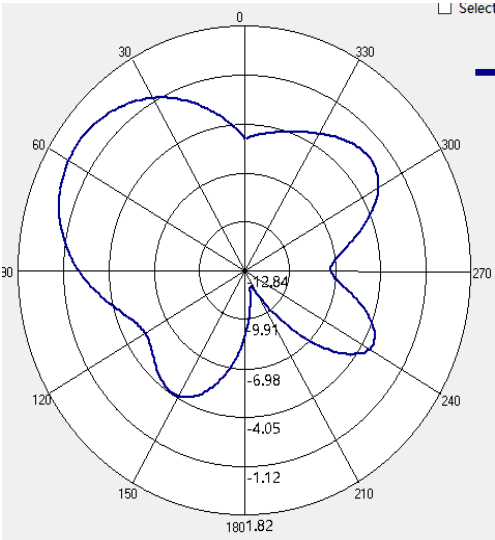


1930MHz

3D Antenna pattern

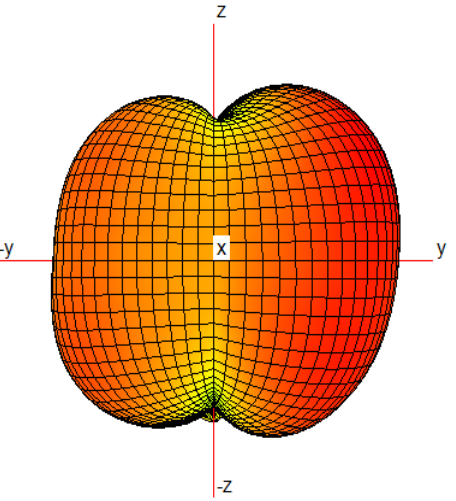

2D Antenna pattern (X->Y;X->Z;Y->Z)

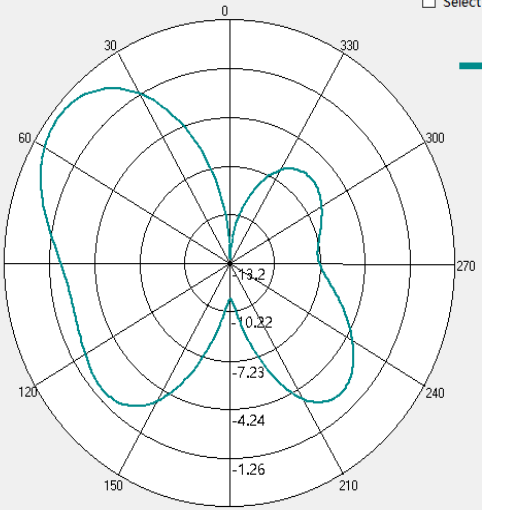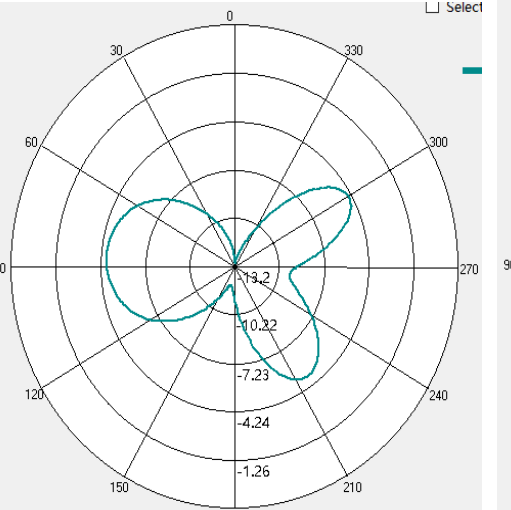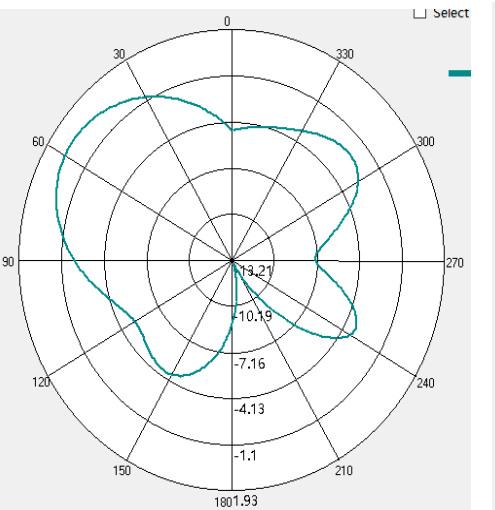

| Point Values    | Minimum Gain (dBi) | Maximum Gain (dBi) | Average Gain (dBi) |
|-----------------|--------------------|--------------------|--------------------|
| Frequency (MHz) |                    |                    |                    |
| 1880            | -13.6386           | 0.48397            | -4.05471           |
| 1900            | -12.5120           | 0.96396            | -3.88674           |
| 1920            | -12.8394           | 1.59947            | -3.51178           |
| 1930            | -13.2041           | 1.71044            | -3.46151           |