
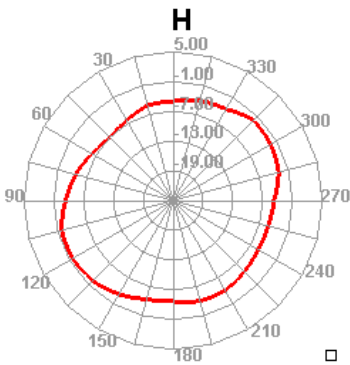
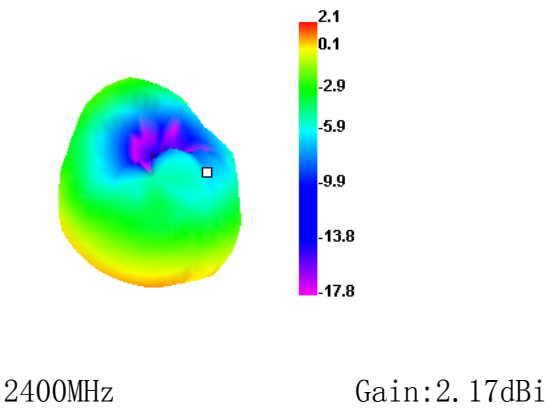
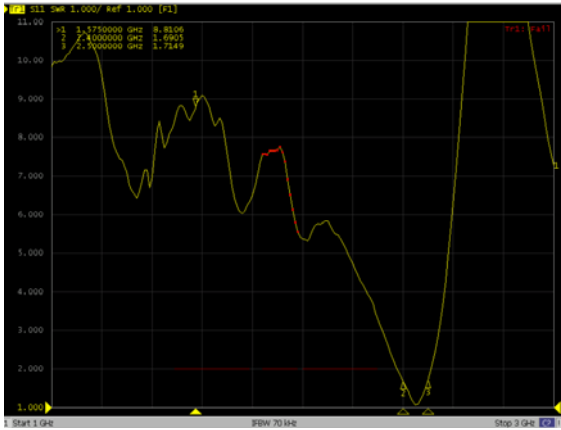




1. Antenna Describe

|                      |                                                                                   |
|----------------------|-----------------------------------------------------------------------------------|
| Antenna              | PCB Antenna                                                                       |
| Antenna Gain         | 3.24dBi                                                                           |
| Frequency Range      | 2.4-2.5GHz                                                                        |
| size                 | 15.2mm(L) x 14mm(W) x 2.5mm(H)                                                    |
| Model Name           | ET25SE                                                                            |
| Manufacture          | Alinco Incorporated, Electronics Division                                         |
| Manufacturer Address | Yodoyabashi Dai Building 13F, 4-4-9<br>Koraibashi, Chuo-Ku, Osaka, 541-0043,Japan |


2. Antenna image

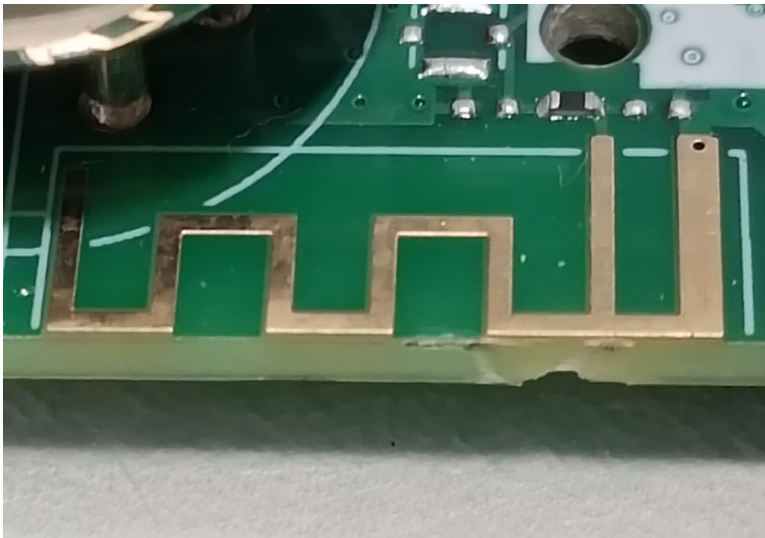

Efficiency: 44.68%

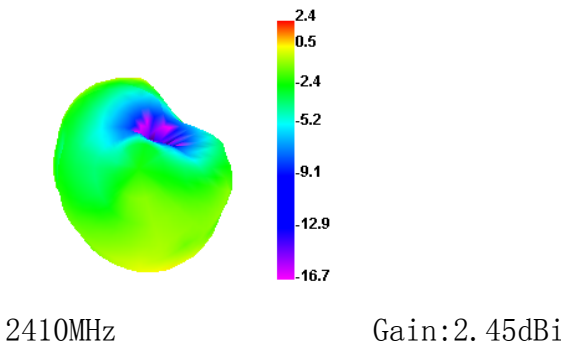


Efficiency: 41.70%




2420MHz

Gain:2.61dBi




Efficiency: 41.56%




2430MHz

Gain:2.8dBi




Efficiency: 46.70%




2440MHz

Gain:2.93dBi




Efficiency: 46.34%




2450MHz

Gain:3.24dBi




Efficiency: 44.88%




2460MHz

Gain:3.18dBi




Efficiency: 46.96%




2470MHz

Gain:2.95dBi




Efficiency: 46.37%




2480MHz

Gain:2.84dBi




Efficiency: 45.51%




2490MHz

Gain:2.71dBi




Efficiency: 47.79%



2500MHz

Gain:2.41dBi

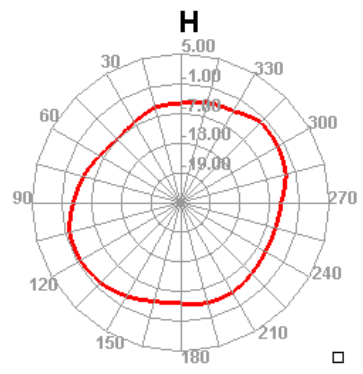

Efficiency:44.69%