


MOVON

Bluetooth Headset
DJP MF200
Digital Signal Processor


www.movon.co.kr

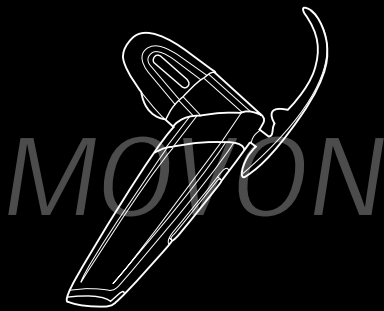


Contents

- Overview of headset
- Charging a headset
- "Pair" to your Bluetooth phone
- Turning on/off
- Wearing a headset
- Making a call
- Ending a call
- Answering a call
- Call-Waiting (3 way calling)
- Volume control & Mute function
- Status Indicator
- Multi-Point function
- Specifications
- Safety and General Information
- Warranty

Overview of headset

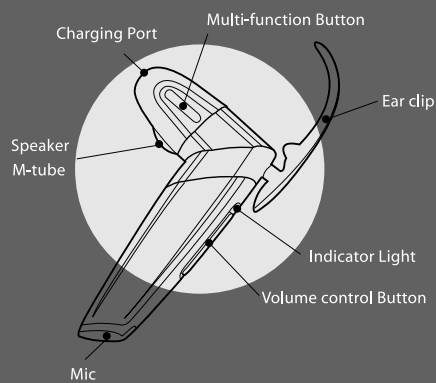

Charging a headset

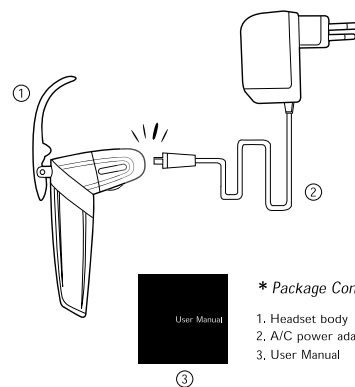

* Package Contents

1. Headset body
2. A/C power adapter
3. User Manual

III "Pair" to your Bluetooth phone

Before you use your headset for the first time, you should pair it with the device like Bluetooth phone that you want to use it with.

Make sure the headset is Off.

6sec

Press and hold the Multi-function button nearly for 6 seconds until you see Blue and Red light blinking then release.

Set your Bluetooth phone to "discover" the headset by following your phone instruction. Typically, find "Bluetooth" menu on your phone and then select the option to "discover" a Bluetooth device.

Your phone will find headset model name and ask if you want to pair with it. Confirm this by pressing "yes" or "ok"

Enter passkey or PIN = 0000(4 zeros), then press "yes" or "ok". A melody is heard after successful pairing

A connection is automatically made after power on of headset if there is a phone previously paired

IMPORTANT:
If pairing is successful, the blue indicator light will briefly flash rapidly before going back to flashing two times every 5 seconds. If unsuccessful, the blue indicator light will flash one time every 5 seconds.

OPERATION

*

III Turning on/off headset


	How to act	Tones	Indicators
Turning on headset	Press and hold the Multi-function Button for approximately 3 seconds.	Turn-On melody	The Blue indicator light will flash while the power is on.
Turning off headset	Press and hold the Multi-function Button for approximately 7 seconds.	Turn-Off melody	The Blue indicator light will stop flashing after Red flashing.

III Wearing a headset


Bluetooth Headset can be worn on either ear, giving great comfort by the air-cushioned ear-piece that comes with the product. To place the headset in your ear, please follow the simple instruction as provided.

A. Wearing on the right ear.

5

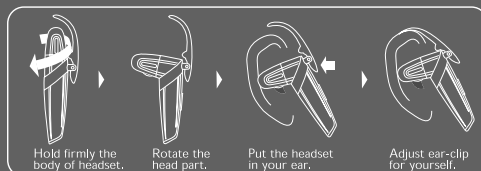

B. Wearing on the left ear.
Rotate the top of headset to opposite site.



III Making a call

2sec

*Using voice-activated dialing
First, you should check up the compatibility of voice dialing on your phone.
If it's possible, please set up voice tags on the phone. (Voice tags should be set up on the phone first)
-Press and hold the Multi-function button, you will hear short beep and long beep with two-second interval.
-Then say the name of person to call.
-You can hear connection melody when the connection is made.

NOTE: Record voice tag from headset for better reception.

*Last number dialing
-Press the Multi-function button short.
-You can hear connection melody when the connection is made.

III Ending a call

Press the Multi-function button short or end a call with a keypad of the mobile phone.

III Reject an incoming call

Press and hold multi-function button for 2 seconds and release button when you hear beep sound

III Answering a call

Press the Multi-function button short when you receive an incoming call.

Answer the call with your phone's keypad. You may then need to transfer the call to the headset by pressing and holding the Multi-function button.(for about 2 seconds)



III Transfer a call

If you want to transfer the call from headset to phone (or from phone to headset), press and hold the multi-function button for about 2 seconds until you hear beep.



III Call-Waiting (3way calling)

Before using 3 way calling with headset, make sure that a phone supports the Hands-free Profile. And it is always assumed under the condition that the service operator provides "call hold and/or multiparty" services through the mobile network.

7

(Recommended) Use standard method by pressing "send" button of your phone.

Press and hold volume down(▼) button until you hear short beep 3 times (approximately 5 seconds), then you can accept waiting call and release active call.

Press and hold volume up(▲) button until you hear short beep 3 times (approximately 5 seconds), then you can accept waiting call and hold active call.

III Volume control & Mute function

You can adjust the volume by pressing volume up(▲) and volume down(▼) button. Press and hold the volume down(▼) button for 2 seconds to make the headset become muted. A melody shall be heard every 10 seconds after successful mute function setting.

* To stop muting, press and hold the volume-down(▼) button for 2 seconds.

III Status Indicator

Status	LED Indication	Audio Indication
Power ON	Blue flash	Turn on melody
Power OFF	Red flash	Turn off melody
Standby Mode	Blue flashes 1 time every 7 second	
Active Mode/On call	Blue flashes 3 times every 5 second	
Charging	Red solid light	
Charging Complete	Red Light off	
Low Battery	Blue changes to Red	Double tones repeated 3 times every 28 second
Pairing Mode	Blue and Red flashing repeatedly	

III Multi-Point function

1. What is Multi-Point

You can connect your headset to 2 bluetooth devices. And you are able to use them simultaneously.
(1) Control 2 bluetooth devices with 1 headset.
(2) You can identify which mobile is ringing with different melody.
(Note: Multipoint connection cannot be worked some mobile phone.

2. Pairing for Multipoint Connection

* The First Pairing

- (1) Ensure the headset is on pairing mode.
- (2) Search your headset from your mobile phone by following your phone instruction
- (3) Connect the first mobile phone after than connect the second mobile phone.

(Note) Please connect headset one by one.

* Recovering Multipoint connection

- (1) Ensure the headset is already connected to the first Mobile phone.
- (2) Push and hold the Vol-up button for 2 seconds until you hear beep sound, After than push the Multi-Function button at once. Then the headset will be connected to the second mobile phone

(Note) Make sure that your second mobile phone was previously paired.

3. How to use Multipoint

[Receiving a phone call]

- (1) Receiving a phone call
- Please push multi function button shortly then you can receive a phone call.
And you can reject by pushing Multi point function for 2 seconds.

(Note) Your headset will automatically switch to the first ringing mobile phone.

- (2) Receiving a phone call from the second mobile phone while the first mobile is on the line.

- Please push multi Function Button shortly then the first call will be stopped.

- Then push the multi function button shortly again to start the second call.

- You can reject the second call by pushing multi function button for 2 second until

you hear the beep sound, After then please release the button to continue the first call.

(Note) Please connect your headset via Handsfree profile to use this reject function

[Make a phone call] : Please select and switch the mobile phone which you want to make a phone call. Then follow the same instruction as described already.

* Switching Mobile

When the mobile is Multipoint connected, you can switch mobile by pushing Vol-Up Button for 2 seconds until you hear the beep sounds. After then please release the button to switch the mobile.

9

Specifications

Bluetooth Compliance	B/T 1.2 compatible with headset and hands-free profile
Output Power	2.5 mW(0.0025 watts)
Maximum Cordless Distance	30 feet (10 meters)
Weight	15g
Standby Time	150 hours
Talk Time	5 hours
Charging Time	1.5 hours
Battery	Lithium polymer (3.7V/100mAh)

Safety and General Information

1. Please read this guidebook carefully and follow the instruction.
2. To avoid any damage or malfunction of the unit, do not drop it from high place.
3. Keep away the unit from humidity, water and any other liquid. And if the unit is exposed by water, moisture and other liquid directly, then do not operate it normally to avoid any electrical shock, explosion and damage of the unit.
4. Do not place or keep the unit near the heat sources such as direct sun light, radiators, stoves or other apparatus which produce heat. It may cause explosion, degrade of performance and reduce battery life.
5. Do not modify, repair & disassemble the unit at discretion (Especially battery: It may cause an explosion)
6. Do not place the heavy objects on the unit.
7. Use only a charger supplied and approved by the manufacturer.

8. Replacement or repair service must be done at a qualified service center or returned to the manufacturer.
9. Unplug this unit when unused for long period of time or during lightning.

*CAUTIONS: ELECTRIC SHOCK HAZARD

The battery used in this device may present a risk of fire or chemical burn if mis-treated.

FCC STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for ANY interference, for example RADIO or TV interference, caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

EU

This product is CE marked according to the provision of the R&TTE Directive (99/5/EC).

Hereby, a supplier declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

You can find the DoC from following website: www.movon.co.kr/certificate/rtte

Please note that this product uses radio frequency bands not harmonized within EU. Within the EU this product is intended to be used in Austria, Belgium, Denmark, Finland, France, Germany, Greece, Ireland, Italy, Luxembourg, The Netherlands, Portugal, Spain, Sweden, United Kingdom and within EFTA in Iceland, Norway and Switzerland.

Bluetooth is a trademark owned by the Bluetooth SIG, Inc.

Warranty

The condition of this warranty and our responsibilities under this warranty are as follows:

Supplier's warranty is non-transferable. And this warranty is limited to the original purchaser only.

- " You must be able to prove the date of original purchase of the unit with a dated receipt.
- " The warranty is not applicable if the product has been subject to physical abuse, improper installation, modification or repair by unauthorized third party.
- " The responsibility of supplier's products shall be limited to the repair or replacement of the product at its sole discretion.
- " Specifically exempt from any warranty are limited-life consumable components subject to normal wear and tear such as batteries, earbuds and other accessories.
- " A supplier will not take any responsibility if the failure of the unit has resulted from accident, abuse, misuse, or any unauthorized repair, modification or disassemble.
- " Modification and repair of the unit should be done by authorized and qualified service personnel, Center or returned to the manufacturer.
- " This warranty gives you specific legal rights, and you may also have other rights which vary under local laws.

WEEE Symbol Information



Correct Disposal of This Product (Waste Electrical & Electronic Equipment)

(Applicable in the European Union and other European countries with separate collection systems)

This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

*** IMPORTANT NOTE:** To comply with RF exposure requirements, this device may not be co-located with any other transmitter or antenna