


# J-310M

## Quick Guide

NC-600


Bluetooth™ Head



## Quick Pairing With your mobile

### 1. Turning On


Press and hold VOL-UP button for 3 secs. LED turn to green ,then release the button it will flash intermittently every 1.28 seconds. ( as below )



### 2. Pairing/Register

Press and hold Answer/End button for 5 seconds for pairing. There will be one loud beep and then Green LED will flash fast for 120 seconds.

Pairing duration in 120 seconds. ( as below )

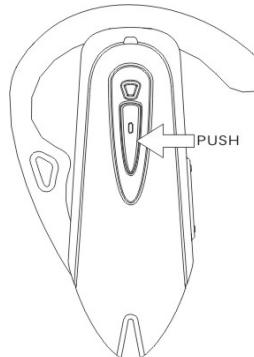

### 3. Connect Mobile and Headset

\*\*note A: The pairing steps would be different from those on the mobile you use.


Normally you can find Bluetooth service in the 'tools', 'Bluetooth' or 'connect' ect. menu.

1. Press 'searching device'. You will see J-310M on your screen.
2. Press J-310M and type '0000' as the pin code to pair your headset and your mobile.
3. After pairing, please connect headset and mobile again.

### 4. Answer incoming call

When there is an incoming call, the ring tone will be heard (volume up), TAP Answer/End button to accept the call.


\*\* see not A

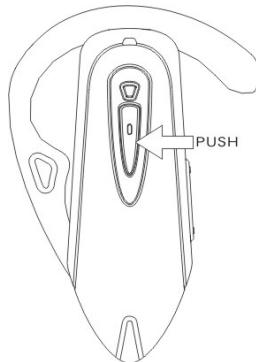

### 5. Volume up and volume down

When you want to increase the volume, you just need to tap up the button.

When you want to decrease the volume, you just need to tap down the button.

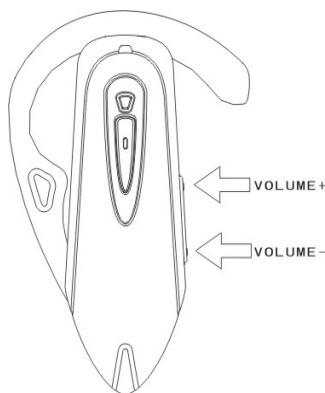


## Contents

### J-310M Introduction

I. J-310M Overview -----	P.3
II. J-310M Charging Method -----	P.4
III. J-310M Operation Guide	
1. Button functions table -----	P.5
2. Turning On -----	P.6
3. Pairing/Registering-----	P.6
4. Turning Off -----	P.7
5. Connect with cell phone -----	P.7
6. Answer incoming call -----	P.7
7. Rejecting incoming call(handsfree) -----	P.8
8. Voice dial(handsfree) -----	P.8
9. End call -----	P.8
10. Disconnected from cell phone( handsfree)-----	P.9
11. Call transfer( handsfree) -----	P.9
12. Mute -----	P.9
13. How to wear headset -----	P.10
IV.LED Indicator Guide -----	P.11
V.Audio Indicator Guide -----	P.11

## **J-310M Introduction**

### **I. J-310M overview**

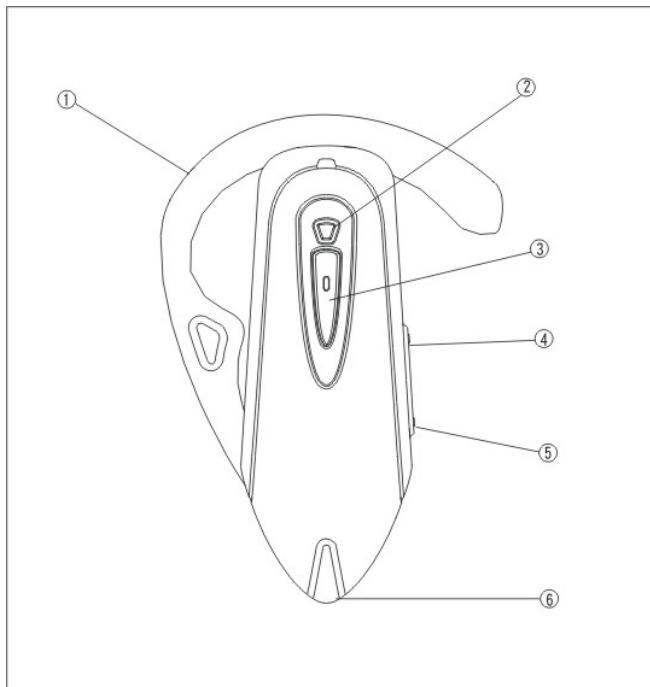

1. Ear hook
2. LED
3. Pick up / end calls
4. Volume up
5. Volume down
6. Microphone

## II. J-310M Charging method

### 1. Charging information

- It takes at least 6 hours when you first charge the battery.
- When the LED of the headset is flashing RED, the battery is low.
- When LED is not lit, the battery is dead and no calls may be made.
- Please only charge when the battery is low, and do not stop charging until the battery is full. Please follow the correct charging method to give your battery a longer life. Not following these guidelines will invalidate your warranty.

### 2. Charging Steps

Connect the charger cable to the charger connector on the headset



- ◆ Please take out the MINI USB charger in the package and plug into the MINI USB port on the headset.
- ◆ LED will be red flashes during you are charging.
- ◆ When the battery is full, LED will be permanently red

### Battery information

Please read and follow the information and user's manual for your reference

- Always try to keep J-310M between -20 to +55
- Do not place this product in strong direct sunlight or extremely hot or cold temperatures.
- Please keep the product away from humid conditions. Do not get it wet.
- Leaving the headset in hot or cold places, such as a closed car in summer or winter conditions, will reduce the capacity and lifetime of the battery.

### III. J-310M Operation Guide(Function key table)

Each button on the headset performs a different function depending on how long it is pressed by the user.

Instruction and key definition	Duration
TAP	Press briefly
PRESS	Press for approximately <u>2</u> seconds
PRESS and HOLD	Press for approximately 3~5 seconds
BT1 Bluetooth pairing mode (multi-compatible) *Note1	Press until hear a beep. Green and red LED quick flash into <b>BT1</b> pairing mode.
BT2 Bluetooth pairing mode *Note2	Press until hear beep twice. Green LED quick flash into <b>BT2</b> pairing mode.

**Note 1:**BT1 could be paired with 5 different Bluetooth equipments.(including mobile phones).

**Note 2:** BT2 is suggested to be used with the Bluetooth equipment you use all the time,

#### 1. Button functions table


See the picture on the right

Action	Button	Answer/End button			
		Incomingcall Alert	On call	Standby	With BT link
Tap		Answer incoming call	End call <b>*Note1</b>	Link to BT1 mode	Voice Dial <b>*Note2</b>
Press until two beeps are heard		Reject Incoming Call <b>*Note2</b>	Call Transfer <b>*Note2</b>	Link to BT2 mode	Disconnect BT link
PRESS and HOLD				Registering BT2 mode	



See the picture on the right

Action	Button	VOL Up button	VOL Down button
tap		Increase volume	Decrease volume
Press until two beeps		MUTE MIC	Dis-mute
PRESS and HOLD	Power On/off	registering <b>BT1 mode</b>	




**Note 1:** For mobile phones with a hands-free option, the mobile may disconnect the BT link after ending a call. For mobile phones with a headset profile, the mobile phone will disconnect the BT link after ending a call. The behavior is dependent on the mobile phone.

**Note 2:** Only available for mobile phones with hands-free profile.

**Note 3:** The Ring tone ascends in volume.

## 2. Turning On

Press and hold VOL-UP button for 3 secs. LED turn to green ,then release the button it will flash intermittently every 1.28 seconds. ( as below )



## 3. Pairing/Registering


### BT1 pairing mode (multi-compatible)

Press and hold VOL-DOWN button 5 seconds for BT1 pairing. There will be one loud beep and then Green and Red will flash change quickly for 120 seconds.(as below)

Into BT1 pairing mode.

\*\*Note A: The pairing steps would be different from those on the mobile you use. Normally you can find Blueooth service in the 'tools', 'Bluetooth' or 'connect' etc. menu.

1. Press 'searching device'. You will see J-310M on your screen. 2. Press J-310M and type '0000' as the pin code to pair your headset and your mobile. 3. After pairing, please connect headset and mobile again.



### BT2 pairing mode

Press and hold Answer/End button for 5 seconds for BT2 pairing. There will be one loud beep and then Green LED will flash fast for 120 seconds.

Pairing duration in 120 seconds. ( as below )

Into BT 2 pairing mode


\*\*Note B: 1. Some mobiles when in power-saving mode will disconnect from the Bluetooth headset, so the ring tone for incoming calls will not be audible.

2. If this happens, please press the button until you hear two beeps, then release. The headset will

connect with the phone and the ring-tone will sound.


\*The other option is to talk directly using the phone.

P.S. Using this function will increase battery drain and reduce stand-by time.



#### 4. Turning Off


In normal mode, Green LED flashes intermittently every 1.28 seconds, press and hold VOL-UP button for 3 secs. LED will go out. (as below)



#### 5. Connect with cell phone


In Stand by mode (green LED flash every 2.56sec), TAP Answer/End button, the headset will create a connection with BT1. (As below)

| In normal mode, PRESS Answer/End button until two beeps are heard then release, the headset will create a connection with BT2. (As below)

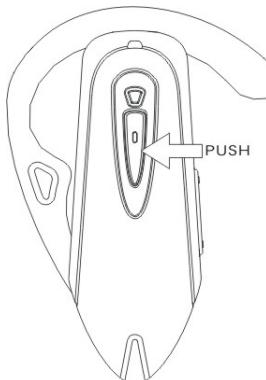


## 6. Answer incoming call

When there is an incoming call, the ring tone will be heard (volume up), TAP Answer/End button to accept the call.

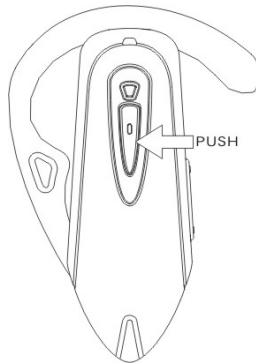


## 7. Rejecting incoming call (hands free) –P.5 Note 1 for your reference

When there is an incoming call RING TONE, PRESS Answer/End button until two short beeps are heard, and then release Answer/End button to reject the incoming call.




## 8. Voice dial–P.5 Note 2 for your reference

In link with mobile mode, TAP Answer/End button. Voice dial function will be activated.

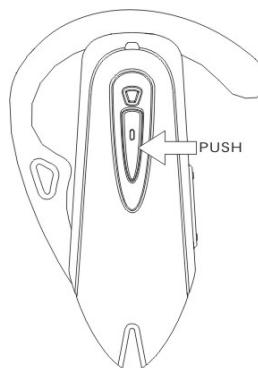


## 9. End call

In talk mode, TAP Answer/End button, the current call will be ended.




## 10. Disconnected from cell phone(hands free) –P.5 Note 2 for your reference

Answer/End button until two beeps are heard and then release. The Bluetooth link will be disconnected.




## 11. Call Transfer (hands free) - P.5 Note 2 for your reference

During talking, PRESS Answer/End button until 2 beeps are heard then release. The current call will be transferred between the cell phone and the headset.

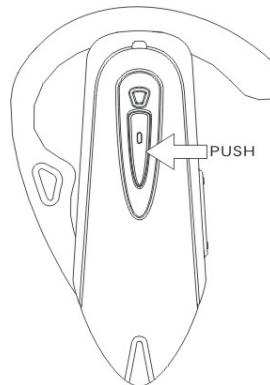

## 12. Mute

PRESS VOL down until two beeps are heard and release, the MIC (AD signal) path will be muted. The user's voice will not be transmitted to the remote cell phone. RED LED lights up in mute mode.(To lift the Mute function, repeat the action again)

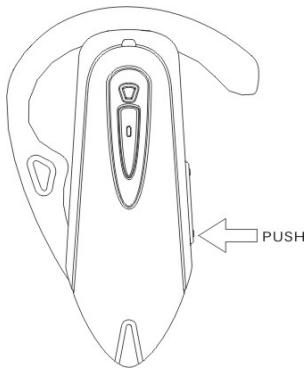


## 13. Wearing the headset

The design of Wireless Headset is very flexible and convenient.

The factory defaults and the instructions in this manual are for wearing the headset on the right ear. You may experience a little discomfort on first use, which will disappear as you become accustomed to using it.

Follow these steps:

1. Pull the ear hook so that it is perpendicular to the headset as shown in the figure below.
2. Loop the ear hook behind the ear as shown, and press the headset to the ear.
3. Point the microphone to toward the month.
4. Adjust your ear hook until it suits your ear.

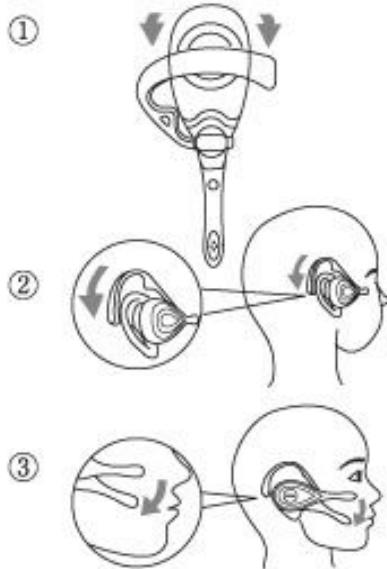

### **Wearing the headset on the left ear**

If wearing the headset on the left ear is preferred, the ear hook to the other side of the headset is easily adjustable. Refer to the figure below.



## IV. LED Indicator Guide

Model	LED
Registering/Pairing	BT1 : red and green quick flash
	BT2 : Green LED quick flash
StandBy	Green LED flash interval every 2.56 sec.
During talking	Green LED flash interval twice every 2.56 sec.
Charging	Red LED slow flash
Charge completed	Red LED permanently flash
Mute	Red LED permanently flash
Battery Low	Red LED slow flash

## V. Audio Indicator Guide

MODE	Audio indication	COMMENT
Registering/Pairing	BT1 high—low—high	So—Mi—So
	BT2 high—low—high	So—Mi—So
Establish Audio Link	high—low	Di—Do
Link disconnect	low—high	Do—Di
Incoming Call	Series tone	crescendo
TAP any button	A short beep	beep
Ends call	Series of two beeps	Beep beep
Turn on	low—high	Do—Re—Mi—Fa
Turn off	high—low	Fa—Mi—Re—Do
Mute	Series of two beeps	beep
To lift Mute	Series of two beeps	beep
Battery low	2 beeps interval every 20 seconds	beep
Volume up	Single high tone	So
Volume down	Single low tone	So

## **Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**FCC Caution:** To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.