

Technical Features:

- Wireless Bluetooth® technology.
- Built in Bluetooth® module to support most of Bluetooth® compatible mobile phones.
- DSP full duplex hands free conversation with digital echo cancellation and background noise reduction for superior sound and voice quality.
- 30ft. range of operation.
- Talk time: 8 hours max
- Standby time: up to 150 hours max
- Auto Shut-off feature when disconnected for longer than 30 minutes.
- When power consumption too low will shut off automatically

System Overview:



Technical Specs:

Standard Bluetooth	HFP V1.0 A2DP AVRCP
Working distance:	UP TO 30 ft
Output power:	0dBm(class 2)
Power consumption:	Low as 0.1 mA
Output consumption :	100-350mA (Working) one speaker 100-550mA (Working) two speaker
Charge time :	Initial charge 2 hours



A. POWER/Hang up	B. Answer
C. Volume Down	D. Volume Up
E. Play/Pause	F. Stop
G. LINE IN LED	H. Charge LED Signal
I. Microphone	J. Microphone
K. LCD Display	L. Microphone
M. USB JACK	N. 3.5mm LINE IN JACK
O. Head Phone	

1

2

BT1250 Function Instruction:

Power Up	" HANG UP/POWER " 2 second
Pairing	During LCD Appearance DISCONNECTED, CONNECTED, WORK A2DP Press " Answer " 2 second
Cancel Pairing	During LCD Appearance PAIRING Press "-" once
Back to Bluetooth, unconnect Bluetooth power	During LCD Appearance EXTRA AUDIO IN press " PLAY " 5 second
A2DP MODE while mobile connected with BT-1290	During LCD Appearance WORK A2DP press "+" 5 second
Mobile Off A2DP Connecting	During LCD Appearance CONNECTED Press "+" 5 second
Mobile Off	During LCD Appearance CONNECTED Press "+" 5 second
A2DP OFF	During LCD Appearance WORK A2DP Press "+" 5 second
Play/Pause	During LCD Appearance WORK A2DP Press " PLAY " once
Stop	During LCD Appearance WORK A2DP Press " PLAY " 2 second
Last Song	During LCD Appearance WORK A2DP Press " HANG_UP " once
Next Song	During LCD Appearance WORK A2DP Press " ANSWER " once
Volume Up	During LCD Appearance CONNECTED, DIALING, RINGING, WORK A2DP Press "+" once
Volume Down	During LCD Appearance CONNECTED, DIALING, RINGING, WORK A2DP Press "+" once

VOICE DIAL	During LCD Appearance CONNECTED, WORK A2DP Press "+" 2 second
Hang Up	During LCD Appearance CONNECTED Press " HANG UP " once
Reject Call	During LCD Appearance RINGING press " HANG UP " once
REDIAL	While Connected press " ANSWER " 2 second
3 Way Call Waiting	When have incoming Call press " Answer " once
3-Way Caller Waiting, Hold current call	When first call is on Hold Press " Answer " once
3 Way Conference Call Activate	When have call on hold press " PLAY " 2 second

Package Contents:

1. STEREO HANDSFREE CAR KIT
2. USB
3. User manual
4. Car charger adapter
5. Battery
6. 3.5mm LINE IN



Accessories:

External Speaker for Hi-Fi stereo sound




Operation Guide:

1. Install Battery. Please unscrew the battery back cover screw. Install the battery and secure the back cover
2. Red light indicator on shows that the device is in need to charge, Red light off shows the device is fully charged, device has built-in overload protection.
3. To use this Bluetooth device, a Bluetooth handset must be paired with the device to for proper use. Password for pairing is "1234".
4. This device provides clear and superior sound quality, working distances from user to the microphone is 10-30 Cm.

STEREO HANDSFREE CAR KIT

User manual

BT-1250

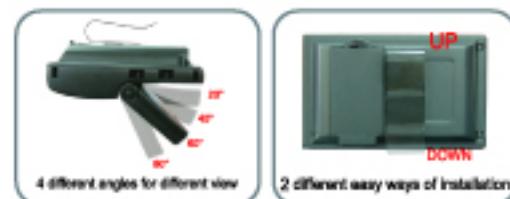

• Bluetooth® • CE • FCC • RoHS

Patented and Copyright ©2006 Sunswell Technology Co.,Ltd. All rights reserved.

Operation Guide:

Charging Methods

1. Please insert the mini USB into the device, insert the other end into the computer. *Note: Initial charge is 3 Hrs for the 1st time.
2. Red light shows that the device is charging, red light off it shows the device is at full charge.
3. Can also be charged with the cigarette lighter adapter included.

Safety and General Information:

- Please use standard accessories and parts approved or provided by manufacturer. If used improperly damage to the device may occur.
- If the device is not in use for a long period of time, please remove the battery from the unit.
- Please do not expose the device to water or attempt to disassemble the device. If exposed or disassembled, user may be at risk from electric shock, warranty for the unit will also be void.
- Please handle this product with care, without proper care the device may not function properly.
- Please do not use this product in the aircraft and in the hospital.
- Temperature may rise when charging; this is normal when charging.
- Please do not expose the device under the sunlight directly
- Please use this product in a dry environment with proper ventilation.
- Please use a neutral sanitizer while cleaning the surface

FCC

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warranty Terms & Conditions:

- Warranty is only honored to the country where the products are sold.
- Warranty takes effect on the date of purchase. Please have all documentation ready when device is submitted for warranty repairs.
- The warranty covers all consumers & retailers, within the warranty period.
- The warranty covers all repairs and/or replacement of component and accessories which are determined as being defective by our technical departments.
- 12 months warranty for the device & 6 months for battery.
- Claims can be validly be made only upon presentation of proof of purchase through an invoice or receipt.
- If the battery needs to be replaced, please buy the NOKIA 7210/6610/2100 battery at your local retailer.

The following situations refuses and is not covered in warranty

- Device and accessories having been repaired or altered by persons not authorized.
- Device is recognized under poor working condition and with noticeable defect.
- Not used in accordingly under the explanation of the owners manual
- Original equipment was not used accordingly.
- Damage is caused by a short from the computer.
- Misuse of the product not specified by the owner's manual.
- Other exemption from non warranty are the following : Interventions due to a faulty installation or connection failure due to the electrical installation of the premises or vehicle or of nominal values provided for the supply of the device. Manipulation, or user insufficient, incorrect maintenance, a fall or a blow during transport of the device.

FCC

NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.