

CZO-510

藍芽耳機



使用手冊

目錄

安全和性能介紹.....	3
簡介：什麼是無線藍芽技術？.....	4
如何使用無線藍芽耳機？.....	5
耳機圖解.....	6
使用方法.....	7
耳機佩戴.....	9
開關耳機.....	11
耳機與手機配對.....	12
調整耳機音量.....	14
撥打及接聽電話.....	15
耳機指示燈 LED.....	16

安全和性能

有關安全及有效使用的重要訊息，請於使用設備前閱讀。用戶不能對設備進行任何更改。任何未經許可的更改都可能導致保修的失效，此設備運作過程中必須符合以下 2 個條件：(1)此設備不能產生任何有害干擾，同時(2)此設備必須能夠接受可能干擾，包括可能會導致非正常工作的干擾。

電磁干擾與電磁兼容

註：幾乎所有電子設備，如果不適當包裝、設計或電磁兼容配置，都極易產生電磁干擾。

在某些場所中，為避免電磁干擾或兼容衝突，請依該場所提示要求，開關您的電子設備。醫院及健康機構使用的某些設備極易受到外置射頻的影響。

在飛機上，在登機後，請依要求關閉您的電子設備。任何電子設備的使用均符合機艙機組人員規定。


簡介：什麼是無線藍芽技術？

藍芽技術是指在無線的情況下，利用內置無線電收發設備進行溝通：此內置無線電收發設備為保證全球兼容性，可接收全球的無線電頻率。此款無線藍芽耳機可在約 10 米(33 英尺) 範圍內與任何一個藍芽設備進行溝通。

如何使用無線藍芽耳機？

此款無線藍芽耳機使您可以隨心地與市場上銷售的絕大部分具備藍芽功能的手機連接使用，例如摩托羅拉 **V3, A780**，多普達 **818** 等藍芽手機。它具備以下功能：

- ★ 來電時鈴聲提示
- ★ 使用免持功能
- ★ 使用耳機多功能鍵處理來電及撥打電話
- ★ 利用聲控撥號

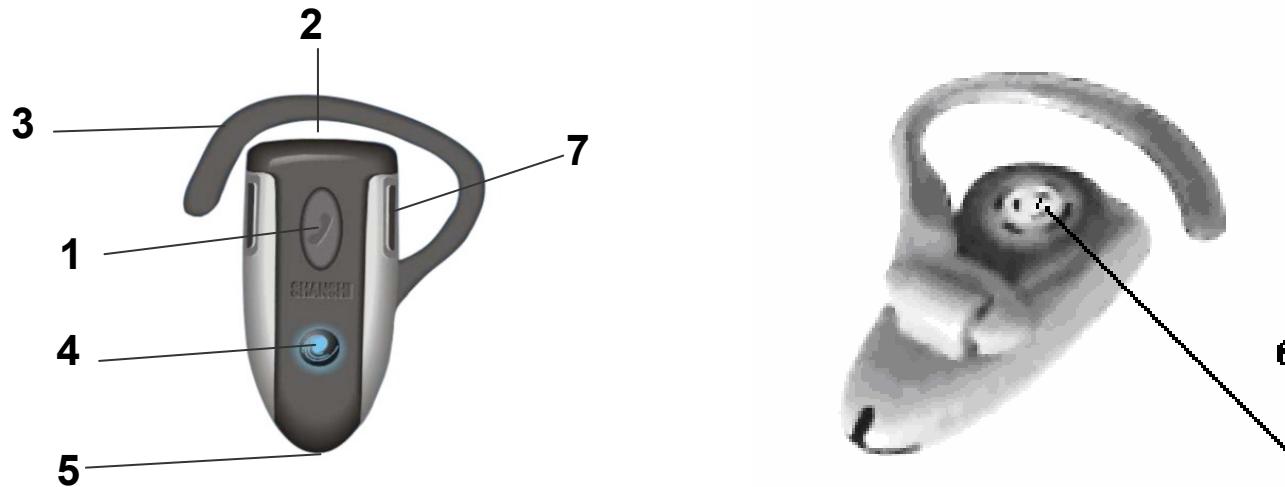

耳機圖解

- 1、多機能鍵——控制耳機多種功能（開機、關機、連線、接聽）
- 2、充電接口——與充電器連接進行耳機充電
- 3、掛 鈎——用於將耳機掛在耳朵上
- 4、耳機顯示燈 LED——顯示耳機狀態
- 5、麥 克 風——傳達聲音
- 6、聽 筒——播放通話
- 7、音量控制鍵——控制聽筒聲音大小、重撥電話、拒絕接聽、結束通話

使用方法

充電

何時充電

首次充電——在使用耳機前，請將隨機電池充電 2 小時；

重複充電——當每隔數秒持續聽到一聲高音，並且看到紅色 LED 持續點亮時，表示耳機需要再次充電；電壓過低時，在開機後會立即聽到兩秒的關機音樂(樂聲 So-Me-Do)，音樂結束後耳機即自動關機。

隨著使用時間，電池功能下降並需要較長時間進行充電，屬於正常現象。同時，耳機通話時間越長，電池的待機時間越短。

註：如您需要暫時 (≥ 2 週) 不使用藍芽耳機，為延長您的藍芽耳機及電池使用壽命，務必請先行將充電電池充滿。

如何充電

操作步驟

- 1、 將適配充電器插入耳機中即可；也可以使用 PC 上 MUSB 接頭充電。
- 2、 將充電器插入電源中，充電時紅燈持續亮著，充飽後熄滅；耳機在充電過程中無法使用。耳機大約 2 小時即可充足電。
- 3、 當充電完畢後（顯示燈熄滅後），拔掉充電器電源，將充電器接頭拔出，拔掉充電器時會閃一下藍燈。



註：電池在充滿電量情況下提供約：

- ★ 通話時間：4 小時
- ★ 待機時間：160 小時

電池與耳機佩戴

耳機佩戴圖示



操作步驟

- 1、將耳機掛鈎旋轉 45 度。
- 3、將耳機機身靠近耳朵。

- 2、將耳機掛鈎在耳後。
- 4、將麥克風對準嘴部。

改變至左耳佩戴模式

操作步驟

- 1、 將耳機掛鈎向外旋轉 90 度。
- 2、 輕輕抬起並拉起耳機掛鈎頂部，與耳機扣鈕分離；取下耳機掛鈎。
- 3、 旋轉耳機。
- 4、 將耳機掛鈎底部按在耳機下端的扣鈕上，將掛鈎與耳機扣鈕扣緊。



開關耳機

開啓耳機

操作步驟：按住多功能鍵大約三秒鐘左右，聽到一長聲高音後，直至 LED 顯示燈閃爍，閃爍有以下三種狀態：

- 1、未連線時（未配對過）：紅、藍色 LED 交錯閃爍。
- 2、未連線時（已配對過或已配對）：藍色 LED 閃爍。
- 3、已連線時：紅、藍色 LED 同時閃爍。

關閉耳機

操作步驟：按住多功能鍵不放直到聽到一短聲的低音，放開多功能鍵，此時會聽到兩秒的關機音樂（樂聲：SO-ME-DO），音樂結束即完成關機程序。

耳機與手機配對

注意：在使用耳機通話前，耳機必須與手機配對。

“配對”是指在藍芽設備之間建立聯繫，同時使手機儲存耳機獨有識別 ID。當耳機與手機實現配對後，耳機自動與手機連接。

配對：將耳機與手機放置在一起，距離約 20cm。

操作步驟

- 1、當耳機在關機狀態下，按住多功能鍵兩秒鐘左右，直至紅、藍色 LED 交錯閃爍（藍芽耳機未曾與手機配對過）。
- 2、啓用手機尋找設備功能。有關手機尋找設備功能，參見手機使用手冊。當手機檢索完成後，手機顯示找到的所有設備。

- 3、在設備列表中選擇 CZO-510，根據手機提示確認。
- 4、在手機確認過程中，輸入密碼“0000”並確認匹配耳機與手機。設備 ID 將存儲在手機內存中。耳機顯示燈將藍、紅同步閃爍顯示耳機配對成功。

與其他設備配對

耳機可儲存最多 8 個藍芽設備的配對訊息。所有設備將按照配對次序先後被儲存在耳機“配對設備列表”中。當與超過 8 台設備進行配對操作時，最早配對設備將被從配對設備列表中清除。

已實現配對過的 8 個設備都可與耳機啓動連接。

耳機只能與最後一個配對設備實現自動啓動連接。如果您想啓用配對設備列表中的其他設備，您必須利用該設備啓動連接。8 個設備中任何一個最近一次與耳機建立了連接，接下來則該設備被默認為最後與耳機建立連接的設備。

在連接狀態下的耳機，須先斷接後，才能與其他設備實現配對或連接。

調整耳機音量

增大或減小音量

增大聽筒音量，請重複按上升音量控制鍵，直到達到理想音量。

減小聽筒音量，請重複按下降音量控制鍵，直到達到理想音量。

撥打及接聽電話

耳機同時支持免持及耳機功能。撥打電話功能取決於您的手機的相應功能。

注意：有些手機並不支持列表中的所有功能。 請參閱您的手機使用指南。

您可以使用以下列表所有的免持通話功能：

功能	設備狀態		操作步驟
	手機	耳機	
聲控撥號	待機	開機	輕按一下多功能鍵，如手機端支持語音撥號功能，會聽到語音撥號提示音，說出名字，電話撥出
重撥電話	開機---聲控撥號開或關	開機	同時按住音量大小控制鍵，並同時放開
結束通話	開機---在通話中	開機	輕按一下多功能鍵
讓一方通話等待	開機---通話中	開機	長時間按住多功能鍵
接聽電話	開機---手機鈴響	開機	輕按一下多功能鍵（電話接通）
拒絕接聽	開機---手機鈴響	開機	同時按住音量大小鍵不放，直到聽到一短聲的低音後，同時放開音量鍵
手機通話轉至耳機	開機---在通話中	開機	同時按住音量大小控制鍵，並同時放開
耳機通話轉至手機	開機---在通話中	開機	同時按住音量大小控制鍵，並同時放開

耳機顯示 LED

充電器插入時

耳機顯示燈	狀態
紅色 LED 亮	充電中
紅色 LED 熄滅	充電完畢

無充電設備接入時

耳機顯示燈	狀態
關	關機
紅、藍色 LED 交錯閃爍	配對模式中（耳機第一次與手機配對）
紅、藍色 LED 同步閃爍，約 5 秒一次	配對成功
紅、藍色 LED 同步閃爍，約 5 秒一次	待機（未在通話中）
持續閃爍紅色 LED，並有來電鈴聲	來電時
紅、藍色 LED 同步閃爍，約 1 秒一次	連線中（通話中）
紅、藍色 LED 同步閃爍，約 5 秒一次	掛斷電話後
藍色 LED 約 5 秒閃一次	關機狀態再次開機後，已配對成功

注意：出廠新機開機時，按多功能鍵期間藍燈快閃（半秒一次），聽到“嘟”一聲響後表示開機完成，此時

紅、藍 LED 交錯閃爍，或藍燈閃爍，若未配對 10 分鐘後關機熄燈。

特殊狀況：

操作過程中，若有開機後藍燈或紅燈持續亮燈不滅，則表示有操作錯誤狀況，此時使用充電器進行短暫的充電(1秒即足夠)，拔掉充電插頭時，會閃一下藍燈表示 **RESET** 成功，即可正常使用。

提示音

提示音	耳機狀態
當按下音量控制鍵時發出一聲高提示音	達到聲音最高或最低
每隔數秒持續聽到一聲高音	低電量(30 秒後自動關機)

響鈴	來電
一聲高提示音	配對成功確認
一聲低提示音	啓動聲控
二聲高提示音	聲控未識別
一聲高提示音	結束通話
一聲長高音	開機
一聲短低音後，兩秒鐘關機音樂 So-Me-Do	關機

注意事項：

- 1、如果連接非正常掉線（例如：不在服務區），耳機將需要重新連接。
- 2、正常情況下，耳機的工作距離約為 10 米，但有時會因為其他電子設備的干擾距離有所縮短屬正常現象。
- 3、為保證正常的通話品質，在耳機通話時耳機與手機間不能有明顯障礙物，包括手或衣袋、手機套的遮擋。
- 4、為達到最佳的通話效果，儘可能把手機放置在靠近與藍芽耳機的身體同側，例如耳機配戴左耳時，手機即放在左側。

Welcome

Thank you for purchasing the Bluetooth headset CZO-510, we hope the headset will bring you a whole new delightful feeling of wireless technology.

Contents

GET CONNECTED IN 4 QUICK STEPS.....	21
BEFORE YOU BEGIN.....	22
(1)CHARGE Your Headset's Battery.....	23
(2)START BLUETOOTH Feature On Your Handset.....	24
(3)PAIR Your Headset.....	25
(3)PAIR Your Headset (CONTINUED).....	26
(4)TEST AND USE.....	27
USING YOUR CZO-510.....	28
TURNING ON AND OFF.....	28
CHANGING FOR USE ON OTHER EAR.....	29
WEARING THE HEADSET.....	30
MAKING CALLS.....	31
MAKING CALLS (CONTINUED).....	32
INDICATOR LIGHTS.....	33
AUDIO TONES.....	34
TROUBLE SHOOTING.....	35

GET CONNECTED IN 4 QUICK STEPS



- 1-CHARGE**
- 2-START BLUETOOTH HEADSET**
- 3-PAIR**
- 4-TEST AND USE**

BEFORE YOU BEGIN

Take a moment to familiarize yourself with your CZO-510 Headset.



(1) CHARGE Your Headset's Battery

Charge your headset's battery for 2 hours:

- 1** Plug the charger into the top of the headset. The red indicator light turns on when the battery is charging. It may take up to 1 minute for the light to turn on. When the headset's battery is fully charged (about 2 hours), the red indicator turns off.
- 2** Unplug the charger from the headset.

Note: Headset is not functional while charging.



(2) START BLUETOOTH Feature ON Your Handset

Your phone's Bluetooth feature is off by default. To use your headset, turn on the Bluetooth feature in your phone.

For most phones:

- 1 Select **Menu > Additional Function > Bluetooth.****
- 2 Select **SWITCH ON.****


Bluetooth feature remains on until you turn it off.

Note: These steps are for most phones. For your phone, see your phone's user's guide.

(3) Pair Your Headset

Step One - PUT HEADSET IN PAIRING NODE

Before you can use your headset, you must pair (link) it with your phone.

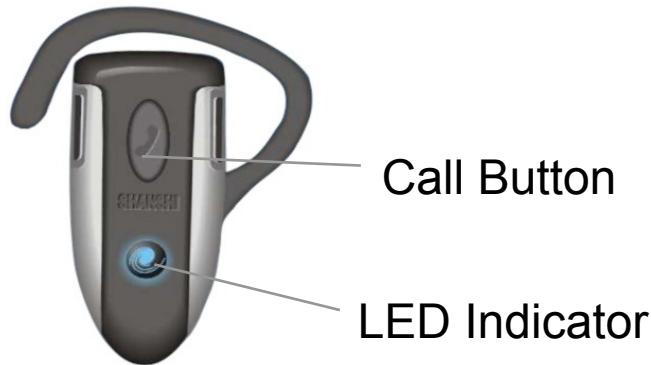

- 1** With the headset power off, press and hold the Call button for 3 to 5 seconds until the blue indicator light turns on and flash. (The light will flash when you first press the Call button.)
- 2** If the indicator light is remain steadily lit, turn off the headset and repeat the step 1.

Note: To turn off headset, see "Turning On and Off" page.

(3) Pair Your Headset (CONTINUED)

Step Two - SET THE PHONE TO LOOK FOR YOUR HEADSET

For most phones:

1 On your phone, select **Menu > Additional Function > Bluetooth > Look for Devices.**

The phone lists all Bluetooth devices it finds.

2 Select **CZO-510.**

3 Select **OK** or **Yes** to pair (link) the device.

4 Enter the passkey : **0000**

5 Select **OK.**

When your headset is successfully paired with your phone, the blue and red indicators will flash simultaneously.

Note: These steps are for most phones. For your phone, see your phone's user's guide.

(4) TEST AND USE

Your phone and headset are now paired and ready to make and receive calls. To confirm they are operating properly, make a call:

- 1 Place the headset over your ear. See "Wearing the Headset"
- 2 On your phone, dial the number you want to call and Press the **Send** Key.
- 3 If your phone and headset are successfully paired, you hear ringing on the headset.

After you have successfully paired your phone and headset, you do not need to repeat these initial setup steps each time you use the headset.

USING YOUR CZO-510

Features and Functions Guide

TURNING ON AND OFF

To turn your headset on, press and hold the Call button for 3 to 5 seconds until the blue indicator light flashes. Then, release the button.

To turn your headset off, press and hold the Call button for 3 to 5 seconds and then turns off.


To conserve battery power, turn off your headset when don't plan to use it for a while.



CHANGING FOR USE ON OTHER EAR

You can wear your CZO-510 headset on your left or right ear. The headset comes ready for the right ear. To change the headset for the left ear:

- 1 Open the ear hook 90 degrees from the headset.
- 2 Gently lift and pull the top of the earhook up and off the upper hinge pin .Then pull it away to remove it.
- 3 Flip the headset over.
- 4 Hook the bottom of the earhook onto the lower hinge pin ,then lift and pull the top of the earhook over the upper hinge pin.

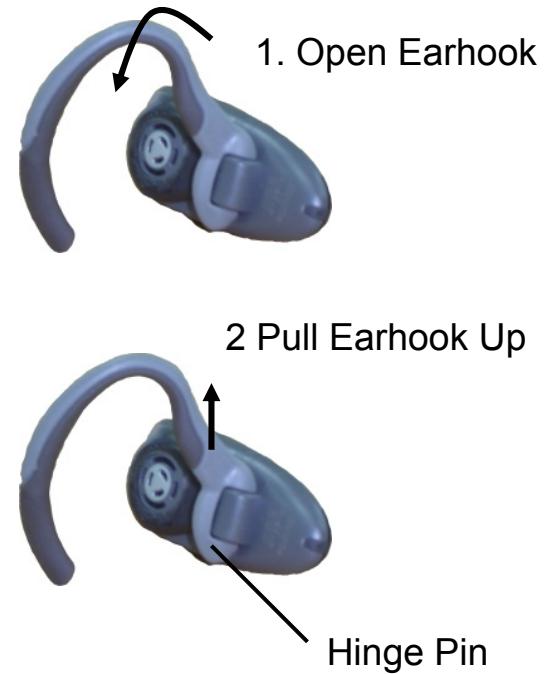

WEARING THE HEADSET

- 1 Open the earhook.
- 2 Loop the earhook over your ear.
- 3 Press the headset to your ear.



MAKING CALLS

Function	Action
Make a voice dial call	Tap the Call button and Speak the name after the tone
Reject a call	Press and hold the two buttons of volume until you hear a beep, then release them.
End a call	Tap the Call button.
Receive a call	Tap the Call button.

Note: Your CZO-510 supports both Handsfree and Headset Profiles. Accessing call functions depends upon which profile your phone supports. See your phone's user's guide for more information.

MAKING CALLS (CONTINUED)

Function	Action
Redial last call	Press and hold the two button of volume and then release them at the same time.
Transfer a call from the phone to the headset	Press and hold the two button of volume and then release them at the same time.
Transfer a call from the headset to the phone	Press and hold the two button of volume and then release them at the same time.

INDICATOR LIGHTS

The indicator light provides information about your headset status.

With the Charger Plugged In

Headset Indicator	Headset Status
Red Led On (light steady)	charging in progress
Red Led Off	charging complete

With No Charger Plugged In

Headset Indicator	Headset Status
Off	Power off
Red, blue light flash	Pairing mode (pairing first time)
Blue light flash	Pairing successful/power on and paired
Both red, blue flash	Connected (on a call)
Blue light Slow pulse	Standby (not on call)

AUDIO TONES

The audio tones provide information about your headset status.

Audio Tone	Headset Status
Music playing when pressing volume button	Adjusting Volume
High tone repeated every 5 sec	Low battery(last for 30 seconds)
Ring tone	Incoming call
Single high tone	Pairing confirmation
Single low tone	Voice activation
Single high tone	End call
Single high tone	Power on
Single low tone followed by So-Me-Do notes	Power off

TROUBLESHOOTING

Make sure the blue light on your headset is flashing when your phone is searching for devices.

Make sure your phone is on and the Bluetooth feature is turned on in your phone. If the Bluetooth feature has been turned off or was turned on only temporarily, you may need to restart the Bluetooth feature.

To reset your stumbled Bluetooth headset, charge the headset for a short period.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.



This symbol on product means the product should not be disposed with household waste. Please do not dispose of mobile telephones or electric accessories, such as chargers or headsets, with your household waste.