


Wireless b/g Skype™ Phone

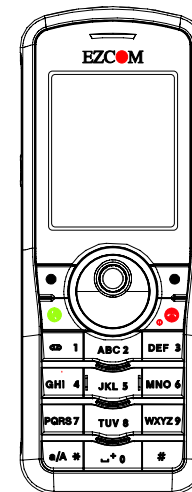

User's Manual
August 2007

Index

Chapter 1 Introduction

1.1 Welcome

Thank you for purchasing this wireless b/g Skype phone. It will enable you to make phone calls using Skype through the broadband internet connection. This wireless b/g Skype phone also supports PC-to-phone calls through SkypeOut™ dialing. In addition you can also receive calls from a phone if you have SkypeIn™.

This wireless b/g Skype phone provides you cordless convenience, so you don't have to sit in front of the computer when you want to talk to their friends.

1.1.1 Getting to know Skype

Skype users can make calls between each other with really cheap cost. Skype also offers additional features, including:

SkypeOut: You can place calls to traditional landline and mobile phones.

SkypeIn: This is a subscription feature that enables you with a traditional number for receiving Skype calls on your wireless phone from traditional landline and mobile phones.

Skype Voicemail™: This feature enables you to send and receive messages and record a greeting.

You can find all these features at www.skype.com

1.2 Familiar with this User's Manual

This user's manual includes the steps for installing and using your wireless b/g Skype phone.

- Chapter 1: Introduction. This chapter includes the brief description of this wireless b/g Skype phone, applications, this user's manual, package contents and care and maintenance.
- Chapter 2: Getting to Know Your Wireless b/g Skype Phone. This chapter includes the physical descriptions and features of the phone.
- Chapter 3: Getting Started. This chapter includes the connection and the setup of your wireless b/g Skype phone.
- Chapter 4: Using Your Wireless b/g Skype Phone. This chapter includes how to make calls and configure different feature of the phone.

1.3 Package Contents

One Handset
One AC power adapter
One Battery
One Quick Installation Guide on CD-ROM
One User's Manual on CD-ROM


1.4 Care and Maintenance











- Keep your phone and accessories away from dusty, wet or dirty areas.
- Don't put your phone or accessories in extremely hot or cold areas.
- Don't use harsh chemicals, cleaning solvents, or strong detergents to clean your phone or accessories.




● Chapter 2 Getting to Know Your Wireless b/g Skype Phone

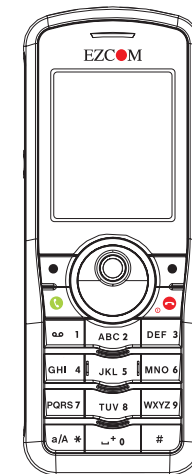2.1 Overall Appearance


2.1.1 Front View and Keys Definitions



Icon	Button Name	Function
	Soft keys	Press a soft key for a displayed menu function.
	Navigation key	Press the navigation key up or down to scroll through menus and settings.
	Space/Receive key	To make or receive internet phone calls.
	Power/End key	To end an internet phone call, quick exit a menu and return to standby. Press and hold the power/end call key to see the Skype menu or power on and power off the phone.
	Alpha/ Star key	To change the characters you are entering. You can select upper case alphabet, lower case alphabet or numbers.
	Pause, Plus, Zero key	To enter a pause, a plus (+) or a zero (0).
	Symbol key	To enter special symbols.
	Keypad Lock/Unlock key	To lock or unlock the keypad, press  and then  .

	Numeric Keypad	Press the keys on the numeric keypad to enter letters and numbers in the phone. When entering a text, press the keys until the letter you want is indicated on the screen.
	Numeric key and Voicemail	Edit: enter number; punctuation:.,?!_@ Long press: access the Skype voicemail
	Numeric and Letter keys	Edit: enter number or character.

2.1.2 Side and Back View

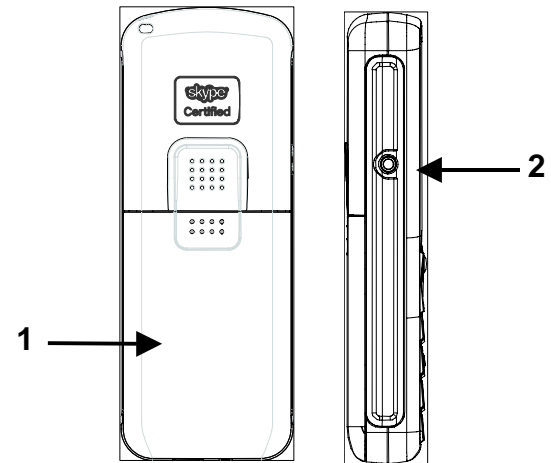

1. Battery compartment

2. Headset port

2.2 Overall Features

- IEEE 802.11b/g WLAN and Embedded 2.4GHz Antenna support
- Bar type ID design
- Polyphonic Ring Tone (MIDI/SMAF)

- SIP v2 signaling protocol, RFC-3261
- 1.8" 128 x 160 (65k) TFT LCD
- Phone Book & Speed Dial
- Multiple Profile Provisioning
- Remote SW upgrade via WLAN
- RF and battery level indication
- Li-ion, 900mAh Nominal
- G.711, G.726, G.729a/b, G.723 CODEC support
- Keypad with backlight
- Key lock (S/W key lock)
- Side key for volume control

2.3 Product Specifications

Specifications	
Standards	802.11b, 802.11g
Band	2.4GHz
Display	1.8" TFT LCD, 128x160 pixel, 65k colors
Environmental	
Dimensions	117.99(L) x 44.99(W) x 20.47(H) mm
Weight	Approx. 100g.
Certification	FCC, CE,
Operating Temperature	0 ~ 40°C
Storage Temperature	-20 ~ 65°C
Operating Humidity	10% ~ 80%

Chapter 3 Getting Started

3.1 Battery Installing and Charging

Step 1: Slide the battery compartment cover downwards to remove the cap.


Step 2: Insert the battery with the metal contacts facing the contacts at the bottom of the battery compartment.

Step 3: Put the battery compartment cover back by sliding it upwards until it matches into place.


Step 4: Connect the small end of the AC power adapter to the USB port on the bottom of the phone.

Step 5: Plug the other end of the adapter into a standard electrical outlet. A charging indicator displays on the LCD screen.

Step 2

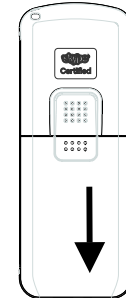

Step 4

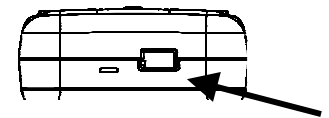




Step 6: When the battery's charging indicator stays solid green, the battery is fully charged and the phone is ready to use.



IMPORTANT: Remain the battery to charge for eight hours continuously before initial use.



3.2 Using the Phone for the First Time

Step 1: To power on the phone, press and hold  until the phone is activated. The first time the phone is turned on, user will be asked to review the Skype agreement. Use  to move up or down. Read the agreement and press  **Accept** to proceed.

Step 1



Step 2: After you accept the Skype agreement, the phone will automatically search for available wireless networks. A list will indicate with available network(s) in range.

Step 3: Use  to scroll to the network you want to use. Press  **Options**. You can then:

- Connect to the selected network
- View the network details
- Search again
- *Add a network manually



Step 4: If the selected network has a lock next to the name, a network key is required to connect that network. Enter the **WEP** or **WPA** key to unlock the network. If user does not know the network key, contact to the Network Administrator.

Step 2




Step 5: Press  **Connect** to access the available network.


Step 6: If the connection is successful, you will be asked to **Sign in to Skype** or **Create a new account**. If user has a Skype account, sign in. To create a new account:

(a) Scroll  to **Create new account** and press  **Select**.

(b) **Enter a Skype Name** and press  **OK**.

(c) **Enter a password** and press  **OK**.
Users will have the option of choosing automatic sign in for future use. Choose this option if users want to have users' name and password automatically entered every time the phone is activated.

Step 6

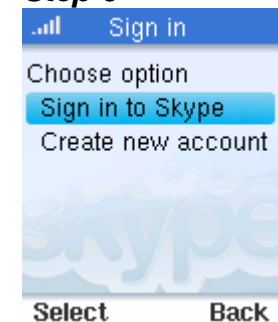



Note! To lock or unlock the keypad, press  and then .



Note! Each Skype account has a unique Skype Name with a Password. The Skype Name requires between **6 to 32 characters**. It can be any combination of letters, numbers and symbols, except for spaces. The name cannot begin with a punctuation mark. If the name is already existed, it is necessary to try another name.



Note! The password requires to be between **4 to 20 characters**. This password cannot be the same as the Skype name. It can be any combination of letters, numbers and symbols, except for spaces. The password cannot begin with a punctuation mark. Each phone user can have their own Skype account.



IMPORTANT: Emergency calls cannot be replaced through the Wireless b/g Skype Phone.

3.3 Wireless b/g Phone for Skype Access Point

It is necessary to have a connection to a Wi-Fi access point before operating the phone. The access point must also include an internet connection to make Skype calls.

You can either configure the phone to connect to a specific wireless network or search for “open” networks. Wireless network is recorded in the phone’s memory as “Preferred Networks” that are searched for each time the phone is turned on.

When powering on your Skype phone for the first time, the Preferred Networks will not included. It is required that you select a wireless network and sign into your Skype account before you can make calls.

Chapter 4 Using Your Wireless b/g Skype Phone

4.1 Skype Services

Before making SkypeOut to traditional or mobile phones, it is required to purchase Skype Credit.

To use SkypeIn, it is required to purchase a SkypeIn number.

To use Skype Voicemail, it is also required to purchase a voicemail subscription.







Visit www.skype.com for detailed information or to purchase these features.




Note! Emergency calls cannot be activated through a Skype phone.

4.2 Entering Names, Numbers and Special Characters



- Use the handset number keys to enter text, numbers or symbols.
- Press  to switch between uppercase and lowercase letters or numeric characters.
 modes also display some special characters.
- Press  for symbols including the @ sign.
- Press and release  to add a space.
- Press and hold  to add a plus (+).
- Press  as the insert key.

- Press  as the cancel key.

4.3 Keypad Lock

To lock or unlock the keypad, press >  + .

4.4 Sign in to Skype

Create a Skype Account or sign in to your existing Skype Account.

4.4.1 Creating a New Skype Account

Each Skype account has a unique Skype Name with a password. Your Skype Name needs to be between 6 and 32 characters. It can be any combination of letters, numbers and symbols, except for spaces. Your name cannot start with a punctuation mark. If the name is already in use, you will be prompted to use another name.

Your password needs to be between 4 and 20 characters. This password cannot be the same as your Skype name. It can be any combination of letters, numbers and symbols, except for spaces. Your password cannot start with a punctuation mark. Each phone user can have their own Skype

account. To erase a character press , to erase an entry press and hold .



Note! After you have created your Skype Name, we strongly suggest you to register an email address for your Skype Name on the Skype website. This will allow Skype to generate a new password for you in the event that you lose your password. Go to www.skype.com and sign


in to your account. Then follow the provided instructions for registering an email address for your account.




4.5 Setting up a Skype Contact List


Your Contact List displays all of the names you can make calls to. If you have an existing Skype account, your Contact List is automatically downloaded when you sign in. If you are a new Skype user, your Contact List is empty and you will need to set up a Contact List.

When you add a name to your list, an authorization request is sent to the user. This is to protect the privacy of all users. The user can accept or deny your request. If a request is accepted, you can see when the contact is online and make calls to them. You can also view their personal profile details and they can view yours, if you have created your personal profile.

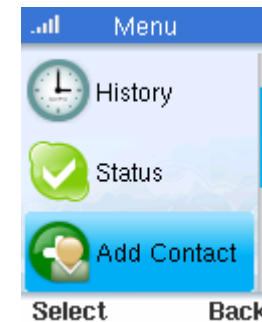4.5.1 Adding a Contact



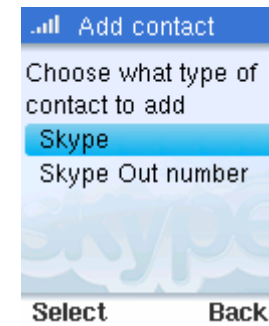

1. Press  **Menu**.
2. Scroll to **Add Contact** and press  **Select**.
3. Scroll to **Skype** or **SkypeOut** number and press  **Select**.
4. For a Skype Contact, enter the Name or Skype Name, using the keypad, when you are finished, press **OK**. Skype will search its database for the Contact's information. Scroll to the contact that you want to add and press **OK**. The Contact will be added to your list.
5. For a SkypeOut number, enter the Contact Name using the keypad. When you are finished, press **OK**. Enter the contact's SkypeOut number, starting with "00" or "011" or "+" sign followed by the international country code, area code and phone number. Press **Enter**. (If the number is not valid, you will get an error message.) The Contact will be added to your list.




When your contact list is full, a notification displays and you will need to erase entries before adding more.

4.5.2 Searching for Contacts

You can look for a Skype user that is not on your contact list.


1. Press  **Menu**.
2. Scroll to **Search** and press  **Select**.

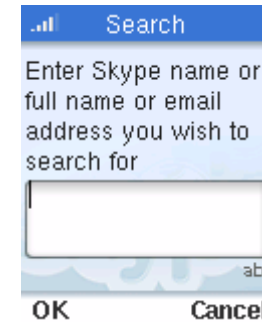

3. Enter the Skype name or as much of the name as possible using the keypad. The more specific name, the shorter the search. When you are finished, press **OK**. A list of matching names indicates.
4. Scroll to the user's name and press **Options**.
 - Add to Contacts: adds to the contact list.
 - More Results: indicates the next 20 names recorded in the list.
 - Search Again: repeats the search.
 - Call: make calls to the chosen contact.
 - View Profile: indicates the contact's profile.
5. To cancel the search press **Stop**.




4.5.3 Advanced Options for Contacts

You can **Rename**, **Remove**, **Block/Unblock**, **Request Details** or **Add a Contact** by using this feature.

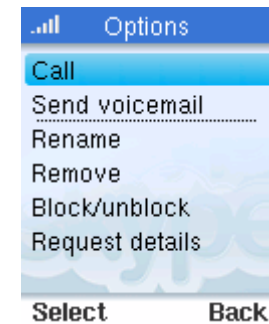







4.6 Outgoing Calls

4.6.1 Making a Call to a Contact



1. Press  **Menu**.
2. Scroll to **Contacts**.
3. Scroll to the Contact you want to call. Press .
4. Press  to end the call.



Note! During the call, you can use  or  for the following options:

- Hold/Resume: press  to place the call on hold or continue talking.
- Mute/Unmute: press  to turn the sound off or on.
- End: press  or  to end the call.



4.6.2 Making a Direct Call

1. Dial the number.
2. Press .
3. Wait for the call to connect, ring and be answered.
4. Press  to end the call.

4.7 Incoming Calls

4.7.1 Answering a Call

When you receive a call, your phone will ring the selected Skype ring tone and the incoming call message is displayed.


1. To answer the incoming call, press .
2. Press  to end the call.

4.7.2 Mood Message




In addition to changing the Status, you can also type in a text mood message that callers will see.

4.8 Call Forwarding

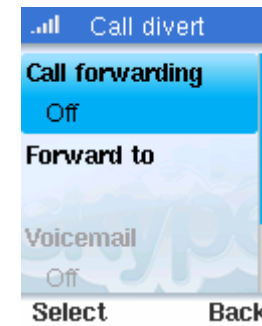



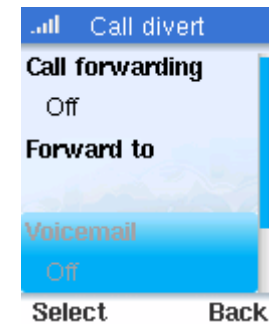

You can forward all your calls to another phone or to your voicemail.

4.9 Skype Voicemail






Skype Voicemail requires subscription from www.skype.com. You can record a greeting for incoming voicemail.

4.9.1 Recording a Greeting

1. Press **Menu**.
2. Scroll to **Settings** and press  *Select*.
3. Scroll to **Call Divert** and press  *Select*.
4. Scroll to **Welcome Message** and press  *Options*.
5. Scroll to **Record New** and press  *Select*.
6. Record your greeting. Press **Save** to store the greeting.

4.9.2 Voice Mail Messages

You may either hold down  or follow these steps:

1. Press **Menu**.
2. Scroll to **History** and press  *Select*.
3. Scroll to **Voicemails** and press  *Select*.
4. Scroll to the Skype Voicemail message you want.




You can listen to the message, return or erase the call. Scroll to the option and press



Select.

4.10 Call History



Your phone keeps track of the calls you make, receive or even miss. The history includes caller name, number call time and date. You can also check received voice mail and new Contact requests.

4.11 Creating a Profile


You can create a personal profile. You can also change your profile's information at any time.

4.11.1 Public Details



You can decide whether to share information about yourself to other Skype users, by choosing Public Details. You are not required to enter any information into your profile, however, the more information you provide, the easier it will be for your friend to find you on Skype. You can enter your Skype name, your full name, gender, birth date, country/region, state/province, city, language, home phone, office phone, cellular, home page (URL info) and about me information.

4.11.2 Private Details

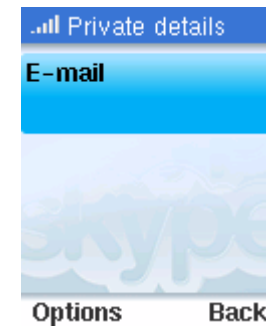


You can record an e-mail address as your Private Details. This information is not indicated on your phone. A Skype user can find you on the network if they know your e-mail address and it is recorded in Private Details.

4.12 Changing the Password

You can change your password at any time and you should do so occasionally to maximize security.

Your password needs to be between 4 and 20 characters.


4.12.1 Privacy

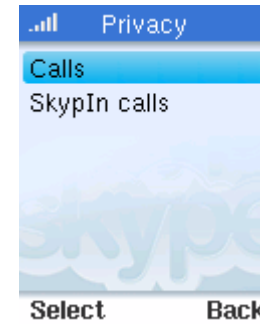

You can set whether only your contacts or only authorized users can call you by modifying the Privacy settings.


4.13 Skype Settings

4.13.1 Automatic Sign In to Skype



You can set to automatically sign in to your Skype account every time the base unit powers up. Your password is recorded in memory so you do not have to enter it.

4.13.2 Skype Software Updates

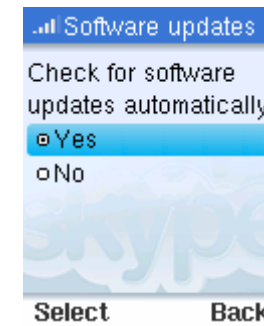


Skype periodically updates its software.

4.13.3 Language




This feature is available only for models with multiple language support.

4.13.4 Adjusting the Screen's Brightness

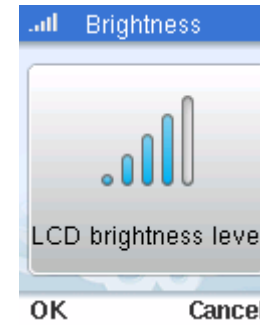

This feature enables you to change the brightness and make the overall screen lighter or darker.

4.13.5 Setting the Screen's Time Out

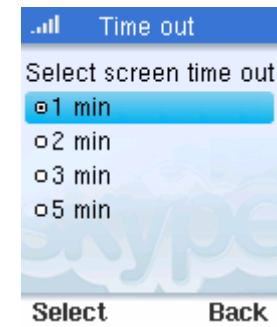


The background light of the screen turns on when your press a key and turns off at a preset time.

4.13.6 Tones




This feature enables you to adjust your phone's tones.

4.13.7 Time and Date Settings

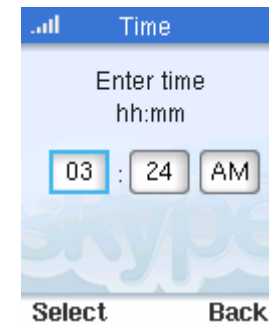

This feature enables you manually set the time and date components.

4.13.8 Manage Blocked Users

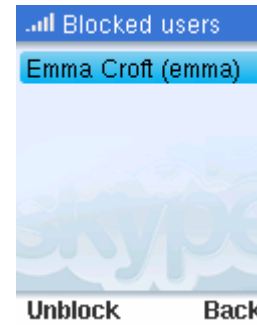

This feature enables you temporarily unblock a previously blocked user.