

1.	Introduction .....
	Bluetooth wireless technology.....
2.	Get started.....
	Overview .....
	Chargers and batteries.....
	Charge the battery.....
	Switch the headset on or off.....
	Pair the headset with a mobile phone.....
	Disconnect the headset from the phone.....
	Reconnect the paired headset to your phone.....
	Trobleshooting.....
3.	Basic use.....
	Wearing the headset.....
	Calling handling.....
	Switch the call between phone and headset.....
	Use the headset with several phones.....
4.	Battery information.....
5.	Care and maintenance.....

## 1. Introduction

1) The Bluetooth Headset IPDA02 allows you freedom to make and receive calls while on the move or in the office. You can connect the headset to a compatible phone that supports Bluetooth wireless technology

Read this user guide carefully before using the headset. Read also the user guide for your phone. Which provides important safety and maintenance information. Keep the headset and it's accessories out of reach of small children.

## 2) Bluetooth wireless technology


Bluetooth wireless technology allows you to connect compatible communication devices without cables. A Bluetooth connection does not require that the phone and the headset be in line of sight. But both devices should be within 10 meters(30 feet)of each other. Connections can be subject to interference from obstructions. Such as walls, or other electronic devices.

The headset is compliant with the Bluetooth Specification 2.0+EDR

There may be restrictions on using Bluetooth technology in some location. Check with your local authorities or service provider.

## 2. Get started.

### 1) Overview.

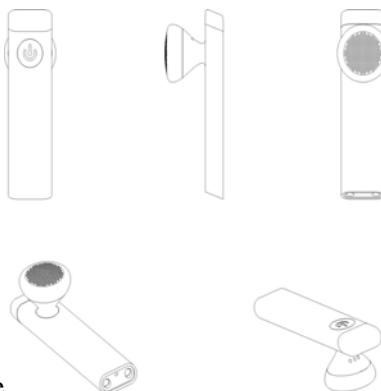

The headset figure on your right hand side

Before you can start using the headset you must charge the battery and pair the headset with a compatible mobile phone.

Note: Parts of the headset are magnetic, metallic materials may be attracted to the headset. Do not place credit cards or other magnetic storage media near the headset, because information stored on them may be erased.


#### 2) Chargers and batteries

Your headset uses a rechargeable battery. You must charge the battery fully before using the headset for the first time.

3) This device has an internal, no removable, rechargeable battery. Do not attempt to remove the battery from the device as you may damage the device.

A. Connect the charger to the headset and the USB port to the computer or AC charger. The red indicator light is during charging. If charging does not start. Disconnect the charger, plug it in again, and retry. Charging the battery fully may take up to 2 hours.

See the figure as below:

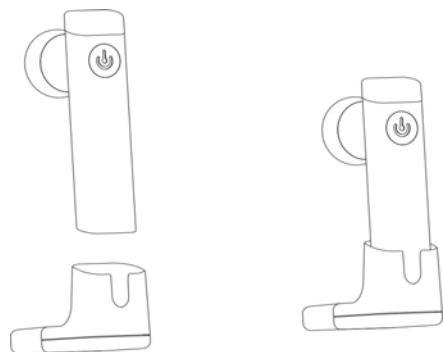

B. When the battery is fully charged. The red indicator light turns off and the blue indicator light turns on. Disconnect the charger from the computer or wall outlet and the headset.

The fully charged battery has power for up to 2 hours of talk time or up to 50 hours of stand by time. However the talk and standby time may vary with different mobile phones. Products that use a Bluetooth connection usage settings. Styles and environments

#### 4) Switch the headset on or off

To switch on, press and hold the power key. The headset beeps and the blue indicator light is displayed when the headset is connected to a paired phone and is ready for use. The blue indicator

light flashes slowly three times.

To switch off, press and hold the power key. The headset beeps and the blue indicator light is flashing twice.

### 5) Pair the headset with a mobile phone

Before using the headset, you must first pair it with a Bluetooth wireless technology enabled device, such as a Bluetooth mobile phone.

- A. Press the call handling button to switch on the the headset, The LED indicator continuously flashes blue 3 seconds, keep the call handling button until the LED indicator alternates between blue and red, the headset is now ready for pairing with the mobile phone.
- B. Activate the Bluetooth feature on the phone, and set the phone to search for Bluetooth devices.
- C. Once the mobile phone discovers the headset, the text "IPDA02" appears on the phone's screen..
- D. Follow the phone instructions to accept pairing. When prompted to enter the passkey. Enter the Number: **0000**. If the pairing was successful; the indicator light will flash in blue 2 times, in Some phones you may need to make the connection separately after pairing see the user guide of your phone for details.

You only need to pair the headset with your phone once.

### 6) Disconnect the headset from the phone

To disconnect the headset from your phone (for example, to connect the phone to another Bluetooth device). Do one of the following:

- A. Switch off the headset.
- B. Disconnect the headset in the Bluetooth menu of your phone.
- C. Move the headset more than 10 meters (30 feet) away from the phone.

You do not need to delete the pairing with the headset to disconnect it.

### 7) To connect the headset to your phone. Switch on the headset make the connection in the Bluetooth menu of your phone, or press and hold the answer/end key. You can set your phone to connect with the headset automatically when the headset is switched on charge your paired device settings in the Bluetooth menu.

### 8) Troubleshooting

If you cannot connect the headset to your phone do as follows:

- A. Ensure that the headset is charged. Switched on and paired with and connected to your phone.
- B. Ensure that the Bluetooth feature is activated on your phone.
- C. Check that the headset is within 10 meters of your phone and that there are no obstructions between the headset and the phone. Such as walls or other electronic devices.

## 3. Basic use

### 1) Wearing the headset

Please put the headset over your ear, make sure that the headset is pointing towards your mouth.

### 2) Call handling

To make a call, use your phone in the normal way when the headset is connected to your phone. The blue indicator light flashes slowly during the call.

If your phone supports redialing with this device, press the answer/end key twice when no call is in progress.

If your phone supports voice dialing with the device, press and hold the answer/end key when no call is in progress and proceed as described in the user guide of your phone.

When you receive a call, the blue indicator light flashes quickly and you hear a ringing tone

through the headset. To answer the call, press the answer/end key or use the phone keys. If the automatic answer function is on. The phone automatically answers the incoming call after one ring.

To reject an incoming call, hold and press the answer/end key two second or use the phone keys.

To end a call, press the answer/end key or use the phone keys.

### 3) Switch the call between phone and headset

To switch the call between the headset and a compatible phone. Press and hold the answer/end key or use the respective function in your phone.

### 4) Use the headset with several phones.

You can pair the headset with up to eight phones but connect it to only one phone at a time.

The phone that was first paired with the headset is the default phone. If the headset is switched on within 10 meters of several paired phones, the headset tries to connect to the default phone.

If the headset cannot connect to the default phone, the headset tries to connect to the last used phone. if the headset cannot connect to this phone either. One of the other six paired phones can be connected to the headset. To make the connection, see the user guide of your phone.

## 4 .Battery information

Your device is powered by a rechargeable battery. The full performance of a new battery is achieved only after two or three complete charge and discharge cycles. The battery can be charged and discharged hundreds of times. But it will eventually wear out. Recharge your battery only with approved chargers designated for this device.

Unplug the charger from the electrical plug and the device when not in use. Do not leave a fully charged battery connected to a charger. Since overcharging may shorten its life time. If left unused. A fully charged battery will lose its charge over time.

Never use any charger that is damaged.

Leaving the device in hot or cold places. such as in a closed car in summer or winter conditions.

Will reduce the capacity and life time of the battery.

Always try to keep the battery between 15-25 centigrade. A device with a hot or cold battery may not work temporarily, even when the battery is fully charged. Battery performance is particularly limited in temperatures below freezing.

Do not dispose of batteries in a fire as they may explode. Batteries may also explode if damaged.

Dispose of batteries according to local regulations. Please recycle when possible. Do not dispose as household waste.

## 5. Care and maintenance.

Your device is product of superior design and craftsmanship and should be treated with care. The suggestions below will help you protect your warranty coverage.

- A. Keep all accessories and enhancements out of the reach of small children.
- B. Keep the device dry. Precipitation, humidity, and all types of liquids or moisture can contain minerals that will corrode electronic circuits. If your device does get wet, allow it to dry completely.
- C. Do not use or store the device in dusty, dirty areas, its moving parts and electronic components can be damaged.
- D. Do not store the device in hot areas. High temperatures can shorten the life of electronic device, damage batteries, and warp or melt certain plastics.
- E. Do not store the device in cold areas. When the device returns to its normal temperature,

moisture can form inside the device and damage electronic circuit boards.

- F. Do not attempt to open the device.
- G. Do not drop, knock or shake the device. Rough handling can break internal circuit boards and fine mechanics.
- H. Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device.
- I. Do not paint the device. Paint can clog the moving parts and prevent proper operation.

All of the above suggestions apply equally to your device. Battery charger or any enhancement if any device is not working properly take it to the nearest authorized service facility for service.

### **Federal Communications Commission (FCC) Statement**

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### **Operation is subject to the following two conditions:**

- 1) this device may not cause interference and
- 2) this device must accept any interference, including interference that may cause undesired operation of the device.

#### **FCC RF Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.