






Green graph may show one of the 8 parameters. Scroll to request parameter and press **SAVE**. Screen jumps back.

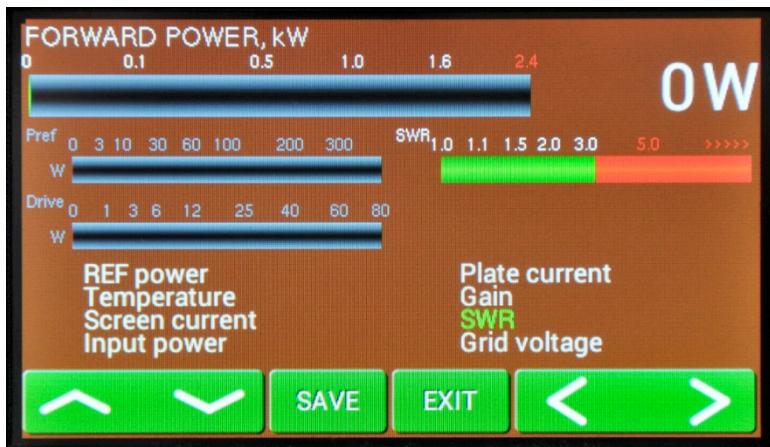

Touch **BARG2** in the next step, then the same way **BARG3**.

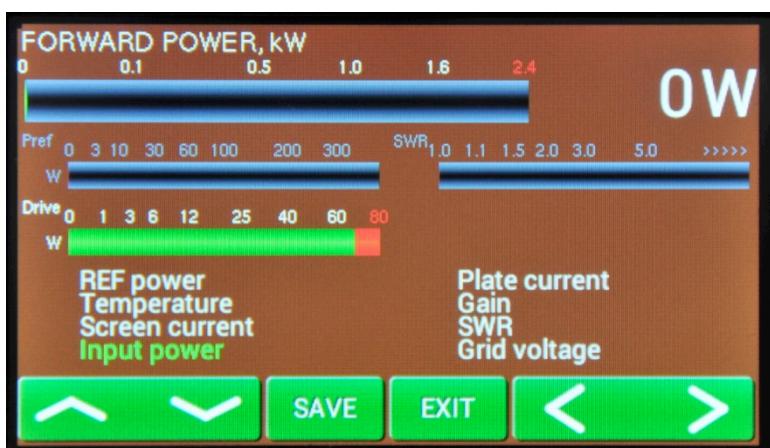


Press **EXIT** to go back to the **Menu display**, then press **SERVICE**.

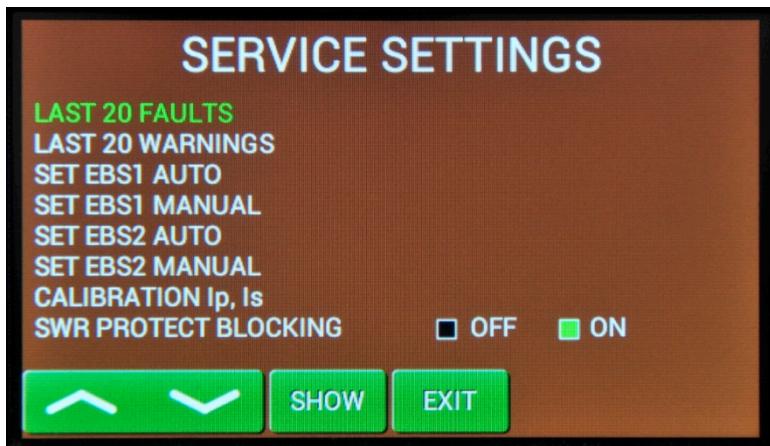


Now we are in the **SERVICE** settings mode.

Scroll to selected line and press **SHOW** or **SET** (depending on the line).

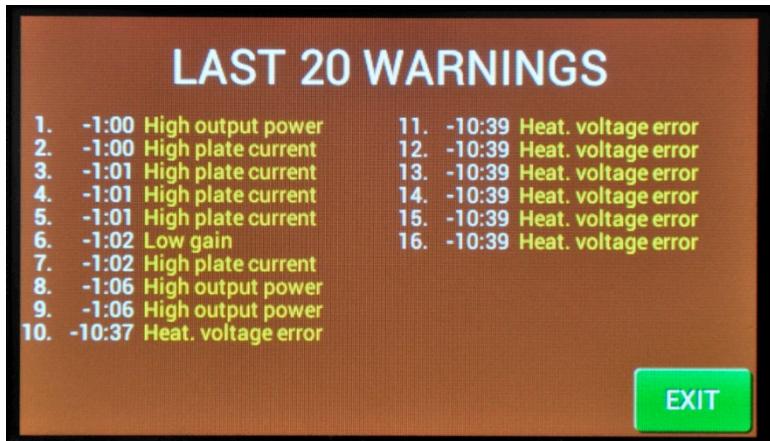

We selected last 20 **WARNINGS** to show.

Press **EXIT** and go to the **SET EBS1 AUTO** and press **SET**.

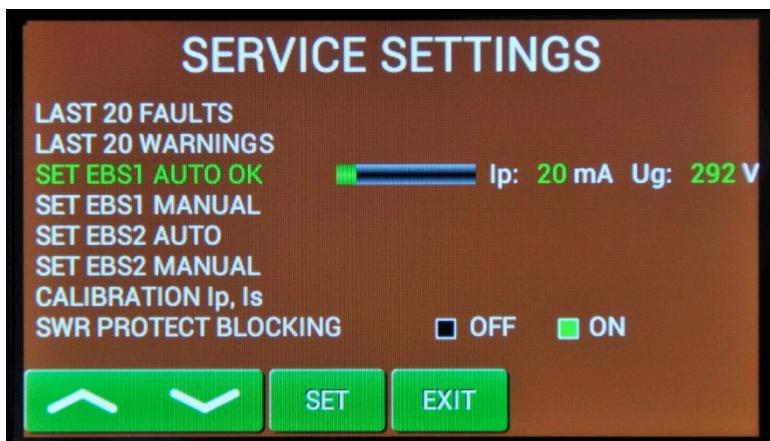

PA will automatically set 20mA of EBS.

You can try to do this manually, too.

Scroll to **SET EBS1 MANUAL** and press **SET**.