

TEST REPORT

Report No.: BCTC2501564735-1E

Applicant: SARIANA LLC

Product Name: OntheGo Power Bank

Test Model: ST-B10Q2SK, ST-B5Q2SK

Tested Date: 2024-12-26 to 2025-03-14

Issued Date: 2025-03-14

Shenzhen BCTC Testing Co., Ltd.



FCC ID: ZE9-ST-BQ2SK

Product Name: OntheGo Power Bank

Trademark: **S A T E C H I**

Model/Type Reference: ST-B10Q2SK, ST-B5Q2SK
ST-B10Q2SN, ST-B10Q2SL, ST-B10Q2SB, ST-B10Q2SV, ST-B10Q2SR,
ST-B10Q2SW, ST-B10Q2ST, ST-B5Q2SN, ST-B5Q2SL, ST-B5Q2SB,
ST-B5Q2SV, ST-B5Q2SR, ST-B5Q2SW, ST-B5Q2ST

Prepared For: SARIANA LLC

Address: 7365 Mission Gorge Road Suite G San Diego, CA 92120 U.S.A.

Manufacturer: SARIANA LLC

Address: 7365 Mission Gorge Road Suite G San Diego, CA 92120 U.S.A.

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-12-26

Sample Tested Date: 2024-12-26 to 2025-03-14


Issue Date: 2025-03-14

Report No.: BCTC2501564735-1E

Test Standards: FCC Part15.209
ANSI C63.10-2013

Test Results: PASS

Tested by:



Shanshan. Zhang / Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information	7
4.2 Support Equipment	7
4.3 Test Setup Configuration	8
4.4 Test Mode	9
5. Test Facility And Test Instrument Used	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. Conducted Emissions	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 EUT operating Conditions	12
6.5 Test Result	13
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test procedure	18
7.4 Test Result	19
8. Bandwidth Test	31
8.1 Test Procedure	31
8.2 Test Setup	31
8.3 Test Result	32
9. Antenna Requirements	34
9.1 Limit	34
9.2 Test Result	34
10. EUT Photographs	35
11. EUT Test Setup Photographs	36

(Note: N/A Means Not Applicable)

1. Version


Report No.	Issue Date	Description	Approved
BCTC2501564735-1E	2025-03-14	Original	Valid

TEST
TC
OVER
t See

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	Radiated Emission	15.209	PASS
3	20dB Bandwidth	15.215	PASS
4	Antenna Requirement	15.203	PASS

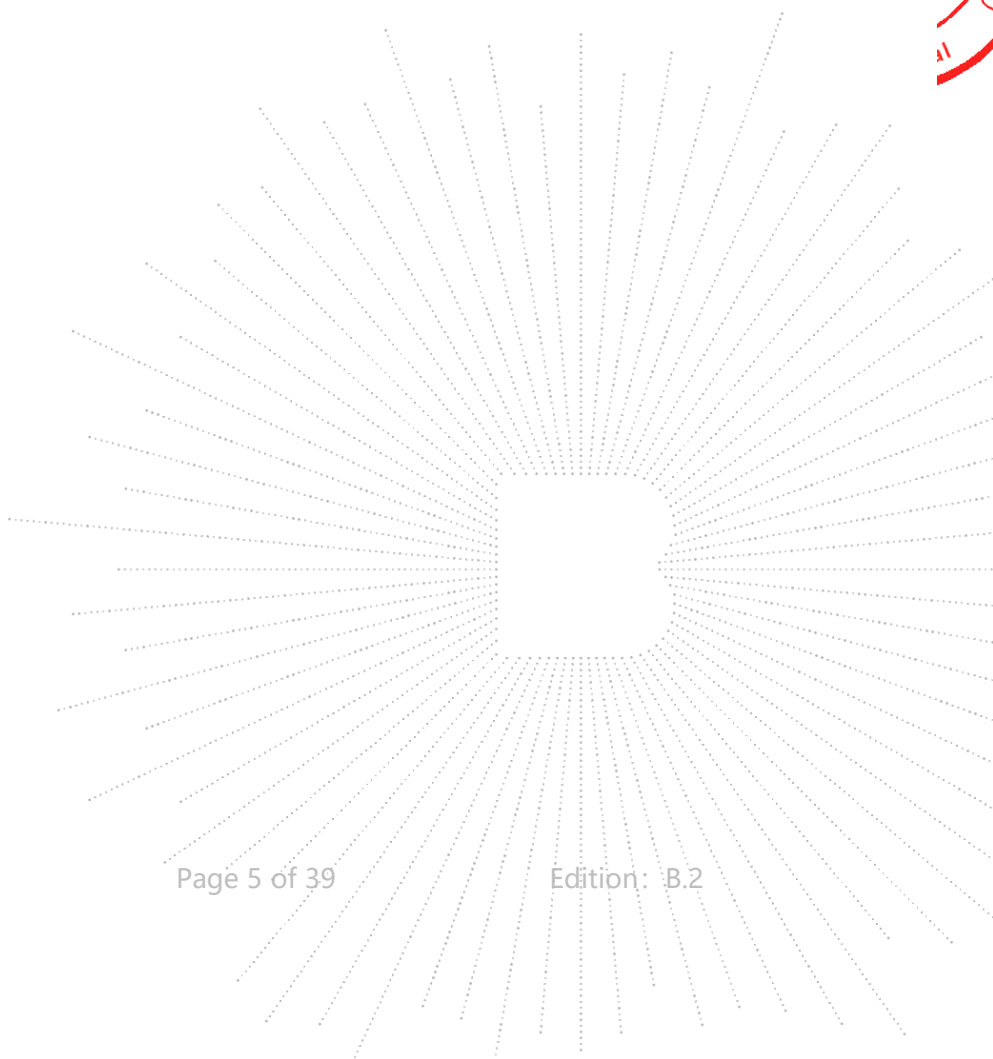

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	Conducted Emission (150kHz-30MHz)	U=3.2dB
3	humidity uncertainty	U=5.3%
4	Temperature uncertainty	U=0.59°C

CO., LTD.

4. Product Information And Test Setup

4.1 Product Information

Model/Type Reference:	ST-B10Q2SK, ST-B5Q2SK ST-B10Q2SN, ST-B10Q2SL, ST-B10Q2SB, ST-B10Q2SV, ST-B10Q2SR, ST-B10Q2SW, ST-B10Q2ST, ST-B5Q2SN, ST-B5Q2SL, ST-B5Q2SB, ST-B5Q2SV, ST-B5Q2SR, ST-B5Q2SW, ST-B5Q2ST
Model Differences:	All the model are the same circuit and RF module, except model names, appearance color, and battery specification.
Hardware Version:	N/A
Software Version:	N/A
Modulation:	ASK
Operation Frequency:	115kHz-205kHz, 360kHz
Antenna installation:	loop coil antenna
Ratings:	USB-C Input: DC 5V/3A, DC 9V/2.22A USB-C Output: DC 5V/2A, DC 9V/2.22A Wireless output: 15W Max USB-C+ Wireless Charging Output: 5.0W+5.0W 10.0W Max. Battery: DC 3.85V

4.2 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	OntheGo Power Bank	Loowoko	ST-B10Q2SK, ST-B5Q2SK	N/A	EUT
E-2	Adapter	UGREEN	CD289	N/A	Auxiliary
E-3	Wireless Load	---	---	N/A	Auxiliary

Notes:


1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.3 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.


Conducted Emission:

Test Mode 1

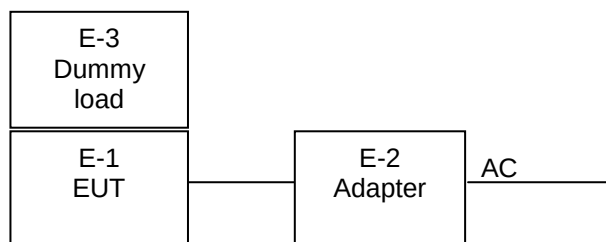


Radiated Spurious Emission:

Test Mode 1

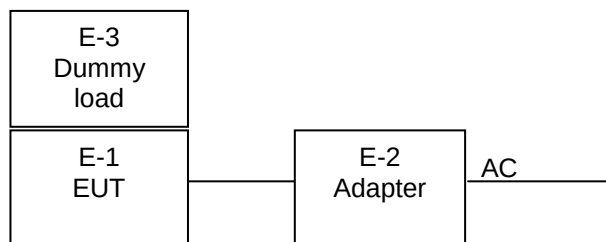

Test Mode 2, 3, 4



4.4 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

AC Mode	Mode 1	Charging+Full Load(5W, 115-205kHz)
DC Mode	Mode 2	Full Load(15W, 360kHz)
	Mode 3	Half Load(7.5W, 115-205kHz)
	Mode 4	Null Load

Note: All test mode were tested and passed, only shows the worst case mode which were recorded in this report.

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 16, 2024	May 15, 2025


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G1 8G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenn(18GHz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

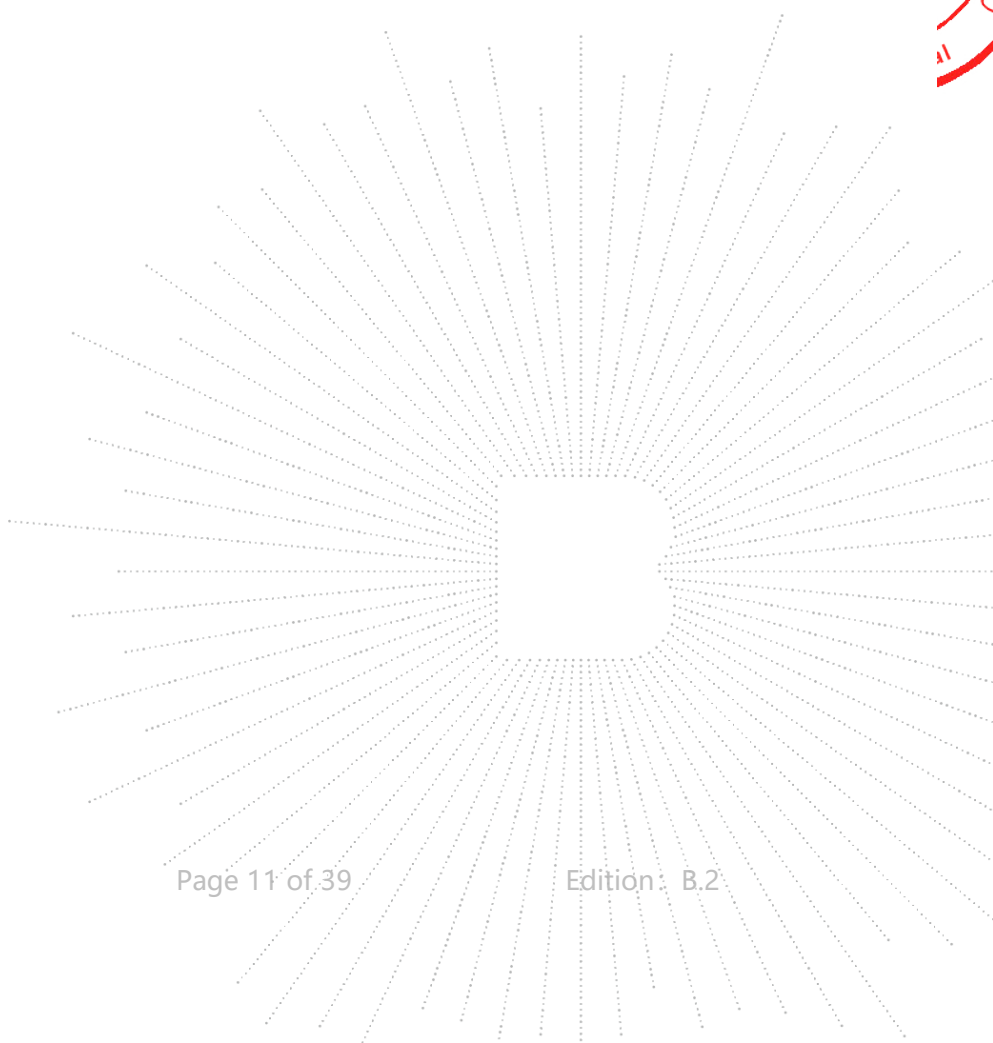

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

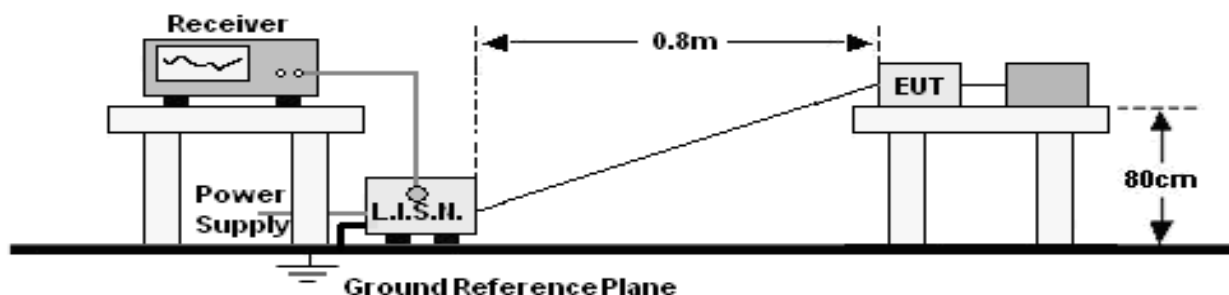

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

ST-B10Q2SK

Temperature:	24.1 °C	Relative Humidity:	56%RH
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

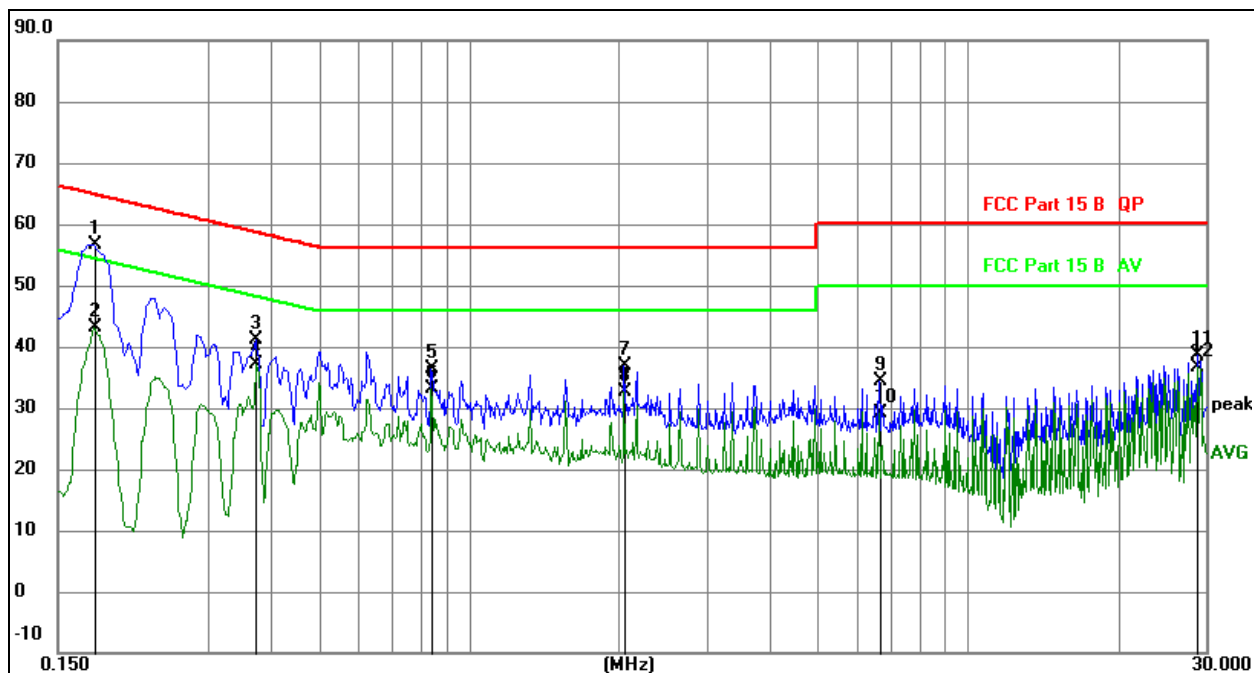


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz		dB	dBuV	dBuV	dB	Detector
1	*	0.1770	36.60	20.07	56.67	64.63	-7.96	QP
2		0.1770	22.96	20.07	43.03	54.63	-11.60	AVG
3		0.3750	21.06	20.08	41.14	58.39	-17.25	QP
4		0.3750	17.03	20.08	37.11	48.39	-11.28	AVG
5		0.8430	16.17	20.09	36.26	56.00	-19.74	QP
6		0.8430	12.98	20.09	33.07	46.00	-12.93	AVG
7		2.0490	16.89	20.10	36.99	56.00	-19.01	QP
8		2.0490	12.51	20.10	32.61	46.00	-13.39	AVG
9		6.6345	14.31	20.16	34.47	60.00	-25.53	QP
10		6.6345	8.97	20.16	29.13	50.00	-20.87	AVG
11		28.8195	18.24	20.28	38.52	60.00	-21.48	QP
12		28.8195	16.29	20.28	36.57	50.00	-13.43	AVG

Temperature:	24.1 °C	Relative Humidity:	56%RH
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

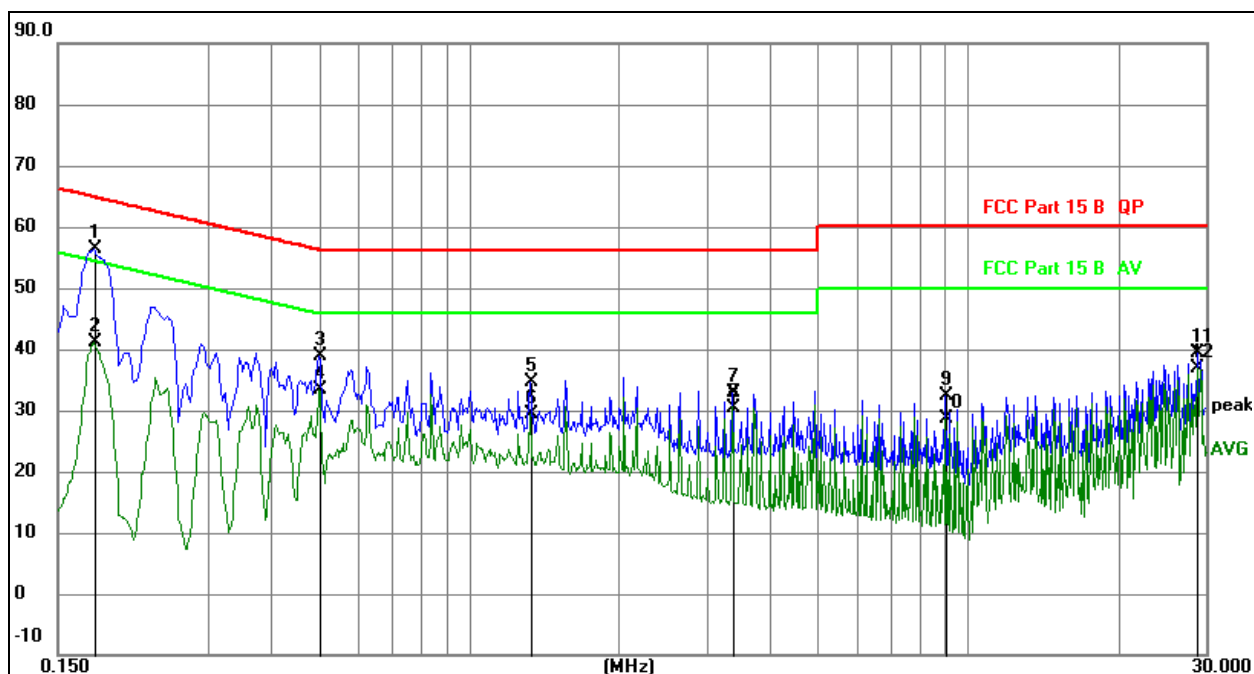


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1	*	0.1770	36.27	20.07	56.34	64.63	-8.29	QP
2		0.1770	20.95	20.07	41.02	54.63	-13.61	AVG
3		0.5010	18.81	20.08	38.89	56.00	-17.11	QP
4		0.5010	13.36	20.08	33.44	46.00	-12.56	AVG
5		1.3245	14.60	20.09	34.69	56.00	-21.31	QP
6		1.3245	9.29	20.09	29.38	46.00	-16.62	AVG
7		3.3765	12.71	20.13	32.84	56.00	-23.16	QP
8		3.3765	10.37	20.13	30.50	46.00	-15.50	AVG
9		9.0420	12.16	20.17	32.33	60.00	-27.67	QP
10		9.0420	8.46	20.17	28.63	50.00	-21.37	AVG
11		28.8195	19.03	20.28	39.31	60.00	-20.69	QP
12		28.8195	16.63	20.28	36.91	50.00	-13.09	AVG

ST-B5Q2SK

Temperature:	24.1 °C	Relative Humidity:	56%RH
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

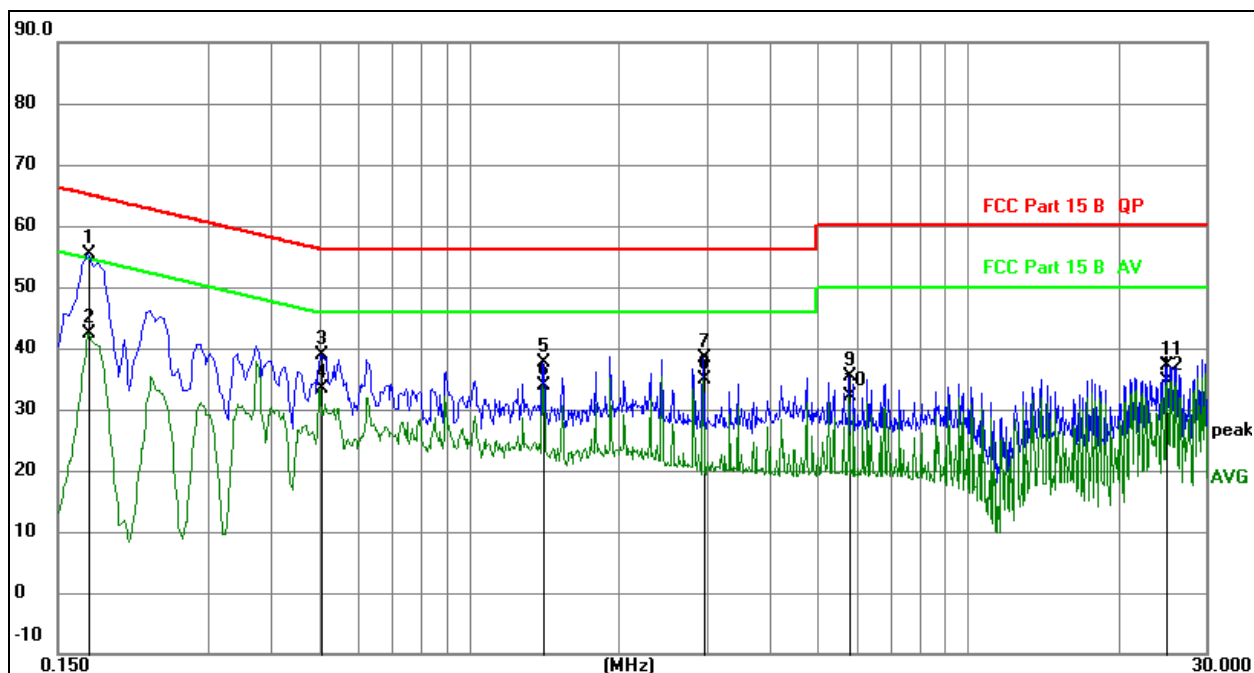


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1725	35.39	20.07	55.46	64.84	-9.38	QP
2		0.1725	22.40	20.07	42.47	54.84	-12.37	AVG
3		0.5055	18.75	20.08	38.83	56.00	-17.17	QP
4		0.5055	13.41	20.08	33.49	46.00	-12.51	AVG
5		1.4100	17.61	20.09	37.70	56.00	-18.30	QP
6		1.4100	13.85	20.09	33.94	46.00	-12.06	AVG
7		2.9534	18.23	20.12	38.35	56.00	-17.65	QP
8		2.9534	14.88	20.12	35.00	46.00	-11.00	AVG
9		5.7750	15.20	20.15	35.35	60.00	-24.65	QP
10		5.7750	12.02	20.15	32.17	50.00	-17.83	AVG
11		25.0305	16.75	20.30	37.05	60.00	-22.95	QP
12		25.0305	14.40	20.30	34.70	50.00	-15.30	AVG

Temperature:	24.1 °C	Relative Humidity:	56%RH
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 1	Test Voltage:	AC 120V/60Hz

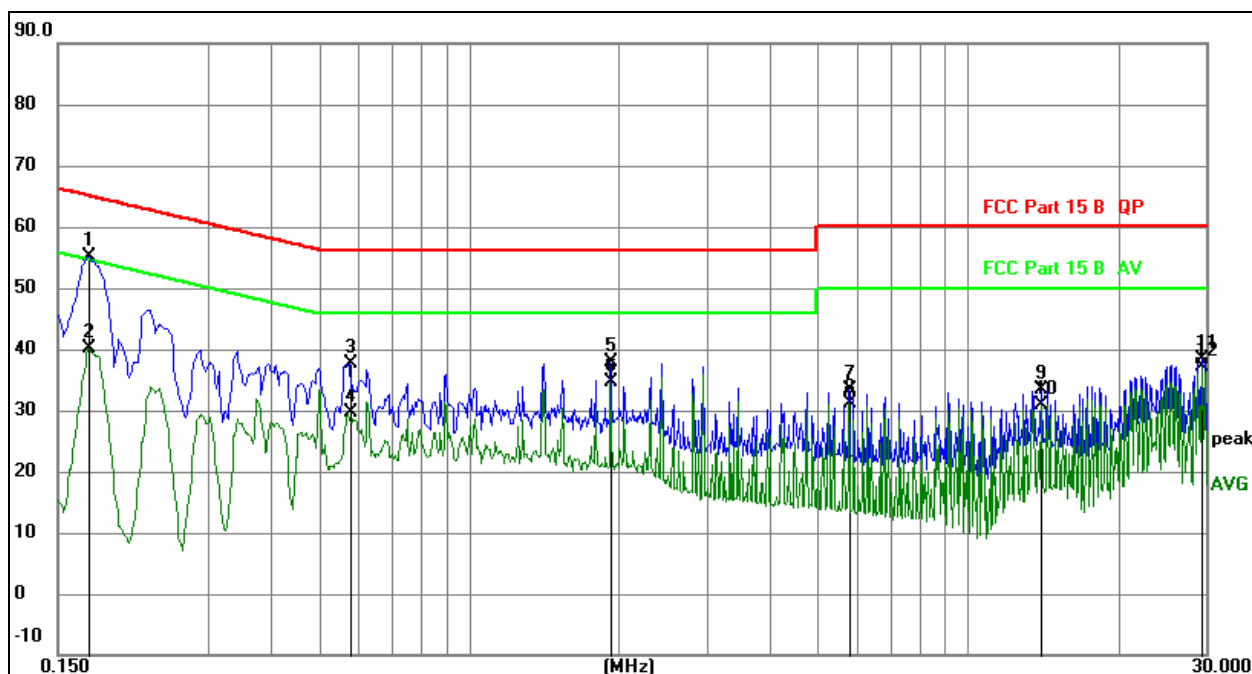

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1	*	0.1725	35.17	20.07	55.24	64.84	-9.60	QP
2		0.1725	20.16	20.07	40.23	54.84	-14.61	AVG
3		0.5775	17.54	20.08	37.62	56.00	-18.38	QP
4		0.5775	9.48	20.08	29.56	46.00	-16.44	AVG
5		1.9275	17.86	20.10	37.96	56.00	-18.04	QP
6		1.9275	14.64	20.10	34.74	46.00	-11.26	AVG
7		5.7750	13.17	20.15	33.32	60.00	-26.68	QP
8		5.7750	11.00	20.15	31.15	50.00	-18.85	AVG
9		13.9965	13.07	20.28	33.35	60.00	-26.65	QP
10		13.9965	10.51	20.28	30.79	50.00	-19.21	AVG
11		29.5260	18.23	20.27	38.50	60.00	-21.50	QP
12		29.5260	16.85	20.27	37.12	50.00	-12.88	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

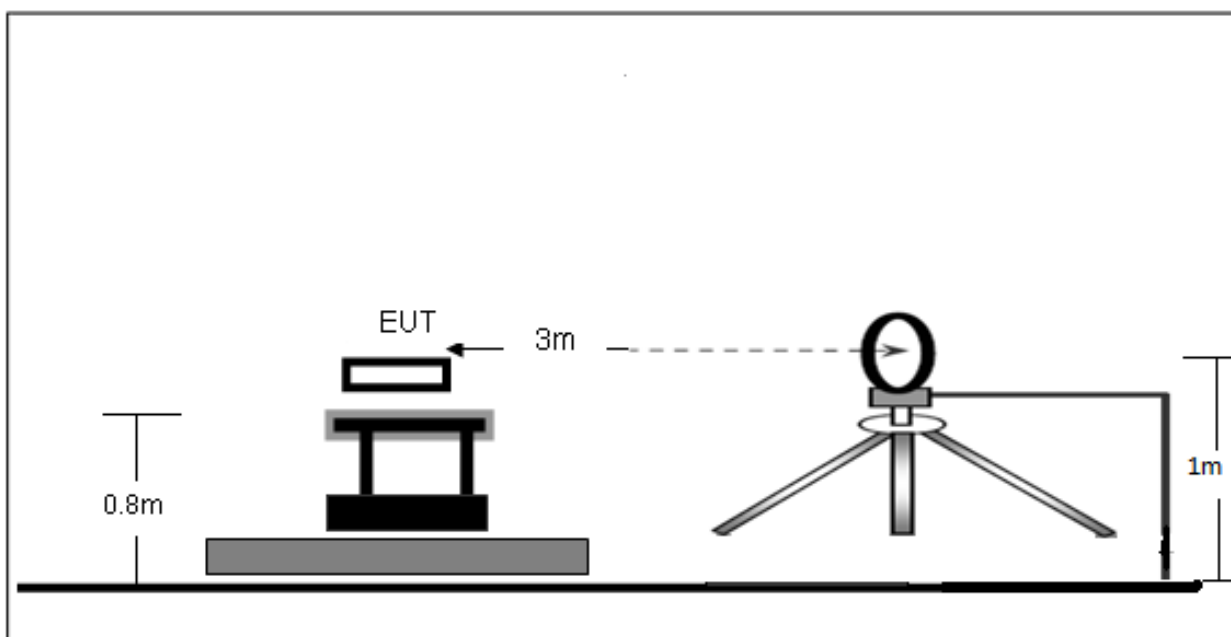

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

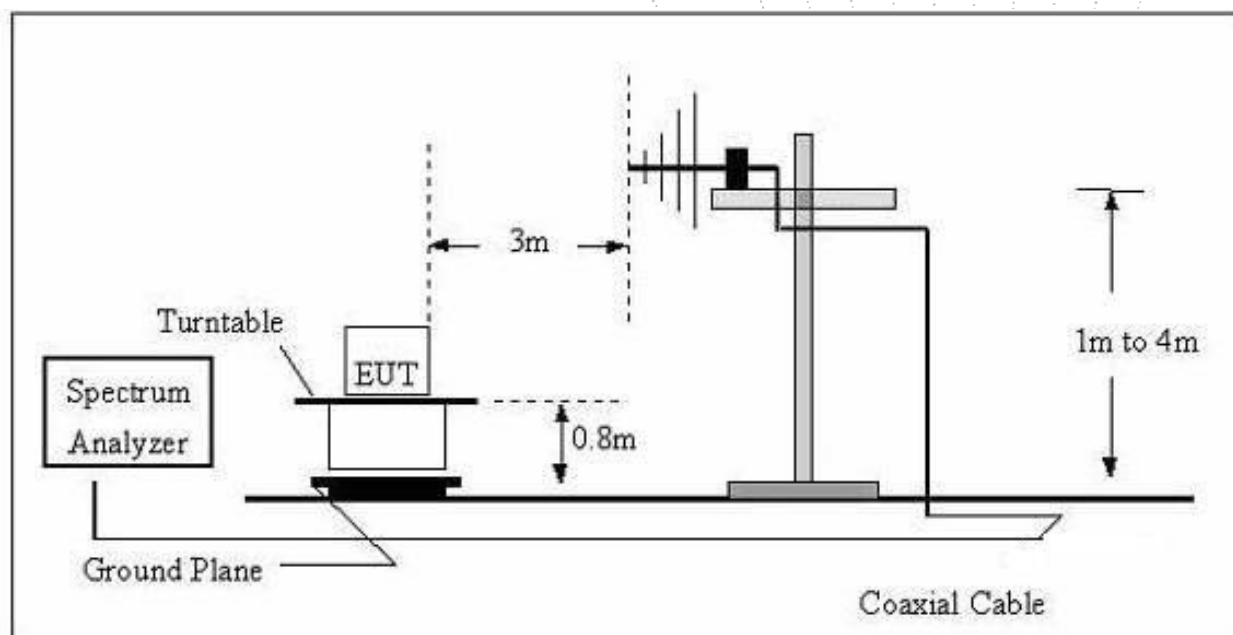

7.2 Limit

FCC §15.209; §15.205.

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 Test Result


ST-B10Q2SK
9kHz-30MHz

Temperature:	24.7℃	Relative Humidity:	50%RH
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 1	Polarization:	Coaxial(Worst)

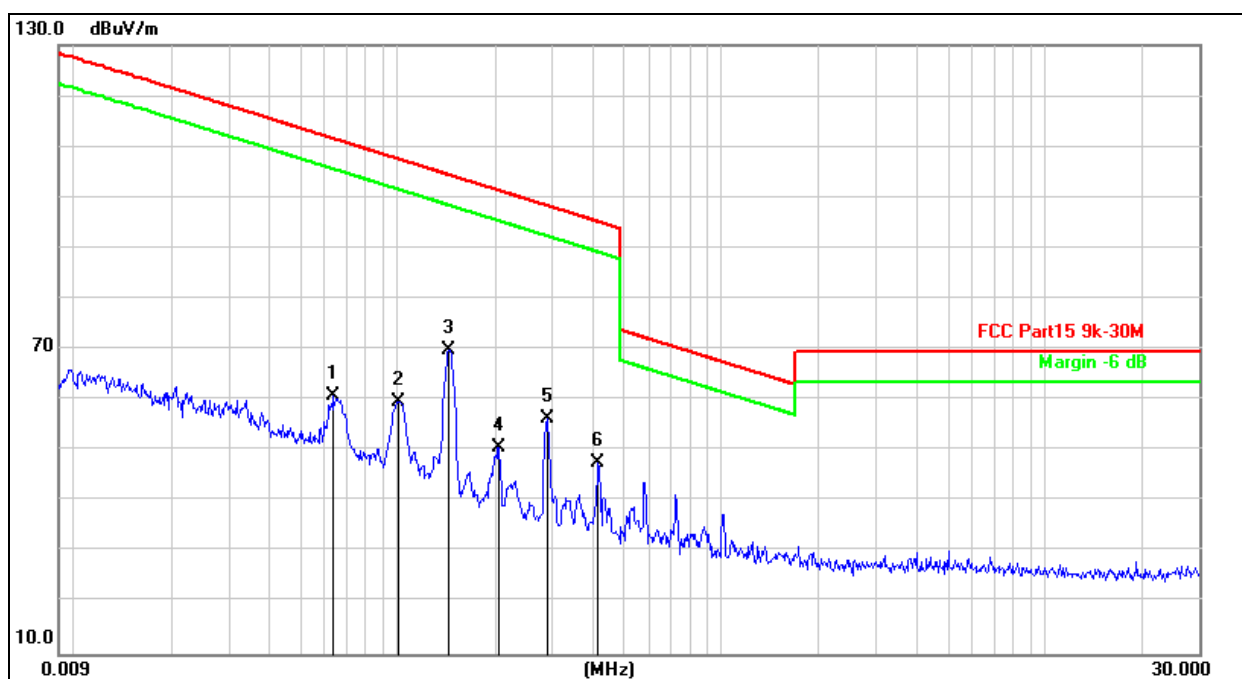

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.0636	68.30	-7.56	60.74	111.54	-50.80	peak
2		0.1008	67.19	-7.49	59.70	107.54	-47.84	peak
3	*	0.1442	77.40	-7.57	69.83	104.42	-34.59	peak
4		0.2061	58.57	-7.78	50.79	101.32	-50.53	peak
5		0.2898	63.95	-7.72	56.23	98.36	-42.13	peak
6		0.4174	55.40	-7.63	47.77	95.19	-47.42	peak


Temperature:	24.7°C	Relative Humidity:	50%RH
Pressure:	101 kPa	Test Voltage:	DC 3.85V
Test Mode:	Mode 2	Polarization:	Coaxial(Worst)

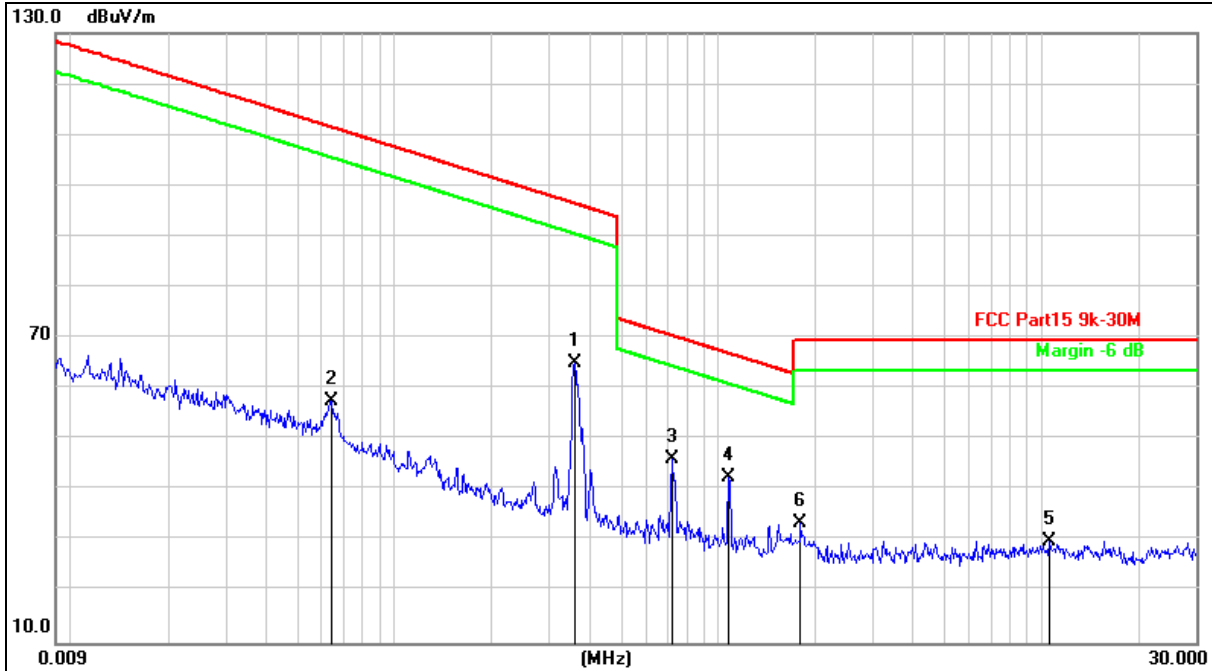

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		0.3607	72.57	-7.67	64.90	96.46	-31.56	peak
2		0.0641	65.26	-7.57	57.69	111.47	-53.78	peak
3	*	0.7187	53.44	-7.36	46.08	70.48	-24.40	peak
4		1.0783	49.80	-7.36	42.44	66.97	-24.53	peak
5		10.5358	37.07	-7.25	29.82	69.54	-39.72	peak
6		1.7976	40.75	-7.33	33.42	69.54	-36.12	peak

Between 30MHz – 1GHz

Temperature:	24.7℃	Relative Humidity:	50%RH
Pressure:	101KPa	Phase:	Horizontal
Test Mode:	Mode 1(Worst case)	Test Voltage:	AC 120V/60Hz

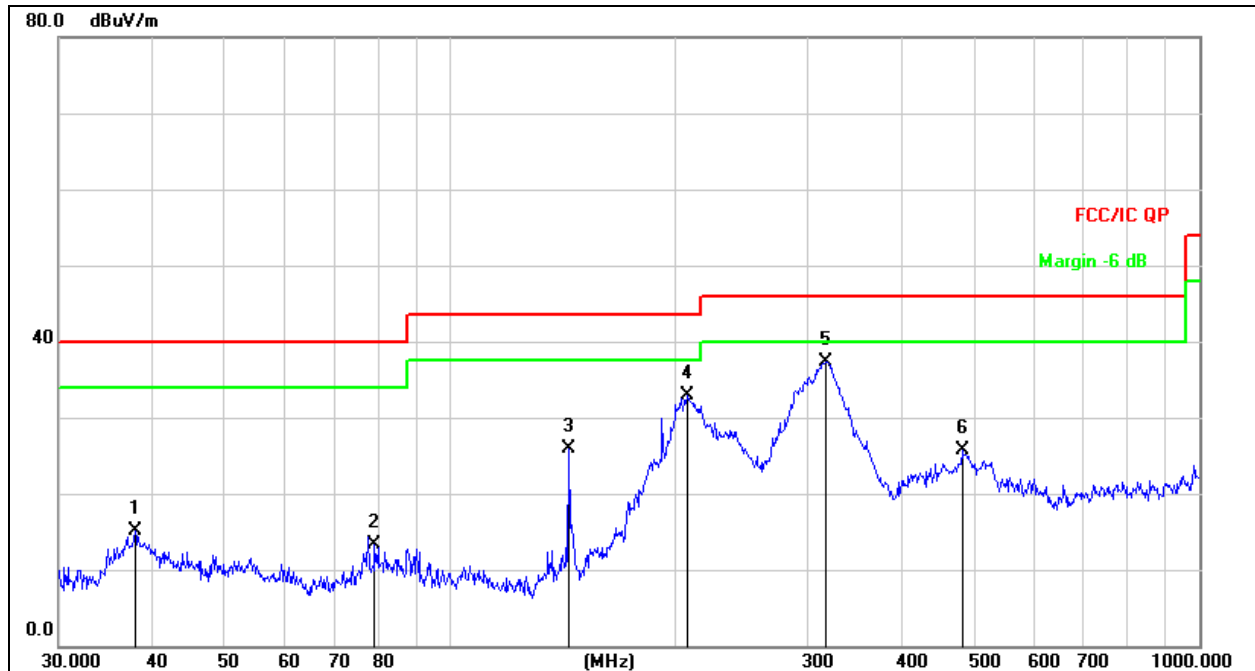


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		37.9450	30.30	-15.12	15.18	40.00	-24.82	QP
2		79.2426	32.89	-19.62	13.27	40.00	-26.73	QP
3		143.8295	44.83	-19.00	25.83	43.50	-17.67	QP
4		207.1226	48.42	-15.52	32.90	43.50	-10.60	QP
5	*	317.7011	49.91	-12.62	37.29	46.00	-8.71	QP
6		482.2156	34.76	-9.05	25.71	46.00	-20.29	QP

Temperature:	24.7°C	Relative Humidity:	50%RH
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 1(Worst case)	Test Voltage:	AC 120V/60Hz

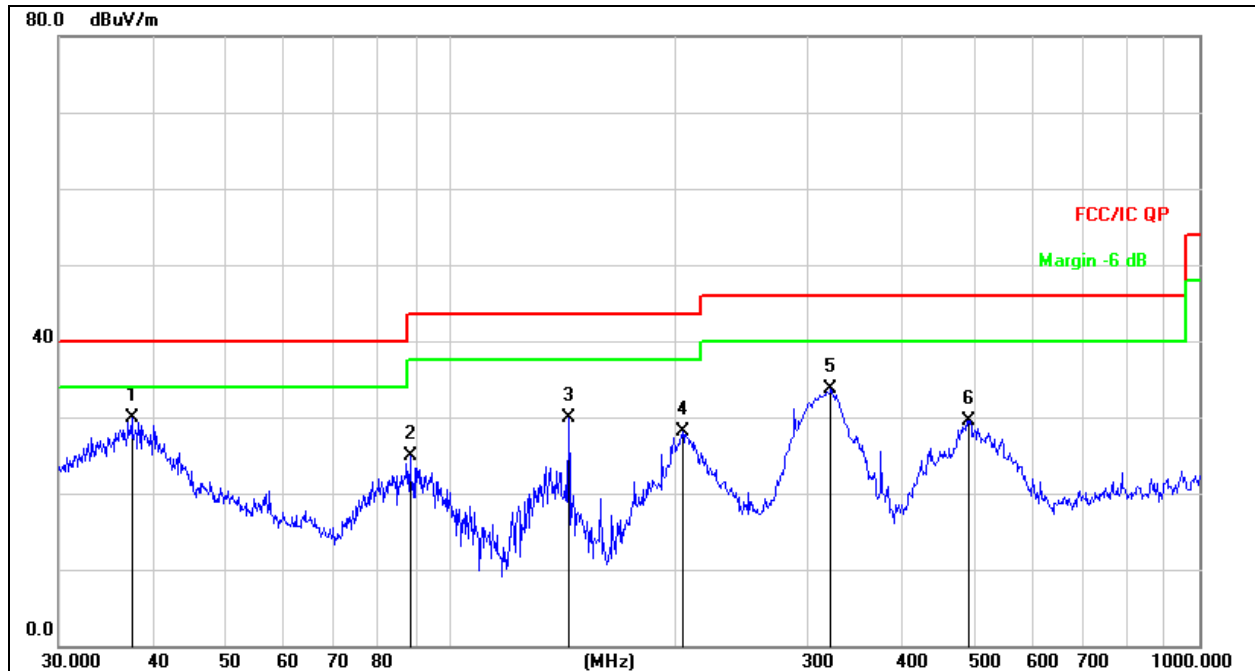


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	37.5479	45.10	-15.19	29.91	40.00	-10.09	QP
2		88.3421	42.64	-17.79	24.85	43.50	-18.65	QP
3		143.8295	48.93	-19.00	29.93	43.50	-13.57	QP
4		204.2377	43.68	-15.60	28.08	43.50	-15.42	QP
5		322.1886	46.08	-12.46	33.62	46.00	-12.38	QP
6		492.4685	38.40	-8.80	29.60	46.00	-16.40	QP

Temperature:	24.7°C	Relative Humidity:	50%RH
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 2(Worst case)	Test Voltage:	DC 3.85V

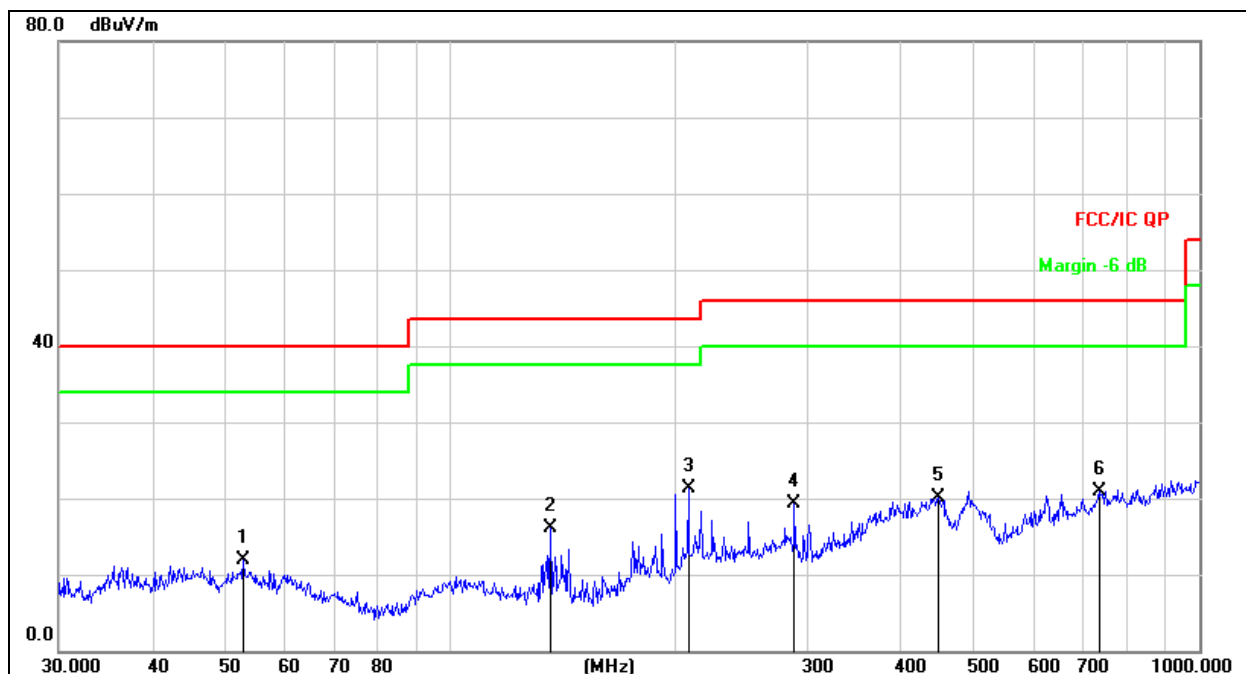


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		52.9453	26.15	-14.30	11.85	40.00	-28.15	QP
2		135.9822	34.54	-18.45	16.09	43.50	-27.41	QP
3	*	207.8501	36.84	-15.50	21.34	43.50	-22.16	QP
4		287.9904	32.88	-13.49	19.39	46.00	-26.61	QP
5		447.9822	29.95	-9.90	20.05	46.00	-25.95	QP
6		734.4913	26.06	-5.21	20.85	46.00	-25.15	QP

Temperature:	24.7°C	Relative Humidity:	50%RH
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 2(Worst case)	Test Voltage:	DC 3.85V

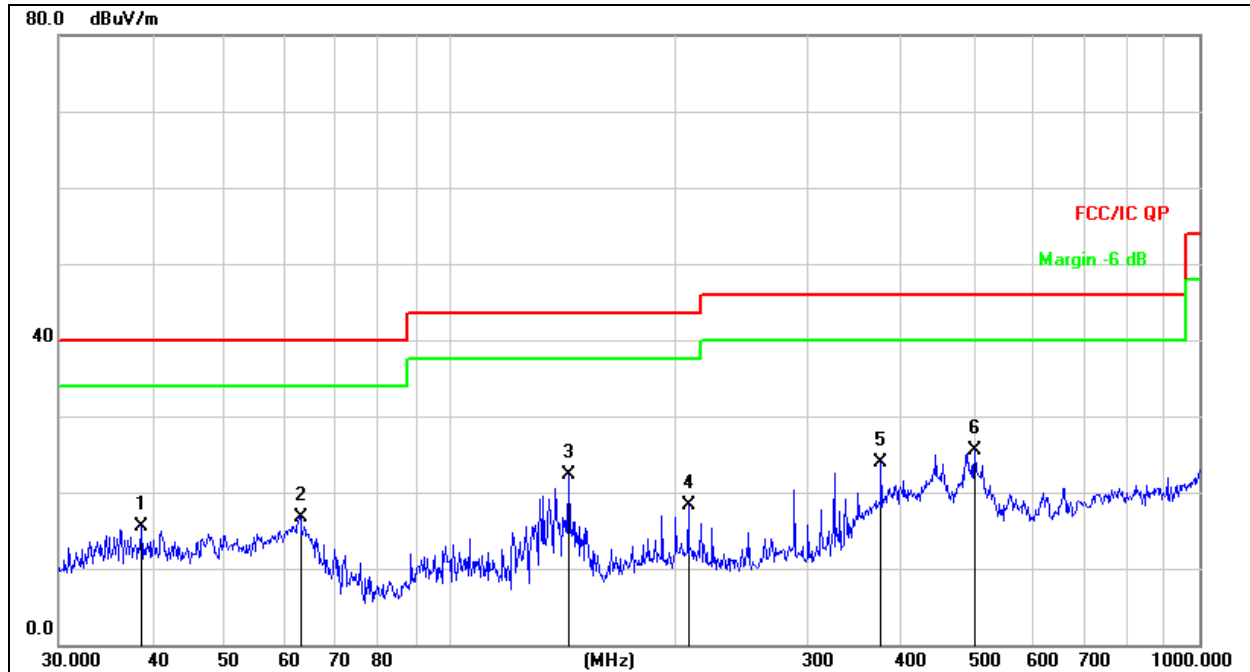


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		38.7518	30.40	-14.96	15.44	40.00	-24.56	QP
2		63.0916	32.73	-16.10	16.63	40.00	-23.37	QP
3		143.8295	41.23	-19.00	22.23	43.50	-21.27	QP
4		207.8501	33.89	-15.50	18.39	43.50	-25.11	QP
5		375.9385	35.05	-11.15	23.90	46.00	-22.10	QP
6	*	501.1790	34.07	-8.65	25.42	46.00	-20.58	QP


ST-B5Q2SK
9kHz-30MHz

Temperature:	24.7℃	Relative Humidity:	50%RH
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 1	Polarization:	Coaxial(Worst)

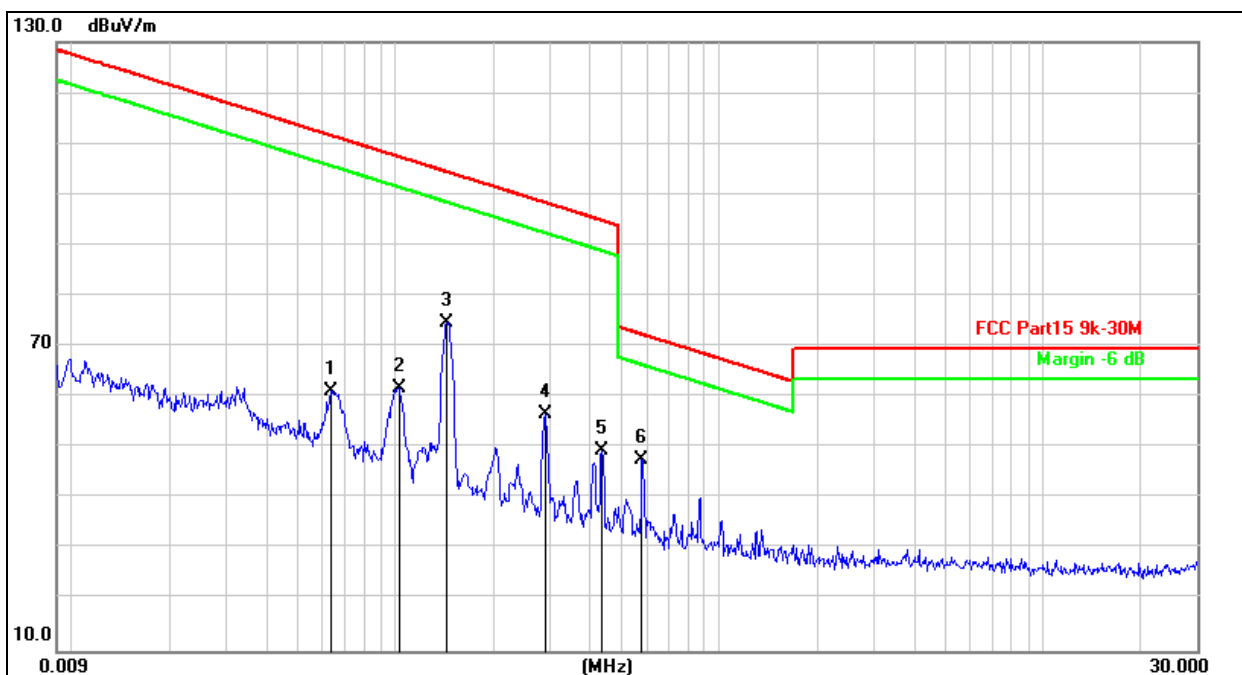

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		0.0631	68.66	-7.55	61.11	111.6	-50.49	peak
2		0.1026	69.33	-7.49	61.84	107.38	-45.54	peak
3		0.1442	82.12	-7.57	74.55	104.42	-29.87	peak
4		0.2898	64.25	-7.72	56.53	98.36	-41.83	peak
5		0.4347	57.03	-7.62	49.41	94.84	-45.43	peak
6	*	0.5774	55.05	-7.49	47.56	72.38	-24.82	peak


Temperature:	24.7°C	Relative Humidity:	50%RH
Pressure:	101 kPa	Test Voltage:	DC 3.85V
Test Mode:	Mode 2	Polarization:	Coaxial(Worst)

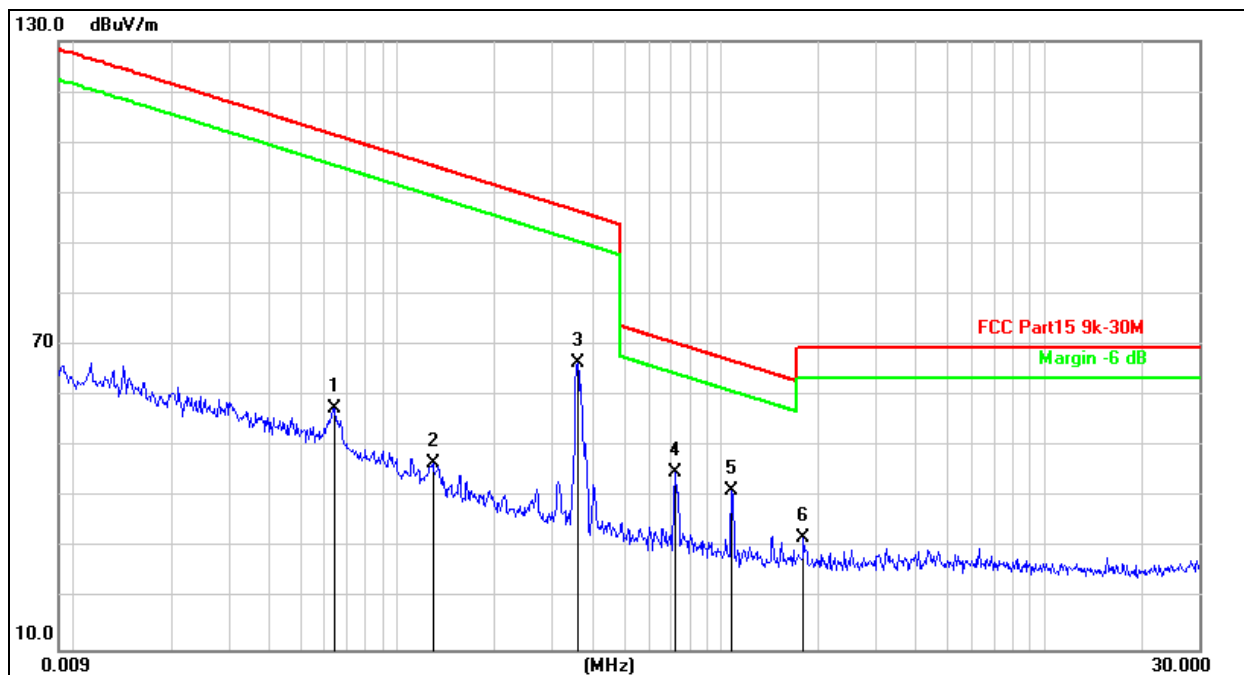

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.0641	65.26	-7.57	57.69	111.47	-53.78	peak
2		0.1287	54.18	-7.54	46.64	105.41	-58.77	peak
3		0.3607	74.07	-7.67	66.40	96.46	-30.06	peak
4	*	0.7188	52.44	-7.36	45.08	70.48	-25.40	peak
5		1.0783	48.80	-7.36	41.44	66.97	-25.53	peak
6		1.7976	39.25	-7.33	31.92	69.54	-37.62	peak

Between 30MHz – 1GHz

Temperature:	24.7℃	Relative Humidity:	50%RH
Pressure:	101KPa	Phase:	Horizontal
Test Mode:	Mode 1(Worst case)	Test Voltage:	AC 120V/60Hz

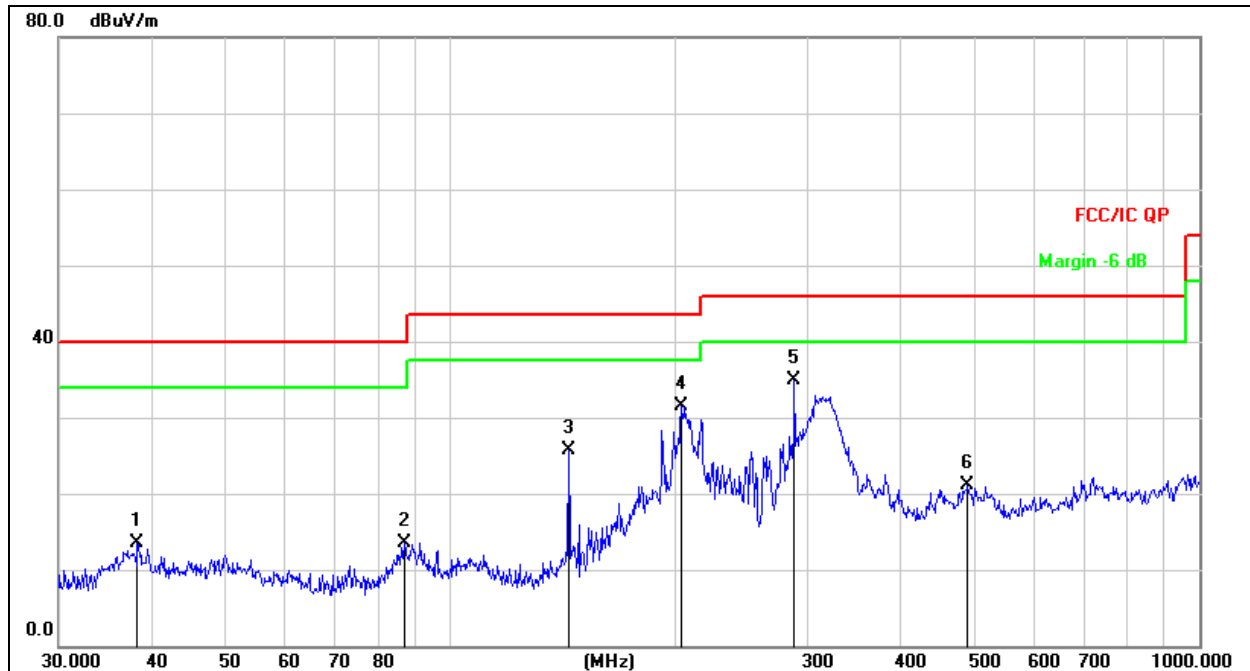


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		38.2120	28.56	-15.07	13.49	40.00	-26.51	QP
2		86.8068	31.68	-18.15	13.53	40.00	-26.47	QP
3		143.8295	44.80	-19.00	25.80	43.50	-17.70	QP
4		203.5228	47.19	-15.62	31.57	43.50	-11.93	QP
5	*	287.9904	48.30	-13.49	34.81	46.00	-11.19	QP
6		490.7447	29.88	-8.84	21.04	46.00	-24.96	QP

Temperature:	24.7°C	Relative Humidity:	50%RH
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 1(Worst case)	Test Voltage:	AC 120V/60Hz

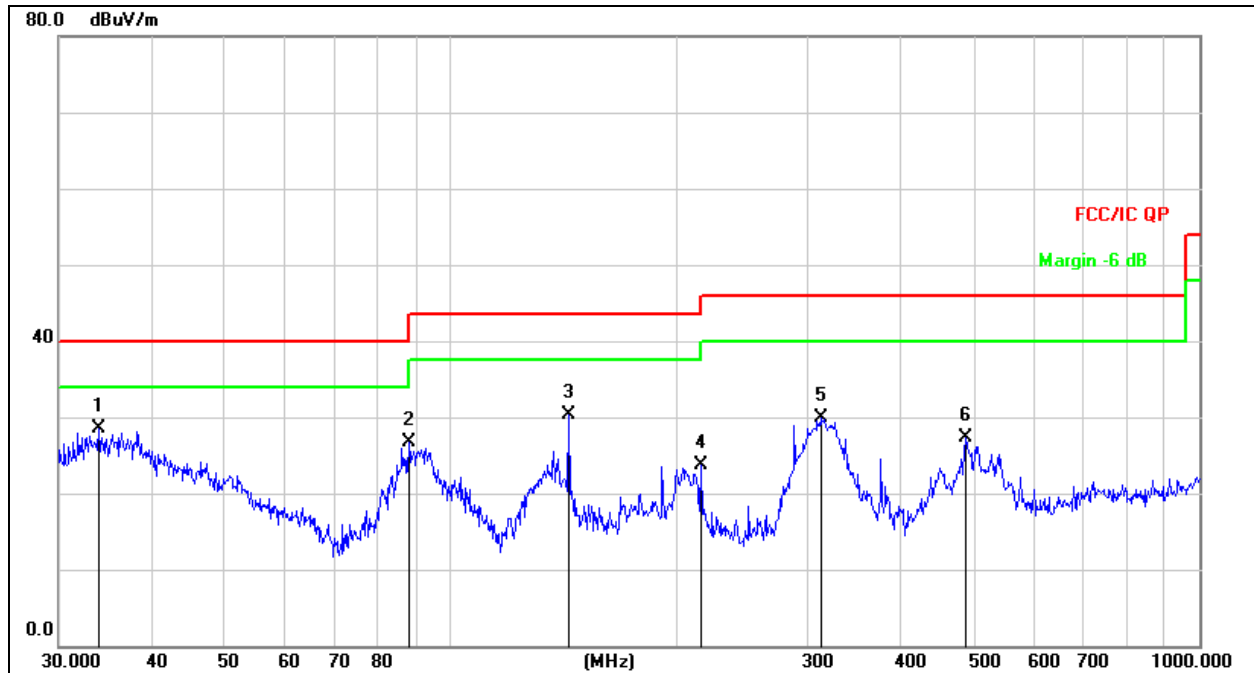


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	33.9174	44.33	-15.89	28.44	40.00	-11.56	QP
2		88.0329	44.47	-17.86	26.61	43.50	-16.89	QP
3		143.8295	49.39	-19.00	30.39	43.50	-13.11	QP
4		216.0240	39.06	-15.26	23.80	46.00	-22.20	QP
5		312.1794	42.67	-12.81	29.86	46.00	-16.14	QP
6		487.3151	36.15	-8.93	27.22	46.00	-18.78	QP

Temperature:	24.7°C	Relative Humidity:	50%RH
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 2(Worst case)	Test Voltage:	DC 3.85V

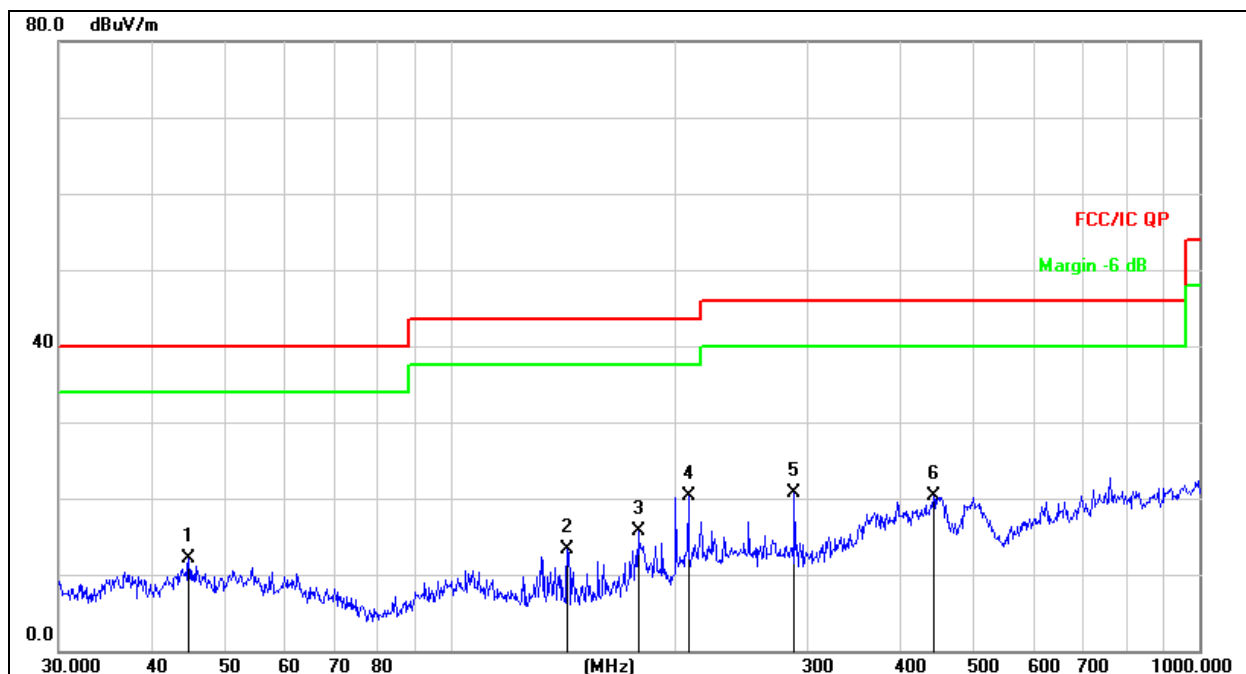


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		44.7433	26.46	-14.33	12.13	40.00	-27.87	QP
2		143.3261	32.23	-18.96	13.27	43.50	-30.23	QP
3		178.1327	33.01	-17.34	15.67	43.50	-27.83	QP
4	*	207.8501	35.88	-15.50	20.38	43.50	-23.12	QP
5		287.9904	34.10	-13.49	20.61	46.00	-25.39	QP
6		441.7426	30.25	-10.02	20.23	46.00	-25.77	QP

Temperature:	24.7°C	Relative Humidity:	50%RH
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 2(Worst case)	Test Voltage:	DC 3.85V

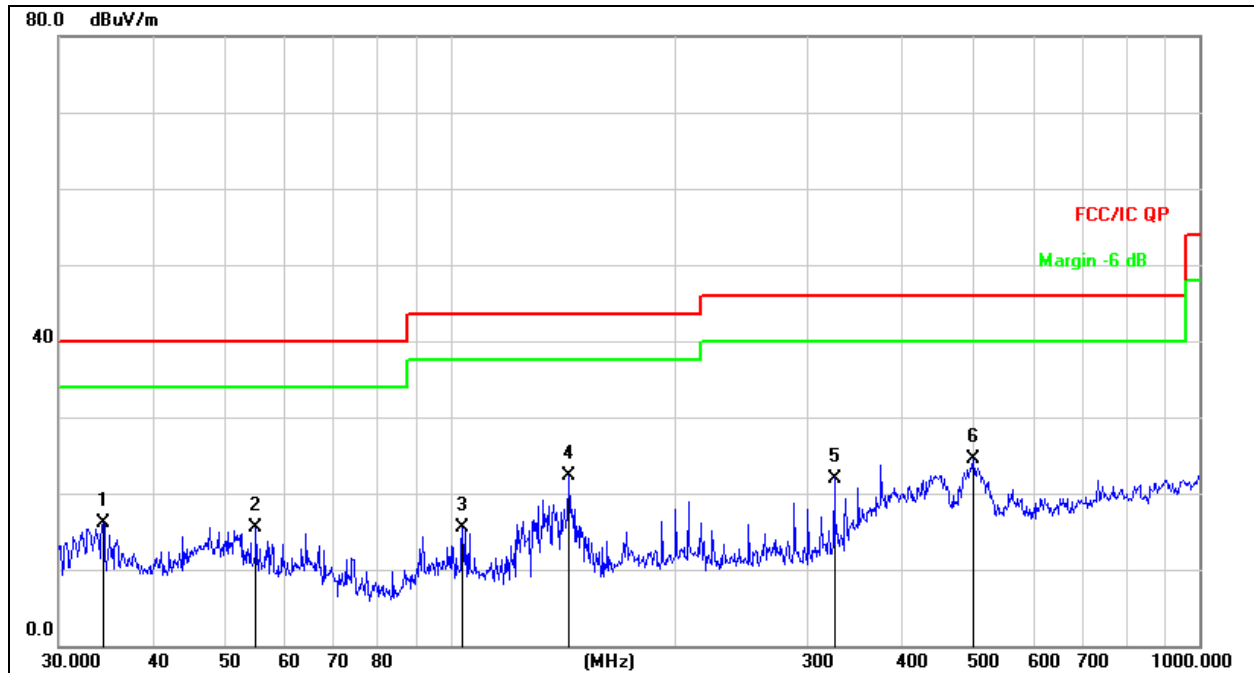

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		34.3964	31.90	-15.80	16.10	40.00	-23.90	QP
2		55.0274	30.08	-14.58	15.50	40.00	-24.50	QP
3		103.8055	31.74	-16.20	15.54	43.50	-27.96	QP
4	*	143.8295	41.38	-19.00	22.38	43.50	-21.12	QP
5		325.5958	34.34	-12.34	22.00	46.00	-24.00	QP
6		499.4247	33.03	-8.62	24.41	46.00	-21.59	QP

8. Bandwidth Test

8.1 Test Procedure

1. Set RBW = 1%~5% OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.



8.2 Test Setup



8.3 Test Result



ST-B10Q2SK

Frequency (kHz)	20dB bandwidth (kHz)	Result
128	0.018	Pass
360	0.003	Pass

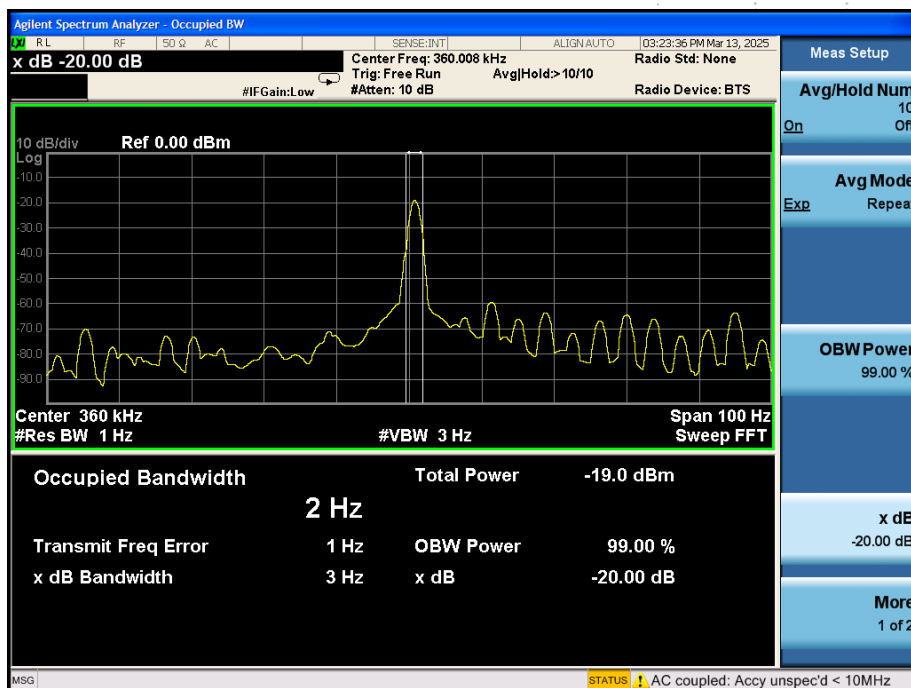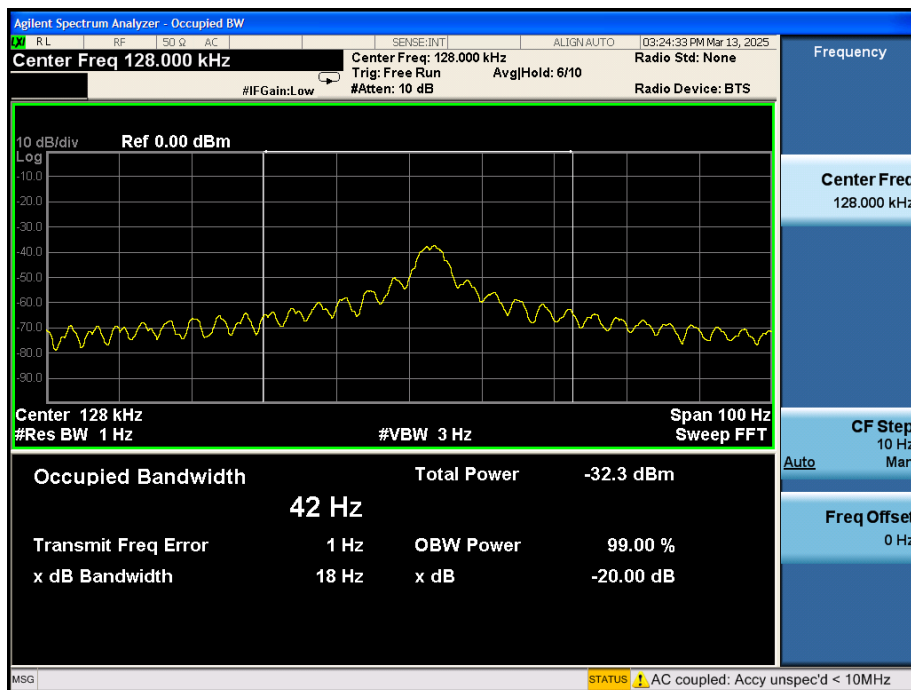

ST-B5Q2SK

Frequency (kHz)	20dB bandwidth (kHz)	Result
128	0.018	Pass
360	0.011	Pass

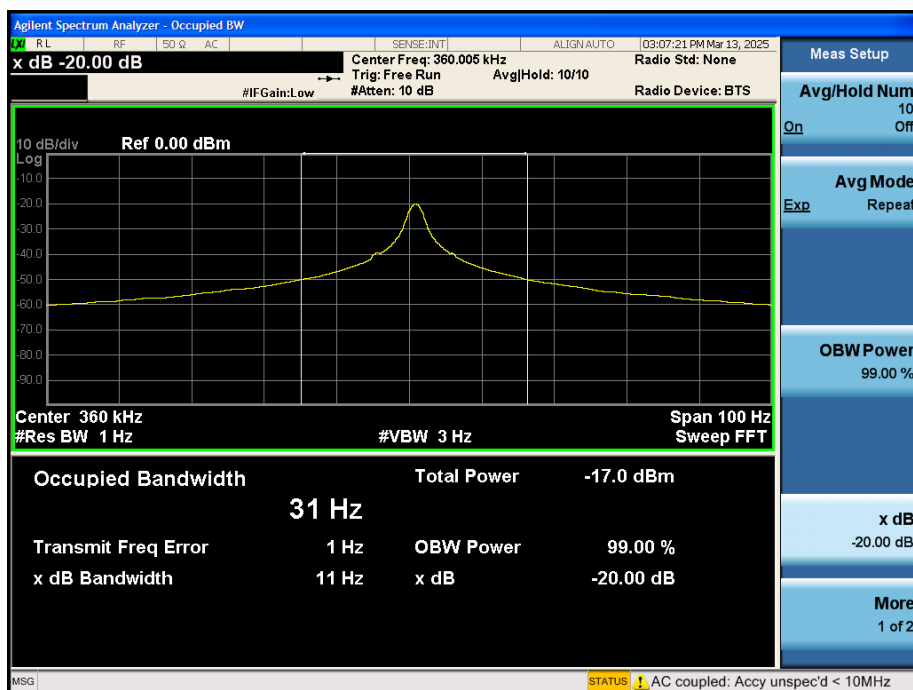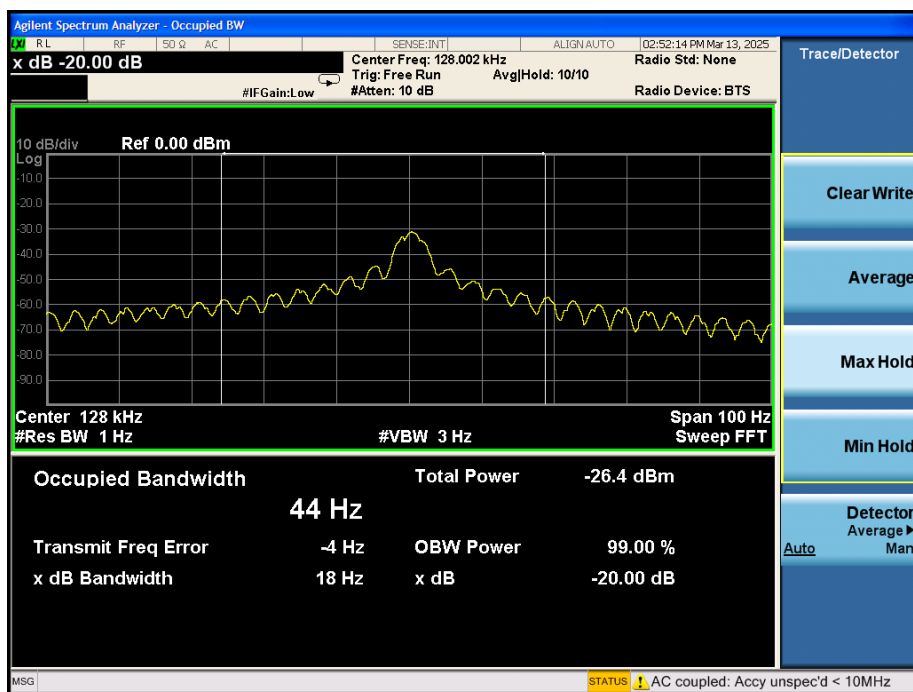


9. Antenna Requirements

9.1 Limit

For intentional device, according to FCC 47 CFR Section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Test Result


The antenna used for this product is Inductive Loop coil antenna.

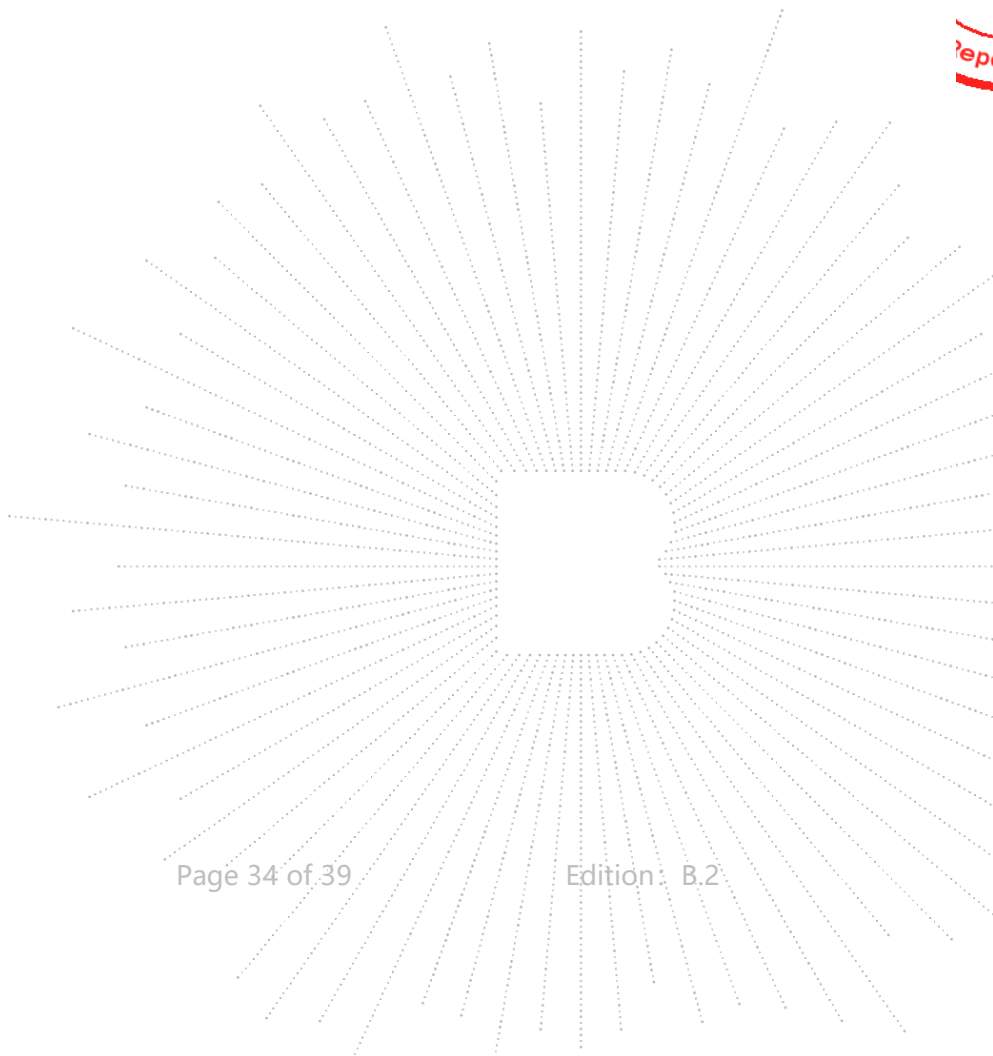


10. EUT Photographs

EUT Photo

ST-B5Q2SK

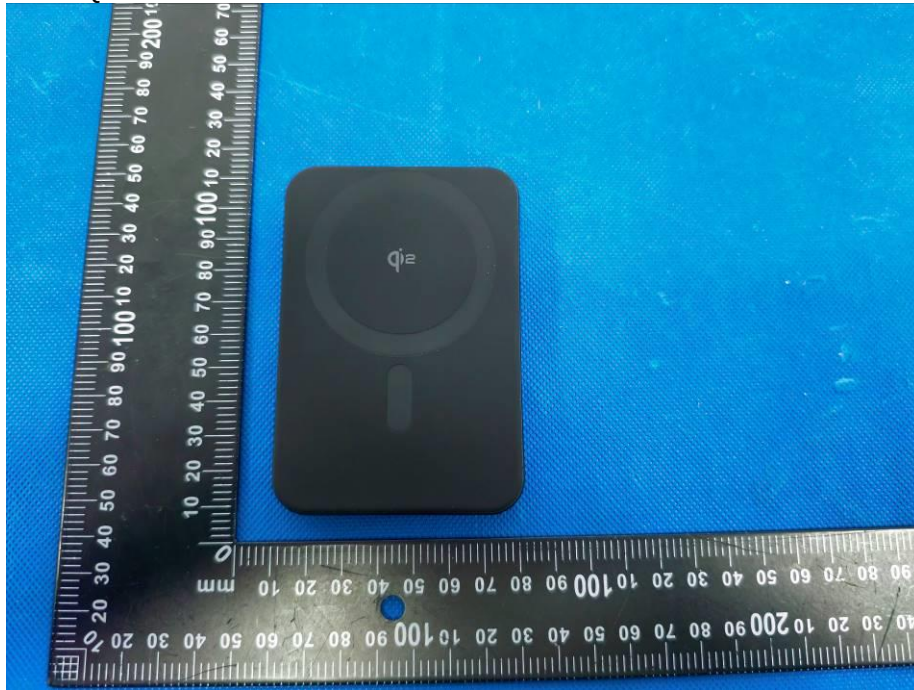


ST-B10Q2SK

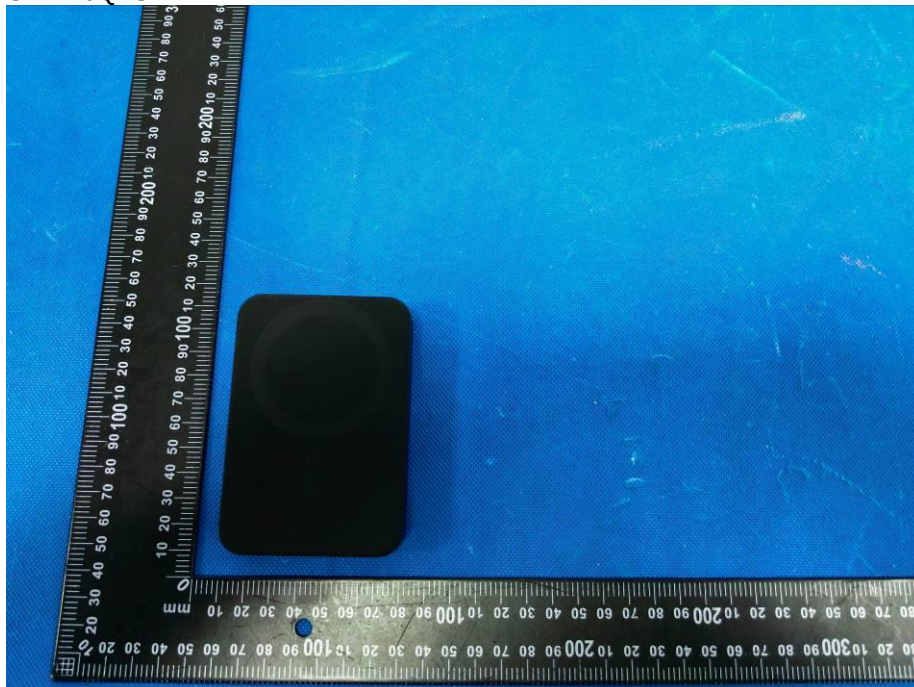

NOTE: Appendix-Photographs Of EUT Constructional Details

11. EUT Test Setup Photographs

ST-B10Q2SK
Conducted emissions

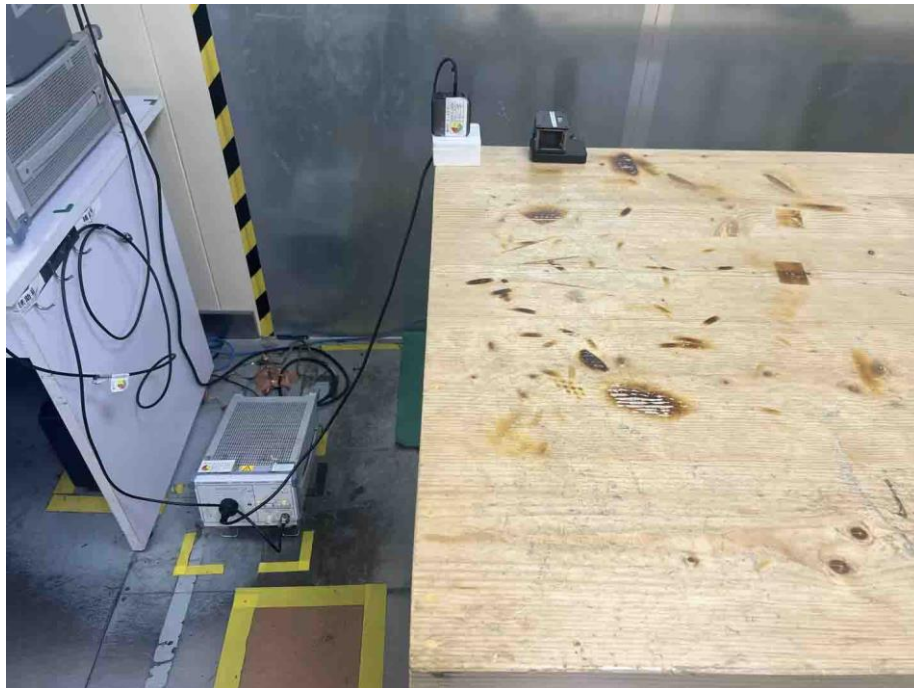

Radiated Measurement Photos
9kHz-30MHz




30MHz-1GHz




ST-B5Q2SK
Conducted emissions



Radiated Measurement Photos
9kHz-30MHz

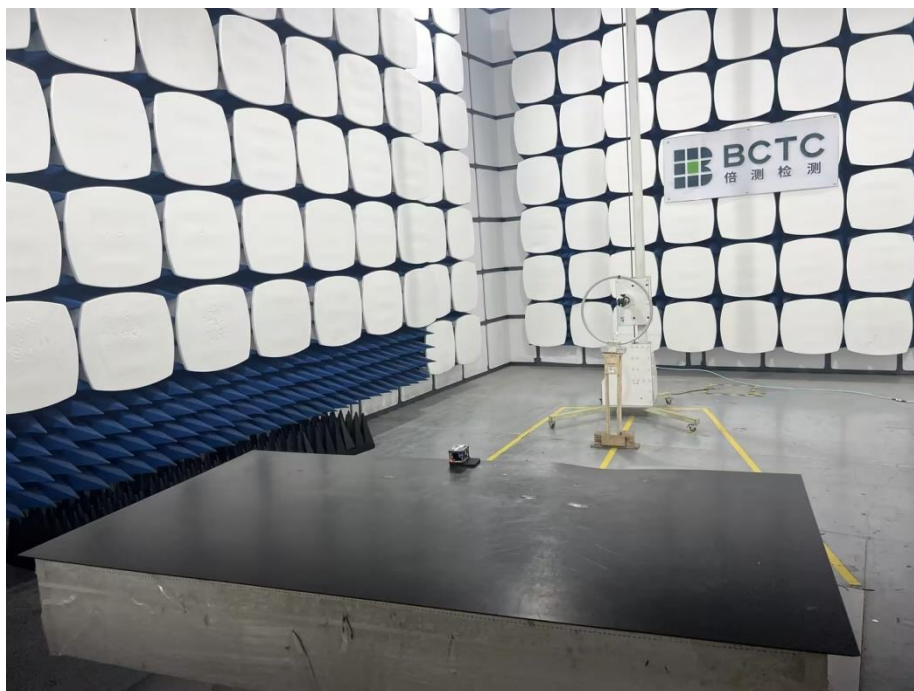

30MHz-1GHz

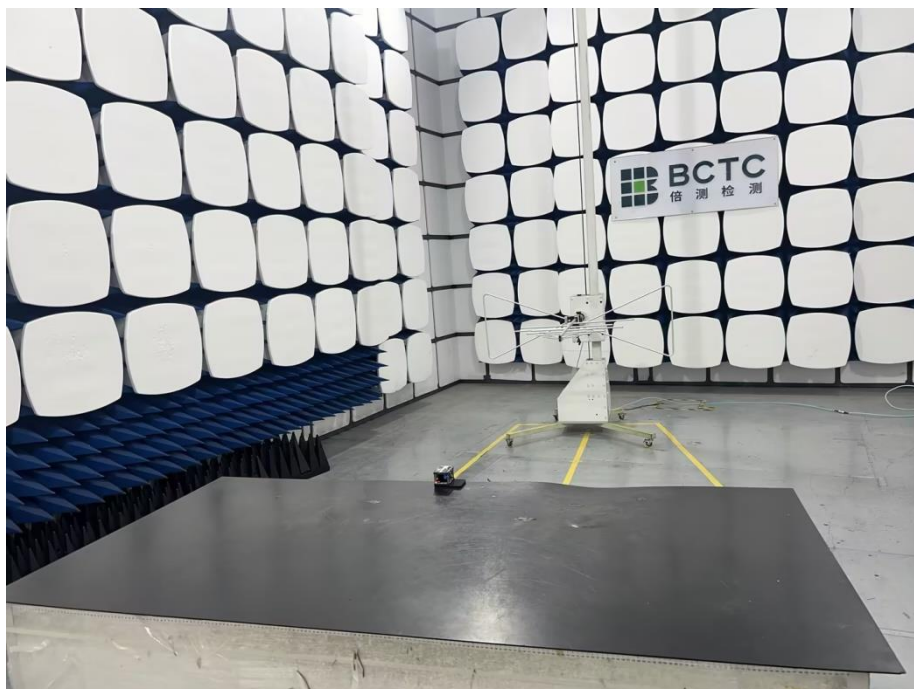

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****