

INTRODUCING

KLIOTM

EXPERIENCE ART EVOLVINGTM

INSTRUCTION MANUAL

Model No.: K42U



Read all of the instructions before using this monitor and keep the instruction manual in a safe place for future reference.

Caution



The lightning flash with arrowhead symbol, within an equilateral triangle is intended to alert the user to the presence of un-insulated "dangerous voltage" within the products enclosure that may be of sufficient magnitude to constitute a risk of electric shock to the persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



Correct disposal of this Product

(Waste Electrical & Electronic Equipment (WEEE))

Your product is designed and manufactured with high quality materials and components which can be recycled and reused.

This symbol means that electrical and electronic equipment, at their end-of-life should be disposed of separately from your household waste.

Please dispose of this equipment at your local community waste collection/recycling centre.

In the USA there are separate collection systems for used electrical and electronic products. Please help us to conserve the environment we live in!



This unit complies with America Safety directives.

FCC ID: ZGT-K42U

This unit complies with FCC directives.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

Safety Information

To ensure reliable and safe operation of this equipment, please read carefully all the instructions in this user guide, especially the safety information below.


Electrical safety

- To prevent overload, don't share the same mains supply socket with too many other items of equipment.
 - Do not place any connecting wires where they may be stepped on or tripped over.
 - Do not place heavy items on the leads, which may damage them.
 - Hold the Mains plug, not the wires, when removing from a socket.
 - During a thunderstorm or while leaving the Monitor for long periods, disconnect the aerial (if outdoor) and power adaptor from the supply.
 - Do not allow water or moisture to enter the Monitor. Do NOT use in wet or moist areas such as Bathrooms, steamy kitchens or near swimming pools.
- Pull the plug out immediately, and seek professional help if:
 - the mains plug or cable is damaged.
 - liquid is spilt onto the set, or if it is accidentally exposed to water or moisture.
 - anything accidentally penetrates the ventilation slots.
 - the set does not work normally.
 - Do NOT remove the safety covers. There are no user serviceable parts inside. You may invalidate the warranty. Qualified personnel only are permitted to service this apparatus.
 - To avoid battery leakage, remove exhausted batteries from the remote control handset, or when not using for along period.
 - Do NOT break open or throw exhausted batteries on a fire.

Physical safety

- Do NOT block ventilation slots in the back cover. You may place the Monitor in a cabinet, but ensure at least 5cm (2") clearance all around the unit.
- Do NOT tap or shake the Monitor screen, you may damage the internal circuitry. Take good care of the remote control, do not drop it or allow it to come into contact with liquids.
- To clean the Monitor use a soft dry cloth. Do NOT use solvents or petrol based fluids. For stubborn stains, you may use a damp soft cloth with diluted detergent.

Product Introduction



Led Indicator Remote Control window
(Keep clear)

(IR) Infrared Receiver: Receives IR signals from the remote control.
(Power on/Standby)LED Indicator: Press to turn on and off.


Indicator on(Red)	Standby mode
Indicator on(Green)	Power on mode

Technical Specification

- Screen Size	41.6 inch(diagonal)
- Resolution	3840 x 2160
- Aerial input	75 Ω (unbalanced)
- Audio output power	2x8W
- Power Consumption	100-240V ~ 50/60Hz 1.1A

Wall Mounting

The TV is provided with mounting holes 200x100mm for a VESA approved wallmounting bracket (NOT SUPPLIED). Remove the Posi screws holding the base to the base bracket and lift the base away (do not remove the base mounting bracket). Mount the VESA bracket using 4xM6x8mm ISO metric threaded screws (not supplied). Do not use screws longer than 8mm, it will occur damage to the internal parts.



- Do not fasten the screws too tight for this may damage the TV or cause the TV to fall, resulting in personal injury.
- Do not mount your TV at more than a 15 degree tilt.
- Always use two people to mount the TV to a wall.
- Do not install your Wall Mount Kit while your TV is turned on. It may result in personal injury due to electric shock.

Remote Control

The remote control is using Infra-Red(IR). Point it towards the front of the monitor. The remote control may not work correctly if it is operated out of range or out of angle.



- : Turn on/standby the monitor
- MUTE: Silence status
- : Cursor up/down keys the menu
- : Cursor left/right keys the menu
- OK: Confirm button.
- : Go to program you latest program
- : Call out menu
- : Home button
- +/-: Volume up/down.

Remote Control

Type	infrared
Control distance	5m
Control angle	30° (horizontal)
Batteries	2 x 1.5V, size AAA

3.3 Startup

Turn on the TV box while indicator light is blue. Enter into main menu at about 30 seconds.



Chapter 4 Home

There are apps which you usual use.

You can add the apps according to your own preference.

Please tick the apps you need. Tick it again when you don't need it.



Chapter 5 My Apps

Move to "My Apps", Press OK to enter in.

You can see icons referring to different function on the picture.



5.1 Email


Move to "Email". Press OK to enter in.

It is a convenient way for you to send and receive your emails.

You can configure Email for most accounts in just a few steps. Move to Email address.

Press to input your email address and password.


And press the icon "next".

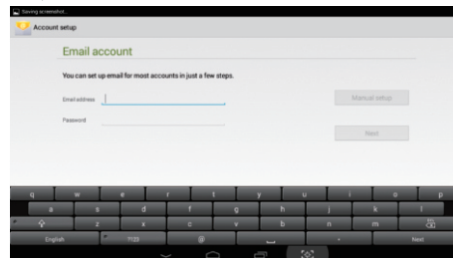

5.2 Calculator

Move to "Calculator" icon. Press OK to enter in.

It is a simple calculator for arithmetical workings.

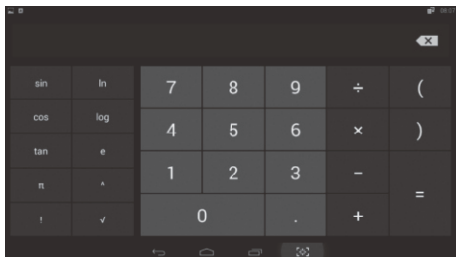

5.3 PPPoE

Move to "PPPoE" icon, Press OK to enter in. You can configure PPPoE here.



5.4 Browser

Move to "Browser", Press OK to enter in.

It is a convenient way for you to go to your desired website.

Notice: Please go to the system setting to set the internet connection before entering into the website.



5.5 Movie Player

Move "Movie Player", Press OK to enter into the movie list.

