

RF Test Data for 5G Wi-Fi (Conducted Measurements)

General Description of EUT	
Product Name:	tablet computer
Test Model:	AYANEO NEXT Pro, AYANEO NEXT
Sample ID:	RW-C-202204-0125-1-2#
Environmental Conditions	
Temperature:	23.8°C
Relative Humidity:	48%
Test Voltage:	DC 11.55V
Test Engineer:	Huang jian ping
Note: For a more detailed features description, please refer to the report TBR-C-202204-0125-113. All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name (AYANEO NEXT Pro for test only).	

Contents


1. Emission Bandwidth.....	3
1.1. Test Result.....	3
2.1. Test Graphs	4
2. Occupied channel bandwidth	18
2.1. Test Result.....	18
2.2. Test Graphs	20
3. Min emission bandwidth	47
3.1. Test Result.....	47
3.2. Test Graphs	48
4. Maximum conducted output power.....	62
4.1. Test Result.....	62
5. Maximum power spectral density	65
5.1. Test Result.....	65
5.2. Test Graphs	68
6. Band edge measurements	95
6.1. Test Result.....	95
6.2. Test Graphs	100
7. Emissions in Restricted Bands.....	124
7.1. Test Result.....	124
7.2. Test Graphs	136
8. Conducted Spurious Emission.....	172
8.1. Test Result.....	172
8.2. Test Graphs	176
9. Frequency Stability	230
9.1. Test Result.....	230
10. Duty Cycle	237
10.1. Test Result.....	237
10.2. Test Graphs.....	239

1. Emission Bandwidth


1.1. Test Result

TestMode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11AMIMO	Ant0	5180	24.72	5167.48	5192.20	---	---
	Ant1	5180	26.88	5165.84	5192.72	---	---
	Ant0	5220	25.16	5207.20	5232.36	---	---
	Ant1	5220	29.24	5205.96	5235.20	---	---
	Ant0	5240	20.08	5229.84	5249.92	---	---
	Ant1	5240	20.00	5229.84	5249.84	---	---
11N20MIMO	Ant0	5180	28.16	5166.68	5194.84	---	---
	Ant1	5180	26.04	5167.48	5193.52	---	---
	Ant0	5220	24.96	5207.24	5232.20	---	---
	Ant1	5220	30.00	5205.44	5235.44	---	---
	Ant0	5240	20.20	5229.84	5250.04	---	---
	Ant1	5240	20.12	5229.92	5250.04	---	---
11N40MIMO	Ant0	5190	40.72	5169.60	5210.32	---	---
	Ant1	5190	40.16	5169.68	5209.84	---	---
	Ant0	5230	40.88	5209.44	5250.32	---	---
	Ant1	5230	41.12	5209.60	5250.72	---	---
11AC20MIMO	Ant0	5180	25.48	5167.16	5192.64	---	---
	Ant1	5180	27.24	5167.08	5194.32	---	---
	Ant0	5220	24.96	5207.64	5232.60	---	---
	Ant1	5220	28.80	5205.72	5234.52	---	---
	Ant0	5240	20.28	5229.68	5249.96	---	---
	Ant1	5240	20.28	5229.68	5249.96	---	---
11AC40MIMO	Ant0	5190	40.96	5169.52	5210.48	---	---
	Ant1	5190	40.08	5170.08	5210.16	---	---
	Ant0	5230	40.56	5209.52	5250.08	---	---
	Ant1	5230	40.16	5209.76	5249.92	---	---
11AC80MIMO	Ant0	5210	80.32	5169.68	5250.00	---	---
	Ant1	5210	80.16	5169.84	5250.00	---	---
11AX20MIMO	Ant0	5180	25.48	5166.28	5191.76	---	---
	Ant1	5180	22.20	5168.88	5191.08	---	---
	Ant0	5220	23.00	5208.80	5231.80	---	---
	Ant1	5220	23.28	5208.72	5232.00	---	---
	Ant0	5240	19.96	5229.92	5249.88	---	---
	Ant1	5240	19.92	5229.92	5249.84	---	---
11AX40MIMO	Ant0	5190	39.84	5170.08	5209.92	---	---
	Ant1	5190	39.60	5170.16	5209.76	---	---
	Ant0	5230	39.92	5209.92	5249.84	---	---
	Ant1	5230	39.84	5210.00	5249.84	---	---
11AX80MIMO	Ant0	5210	80.64	5169.52	5250.16	---	---
	Ant1	5210	80.48	5169.68	5250.16	---	---


2.1.Test Graphs

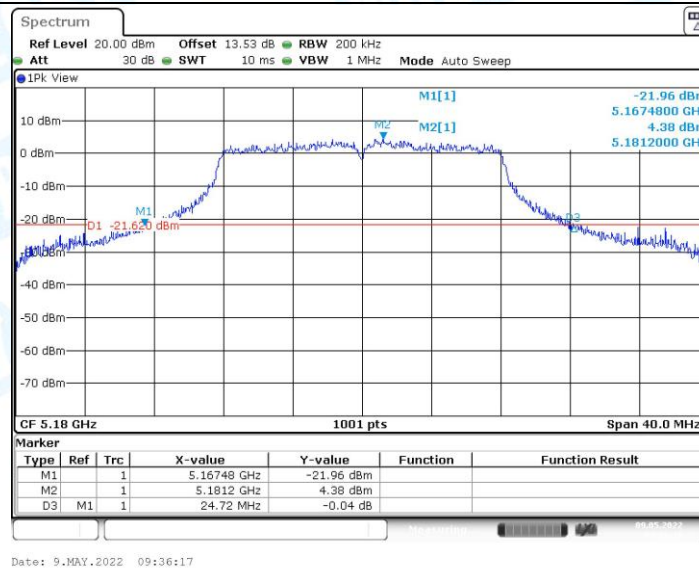


11AMIMO_Ant0_5180

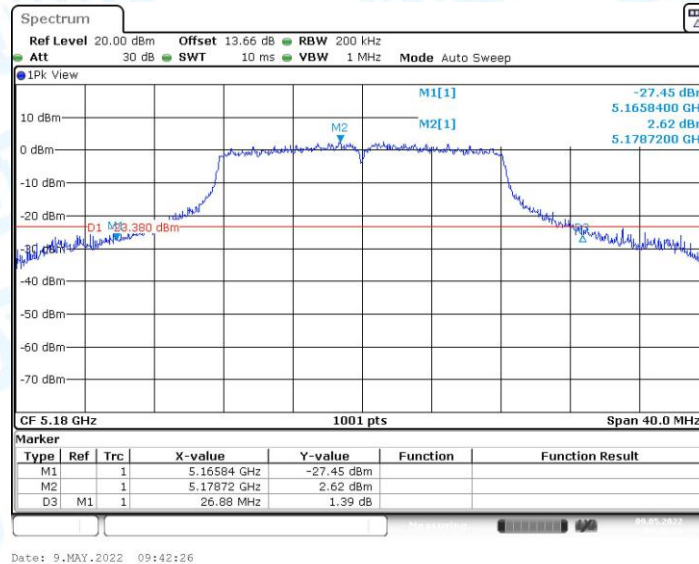


11AMIMO_Ant1_5180

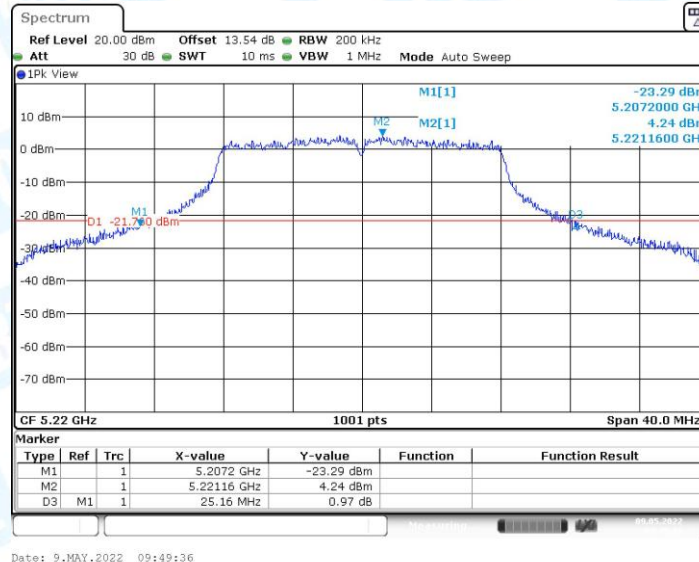


11AMIMO_Ant0_5220

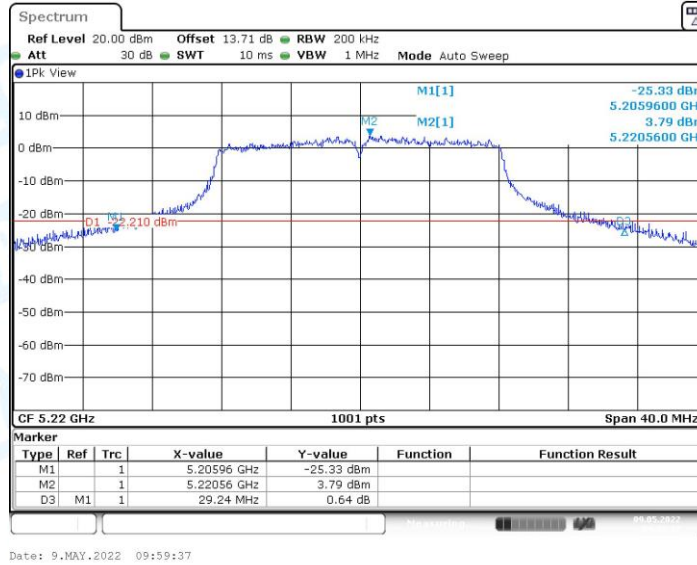


11AMIMO_Ant1_5220

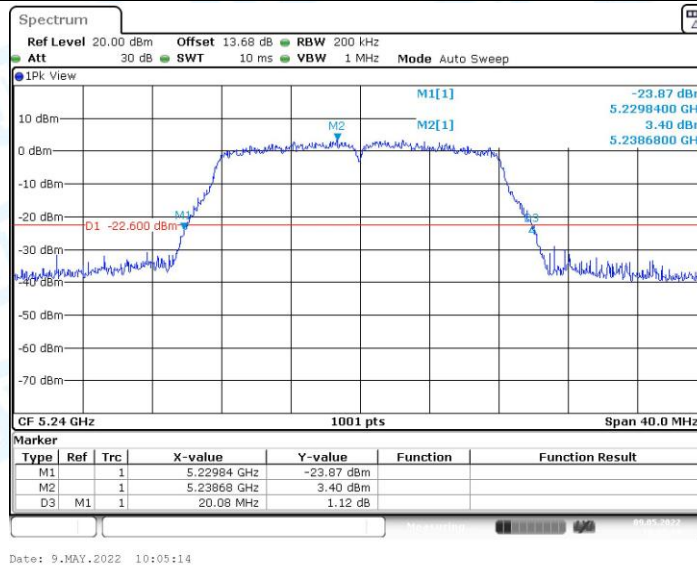


11AMIMO_Ant0_5240

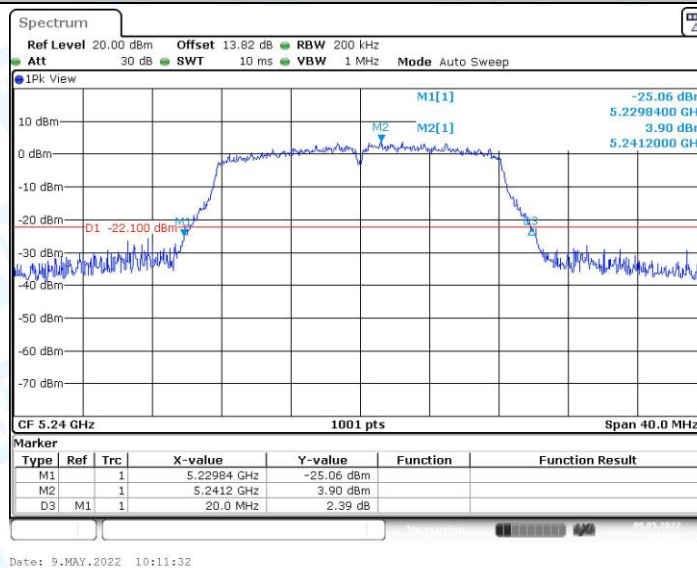


11AMIMO_Ant1_5240

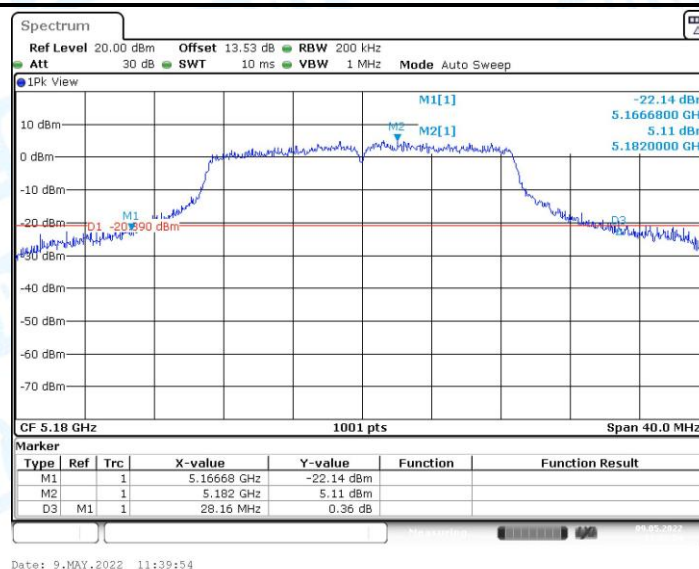


11N20MIMO_Ant0_5180

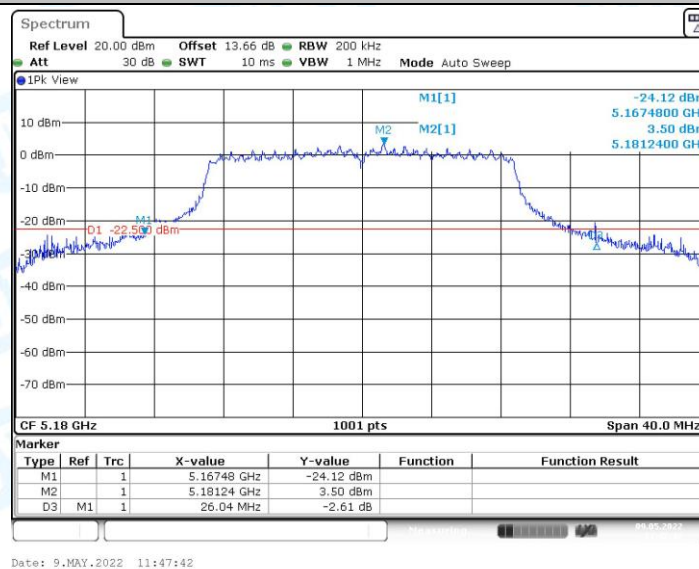


11N20MIMO_Ant1_5180

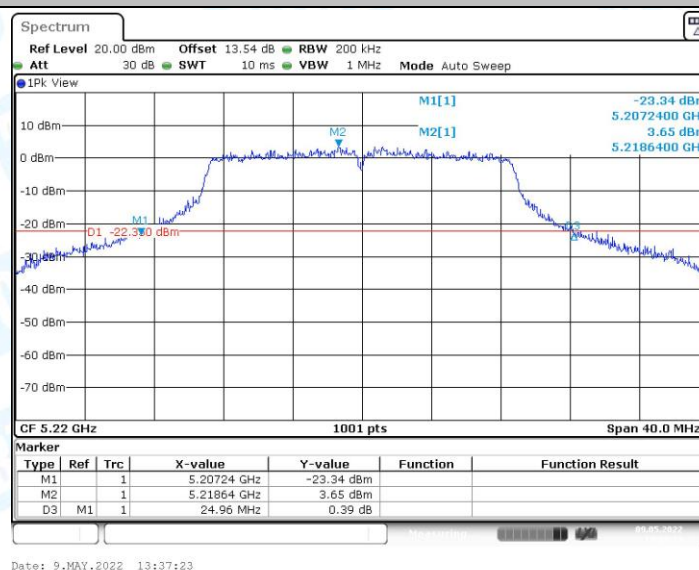


11N20MIMO_Ant0_5220

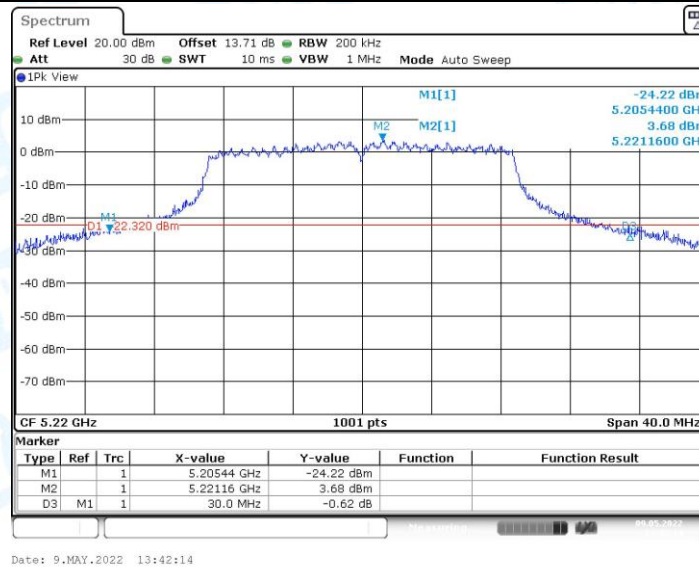


11N20MIMO_Ant1_5220

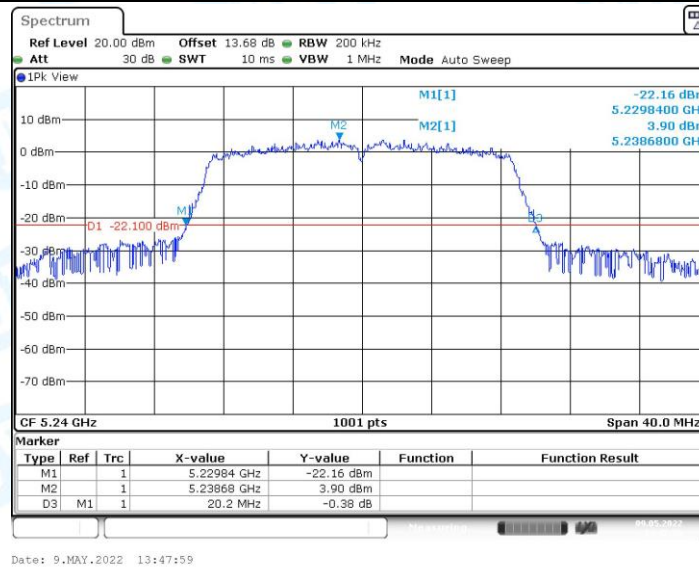


11N20MIMO_Ant0_5240

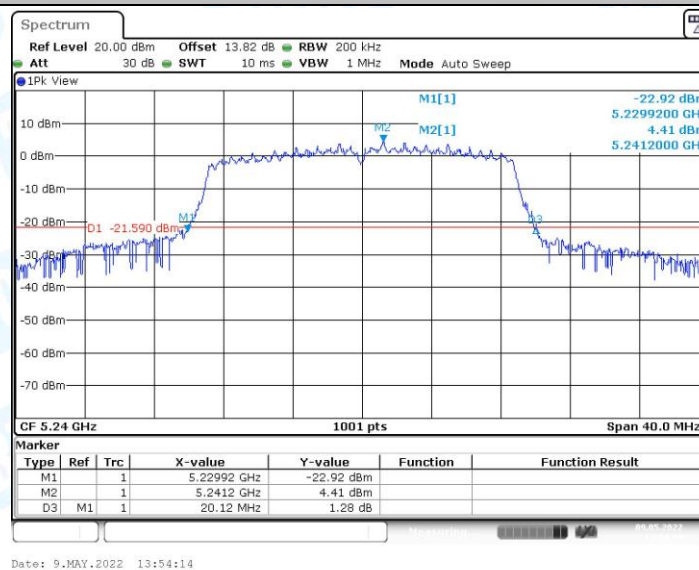


11N20MIMO_Ant1_5240

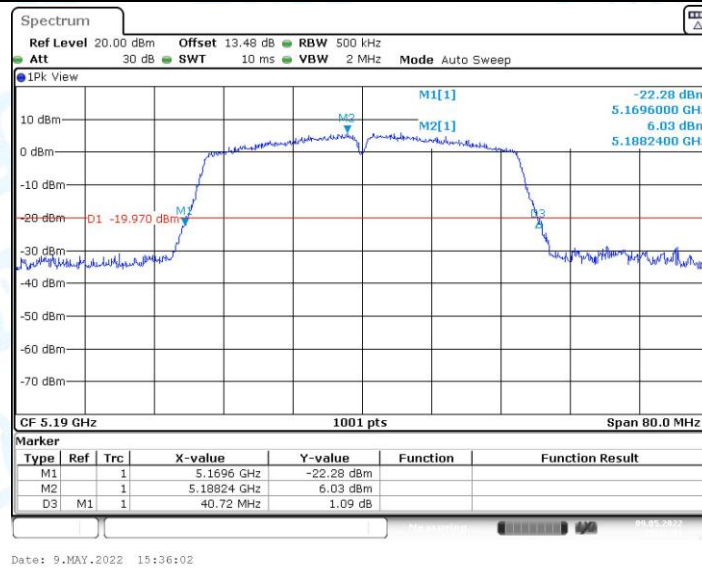


11N40MIMO_Ant0_5190

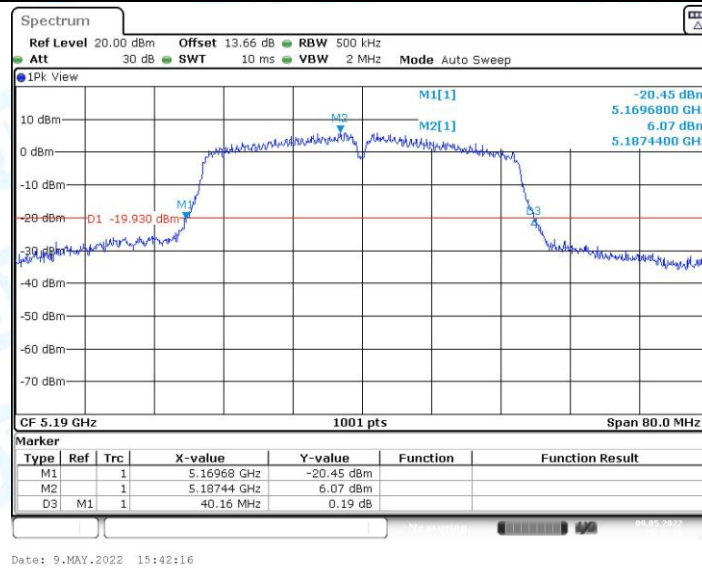


11N40MIMO_Ant1_5190

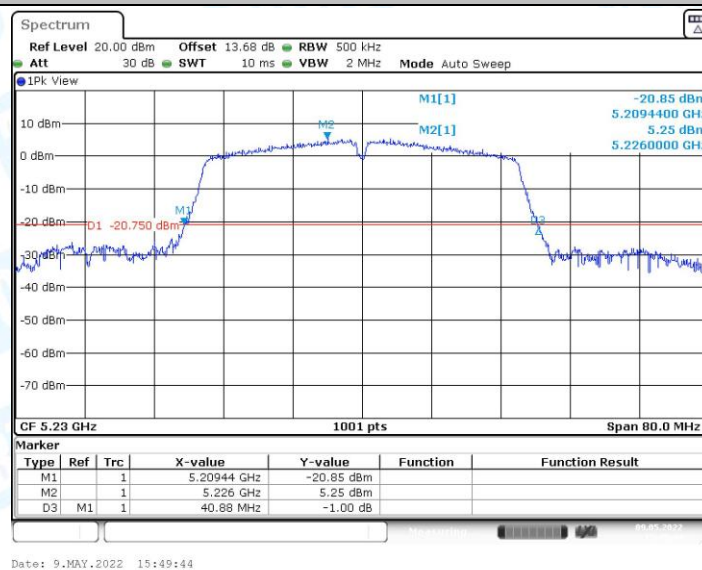


11N40MIMO_Ant0_5230

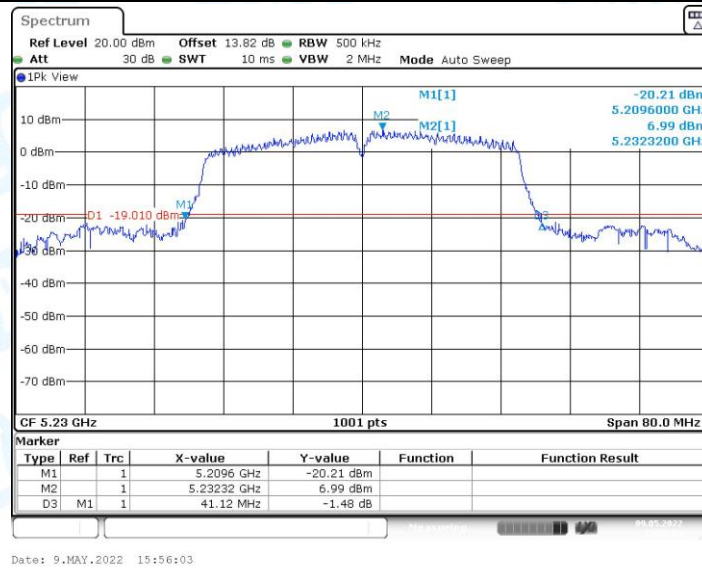


11N40MIMO_Ant1_5230

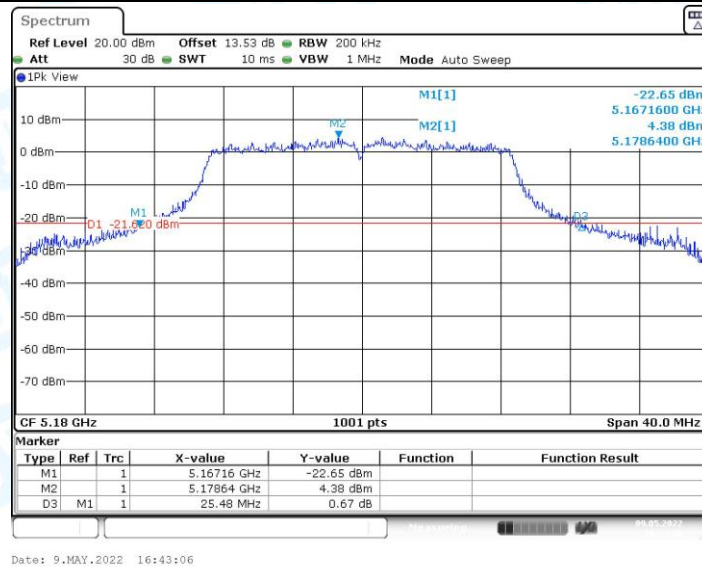


11AC20MIMO_Ant0_5180

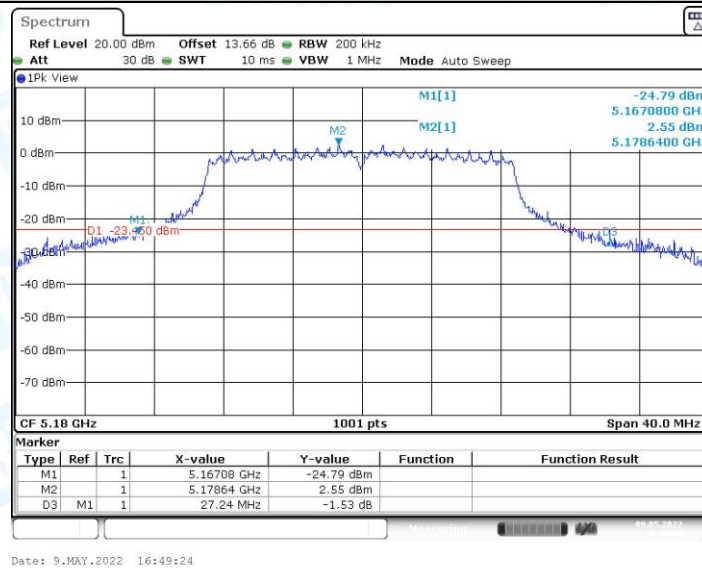


11AC20MIMO_Ant1_5180

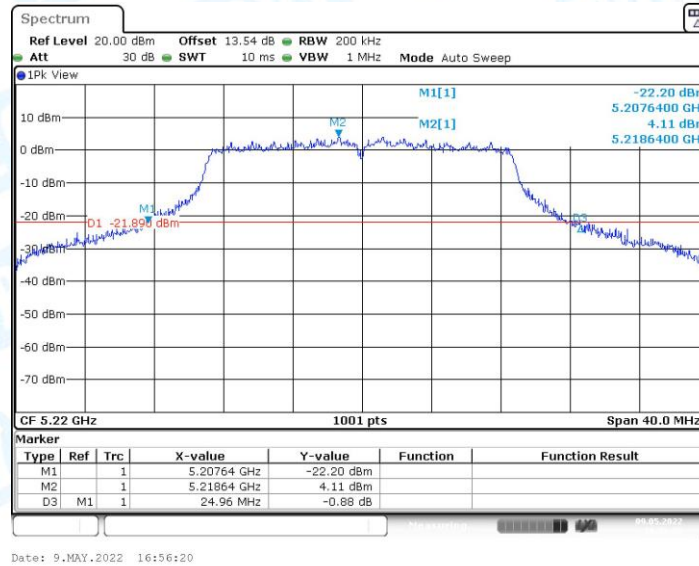


11AC20MIMO_Ant0_5220

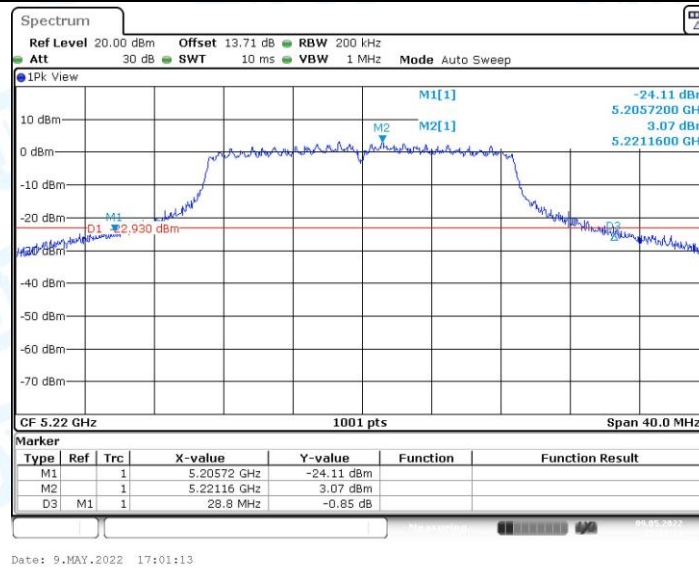


11AC20MIMO_Ant1_5220

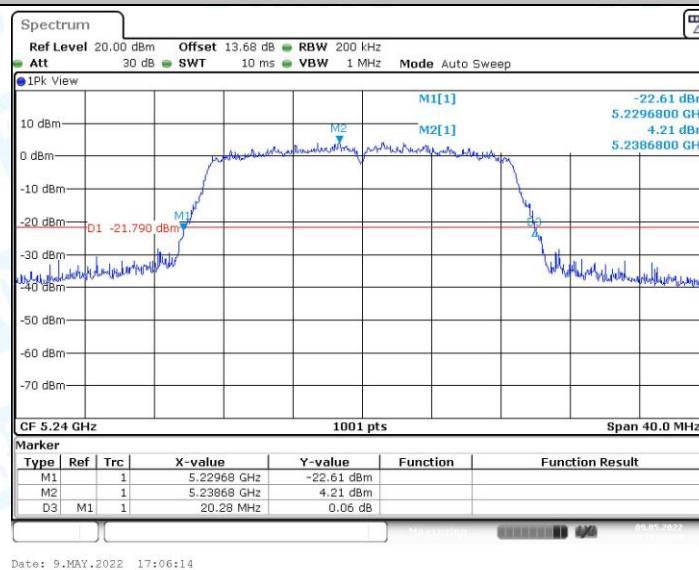


11AC20MIMO_Ant0_5240

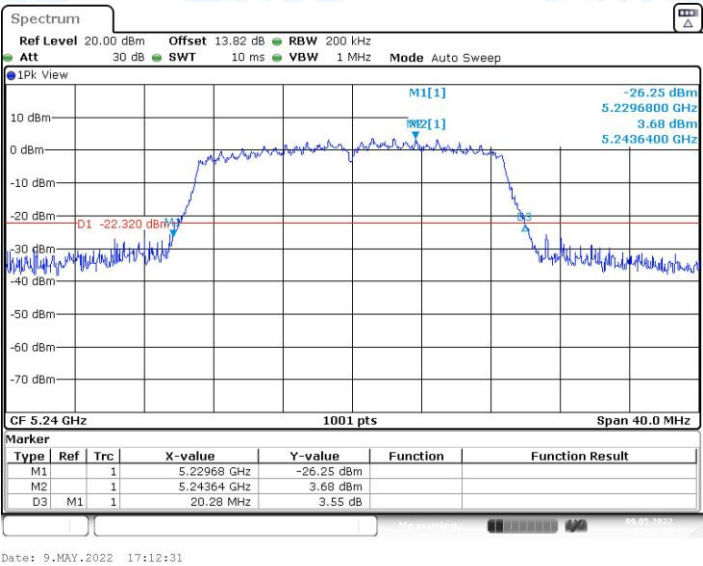


11AC20MIMO_Ant1_5240

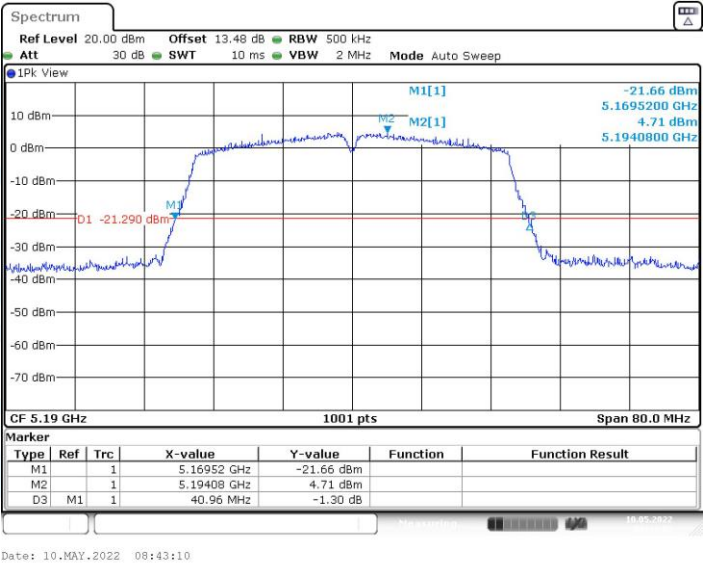


11AC40MIMO_Ant0_5190

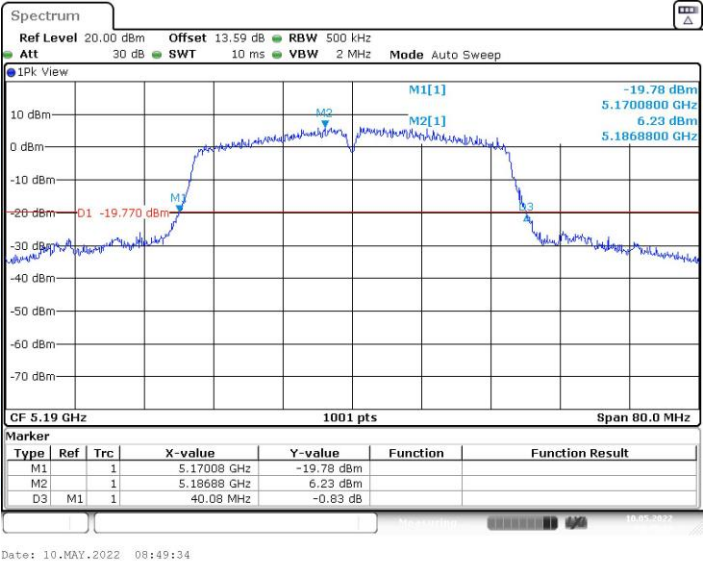


11AC40MIMO_Ant1_5190

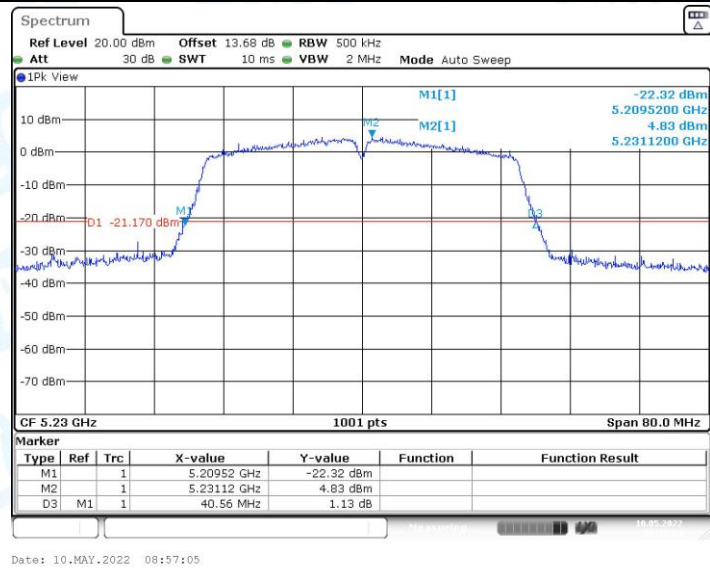


11AC40MIMO_Ant0_5230

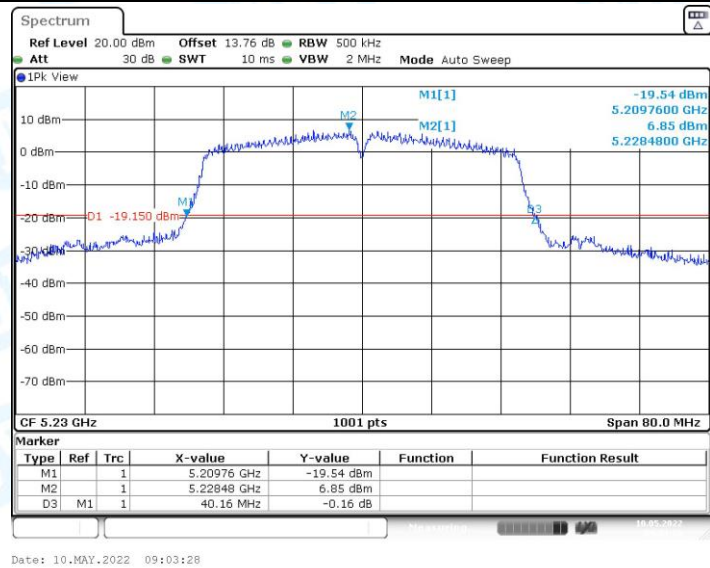


11AC40MIMO_Ant1_5230

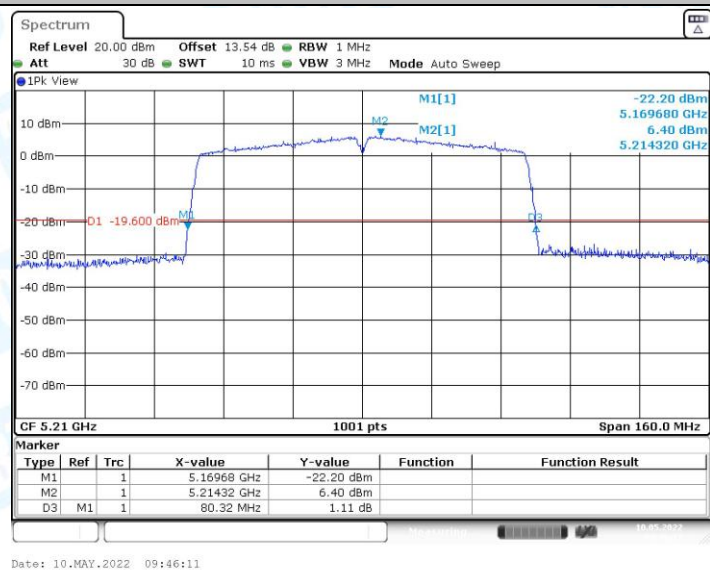


11AC80MIMO_Ant0_5210

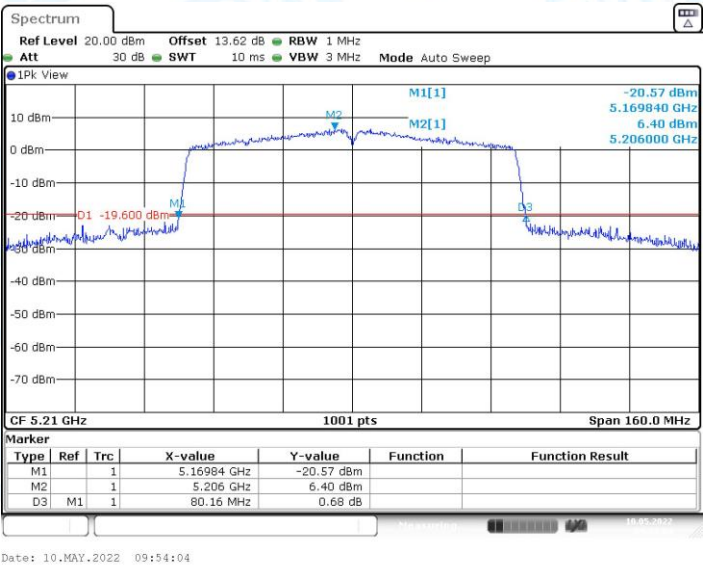


11AC80MIMO_Ant1_5210

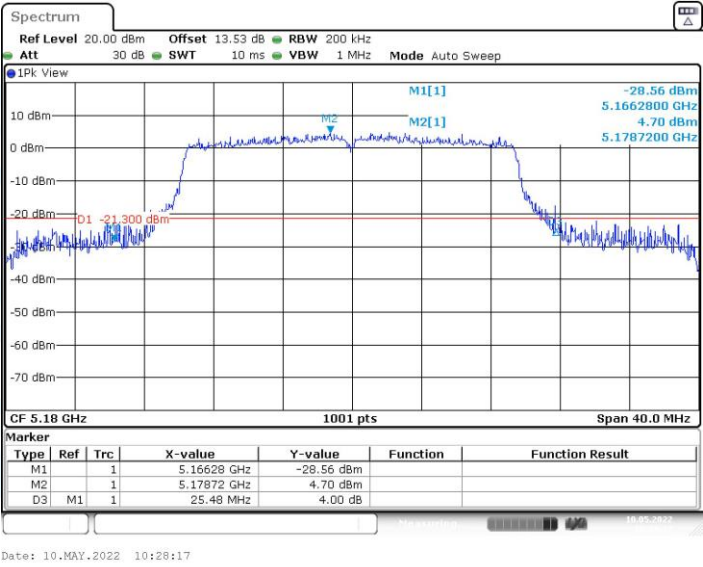


11AX20MIMO_Ant0_5180

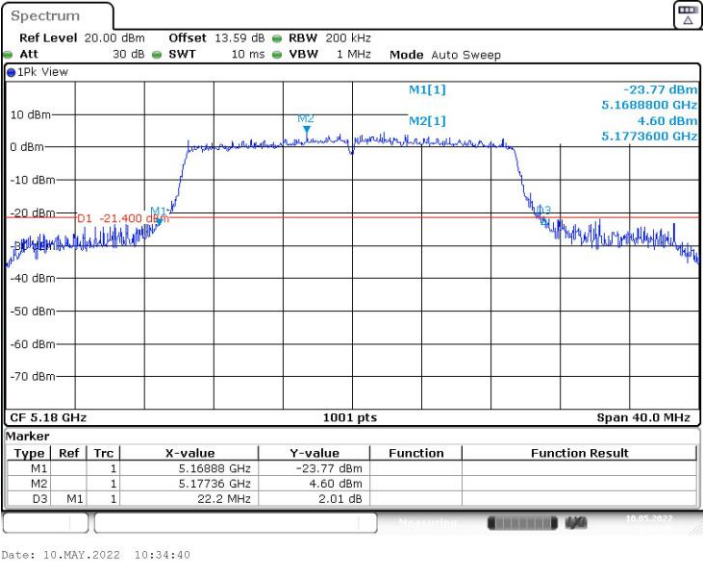


11AX20MIMO_Ant1_5180

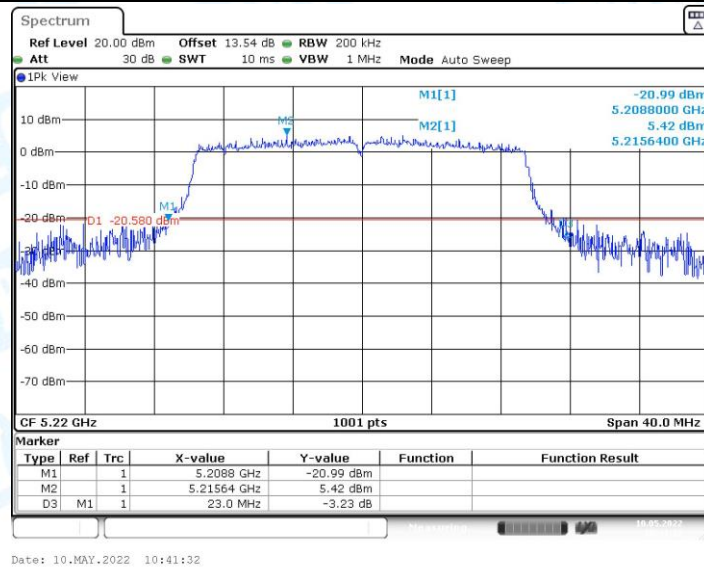


11AX20MIMO_Ant0_5220

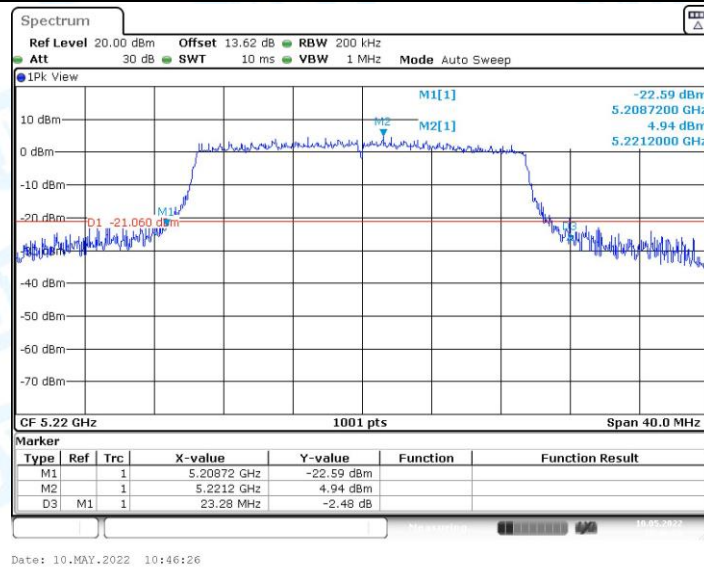


11AX20MIMO_Ant1_5220

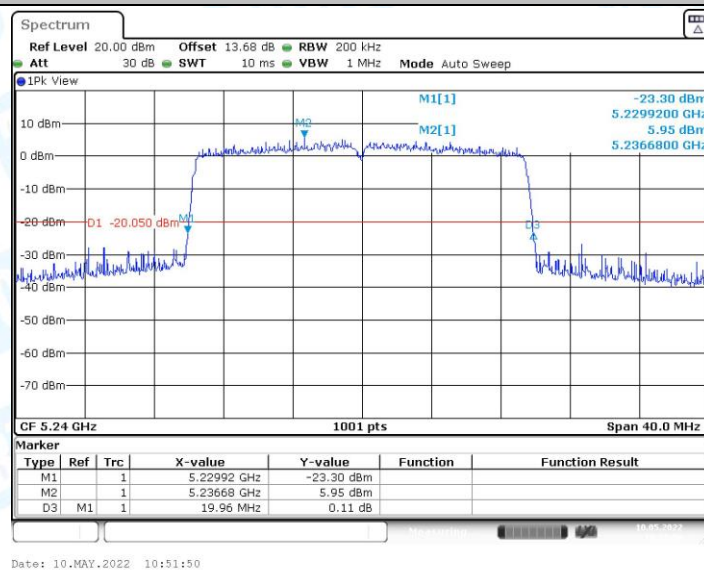


11AX20MIMO_Ant0_5240

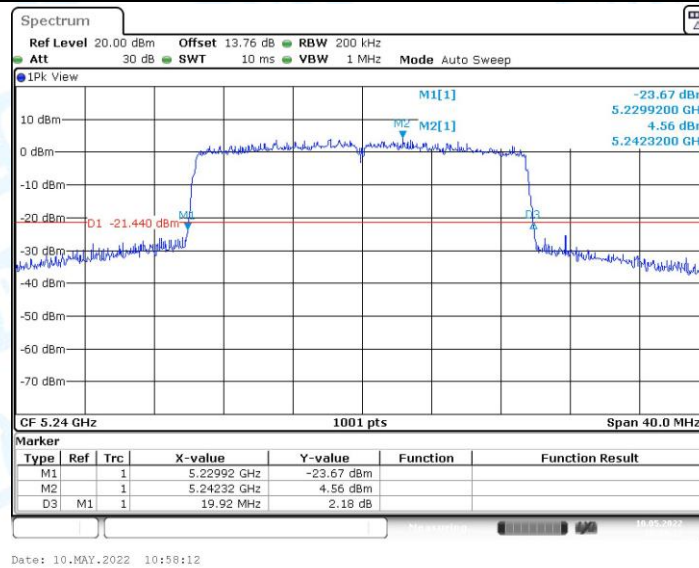


11AX20MIMO_Ant1_5240

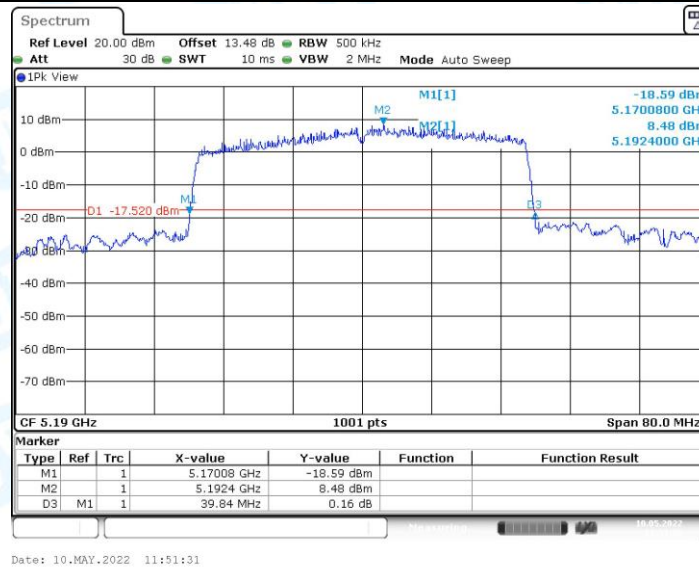


11AX40MIMO_Ant0_5190

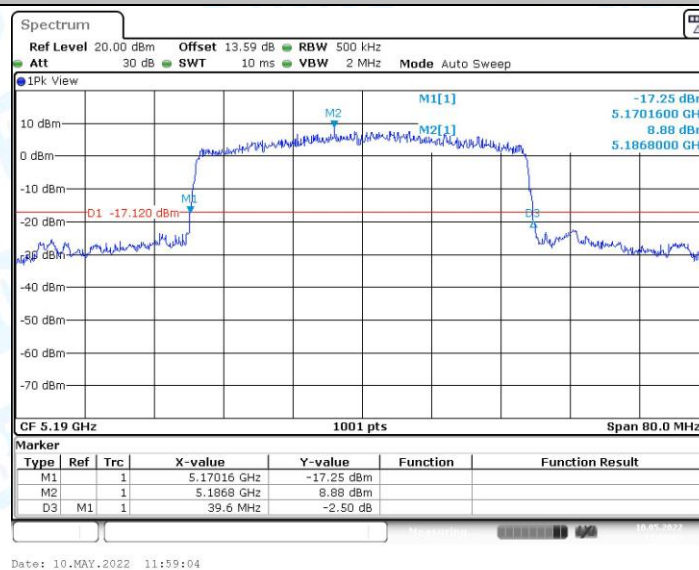


11AX40MIMO_Ant1_5190

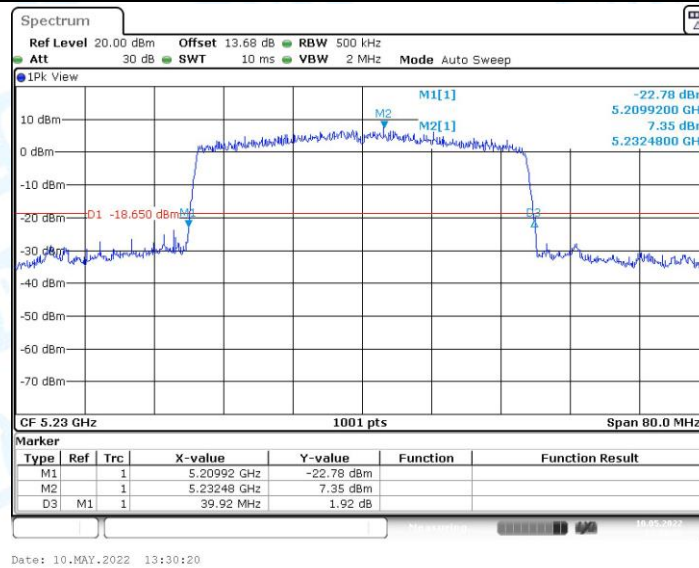


11AX40MIMO_Ant0_5230

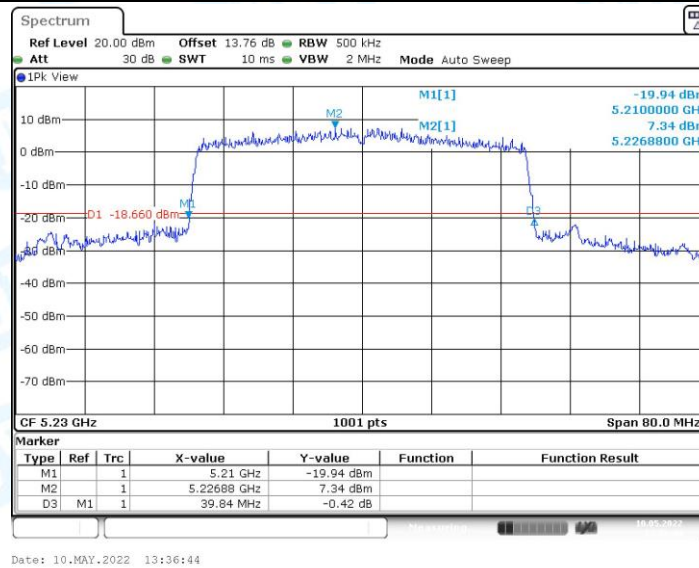

11AX40MIMO_Ant1_5230

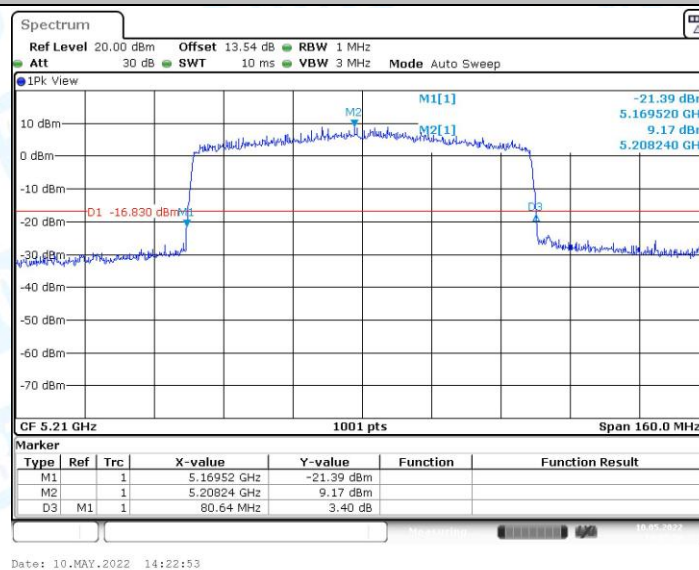

11AX80MIMO_Ant0_5210

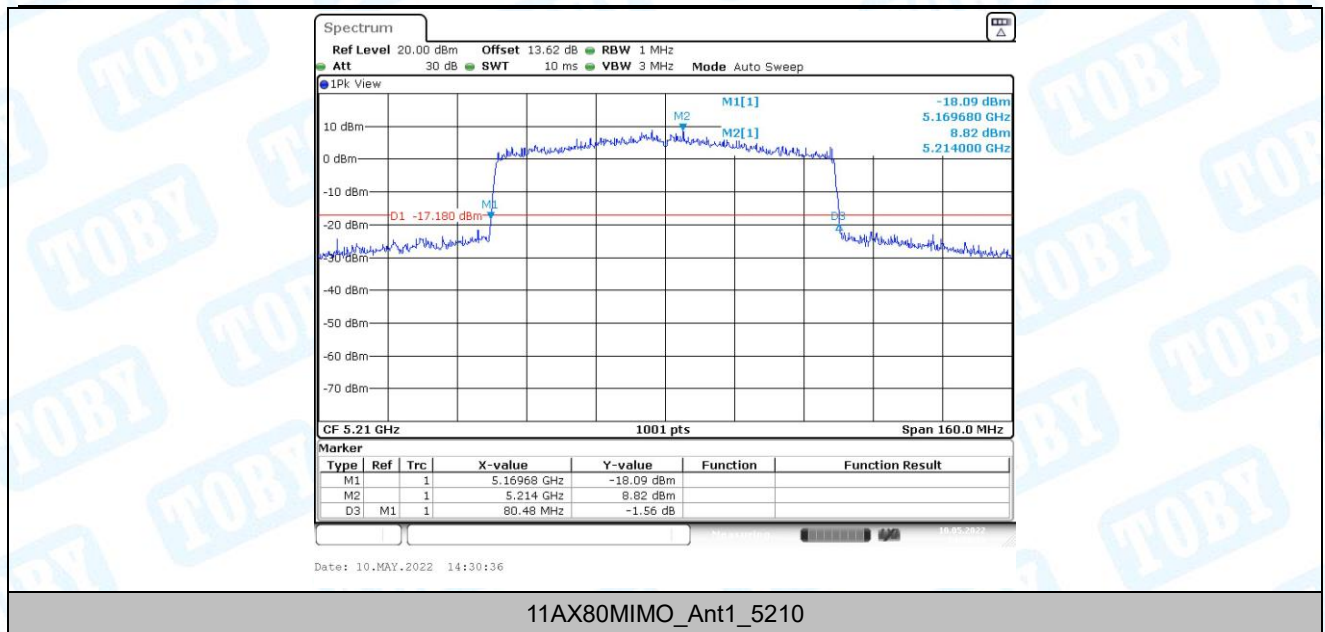


2. Occupied channel bandwidth

2.1. Test Result


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11AMIMO	Ant0	5180	18.262	5170.769	5189.031	---	---
	Ant1	5180	17.862	5171.249	5189.111	---	---
	Ant0	5220	18.102	5210.769	5228.871	---	---
	Ant1	5220	17.662	5211.209	5228.871	---	---
	Ant0	5240	16.983	5231.489	5248.472	---	---
	Ant1	5240	17.103	5231.608	5248.711	---	---
	Ant0	5745	17.982	5735.849	5753.831	---	---
	Ant1	5745	17.942	5735.889	5753.831	---	---
	Ant0	5785	17.942	5775.729	5793.671	---	---
	Ant1	5785	17.782	5776.009	5793.791	---	---
	Ant0	5825	17.942	5815.889	5833.831	---	---
	Ant1	5825	17.862	5816.089	5833.951	---	---
11N20MIMO	Ant0	5180	19.421	5170.490	5189.910	---	---
	Ant1	5180	18.422	5170.649	5189.071	---	---
	Ant0	5220	19.221	5209.850	5229.071	---	---
	Ant1	5220	18.541	5210.769	5229.311	---	---
	Ant0	5240	18.102	5230.769	5248.871	---	---
	Ant1	5240	17.822	5231.089	5248.911	---	---
	Ant0	5745	19.141	5735.330	5754.471	---	---
	Ant1	5745	18.501	5735.689	5754.191	---	---
	Ant0	5785	18.302	5775.729	5794.031	---	---
	Ant1	5785	18.581	5775.649	5794.231	---	---
	Ant0	5825	19.061	5815.450	5834.510	---	---
	Ant1	5825	18.422	5816.009	5834.431	---	---
11N40MIMO	Ant0	5190	35.884	5172.018	5207.902	---	---
	Ant1	5190	36.204	5171.698	5207.902	---	---
	Ant0	5230	35.804	5211.938	5247.742	---	---
	Ant1	5230	36.124	5211.938	5248.062	---	---
	Ant0	5755	35.884	5737.018	5772.902	---	---
	Ant1	5755	36.124	5736.858	5772.982	---	---
	Ant0	5795	35.964	5776.938	5812.902	---	---
	Ant1	5795	35.884	5776.778	5812.662	---	---
11AC20MIMO	Ant0	5180	19.66	5170.569	5190.230	---	---
	Ant1	5180	18.861	5170.290	5189.151	---	---
	Ant0	5220	18.821	5210.529	5229.351	---	---
	Ant1	5220	18.262	5210.729	5228.991	---	---
	Ant0	5240	17.822	5231.049	5248.871	---	---
	Ant1	5240	17.662	5231.089	5248.751	---	---
	Ant0	5745	18.901	5735.330	5754.231	---	---
	Ant1	5745	18.501	5735.529	5754.031	---	---
	Ant0	5785	18.462	5775.529	5793.991	---	---

	Ant1	5785	18.501	5775.729	5794.231	---	---
	Ant0	5825	19.261	5815.689	5834.950	---	---
	Ant1	5825	18.581	5815.769	5834.351	---	---
11AC40MIMO	Ant0	5190	35.964	5172.018	5207.982	---	---
	Ant1	5190	35.804	5172.098	5207.902	---	---
	Ant0	5230	35.884	5211.858	5247.742	---	---
	Ant1	5230	36.124	5211.698	5247.822	---	---
	Ant0	5755	35.884	5736.938	5772.822	---	---
	Ant1	5755	36.204	5736.858	5773.062	---	---
	Ant0	5795	35.964	5776.938	5812.902	---	---
	Ant1	5795	36.204	5777.018	5813.222	---	---
11AC80MIMO	Ant0	5210	75.285	5172.438	5247.722	---	---
	Ant1	5210	75.764	5171.958	5247.722	---	---
	Ant0	5775	75.604	5736.958	5812.562	---	---
	Ant1	5775	75.604	5737.438	5813.042	---	---
11AX20MIMO	Ant0	5180	19.461	5170.290	5189.750	---	---
	Ant1	5180	19.181	5170.330	5189.510	---	---
	Ant0	5220	19.181	5210.250	5229.431	---	---
	Ant1	5220	19.261	5210.170	5229.431	---	---
	Ant0	5240	18.821	5230.490	5249.311	---	---
	Ant1	5240	18.941	5230.410	5249.351	---	---
	Ant0	5745	19.061	5735.370	5754.431	---	---
	Ant1	5745	19.221	5735.210	5754.431	---	---
	Ant0	5785	19.141	5775.330	5794.471	---	---
	Ant1	5785	19.101	5775.330	5794.431	---	---
	Ant0	5825	19.381	5815.090	5834.471	---	---
	Ant1	5825	19.141	5815.330	5834.471	---	---
11AX40MIMO	Ant0	5190	37.722	5171.219	5208.941	---	---
	Ant1	5190	37.562	5171.299	5208.861	---	---
	Ant0	5230	37.403	5211.219	5248.621	---	---
	Ant1	5230	37.483	5211.059	5248.541	---	---
	Ant0	5755	37.722	5736.059	5773.781	---	---
	Ant1	5755	37.802	5736.139	5773.941	---	---
	Ant0	5795	37.642	5776.059	5813.701	---	---
	Ant1	5795	37.403	5776.379	5813.781	---	---
11AX80MIMO	Ant0	5210	77.363	5171.319	5248.681	---	---
	Ant1	5210	76.563	5171.479	5248.042	---	---
	Ant0	5775	77.363	5735.999	5813.362	---	---
	Ant1	5775	77.043	5736.798	5813.841	---	---


2.2. Test Graphs

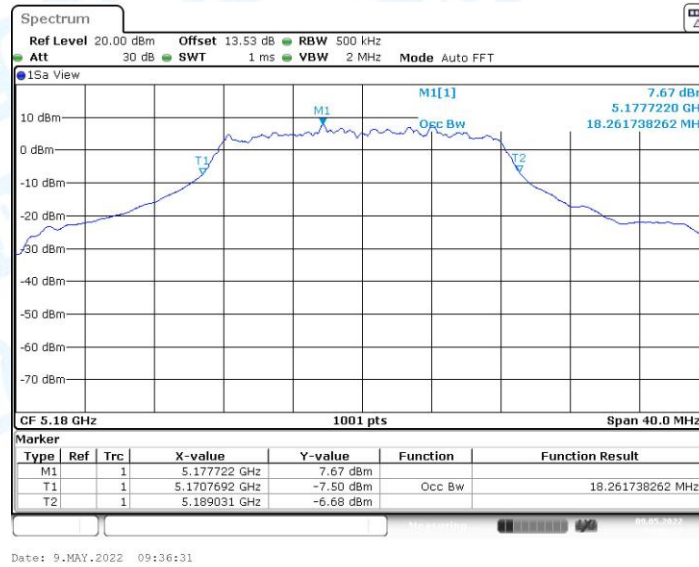


11AMIMO_Ant0_5180

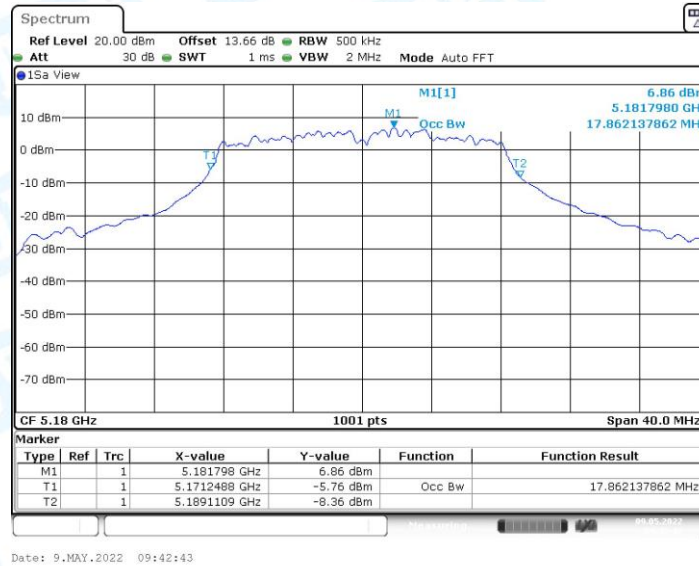


11AMIMO_Ant1_5180

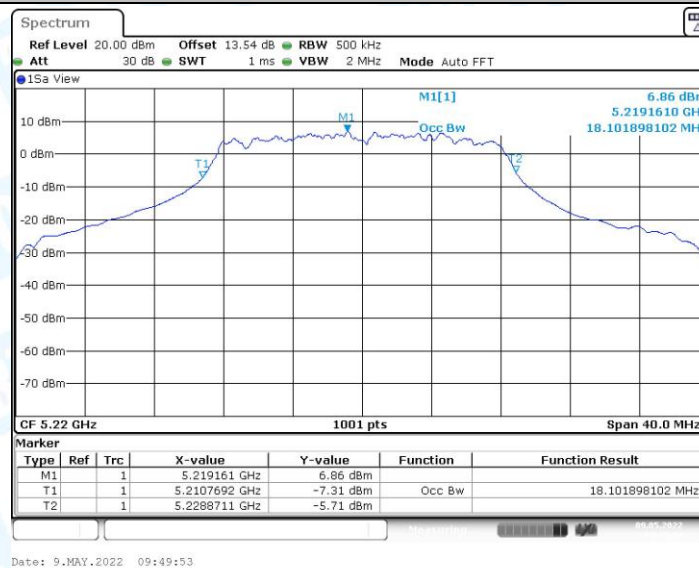


11AMIMO_Ant0_5220

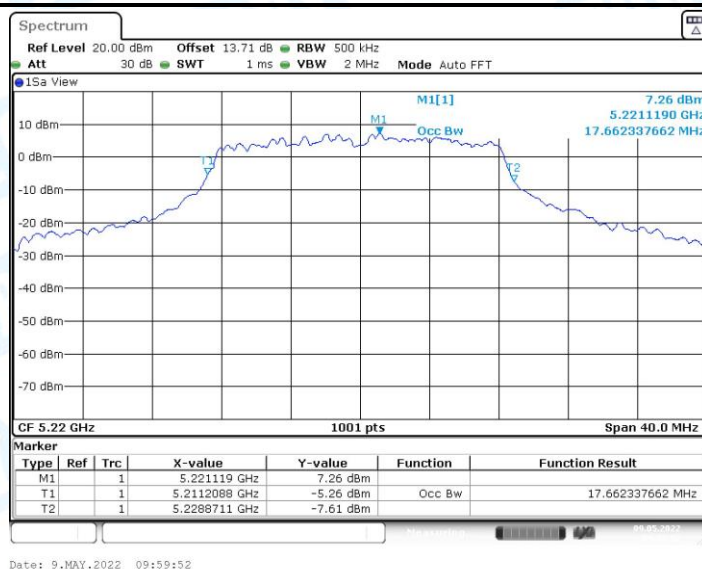


11AMIMO_Ant1_5220

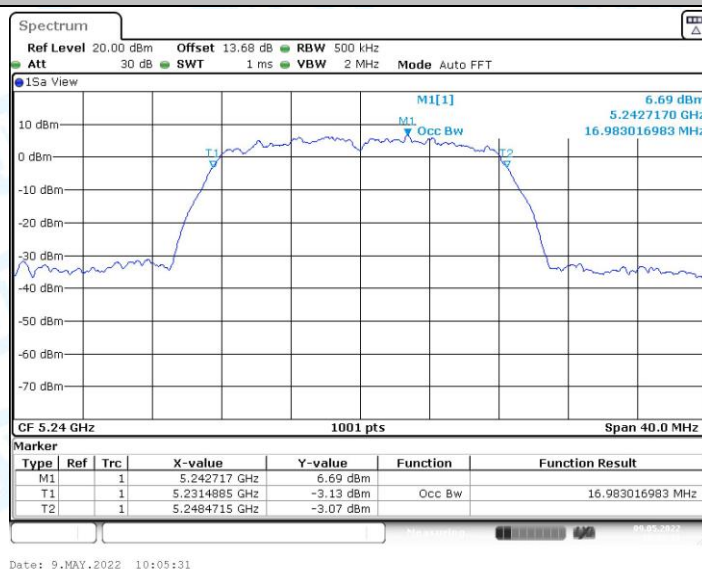


11AMIMO_Ant0_5240

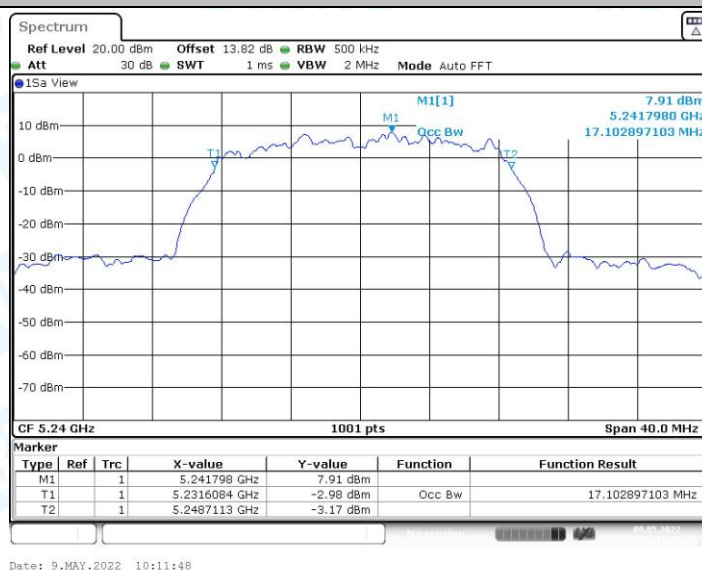


11AMIMO_Ant1_5240

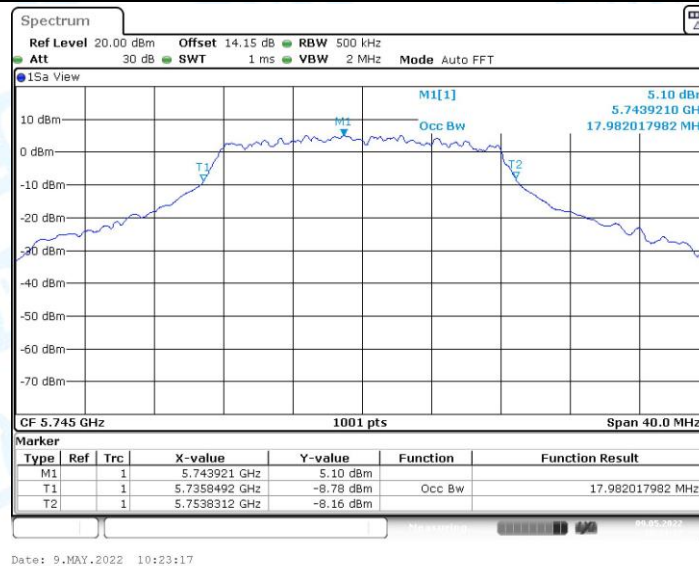

11AMIMO_Ant0_5745

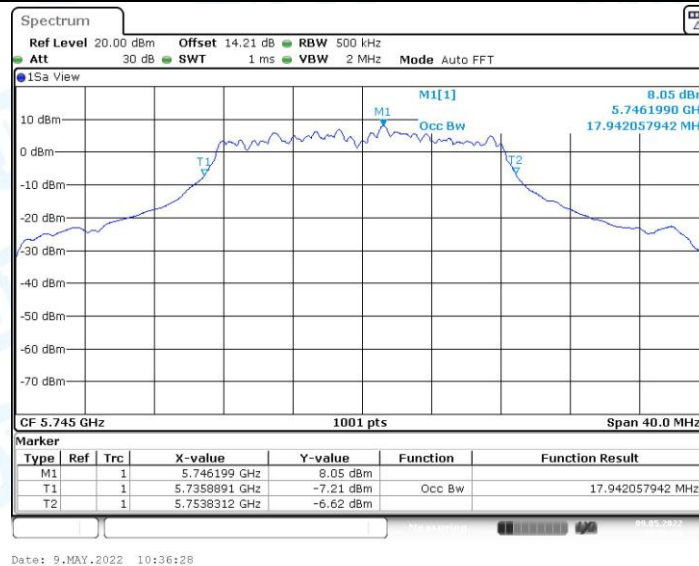

11AMIMO_Ant1_5745

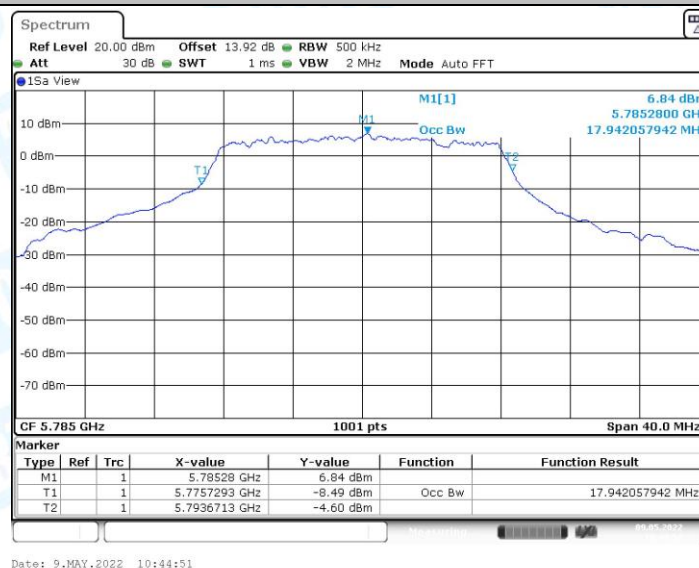

11AMIMO_Ant0_5785