



Test Graphs


OBW NVNT b 2412MHz Ant1







OBW NVNT b 2437MHz Ant1

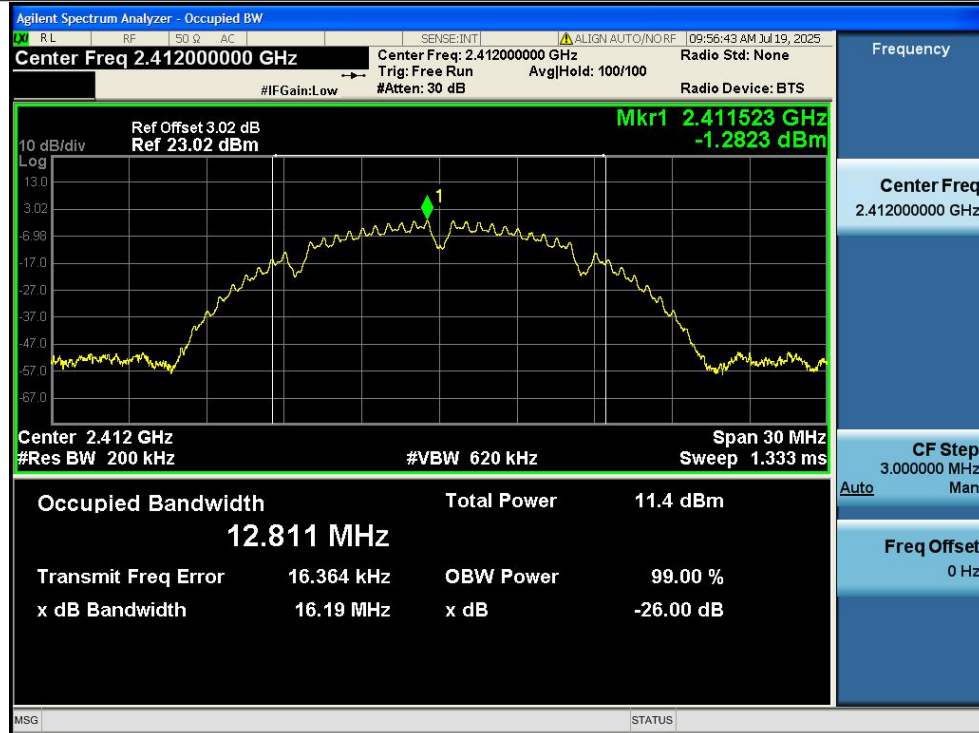


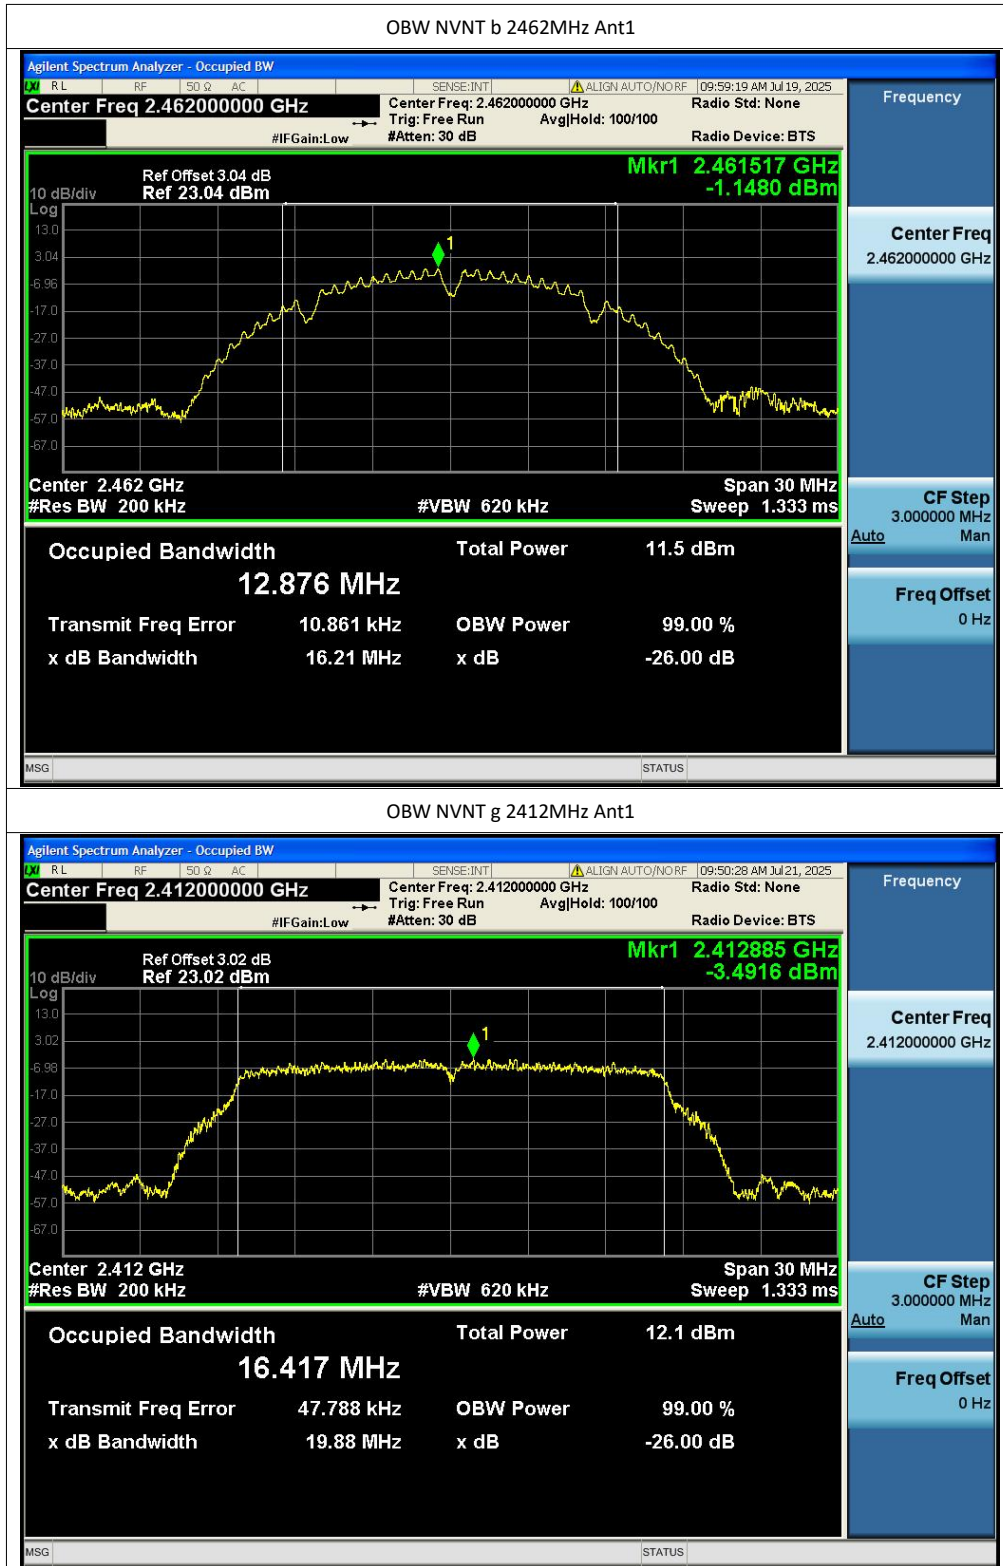

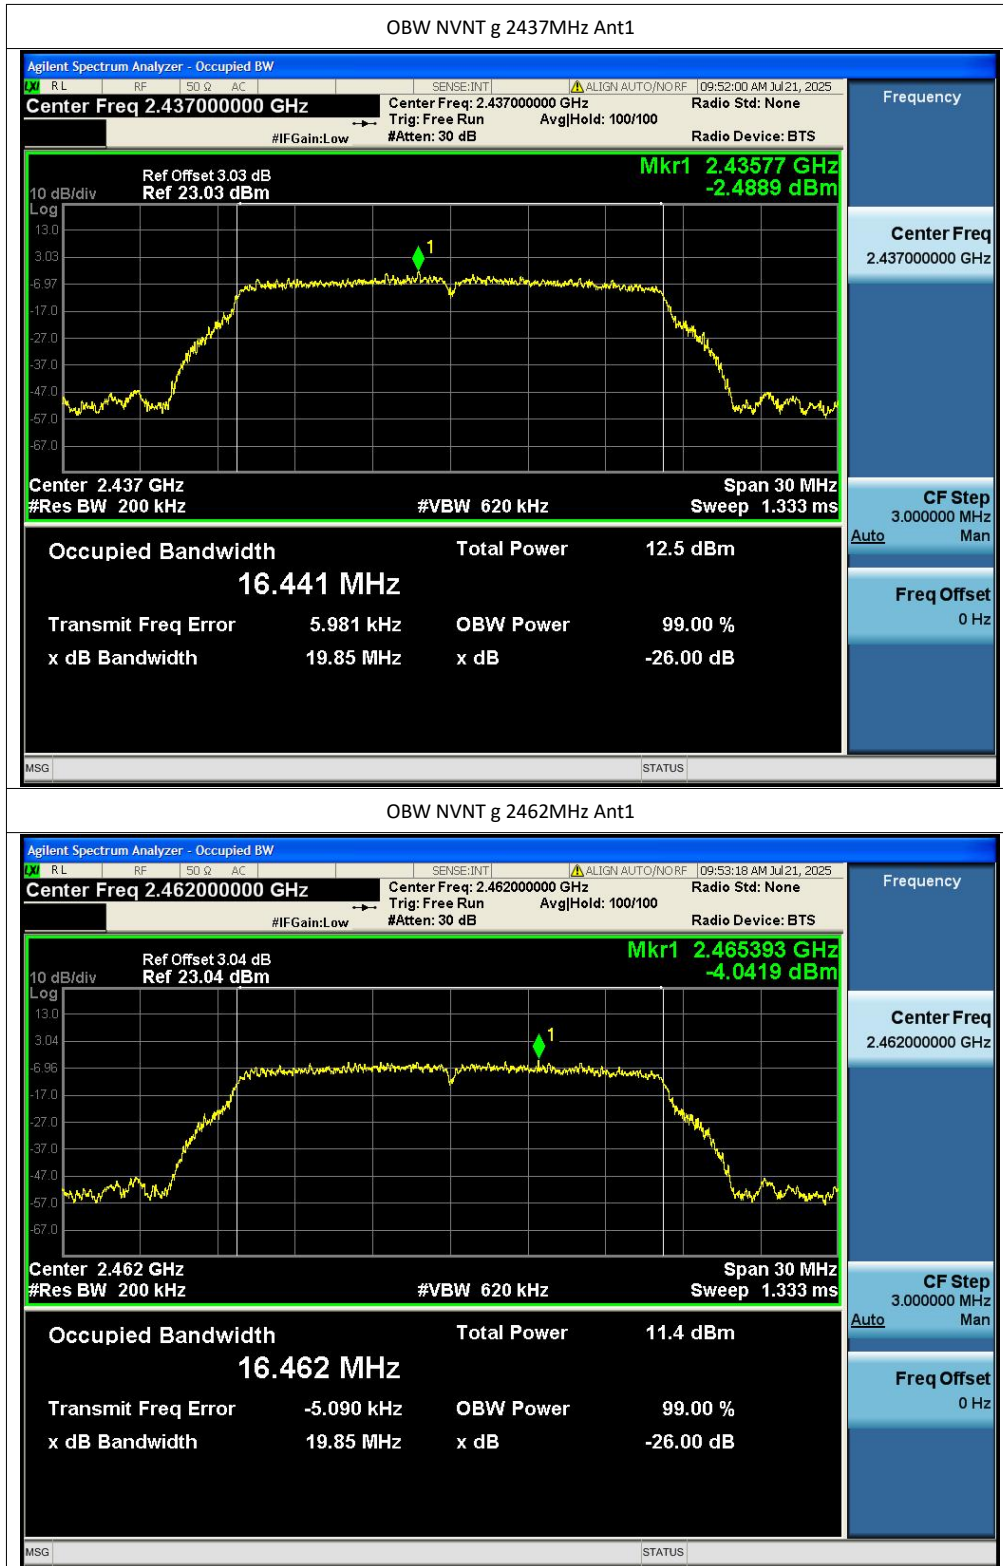

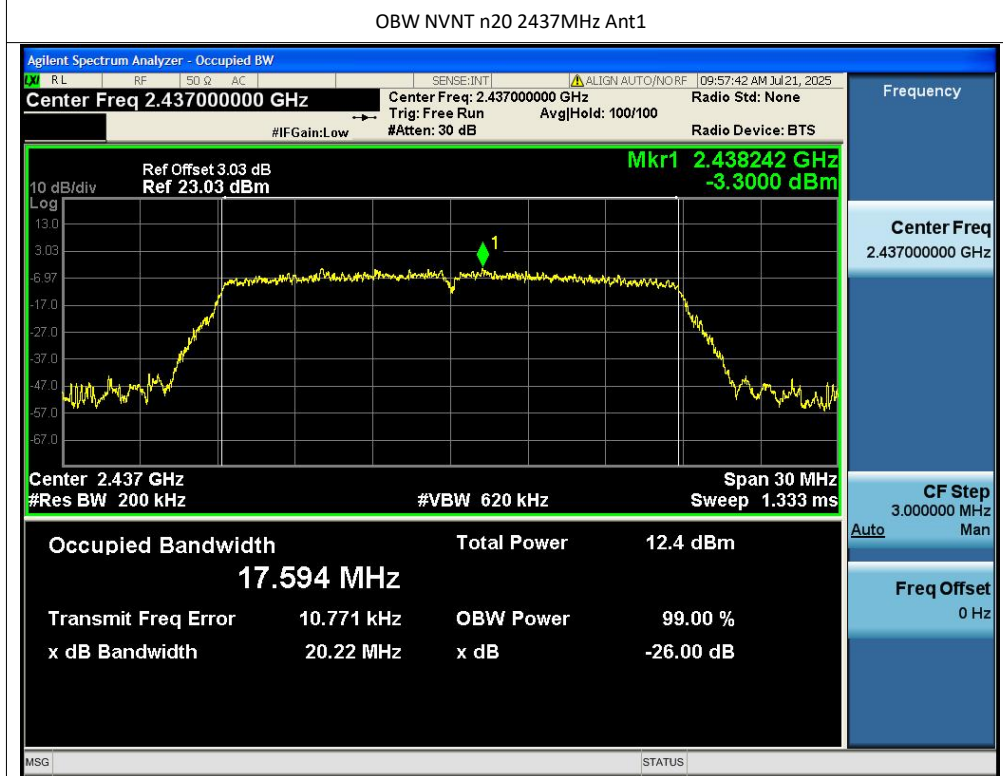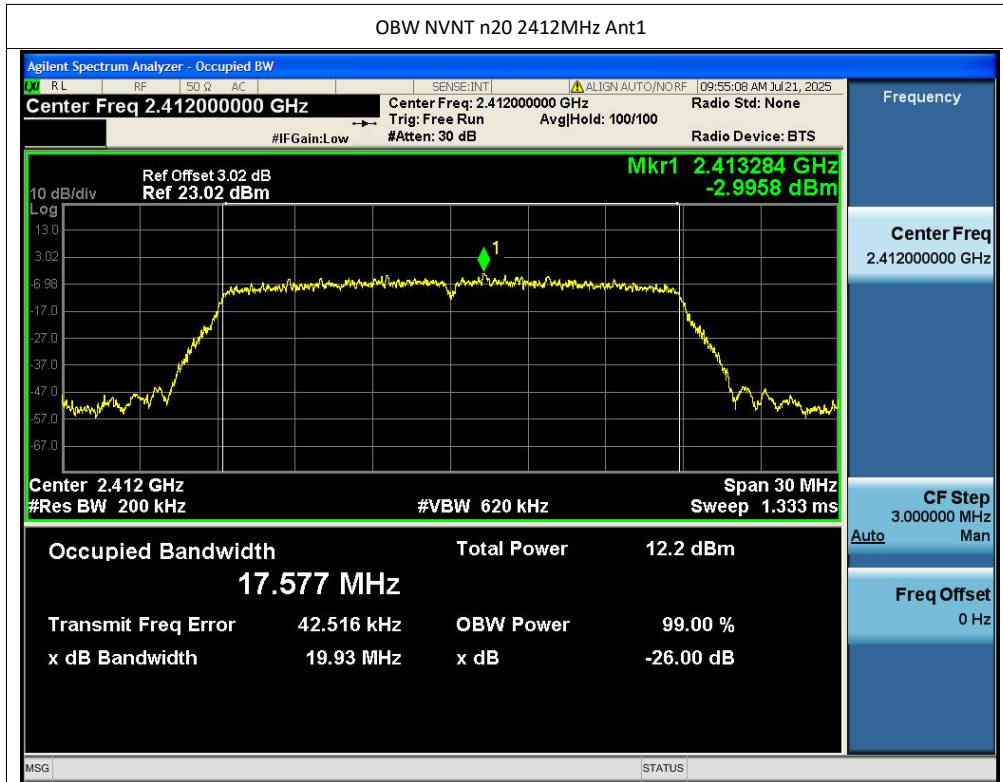

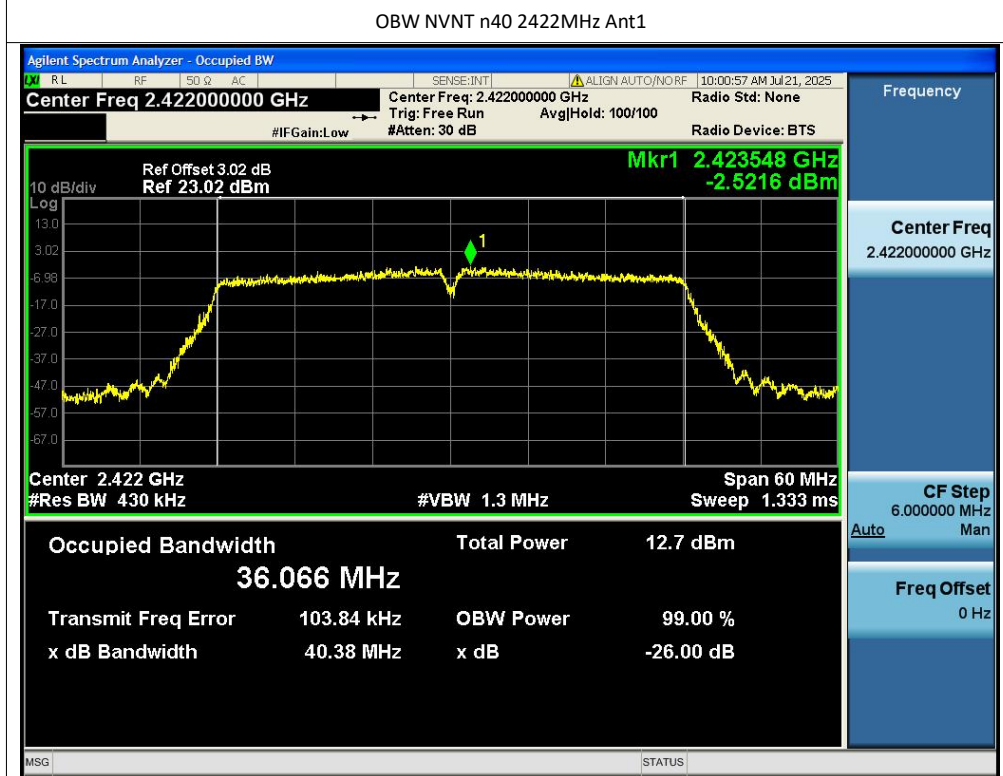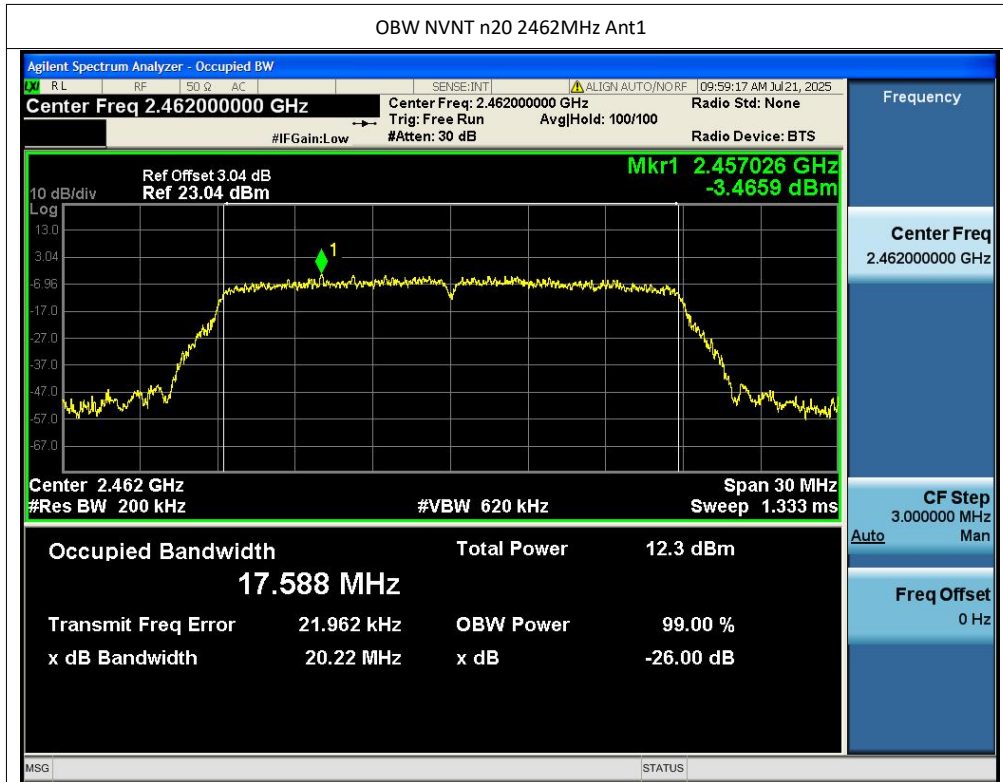

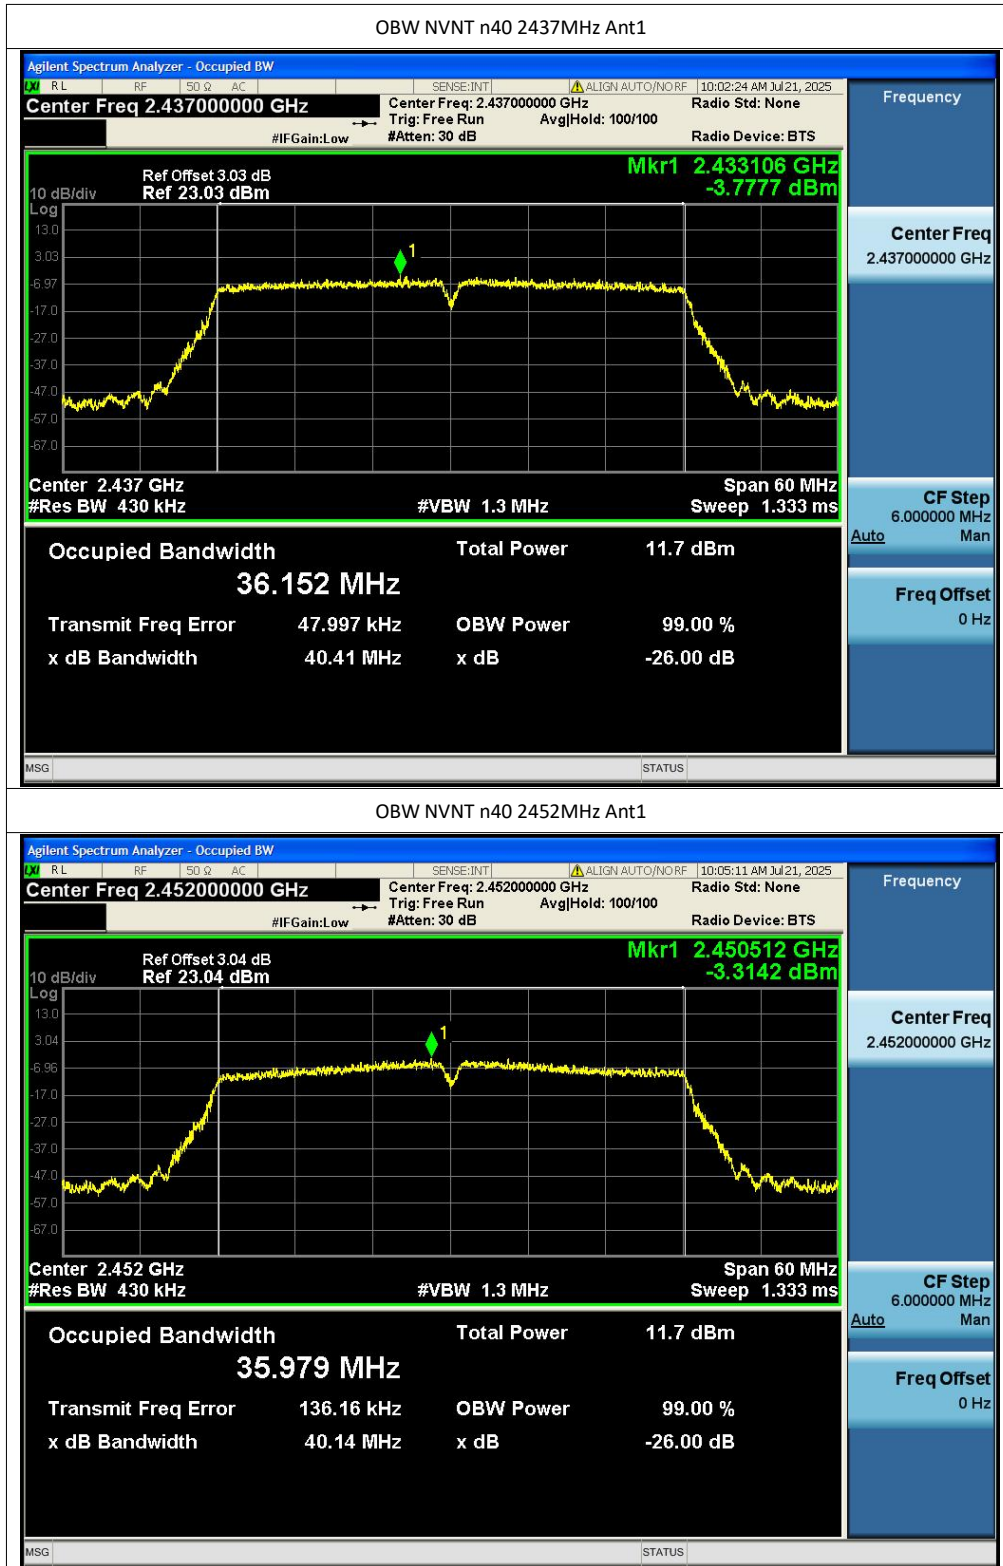

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/100kHz)	Duty Factor (dB)	Total PSD (dBm/100kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-9.59	0.01	-9.58	8	Pass
NVNT	b	2437	Ant1	-9.59	0.02	-9.57	8	Pass
NVNT	b	2462	Ant1	-9.9	0.02	-9.88	8	Pass
NVNT	g	2412	Ant1	-12.69	0.11	-12.58	8	Pass
NVNT	g	2437	Ant1	-12.47	0.11	-12.36	8	Pass
NVNT	g	2462	Ant1	-13.49	0.11	-13.38	8	Pass
NVNT	n20	2412	Ant1	-12.83	0.12	-12.71	8	Pass
NVNT	n20	2437	Ant1	-12.73	0.12	-12.61	8	Pass
NVNT	n20	2462	Ant1	-12.68	0.12	-12.56	8	Pass
NVNT	n40	2422	Ant1	-14.66	0.22	-14.44	8	Pass
NVNT	n40	2437	Ant1	-17.13	0.23	-16.9	8	Pass
NVNT	n40	2452	Ant1	-15.93	0.22	-15.71	8	Pass

Test Graphs

PSD NVNT b 2412MHz Ant1



PSD NVNT b 2437MHz Ant1




PSD NVNT b 2462MHz Ant1





PSD NVNT g 2412MHz Ant1





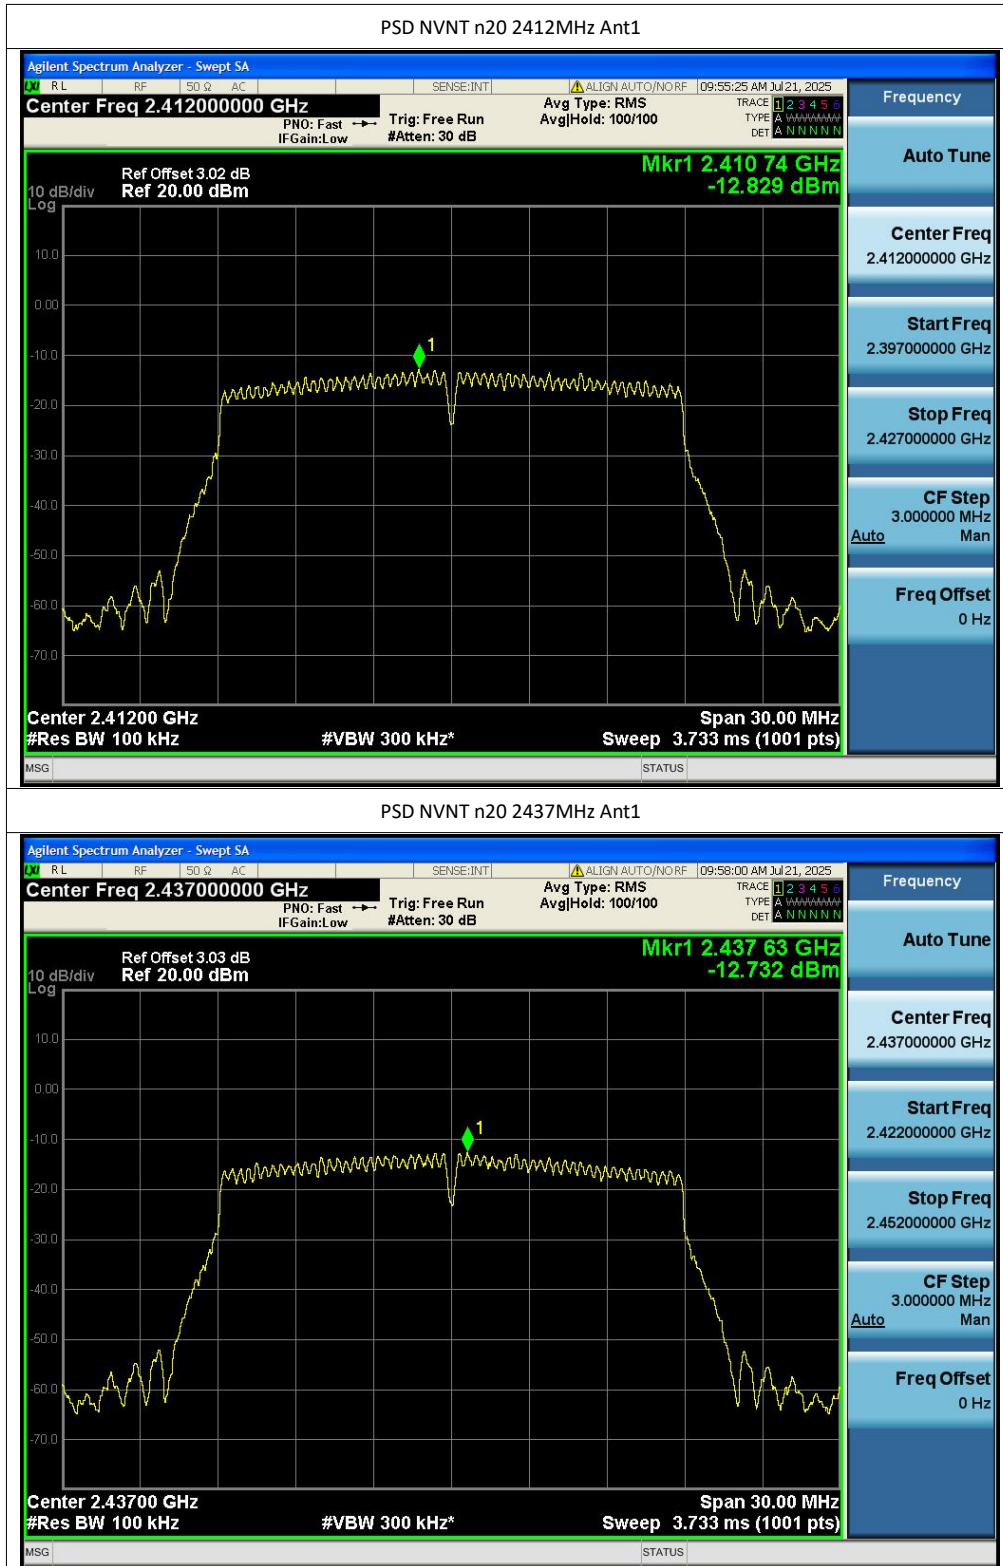

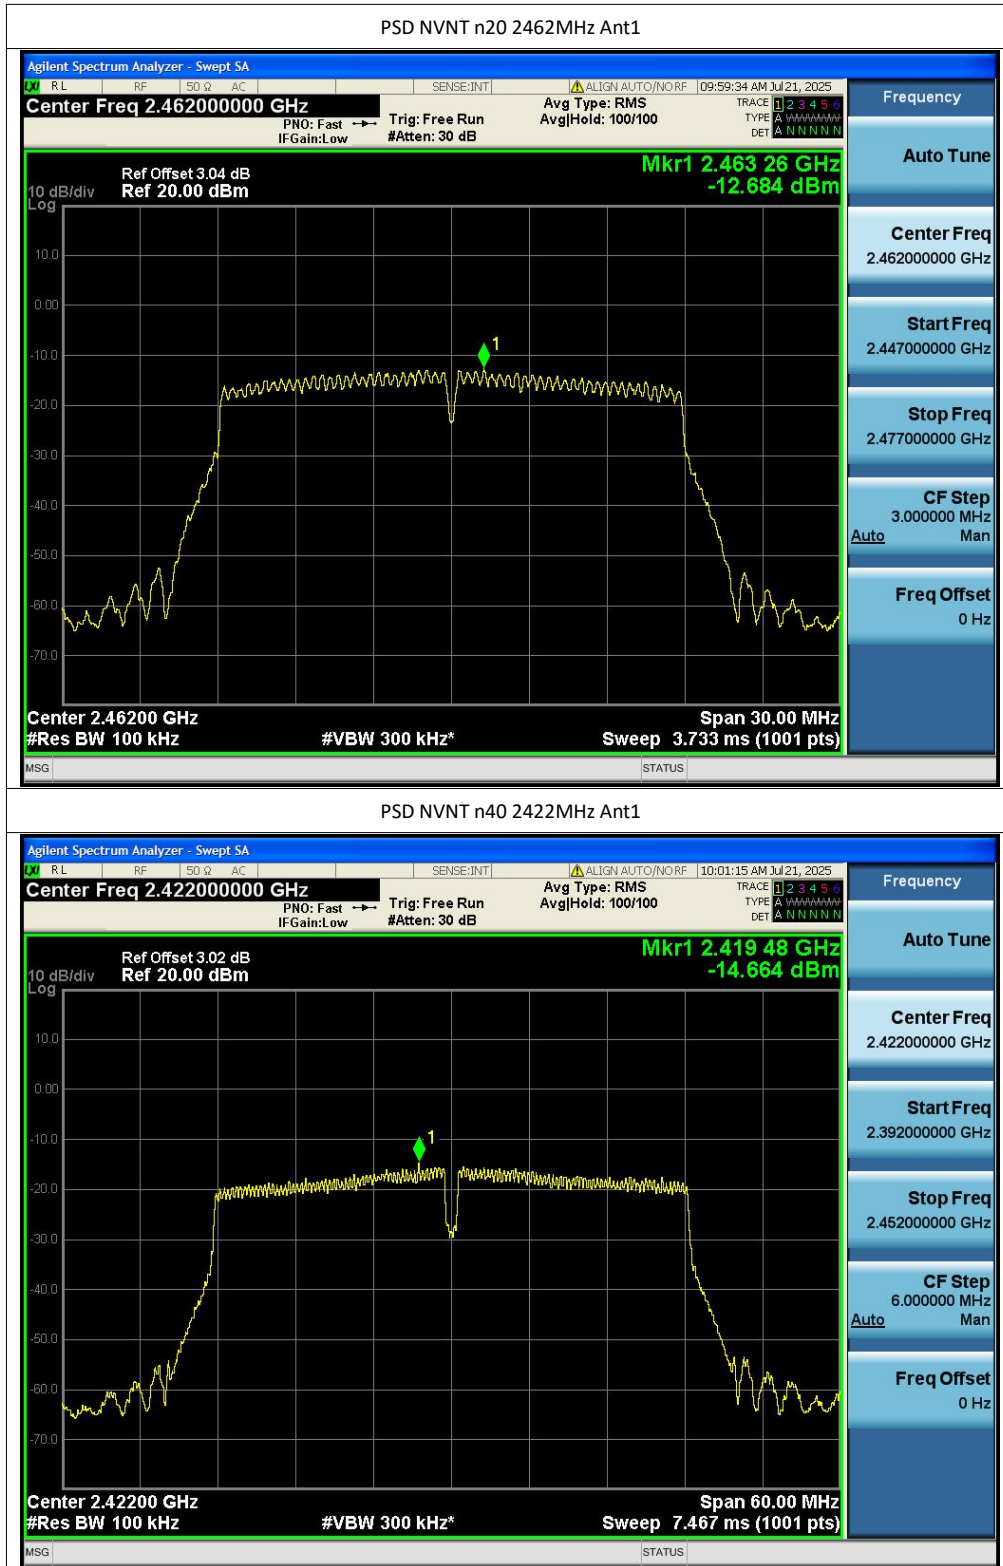

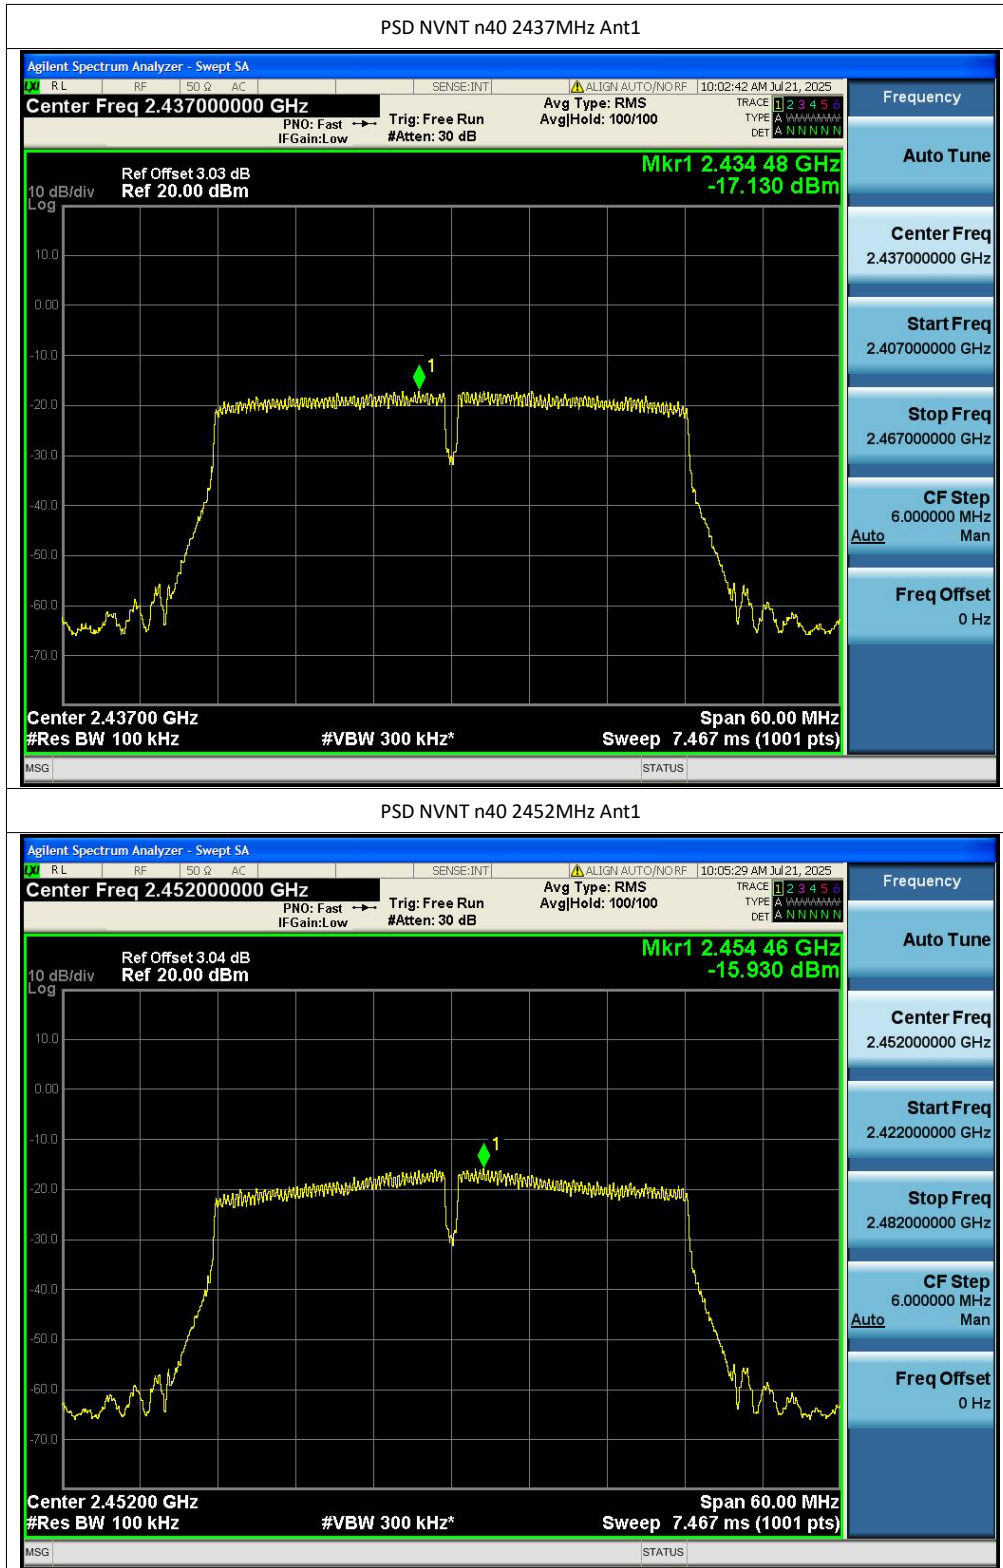

Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-50.55	-30	Pass
NVNT	b	2462	Ant1	-51.24	-30	Pass
NVNT	g	2412	Ant1	-45.79	-30	Pass
NVNT	g	2462	Ant1	-48.56	-30	Pass
NVNT	n20	2412	Ant1	-44.97	-30	Pass
NVNT	n20	2462	Ant1	-49.88	-30	Pass
NVNT	n40	2422	Ant1	-40.16	-30	Pass
NVNT	n40	2452	Ant1	-47.41	-30	Pass

Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref



Band Edge NVNT b 2412MHz Ant1 Emission

