

5 TEST SETUP PHOTOS

Please refer to Setup Photo file

6 PHOTOS OF THE EUT

Please refer to external photos file and internal photos file

Appendix-5.2G-ANT1


HT250729014--X5M Pro--5.2G--FCC

FCC_5.2G_WIFI (Part15.407) Test Data


1. -26dB and 99% Emission Bandwidth

Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5180.00	18.42	16.34
NVNT	ANT1	802.11a	5200.00	18.22	16.33
NVNT	ANT1	802.11a	5240.00	18.25	16.34
NVNT	ANT1	802.11n(HT20)	5180.00	19.24	17.54
NVNT	ANT1	802.11n(HT20)	5200.00	19.50	17.56
NVNT	ANT1	802.11n(HT20)	5240.00	19.32	17.54
NVNT	ANT1	802.11ac(VHT20)	5180.00	19.35	17.53
NVNT	ANT1	802.11ac(VHT20)	5200.00	19.52	17.55
NVNT	ANT1	802.11ac(VHT20)	5240.00	19.40	17.52
NVNT	ANT1	802.11ax(HE20)	5180.00	19.17	17.53
NVNT	ANT1	802.11ax(HE20)	5200.00	19.27	17.52
NVNT	ANT1	802.11ax(HE20)	5240.00	19.19	17.53
NVNT	ANT1	802.11n(HT40)	5190.00	40.74	36.10
NVNT	ANT1	802.11n(HT40)	5230.00	40.56	36.07
NVNT	ANT1	802.11ac(VHT40)	5190.00	40.72	36.09
NVNT	ANT1	802.11ac(VHT40)	5230.00	40.58	36.08
NVNT	ANT1	802.11ax(HE40)	5190.00	40.48	36.05
NVNT	ANT1	802.11ax(HE40)	5230.00	40.11	36.02
NVNT	ANT1	802.11ac(VHT80)	5210.00	81.16	74.66
NVNT	ANT1	802.11ax(HE80)	5210.00	80.10	74.63

99%_OCB_NVNT_ANT1_802_11a_5180

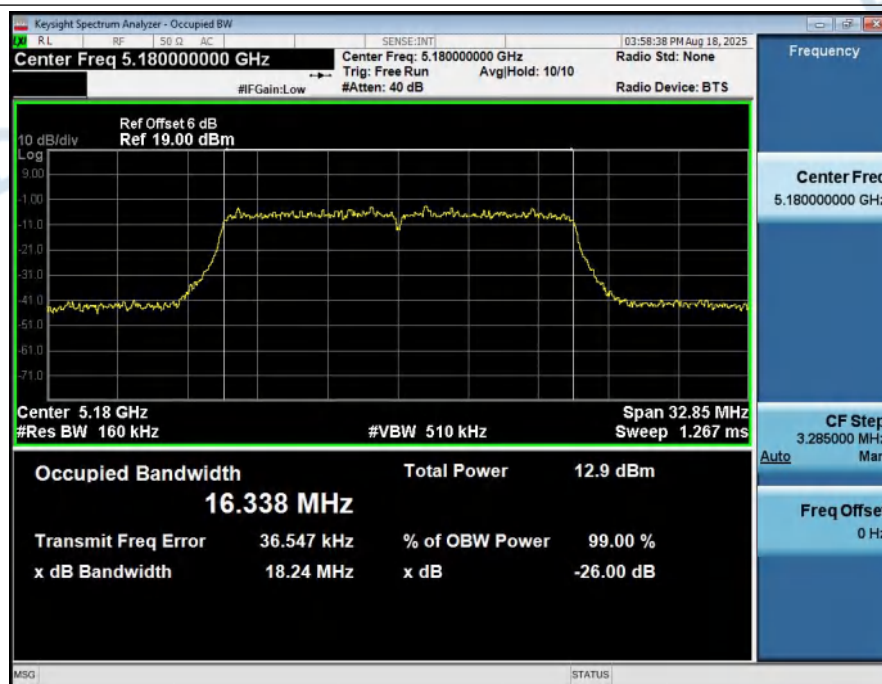


-26BW_NVNT_ANT1_802_11a_5180

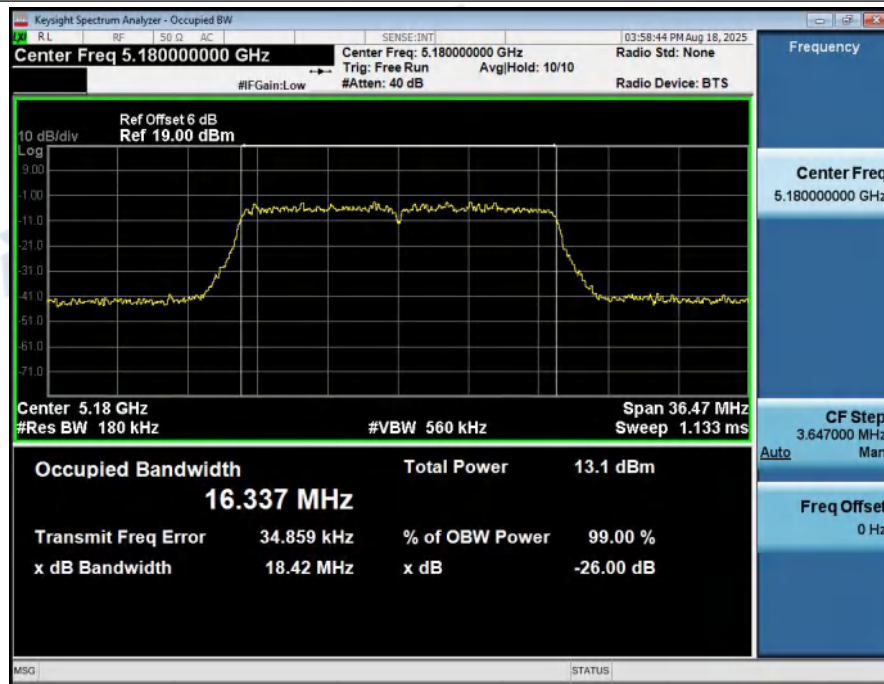

99%_OCB_NVNT_ANT1_802_11a_5200




-26BW_NVNT_ANT1_802_11a_5200

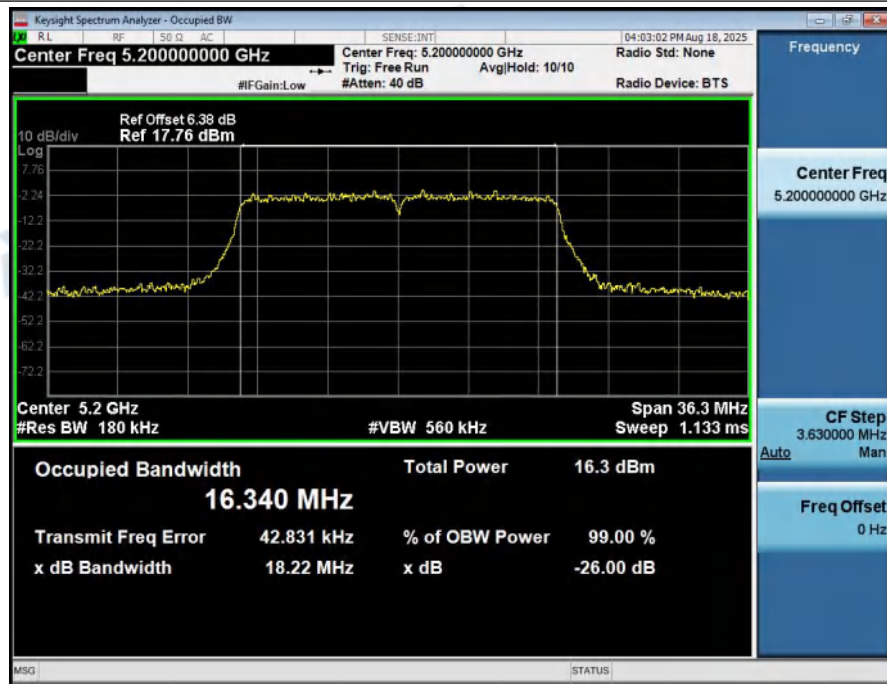


99%_OCB_NVNT_ANT1_802_11a_5240




-26BW_NVNT_ANT1_802_11a_5240

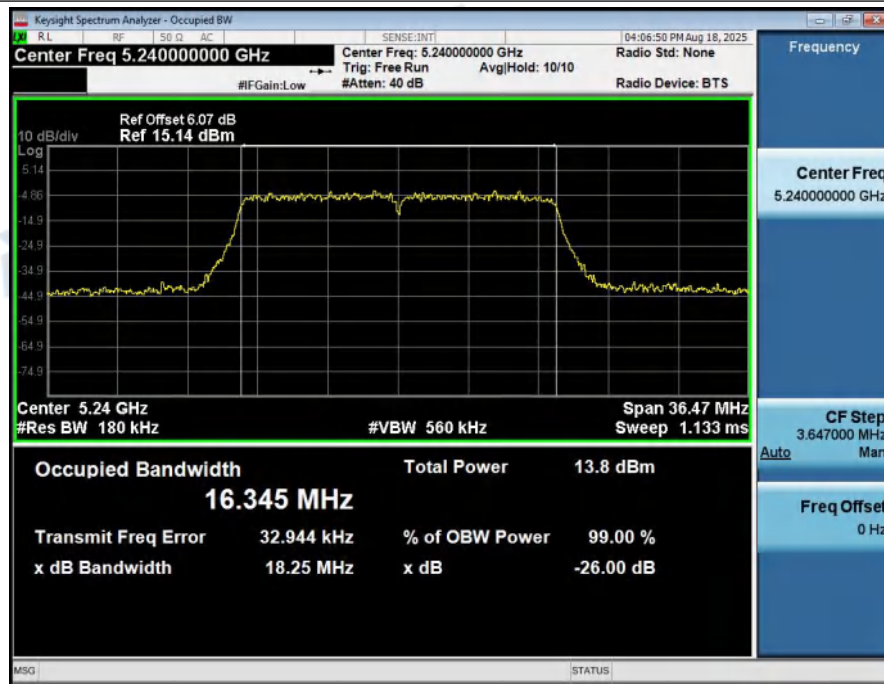

99%_OCB_NVNT_ANT1_802_11n(HT20)_5180

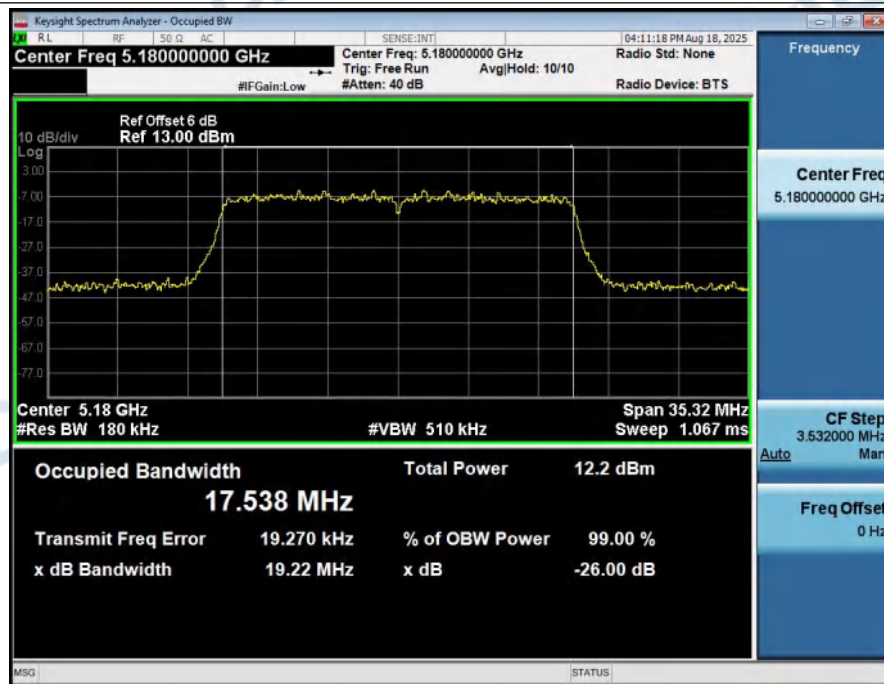


-26BW_NVNT_ANT1_802_11n(HT20)_5180

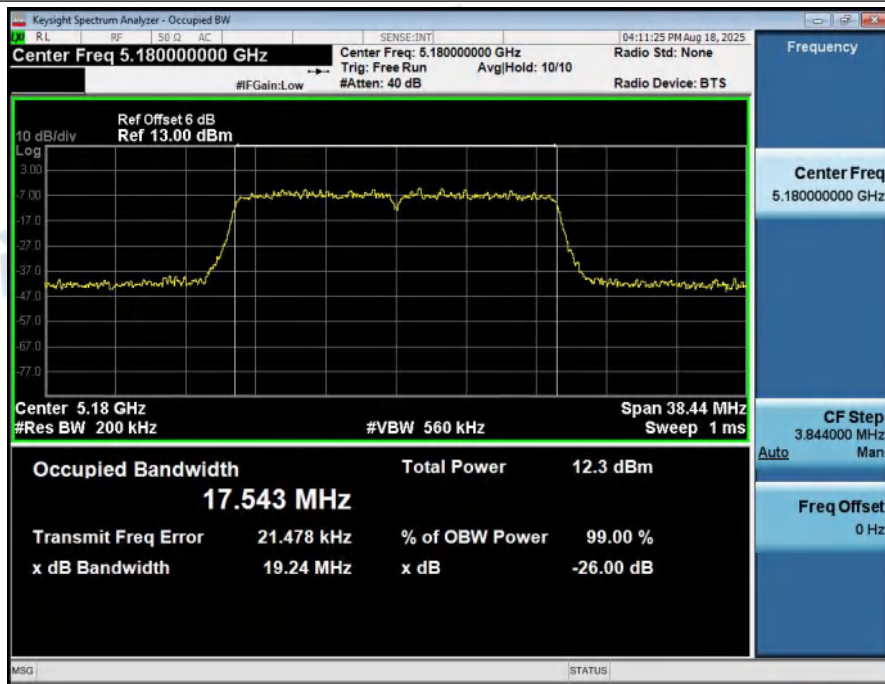


99%_OCB_NVNT_ANT1_802_11n(HT20)_5200




-26BW_NVNT_ANT1_802_11n(HT20)_5200

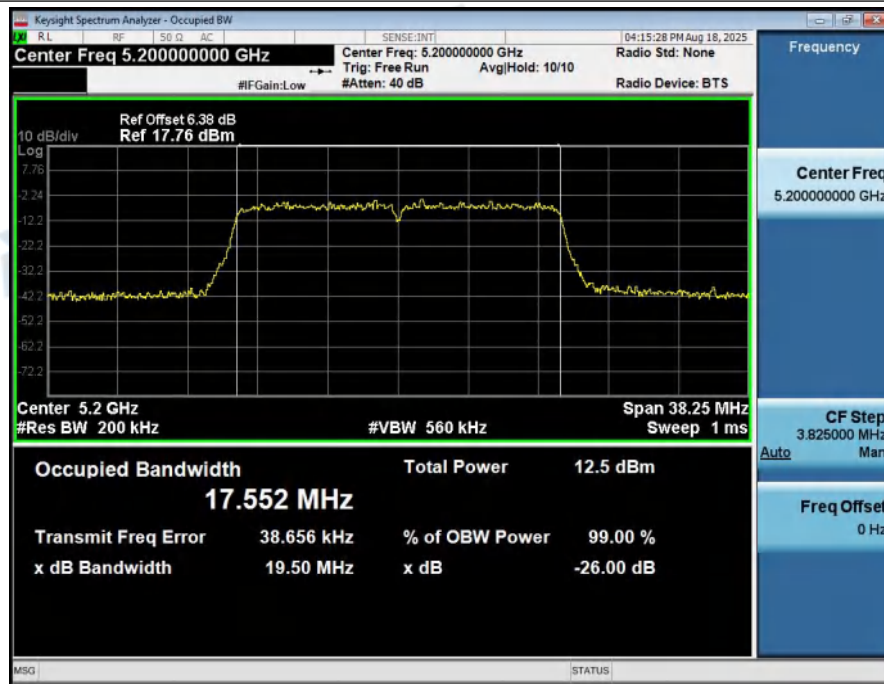


99%_OCB_NVNT_ANT1_802_11n(HT20)_5240

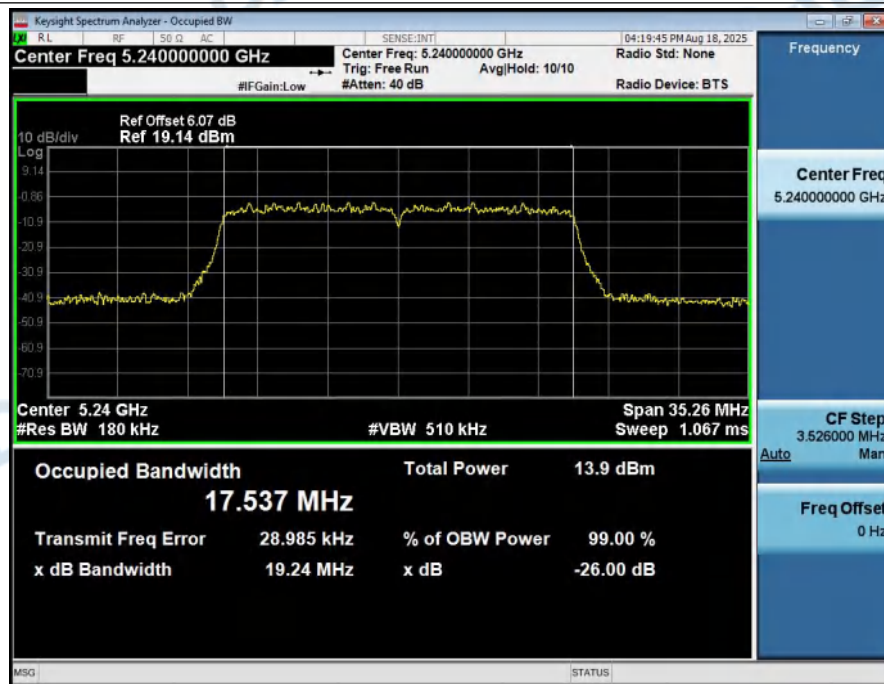


-26BW_NVNT_ANT1_802_11n(HT20)_5240

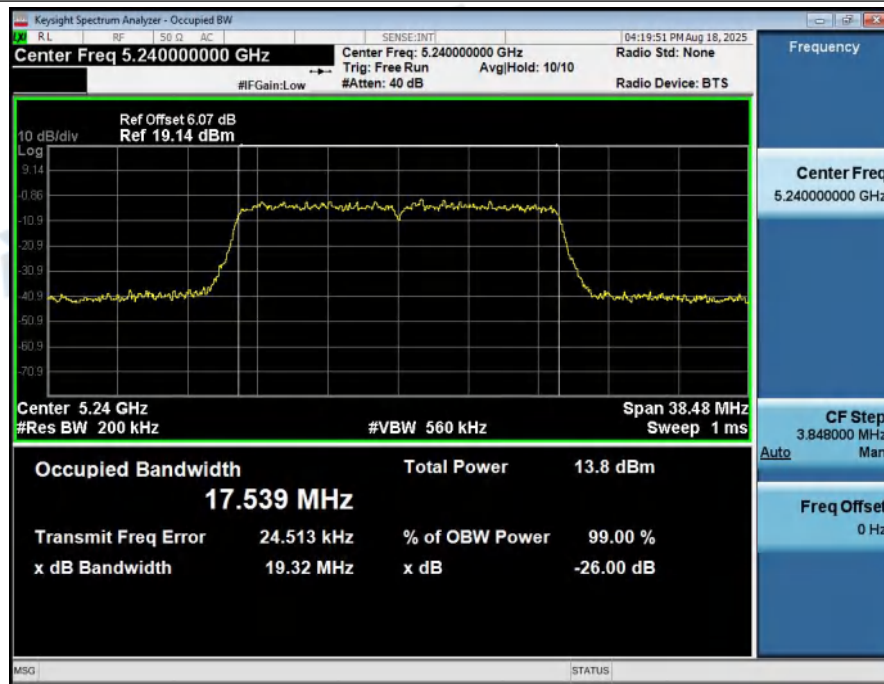


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5180

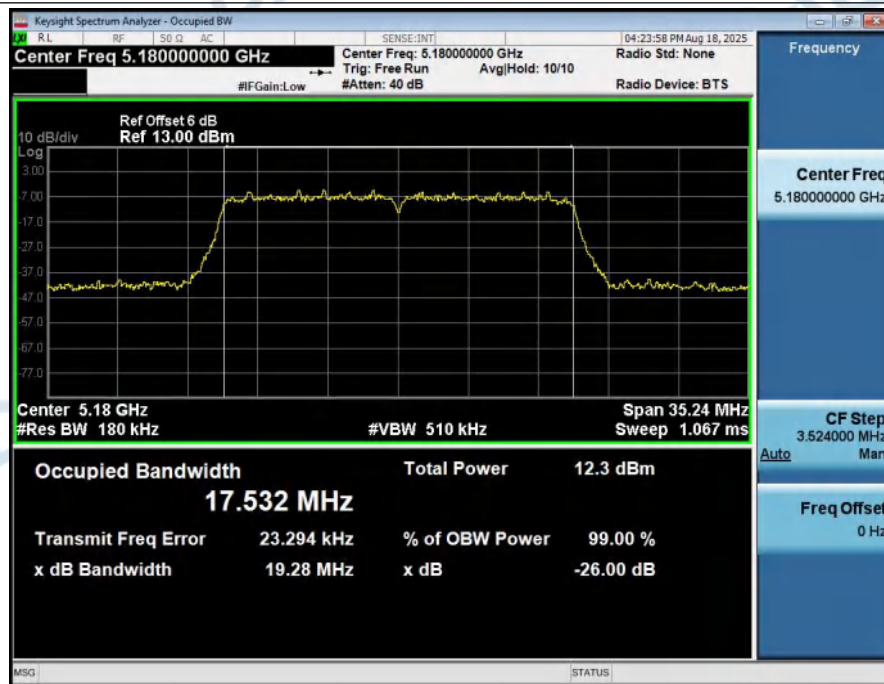


-26BW_NVNT_ANT1_802_11ac(VHT20)_5180

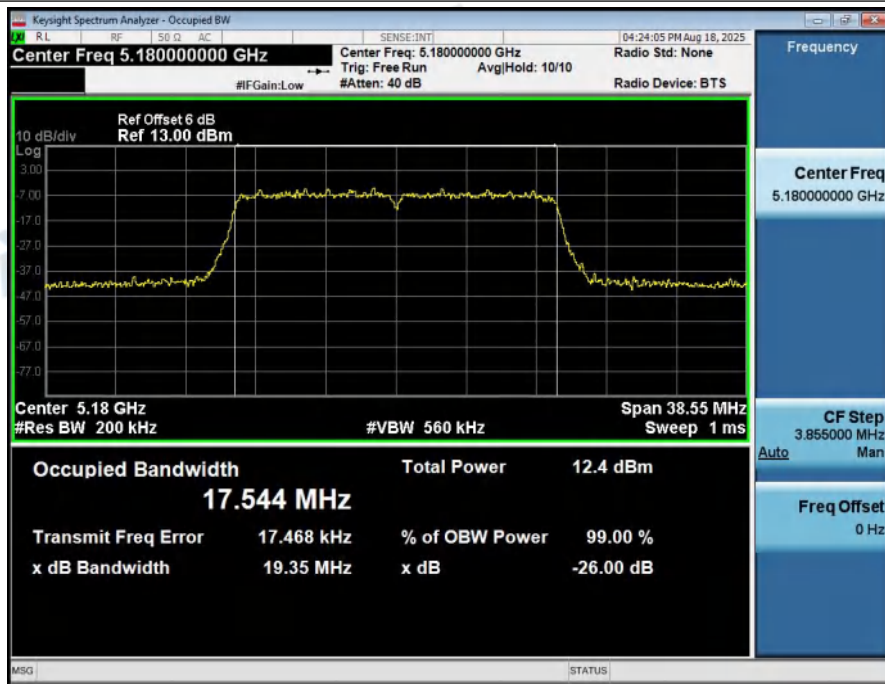


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5200

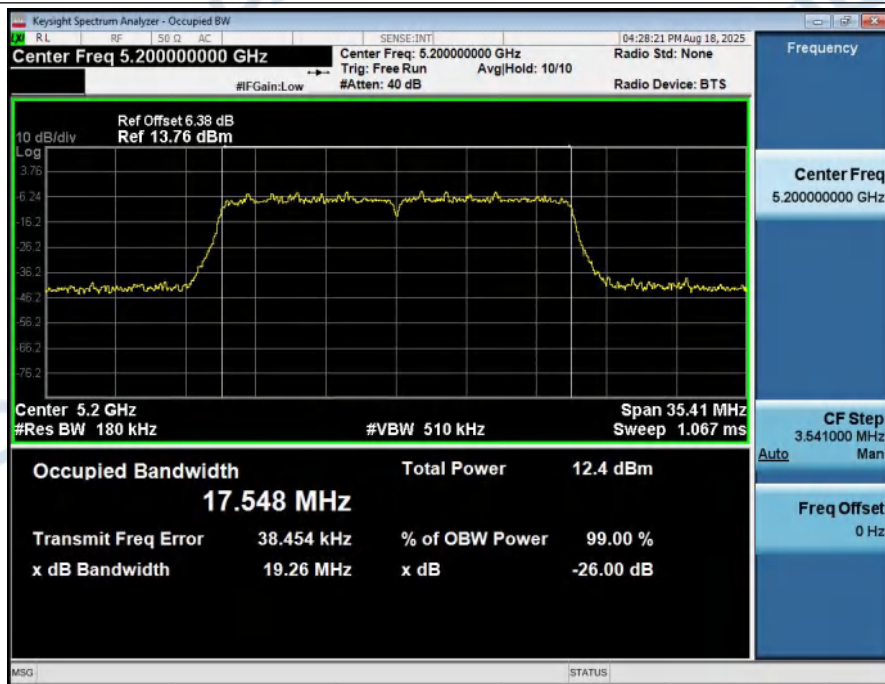


-26BW_NVNT_ANT1_802_11ac(VHT20)_5200

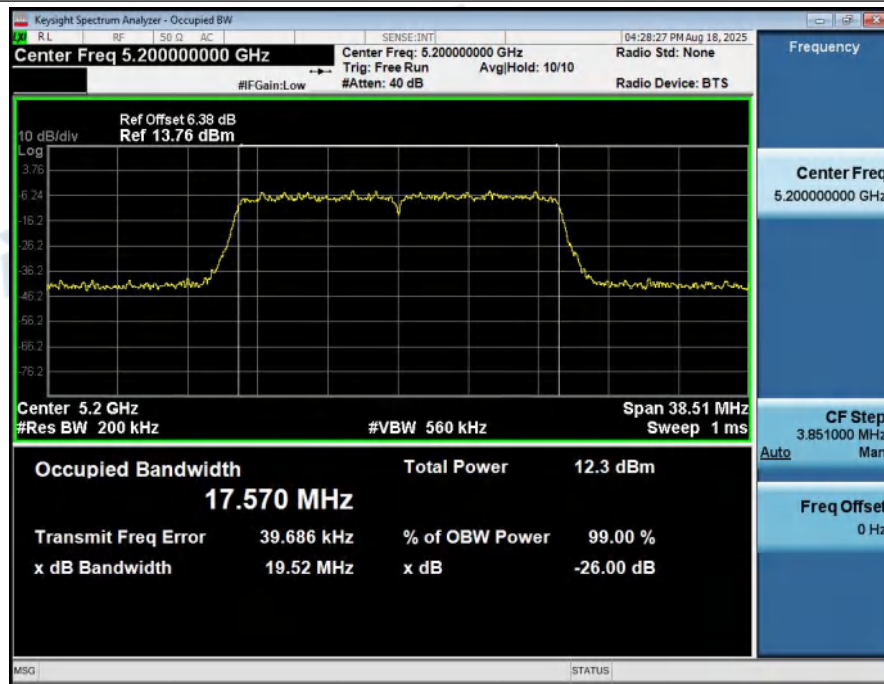


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5240

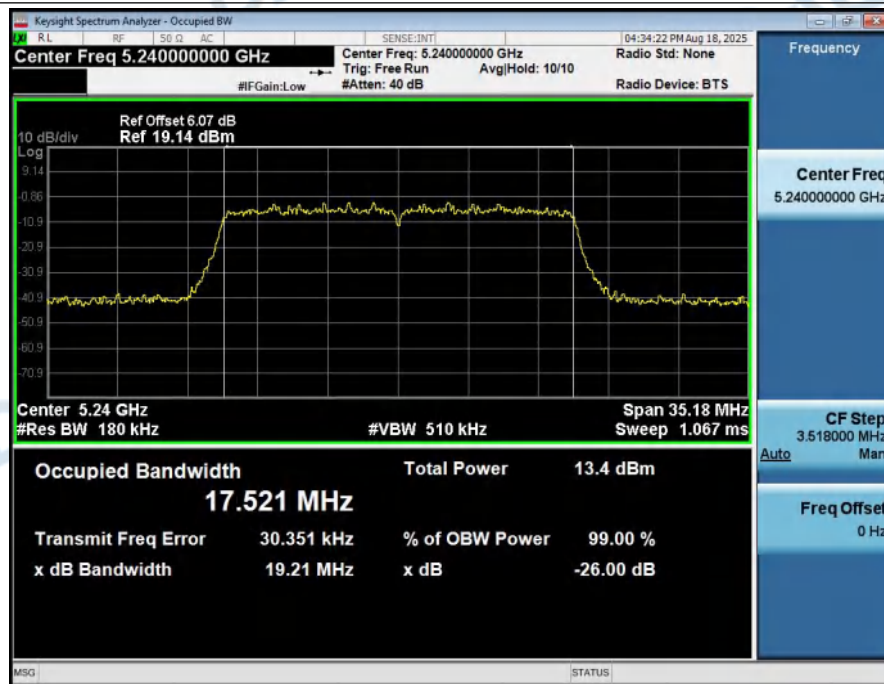


-26BW_NVNT_ANT1_802_11ac(VHT20)_5240

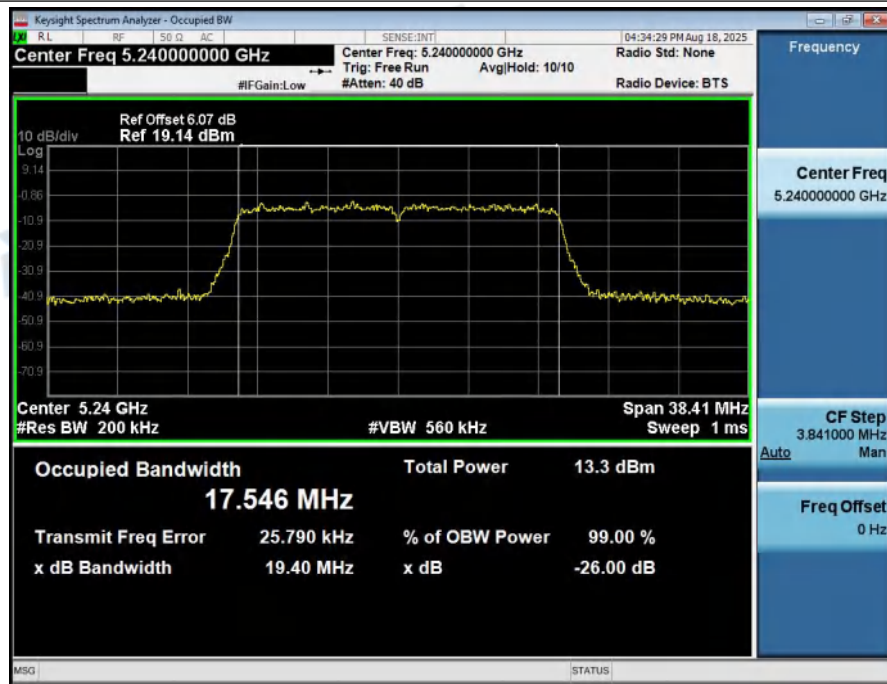


99%_OCB_NVNT_ANT1_802_11ax(HE20)_5180

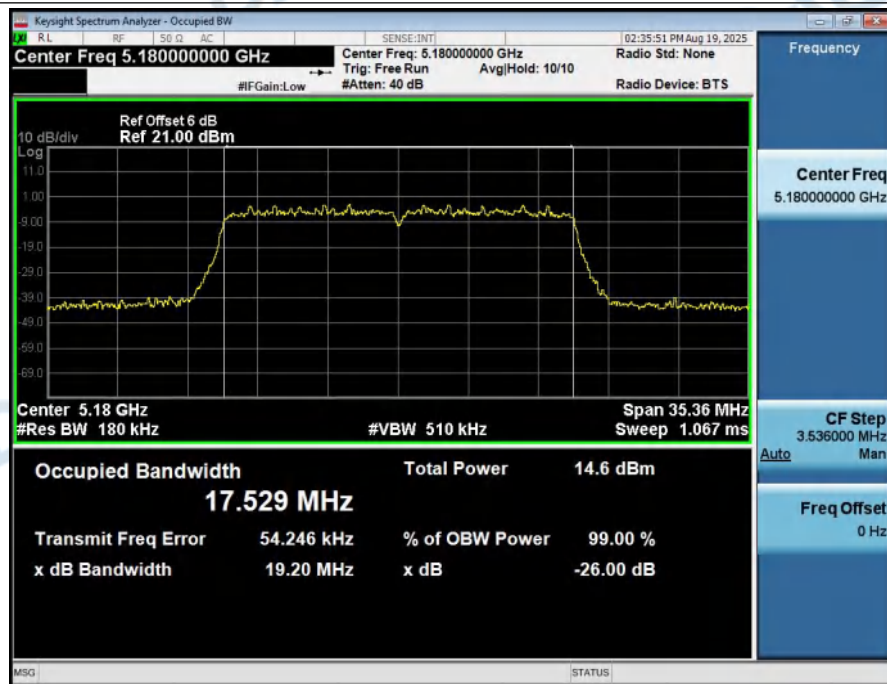


-26BW_NVNT_ANT1_802_11ax(HE20)_5180

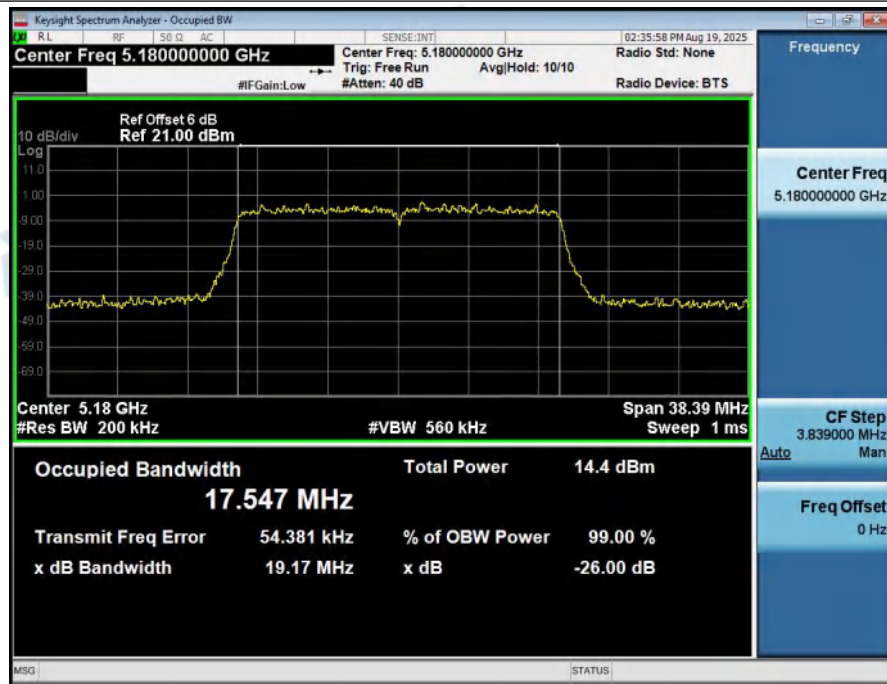


99%_OCB_NVNT_ANT1_802_11ax(HE20)_5200

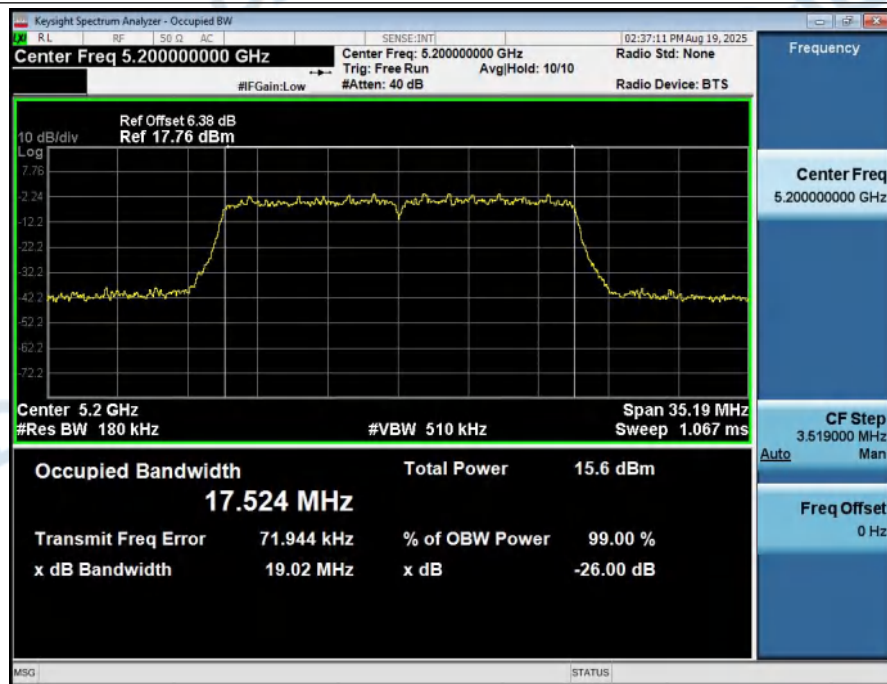


-26BW_NVNT_ANT1_802_11ax(HE20)_5200

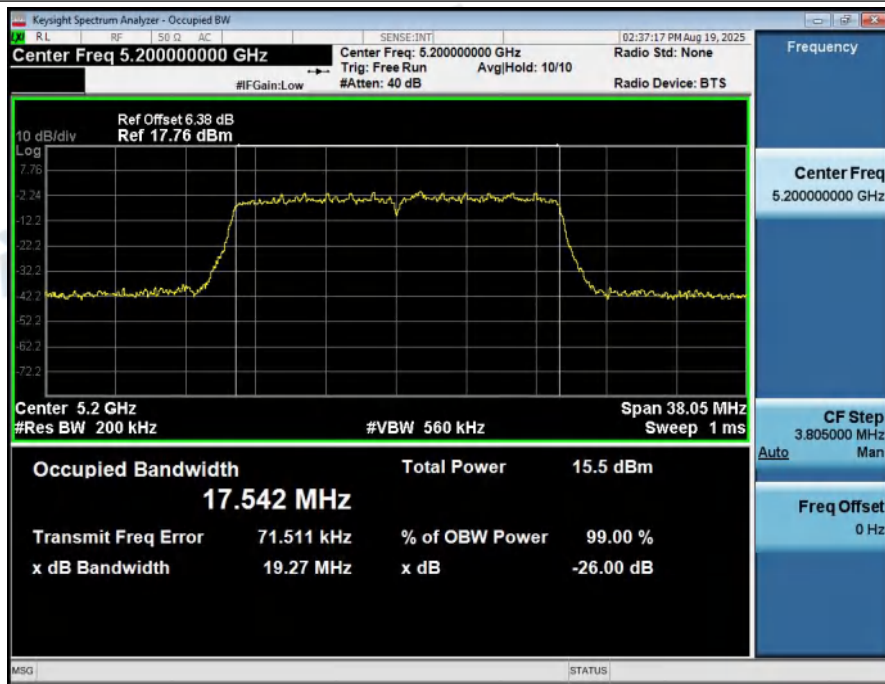


99%_OCB_NVNT_ANT1_802_11ax(HE20)_5240

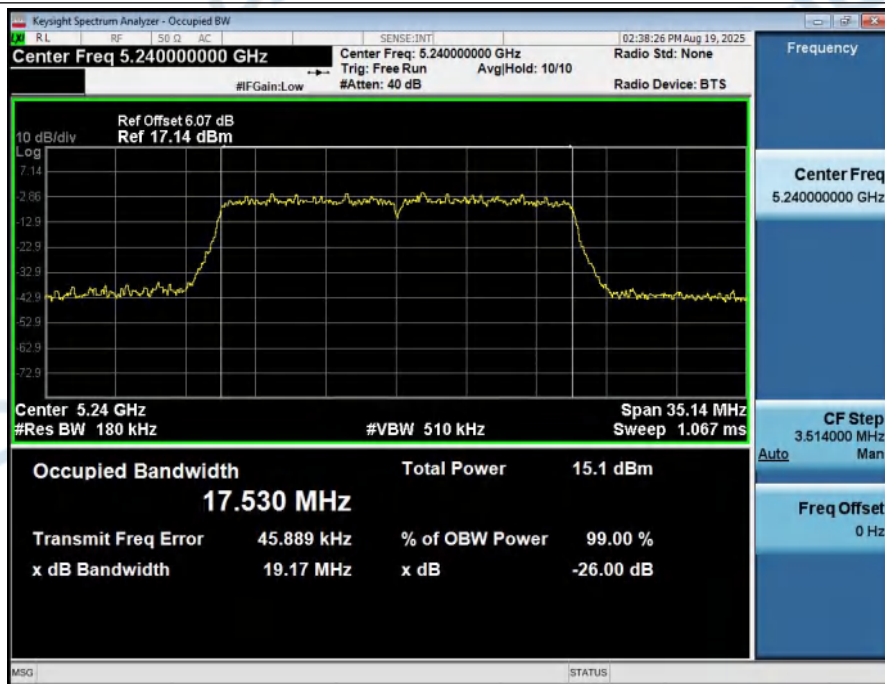


-26BW_NVNT_ANT1_802_11ax(HE20)_5240

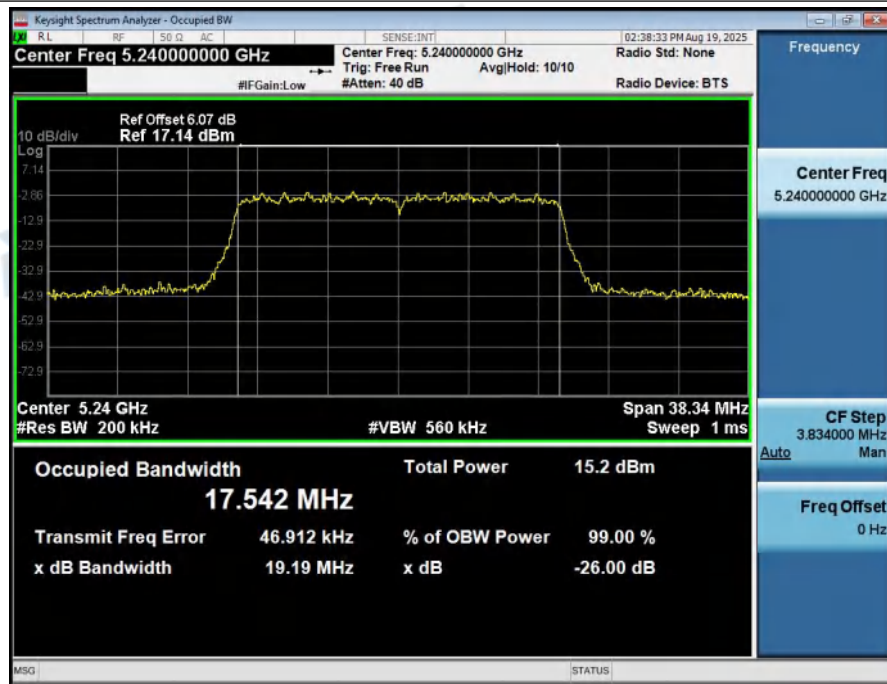

99%_OCB_NVNT_ANT1_802_11n(HT40)_5190

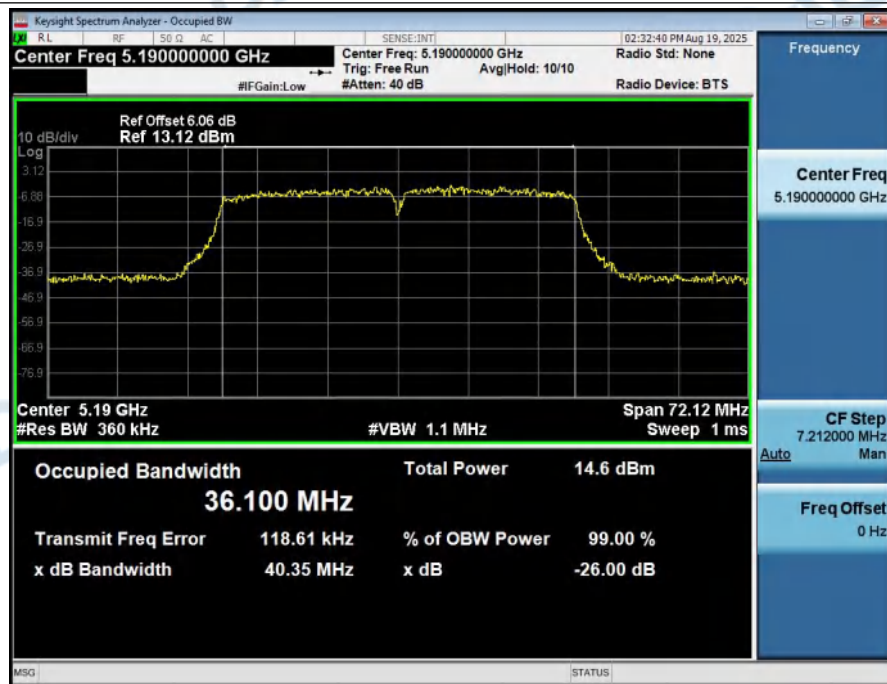


-26BW_NVNT_ANT1_802_11n(HT40)_5190

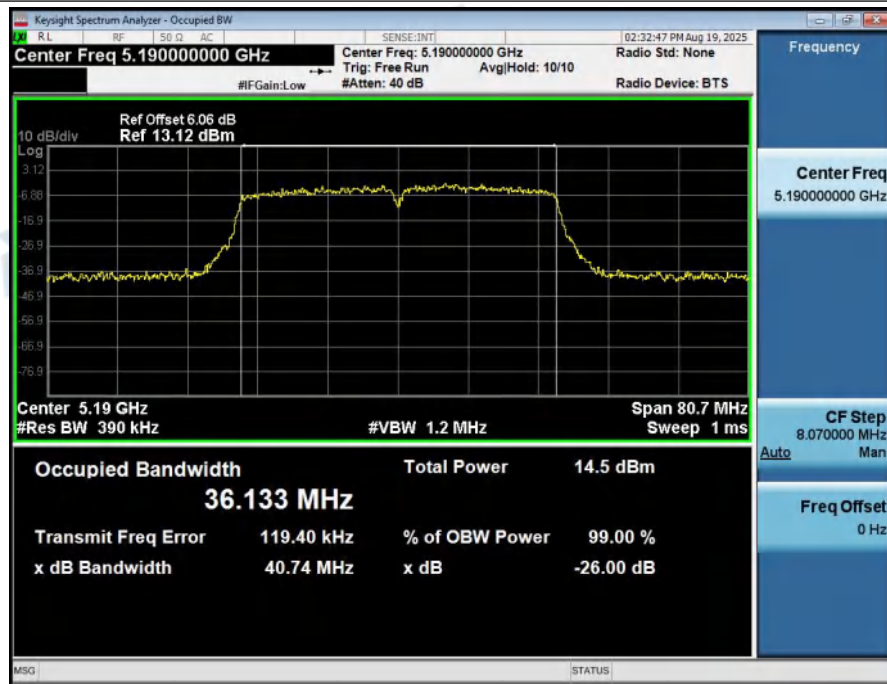

99%_OCB_NVNT_ANT1_802_11n(HT40)_5230




-26BW_NVNT_ANT1_802_11n(HT40)_5230

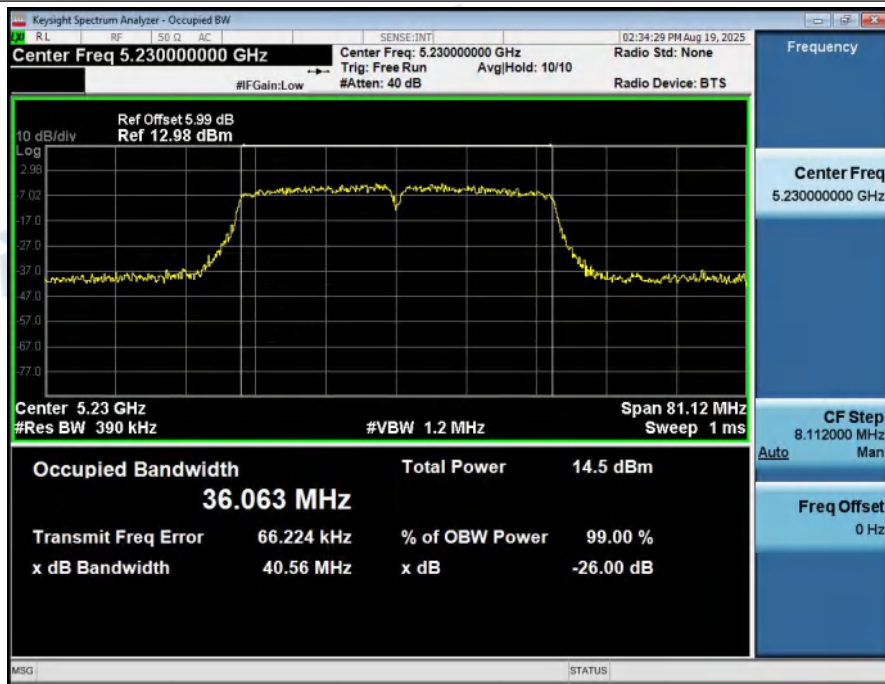

99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5190




-26BW_NVNT_ANT1_802_11ac(VHT40)_5190

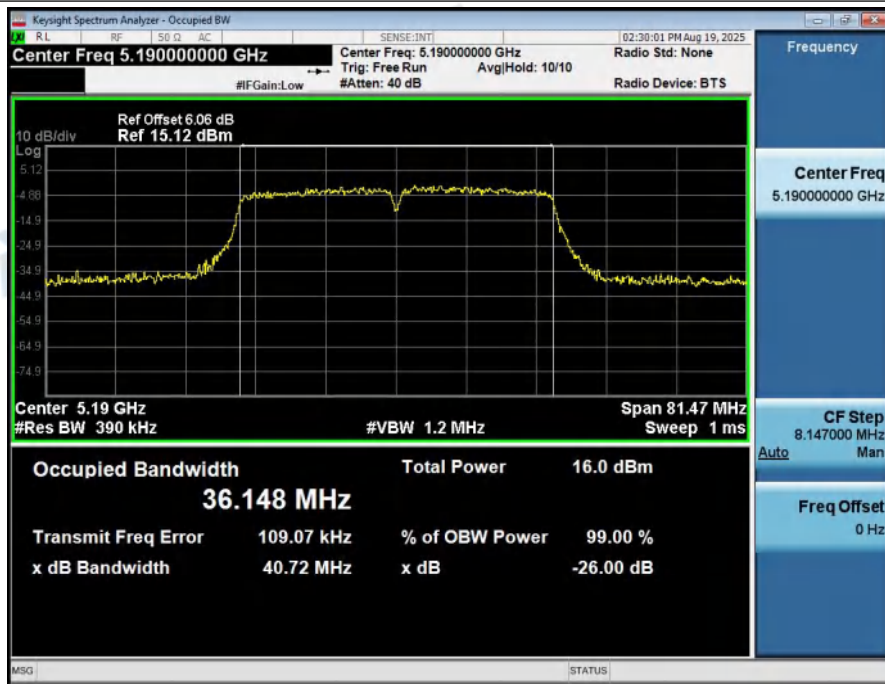

99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5230




-26BW_NVNT_ANT1_802_11ac(VHT40)_5230

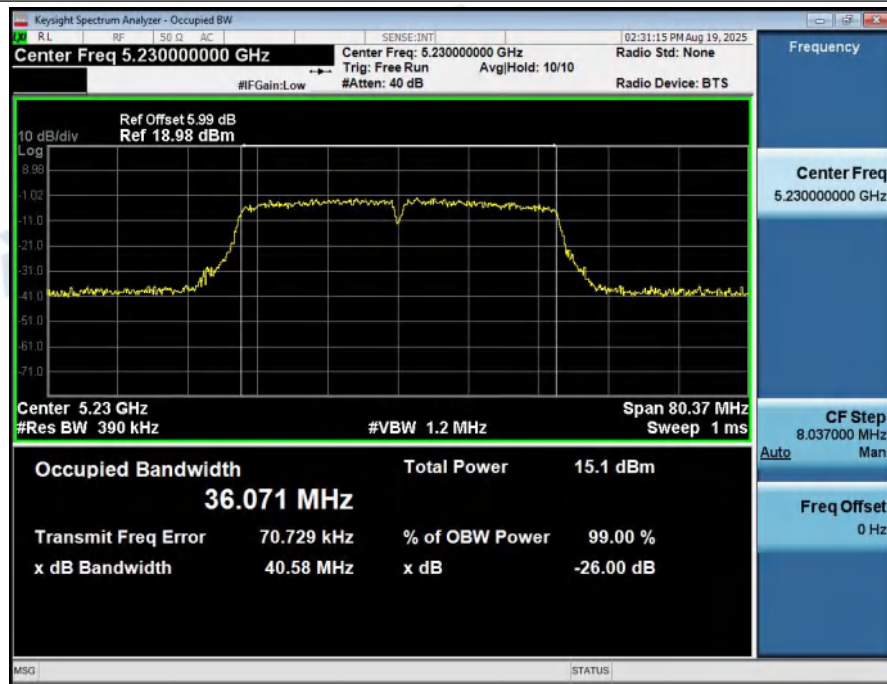

99%_OCB_NVNT_ANT1_802_11ax(HE40)_5190




-26BW_NVNT_ANT1_802_11ax(HE40)_5190

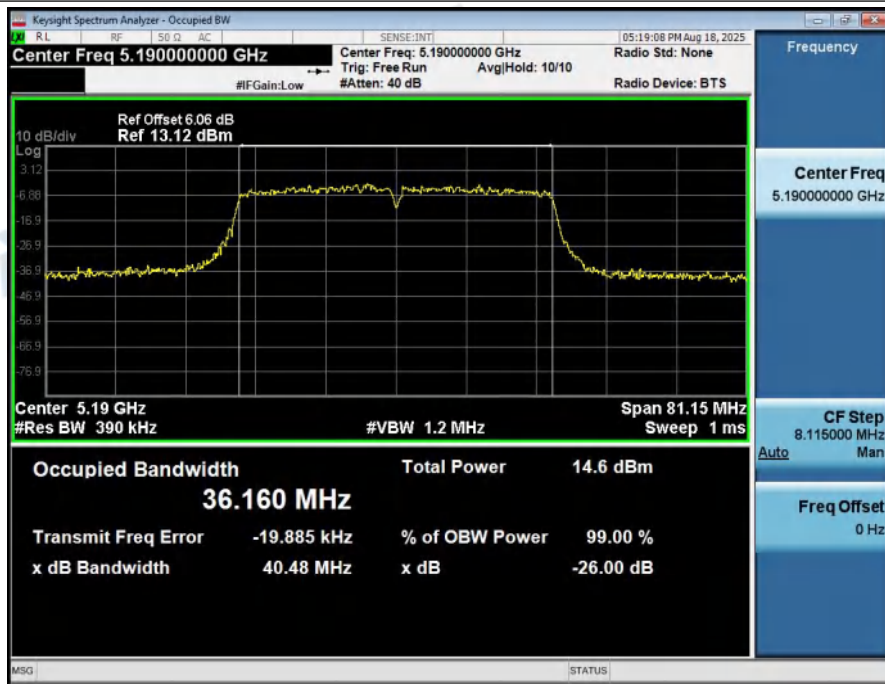

99%_OCB_NVNT_ANT1_802_11ax(HE40)_5230




-26BW_NVNT_ANT1_802_11ax(HE40)_5230

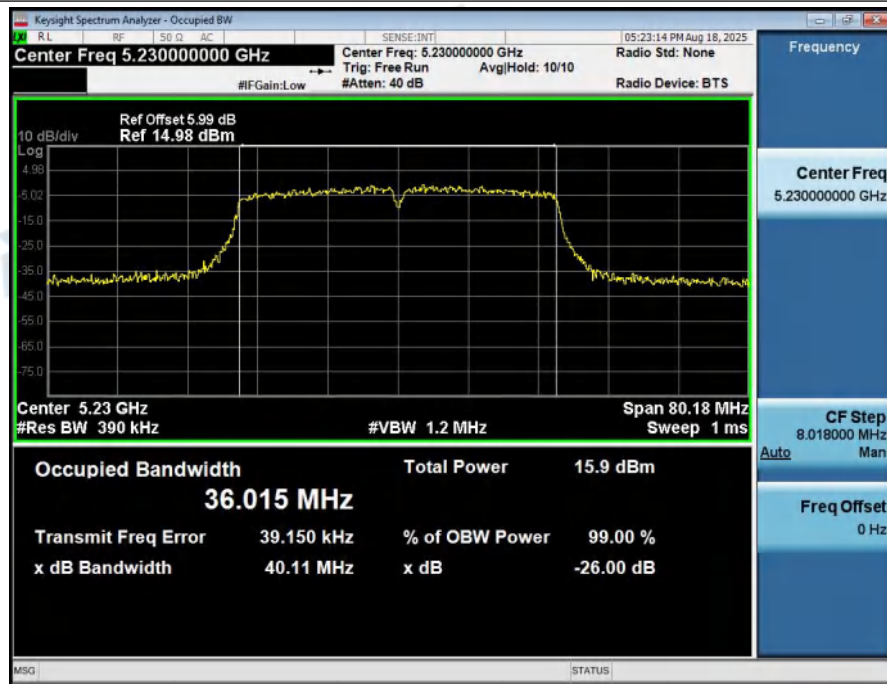

99%_OCB_NVNT_ANT1_802_11ac(VHT80)_5210




-26BW_NVNT_ANT1_802_11ac(VHT80)_5210

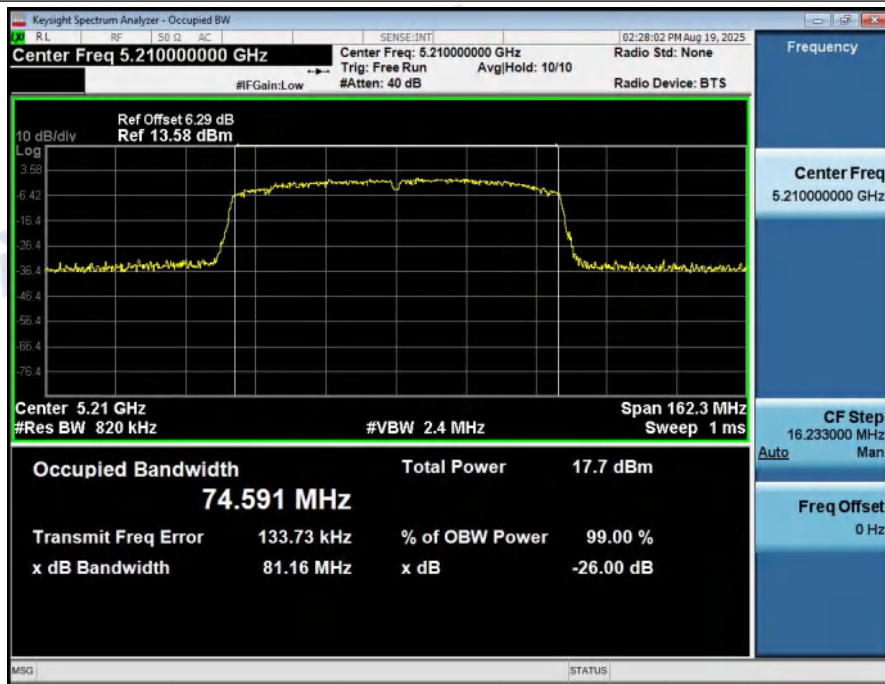

99%_OCB_NVNT_ANT1_802_11ax(HE80)_5210



-26BW_NVNT_ANT1_802_11ax(HE80)_5210

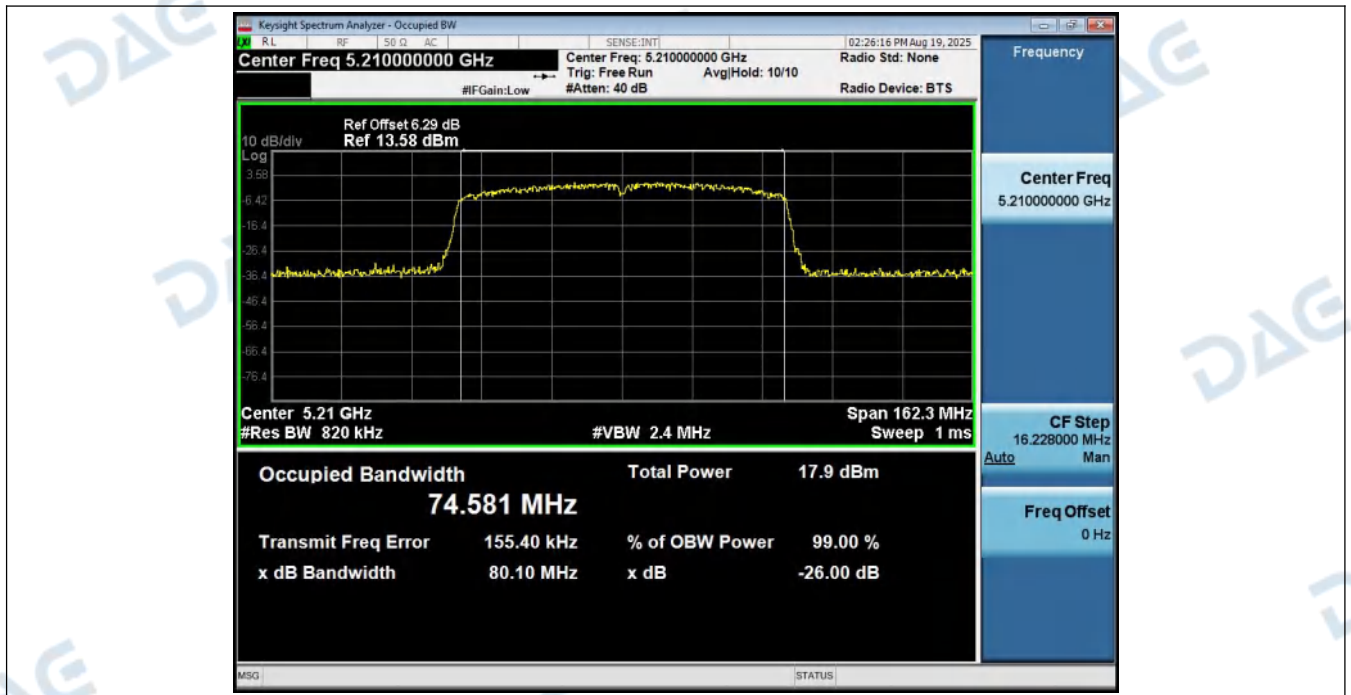

2. Duty Cycle

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5180.00	73.12	1.36
NVNT	ANT1	802.11a	5200.00	73.12	1.36
NVNT	ANT1	802.11a	5240.00	73.12	1.36
NVNT	ANT1	802.11n(HT20)	5180.00	71.91	1.43
NVNT	ANT1	802.11n(HT20)	5200.00	70.79	1.50
NVNT	ANT1	802.11n(HT20)	5240.00	70.79	1.50
NVNT	ANT1	802.11ac(VHT20)	5180.00	71.91	1.43
NVNT	ANT1	802.11ac(VHT20)	5200.00	71.91	1.43
NVNT	ANT1	802.11ac(VHT20)	5240.00	71.91	1.43
NVNT	ANT1	802.11ax(HE20)	5180.00	56.90	2.45
NVNT	ANT1	802.11ax(HE20)	5200.00	56.90	2.45
NVNT	ANT1	802.11ax(HE20)	5240.00	57.63	2.39
NVNT	ANT1	802.11n(HT40)	5190.00	55.36	2.57
NVNT	ANT1	802.11n(HT40)	5230.00	56.14	2.51
NVNT	ANT1	802.11ac(VHT40)	5190.00	55.36	2.57
NVNT	ANT1	802.11ac(VHT40)	5230.00	54.39	2.65
NVNT	ANT1	802.11ax(HE40)	5190.00	40.48	3.93
NVNT	ANT1	802.11ax(HE40)	5230.00	40.48	3.93
NVNT	ANT1	802.11ac(VHT80)	5210.00	37.50	4.26
NVNT	ANT1	802.11ax(HE80)	5210.00	26.47	5.77

3. Maximum Conducted Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5180.00	7.75	1.36	9.11	24	Pass
NVNT	ANT1	802.11a	5200.00	5.86	1.36	7.22	24	Pass
NVNT	ANT1	802.11a	5240.00	6.00	1.36	7.36	24	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	4.38	1.43	5.81	24	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	4.70	1.50	6.20	24	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	5.53	1.50	7.03	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	4.70	1.43	6.13	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	4.58	1.43	6.01	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	5.75	1.43	7.18	24	Pass
NVNT	ANT1	802.11ax(HE20)	5180.00	5.76	2.45	8.21	24	Pass
NVNT	ANT1	802.11ax(HE20)	5200.00	6.81	2.45	9.26	24	Pass
NVNT	ANT1	802.11ax(HE20)	5240.00	6.34	2.39	8.73	24	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	5.71	2.65	8.36	24	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	6.10	2.51	8.61	24	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	7.03	2.57	9.60	24	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	6.24	2.65	8.89	24	Pass
NVNT	ANT1	802.11ax(HE40)	5190.00	4.73	3.93	8.66	24	Pass
NVNT	ANT1	802.11ax(HE40)	5230.00	5.65	3.93	9.58	24	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	6.63	4.26	10.89	24	Pass
NVNT	ANT1	802.11ax(HE80)	5210.00	5.63	5.77	11.40	24	Pass


4. Power Spectral Density

Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/MHz)	Duty factor(dB)	Total PSD(dBm/MHz)	limit(dBm)	Result
NVNT	ANT1	802.11a	5180.00	2.44	1.36	3.80	11	Pass
NVNT	ANT1	802.11a	5200.00	0.65	1.36	2.01	11	Pass
NVNT	ANT1	802.11a	5240.00	0.39	1.36	1.75	11	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	-1.03	1.43	0.40	11	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	-0.99	1.50	0.51	11	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	-0.18	1.50	1.31	11	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	-0.53	1.43	0.90	11	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	-1.09	1.43	0.34	11	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	0.20	1.43	1.63	11	Pass
NVNT	ANT1	802.11ax(HE20)	5180.00	-1.03	2.45	1.42	11	Pass
NVNT	ANT1	802.11ax(HE20)	5200.00	-1.07	2.39	1.32	11	Pass
NVNT	ANT1	802.11ax(HE20)	5240.00	0.14	2.45	2.59	11	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	1.07	2.51	3.58	11	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	1.99	2.51	4.50	11	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	1.36	2.51	3.87	11	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	-0.87	2.51	1.64	11	Pass
NVNT	ANT1	802.11ax(HE40)	5190.00	-1.61	3.93	2.32	11	Pass
NVNT	ANT1	802.11ax(HE40)	5230.00	0.53	3.93	4.46	11	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	-4.34	4.09	-0.25	11	Pass
NVNT	ANT1	802.11ax(HE80)	5210.00	-4.12	5.77	1.65	11	Pass

Power_Spectral_Density_NVNT_ANT1_802_11a_5180




Power_Spectral_Density_NVNT_ANT1_802_11a_5200

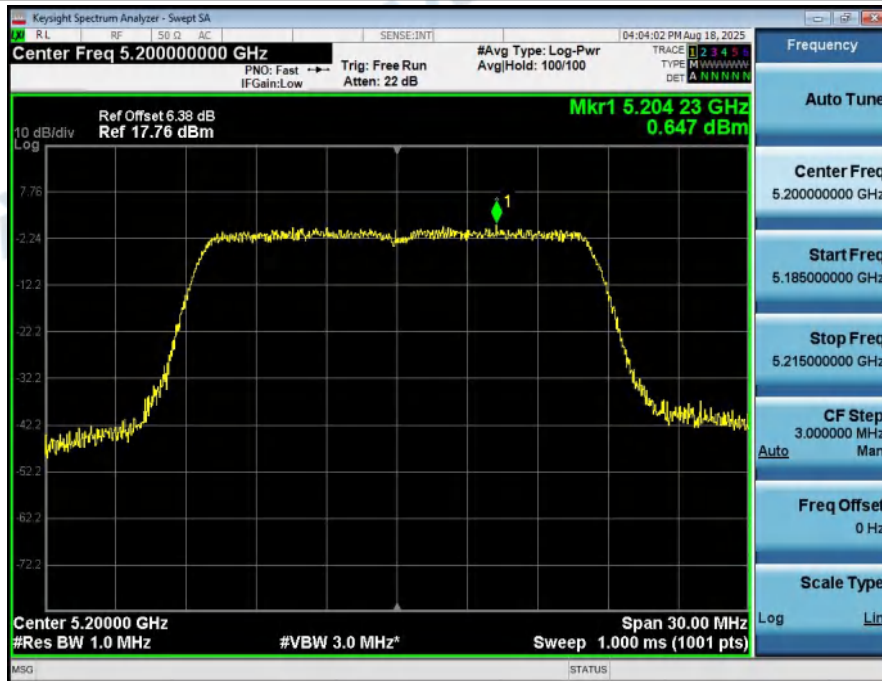

Power_Spectral_Density_NVNT_ANT1_802_11a_5240



Power_Spectral_Density_NVNT_ANT1_802_11n(HT20)_5180

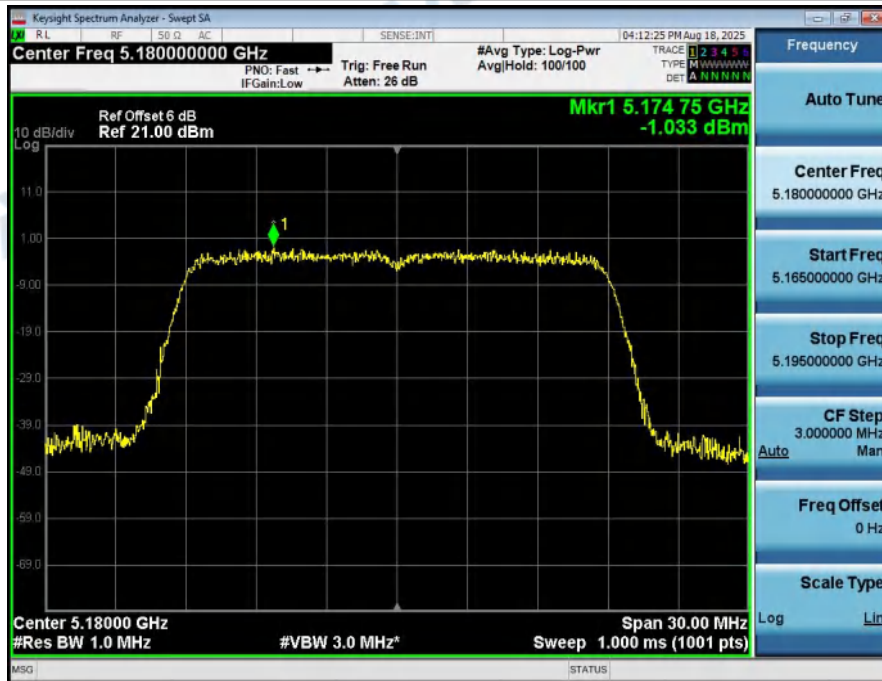

Power_Spectral_Density_NVNT_ANT1_802_11n(HT20)_5200



Power_Spectral_Density_NVNT_ANT1_802_11n(HT20)_5240



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT20)_5180



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT20)_5200



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT20)_5240




Power_Spectral_Density_NVNT_ANT1_802_11ax(HE20)_5180



Power_Spectral_Density_NVNT_ANT1_802_11ax(HE20)_5200



Power_Spectral_Density_NVNT_ANT1_802_11ax(HE20)_5240

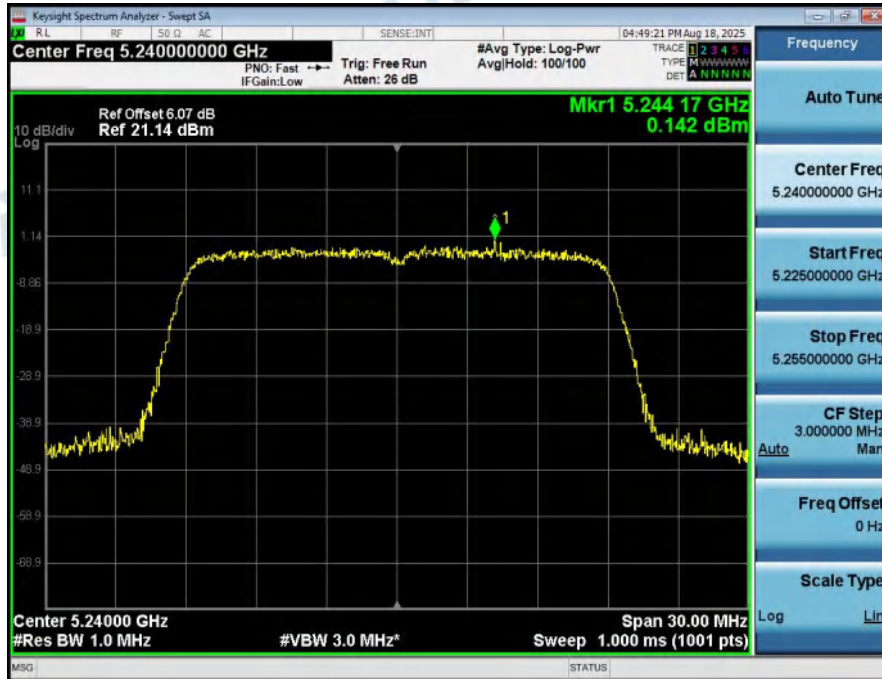

Power_Spectral_Density_NVNT_ANT1_802_11n(HT40)_5190



Power_Spectral_Density_NVNT_ANT1_802_11n(HT40)_5230



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT40)_5190



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT40)_5230



Power_Spectral_Density_NVNT_ANT1_802_11ax(HE40)_5190



Power_Spectral_Density_NVNT_ANT1_802_11ax(HE40)_5230



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT80)_5210




Power_Spectral_Density_NVNT_ANT1_802_11ax(HE80)_5210




5. Bandedge

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark Frequency(MHz)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5180.00	5139.60	-41.25	-27	Pass
NVNT	ANT1	802.11a	5240.00	5418.80	-41.25	-27	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	5130.20	-41.62	-27	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	5385.20	-41.03	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	5136.40	-40.88	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	5394.40	-41.90	-27	Pass
NVNT	ANT1	802.11ax(HE20)	5180.00	5032.00	-41.25	-27	Pass
NVNT	ANT1	802.11ax(HE20)	5240.00	5351.20	-41.25	-27	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	5147.42	-39.85	-27	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	5361.41	-41.37	-27	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	5149.94	-34.09	-27	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	5371.07	-40.93	-27	Pass
NVNT	ANT1	802.11ax(HE40)	5190.00	5149.94	-36.92	-27	Pass
NVNT	ANT1	802.11ax(HE40)	5230.00	5350.91	-41.69	-27	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	5148.68	-34.43	-27	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	5362.46	-41.01	-27	Pass
NVNT	ANT1	802.11ax(HE80)	5210.00	5139.86	-39.71	-27	Pass
NVNT	ANT1	802.11ax(HE80)	5210.00	5356.16	-40.25	-27	Pass


Bandedge_NVNT_ANT1_802_11a_5180

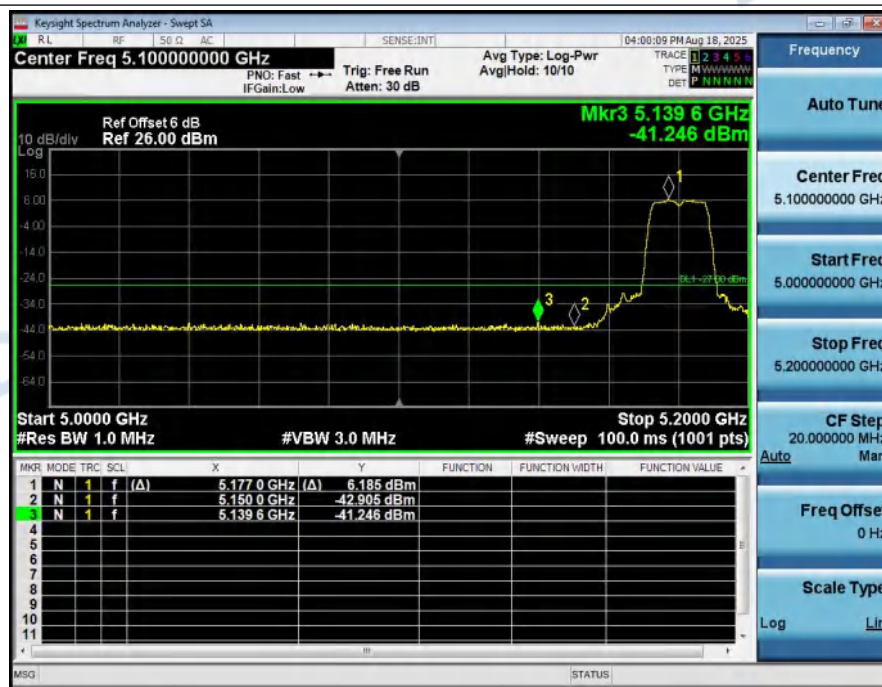


Bandedge_NVNT_ANT1_802_11a_5240

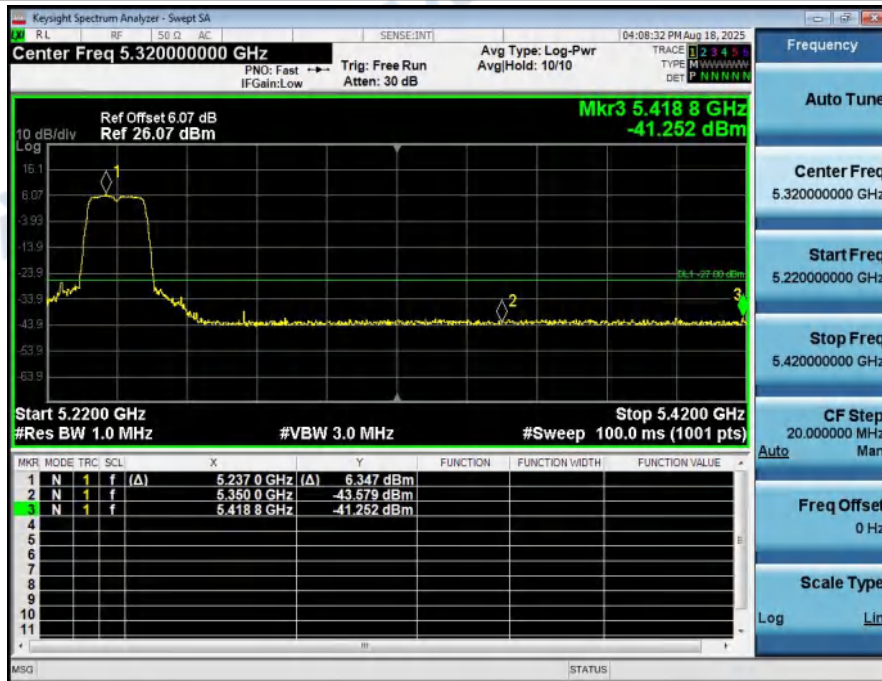


Bandedge_NVNT_ANT1_802_11n(HT20)_5180

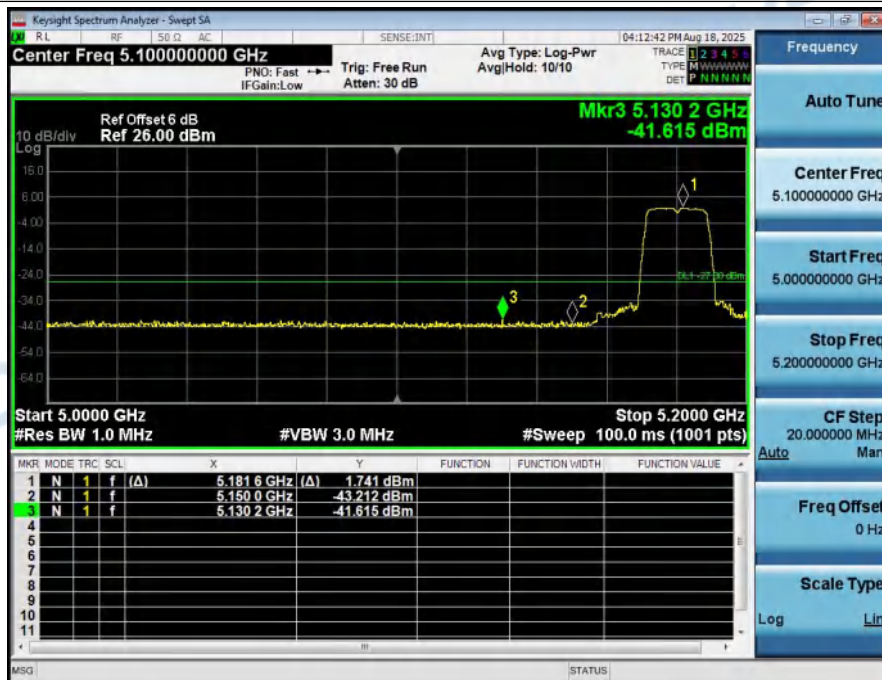


Bandedge_NVNT_ANT1_802_11n(HT20)_5240

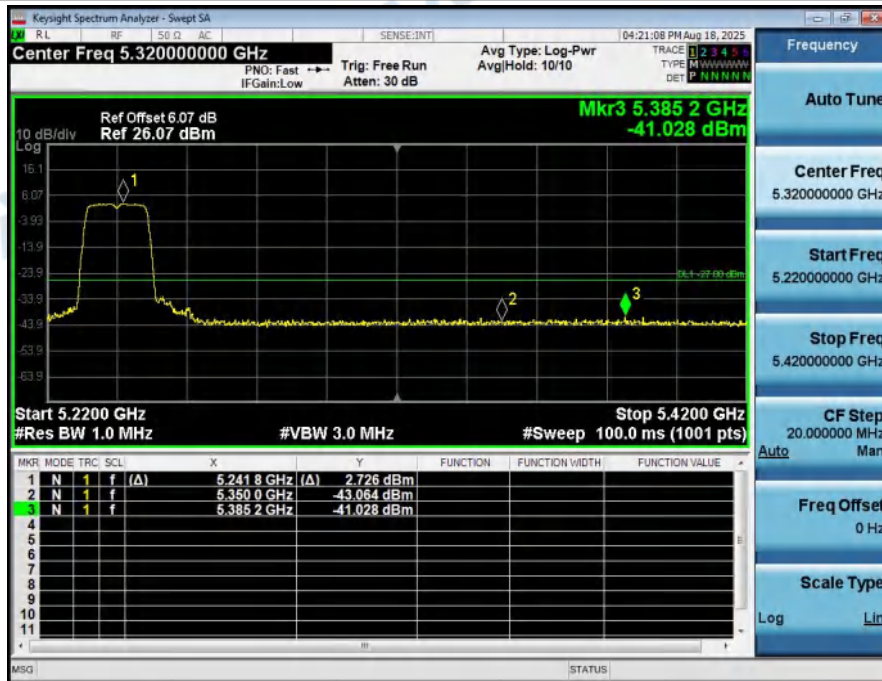


Bandedge_NVNT_ANT1_802_11ac(VHT20)_5180

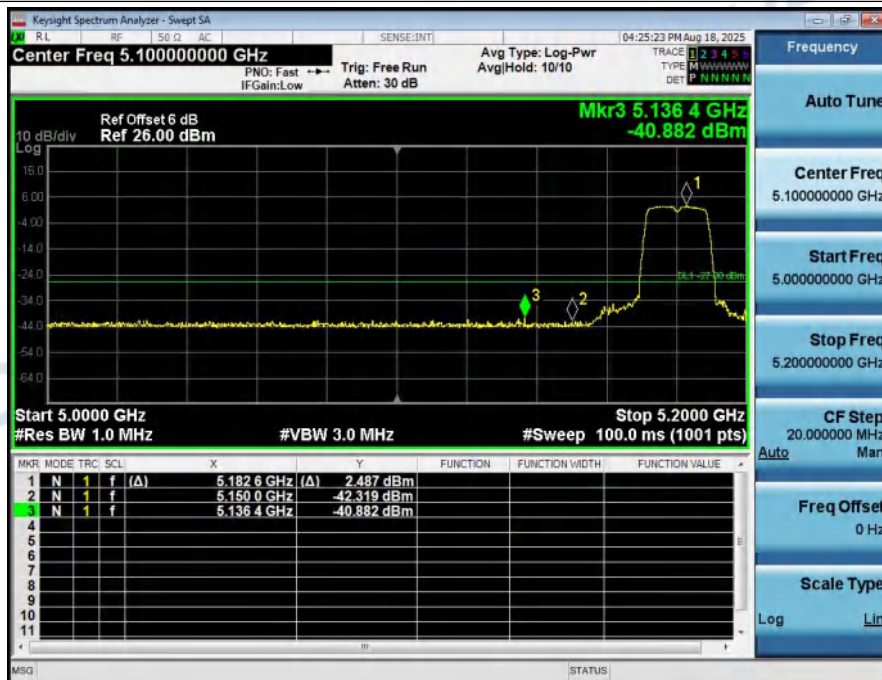


Bandedge_NVNT_ANT1_802_11ac(VHT20)_5240

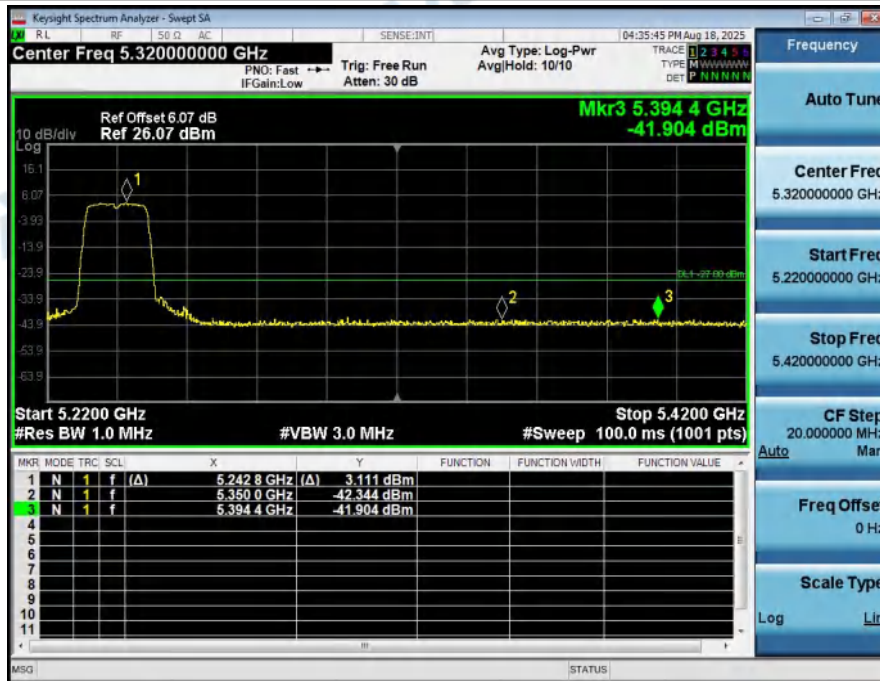


Bandedge_NVNT_ANT1_802_11ax(HE20)_5180

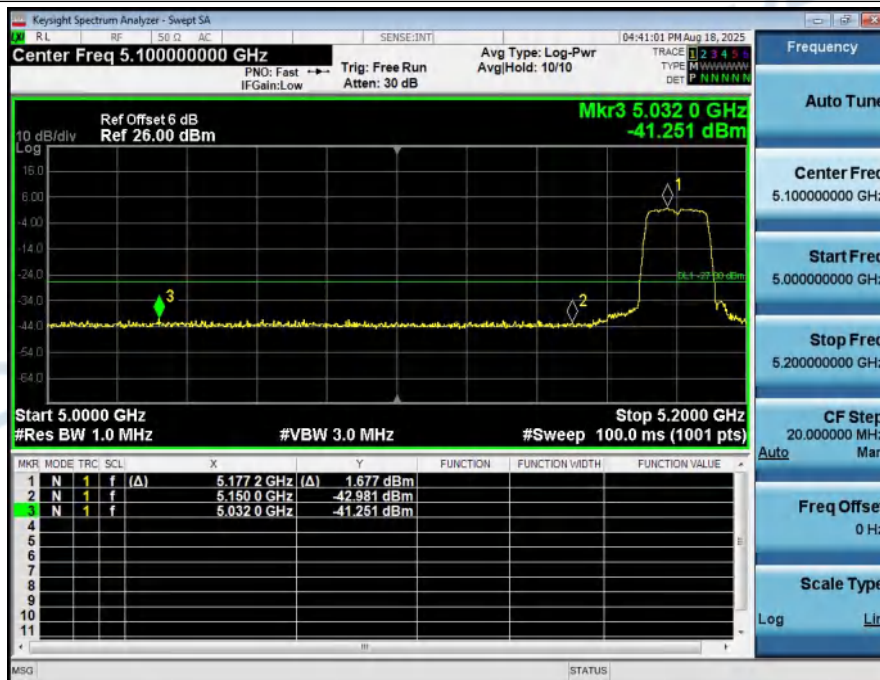

Bandedge_NVNT_ANT1_802_11ax(HE20)_5240

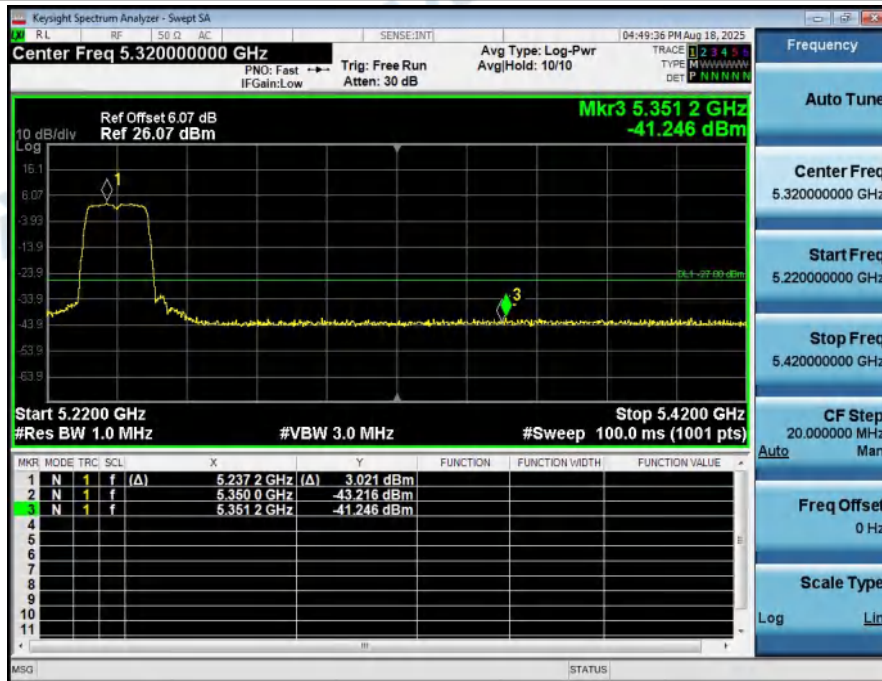


Bandedge_NVNT_ANT1_802_11n(HT40)_5190

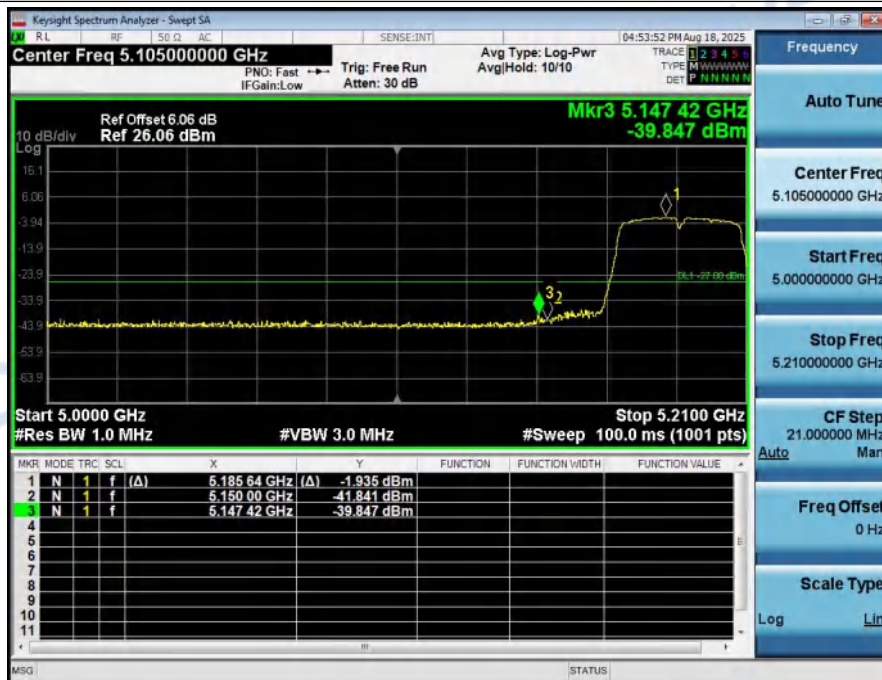

Bandedge_NVNT_ANT1_802_11n(HT40)_5230




Bandedge_NVNT_ANT1_802_11ac(VHT40)_5190

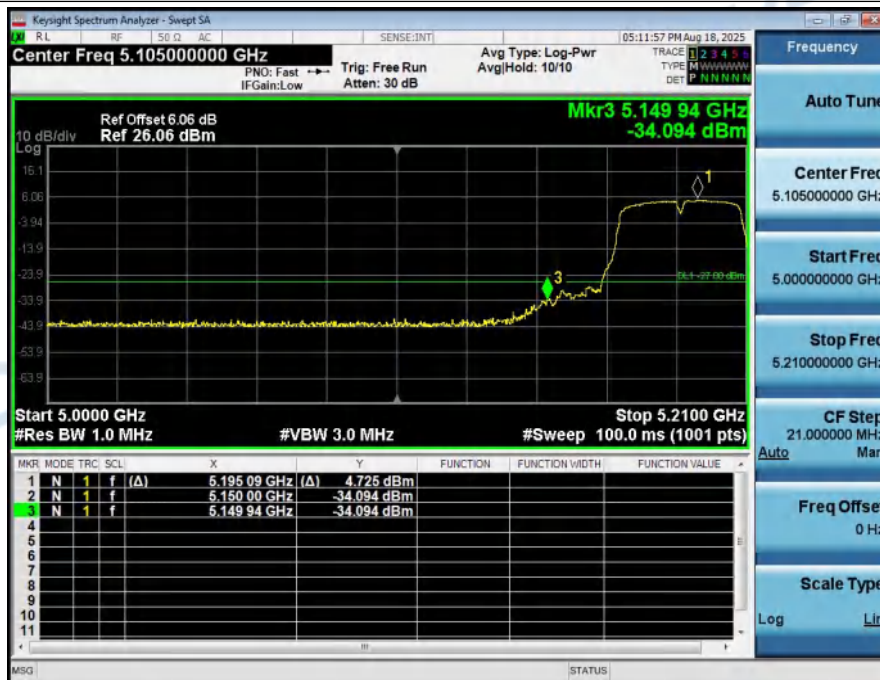

Bandedge_NVNT_ANT1_802_11ac(VHT40)_5230




Bandedge_NVNT_ANT1_802_11ax(HE40)_5190

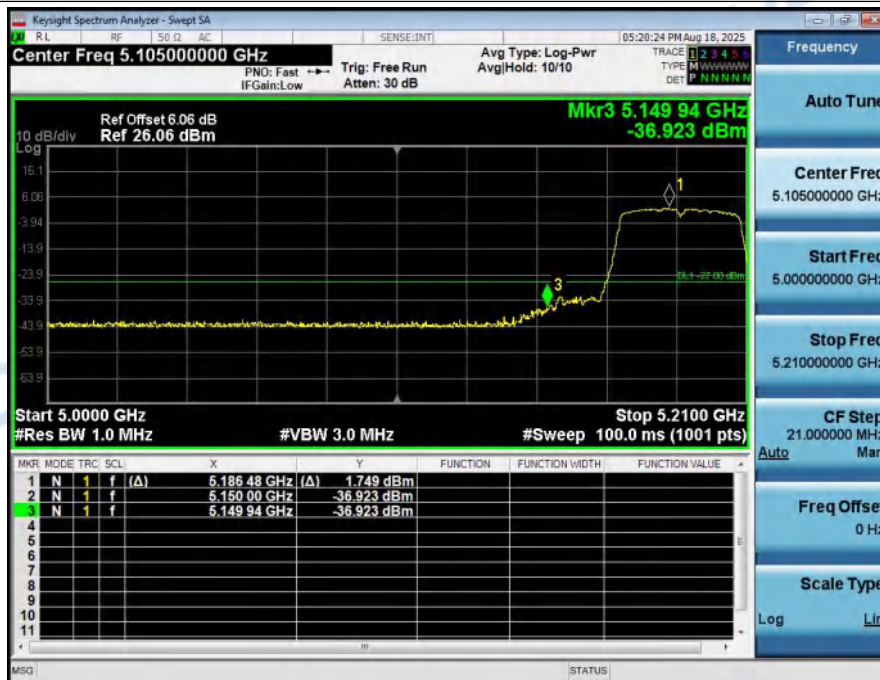


Bandedge_NVNT_ANT1_802_11ax(HE40)_5230



Bandedge_NVNT_ANT1_802_11ac(VHT80)_5210

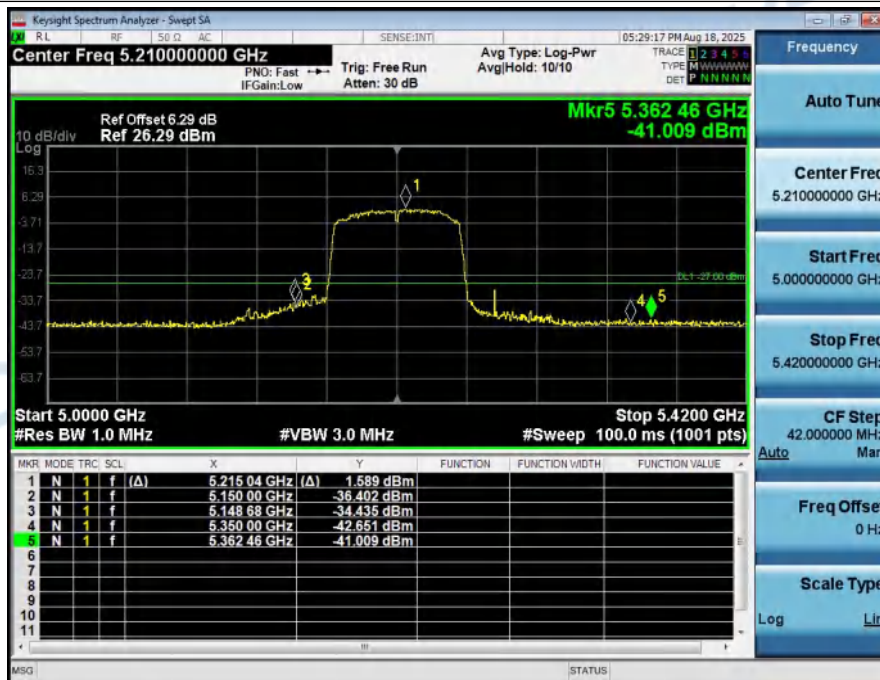


Bandedge_NVNT_ANT1_802_11ax(HE80)_5210

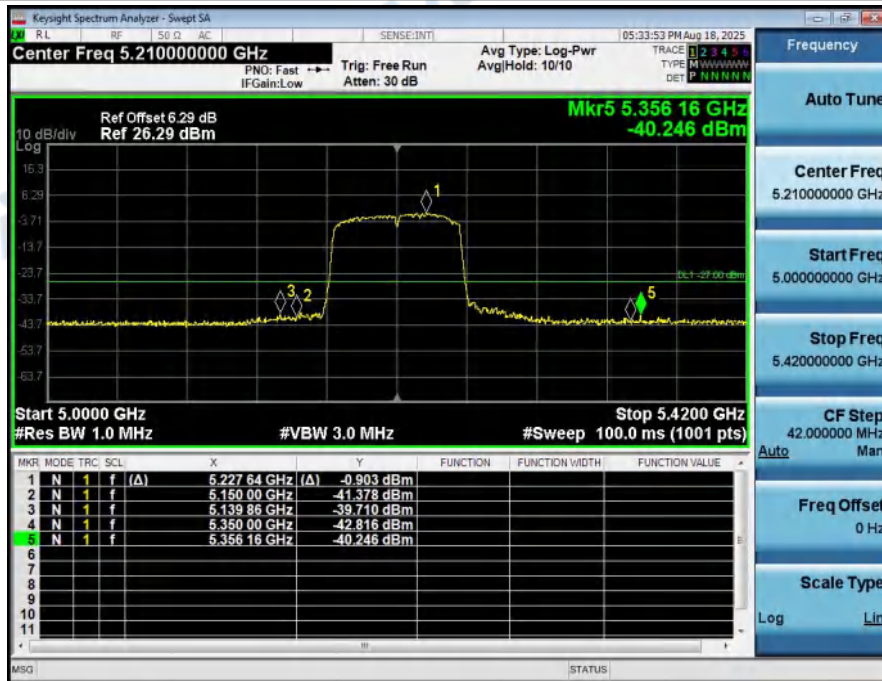


6. Spurious Emission

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark Frequency(MHz)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5180.00	25044.15	-37.35	-27	Pass
NVNT	ANT1	802.11a	5200.00	24991.21	-37.32	-27	Pass
NVNT	ANT1	802.11a	5240.00	25044.15	-37.65	-27	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	25097.09	-35.47	-27	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	25070.62	-37.49	-27	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	25044.15	-37.77	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	25070.62	-37.82	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	24964.74	-37.09	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	24964.74	-38.27	-27	Pass
NVNT	ANT1	802.11ax(HE20)	5180.00	24964.74	-37.14	-27	Pass
NVNT	ANT1	802.11ax(HE20)	5200.00	25044.15	-37.49	-27	Pass
NVNT	ANT1	802.11ax(HE20)	5240.00	25017.68	-37.41	-27	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	25044.15	-37.68	-27	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	25044.15	-36.10	-27	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	24991.21	-36.94	-27	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	25123.56	-36.76	-27	Pass
NVNT	ANT1	802.11ax(HE40)	5190.00	25044.15	-36.76	-27	Pass
NVNT	ANT1	802.11ax(HE40)	5230.00	24964.74	-36.91	-27	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	25017.68	-37.75	-27	Pass
NVNT	ANT1	802.11ax(HE80)	5210.00	24488.28	-37.38	-27	Pass


Spurious_Emission_NVNT_ANT1_802_11a_5180_20M

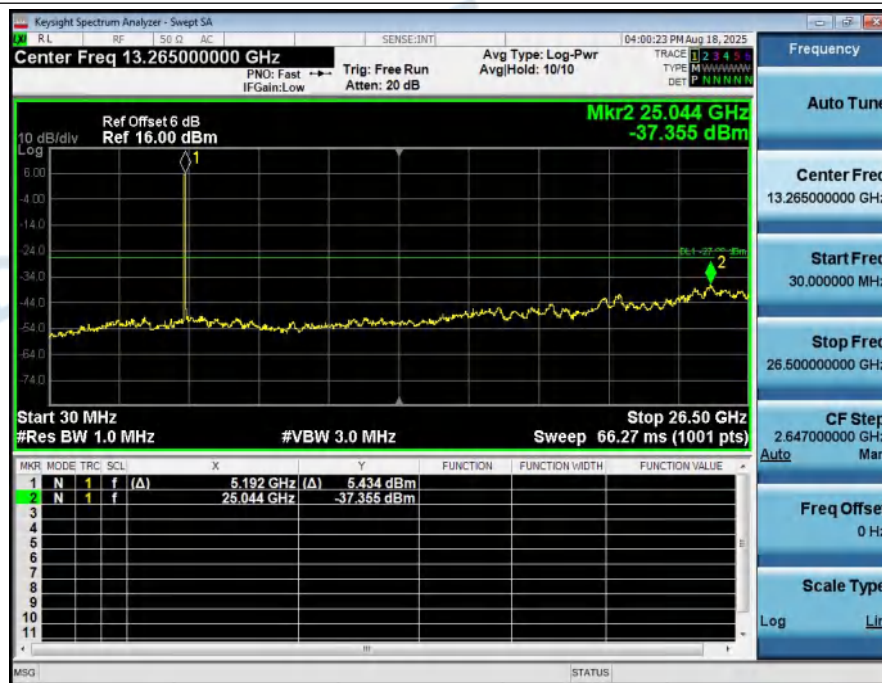


Spurious_Emission_NVNT_ANT1_802_11a_5200_20M

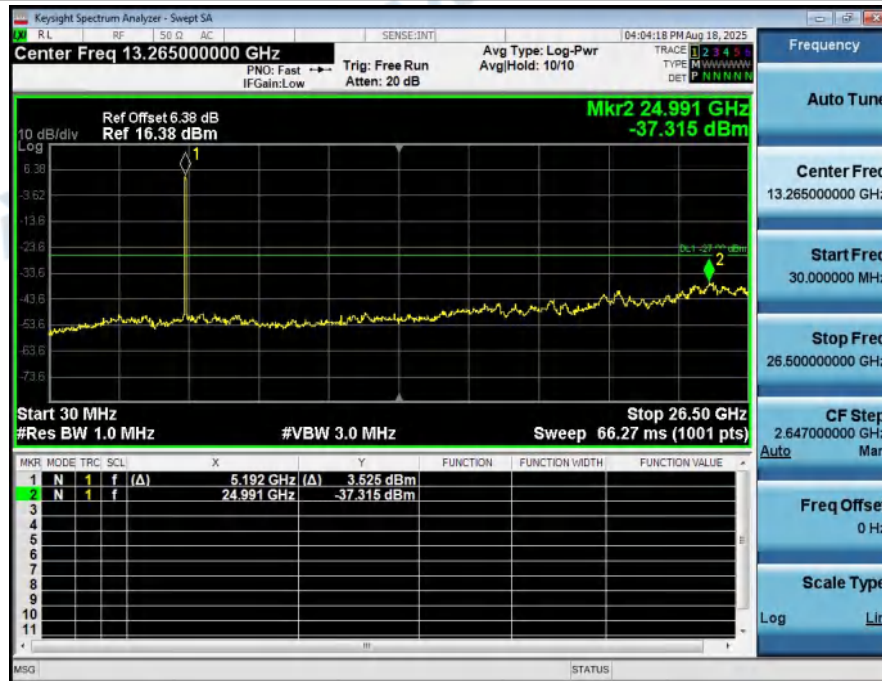


Spurious_Emission_NVNT_ANT1_802_11a_5240_20M

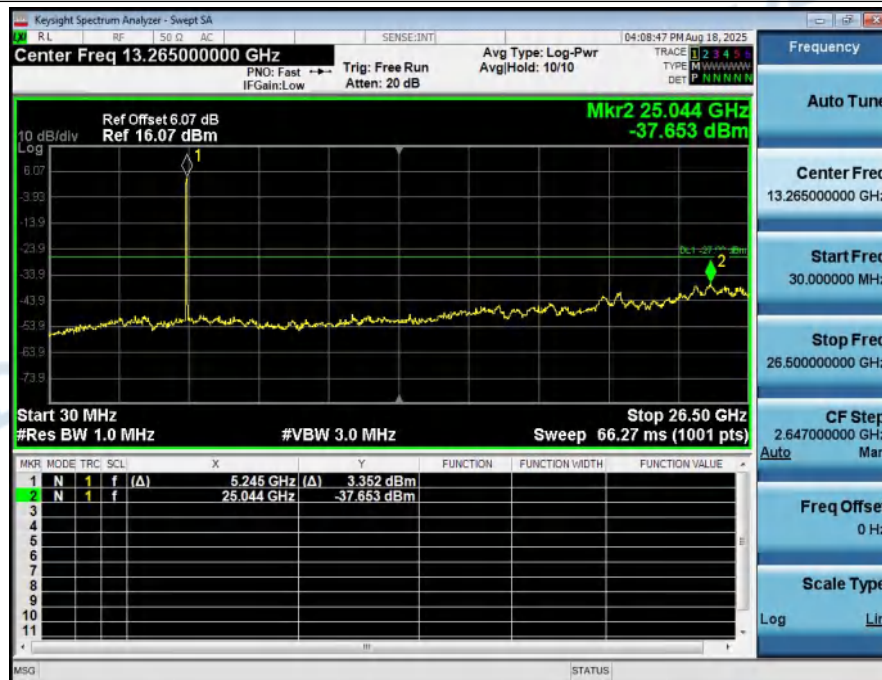


Spurious_Emission_NVNT_ANT1_802_11n(HT20)_5180_20M

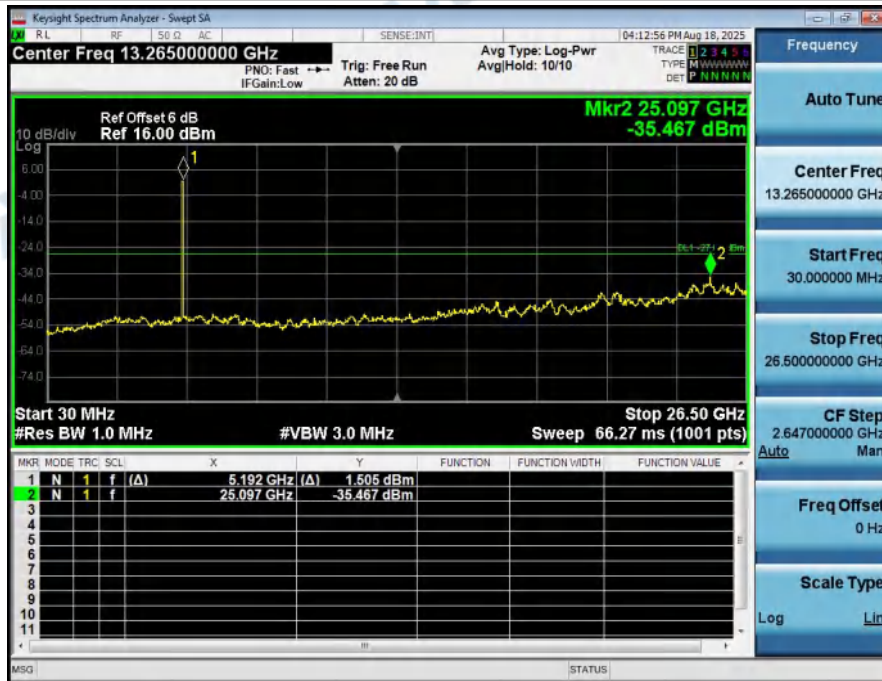


Spurious_Emission_NVNT_ANT1_802_11n(HT20)_5200_20M

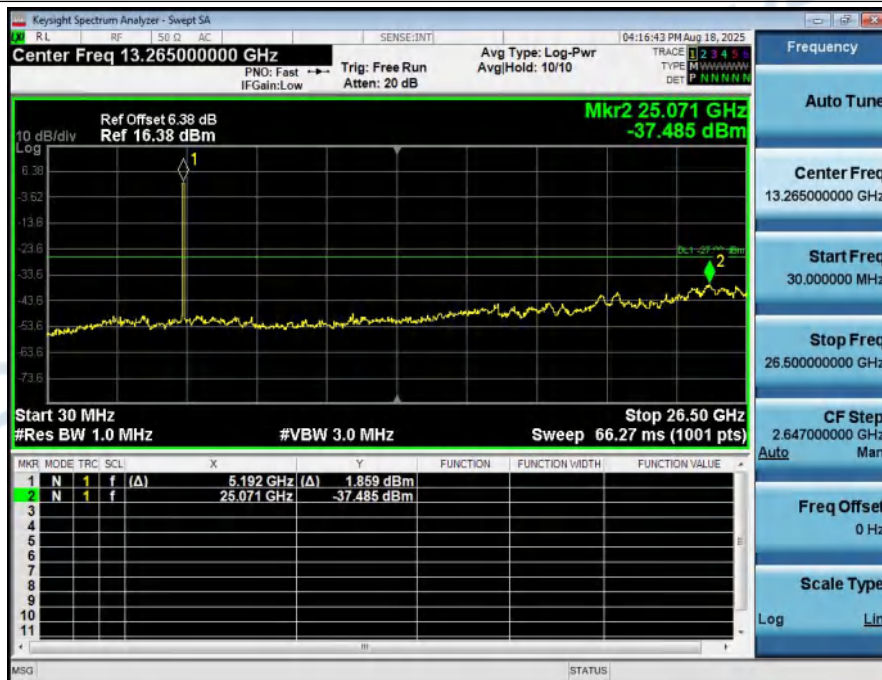


Spurious_Emission_NVNT_ANT1_802_11n(HT20)_5240_20M

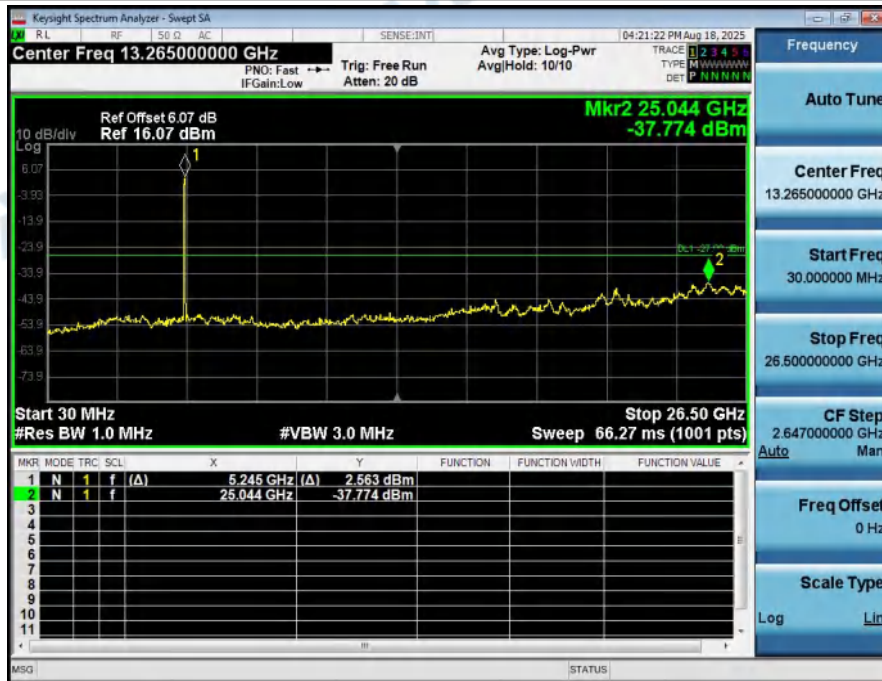


Spurious_Emission_NVNT_ANT1_802_11ac(VHT20)_5180_20M

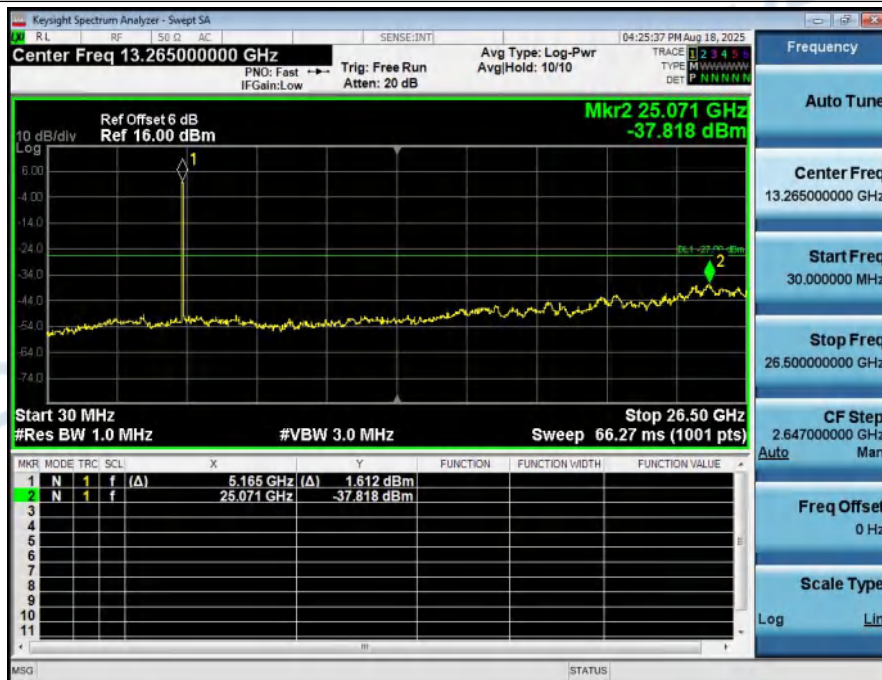


Spurious_Emission_NVNT_ANT1_802_11ac(VHT20)_5200_20M

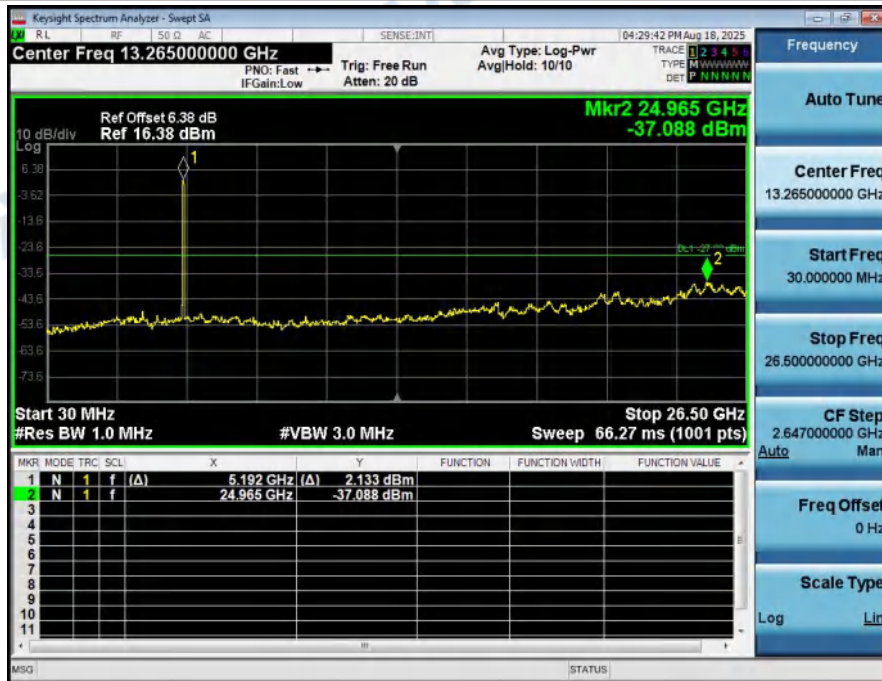


Spurious_Emission_NVNT_ANT1_802_11ac(VHT20)_5240_20M

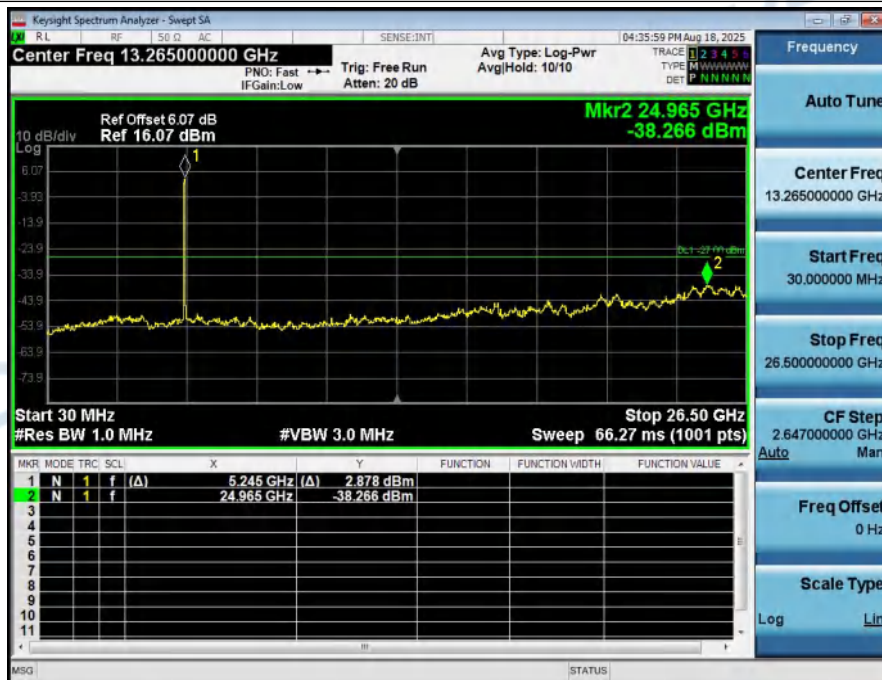


Spurious_Emission_NVNT_ANT1_802_11ax(HE20)_5180_20M

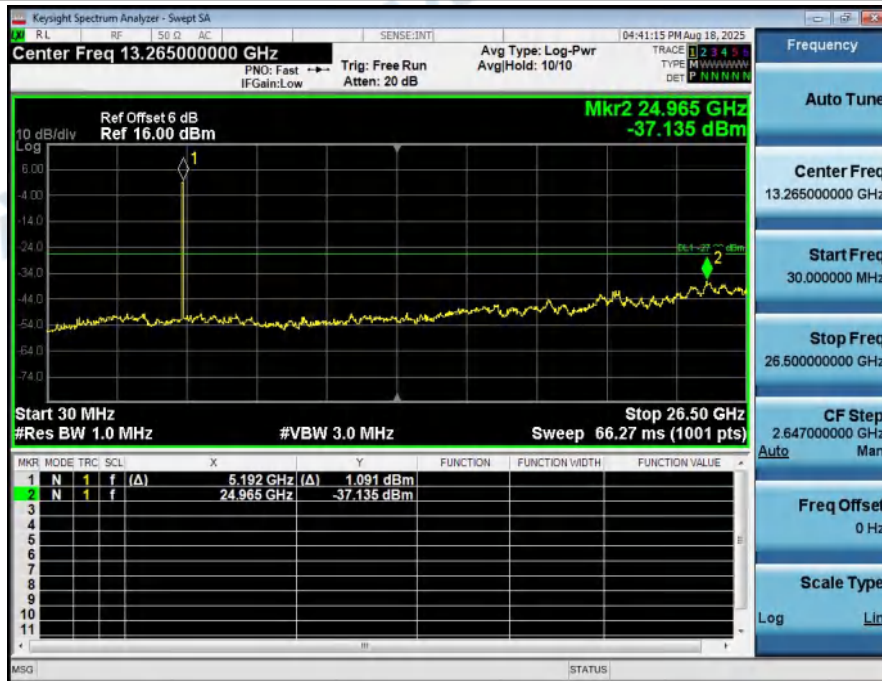


Spurious_Emission_NVNT_ANT1_802_11ax(HE20)_5200_20M

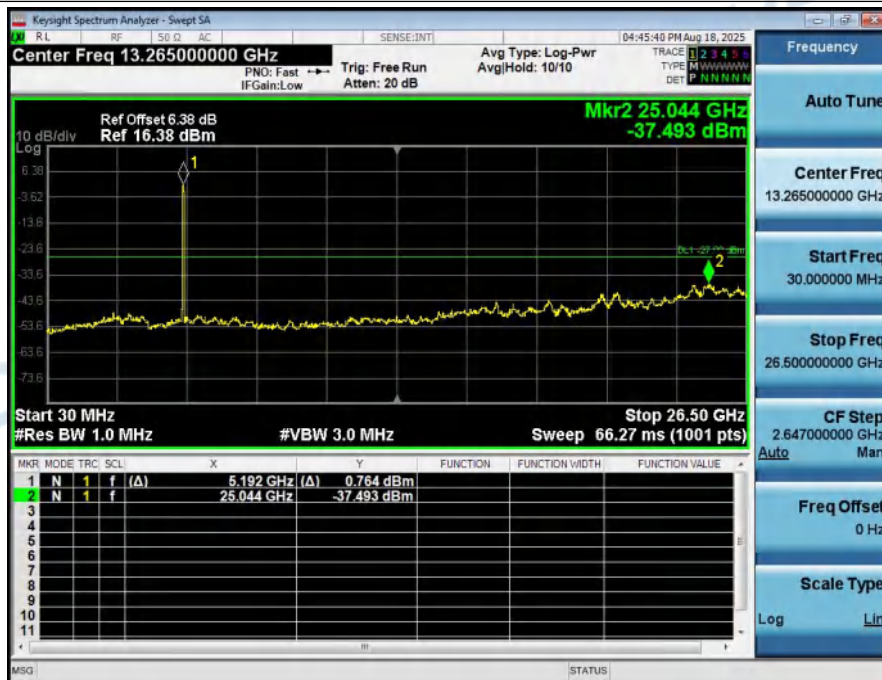


Spurious_Emission_NVNT_ANT1_802_11ax(HE20)_5240_20M

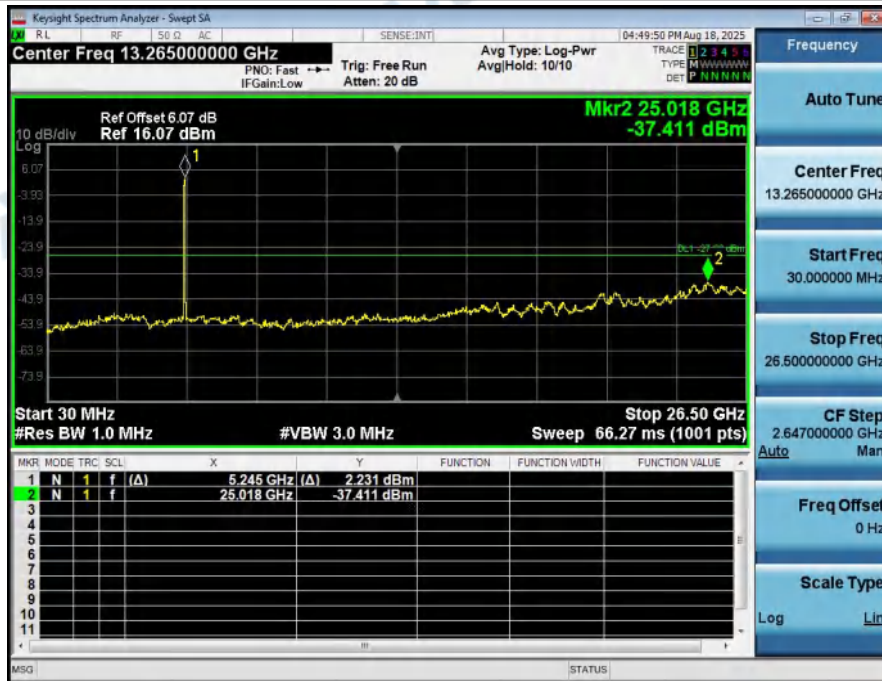


Spurious_Emission_NVNT_ANT1_802_11n(HT40)_5190_40M

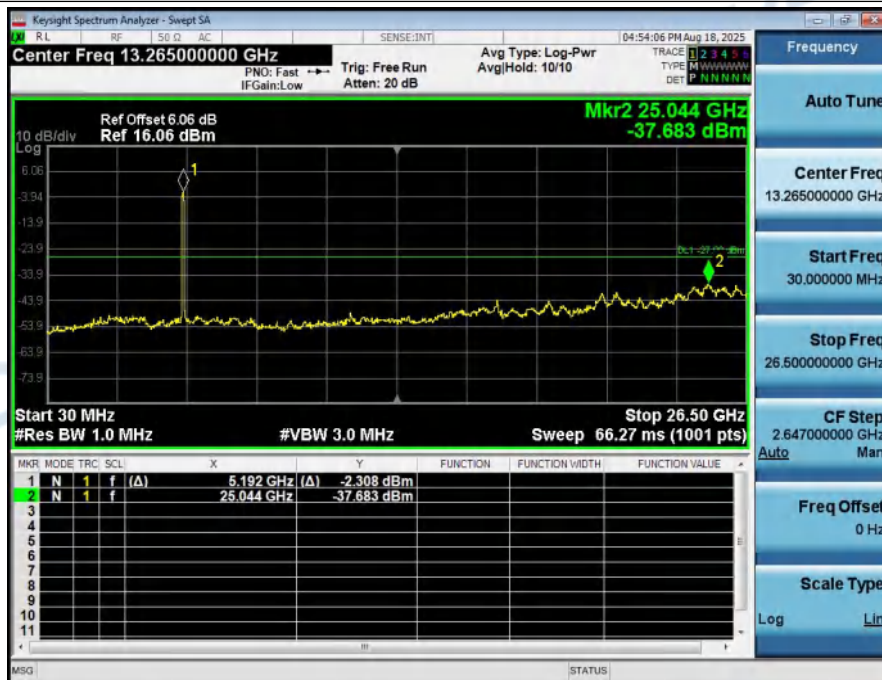


Spurious_Emission_NVNT_ANT1_802_11n(HT40)_5230_40M

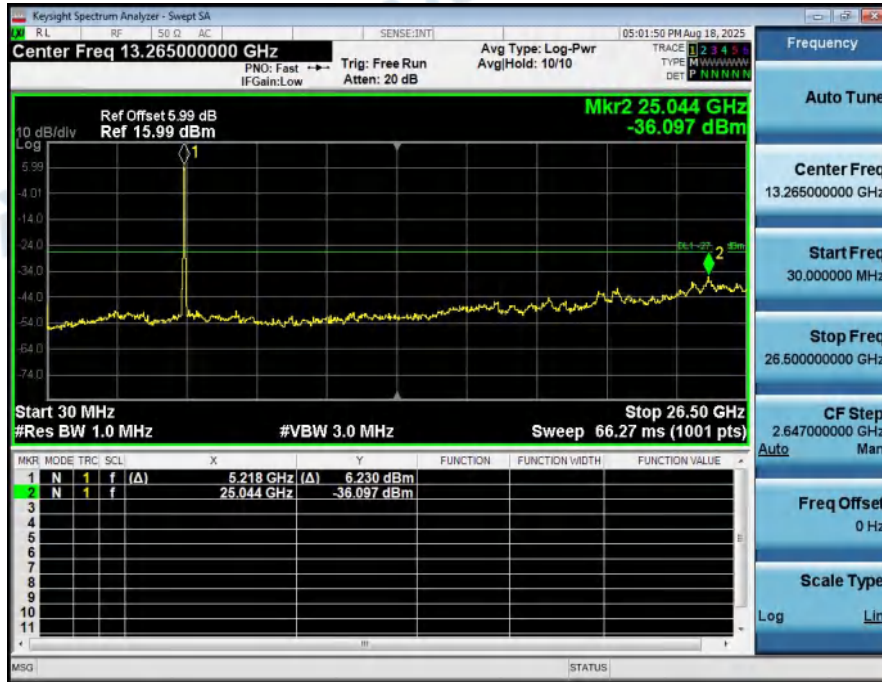


Spurious_Emission_NVNT_ANT1_802_11ac(VHT40)_5190_40M

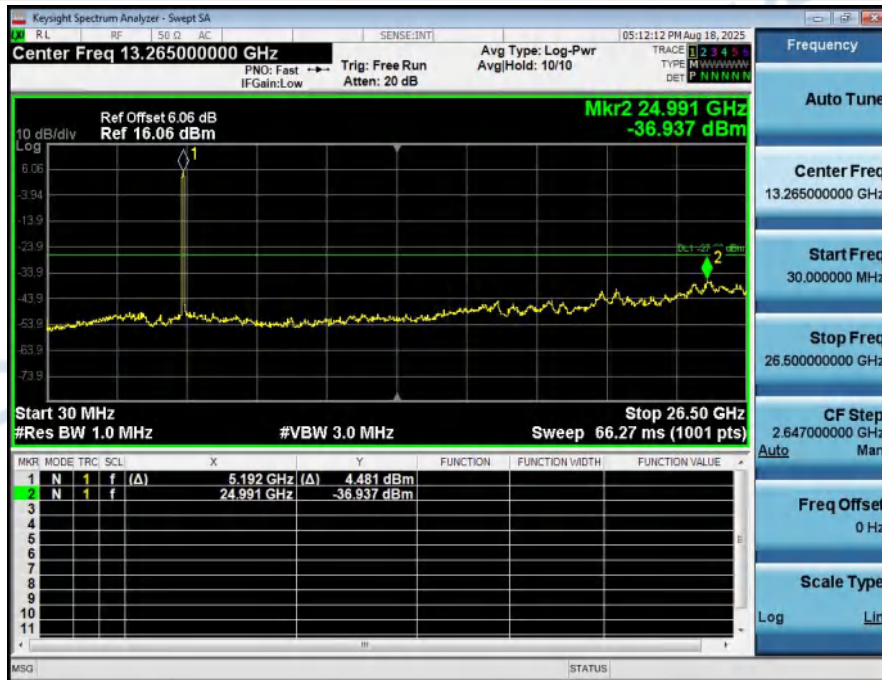


Spurious_Emission_NVNT_ANT1_802_11ac(VHT40)_5230_40M

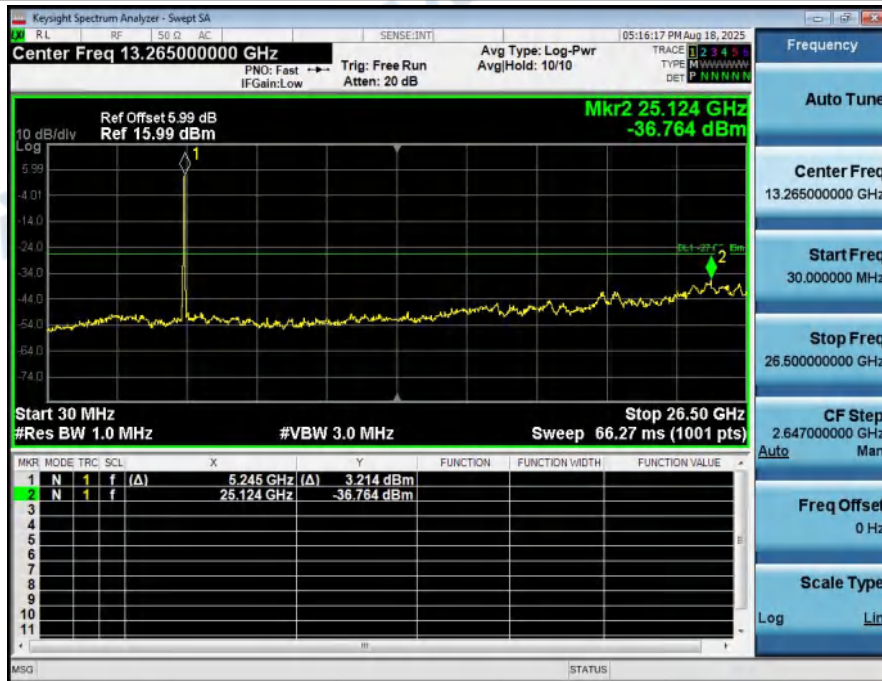


Spurious_Emission_NVNT_ANT1_802_11ax(HE40)_5190_40M

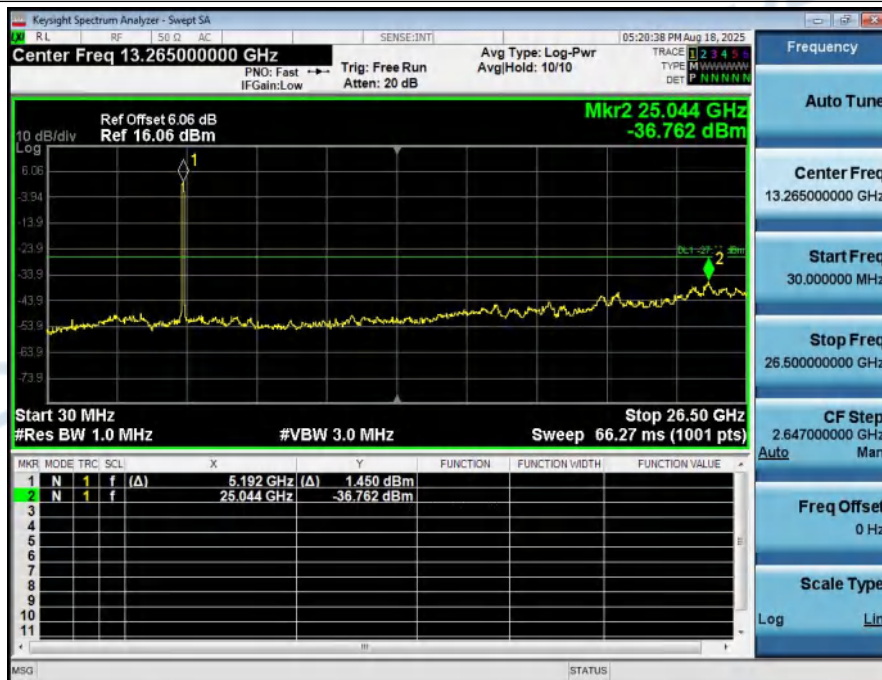


Spurious_Emission_NVNT_ANT1_802_11ax(HE40)_5230_40M

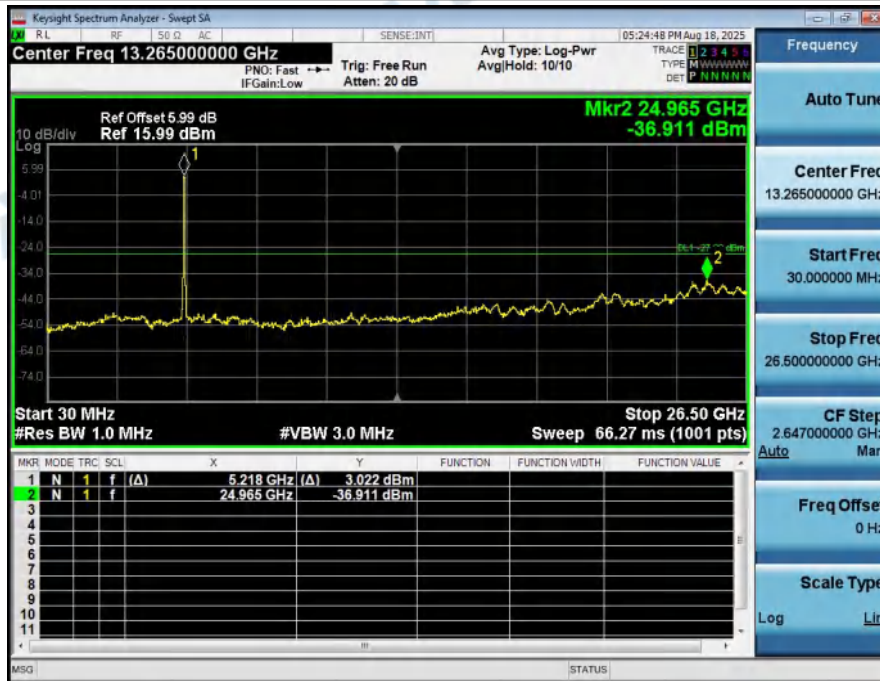

Spurious_Emission_NVNT_ANT1_802_11ac(VHT80)_5210_80M

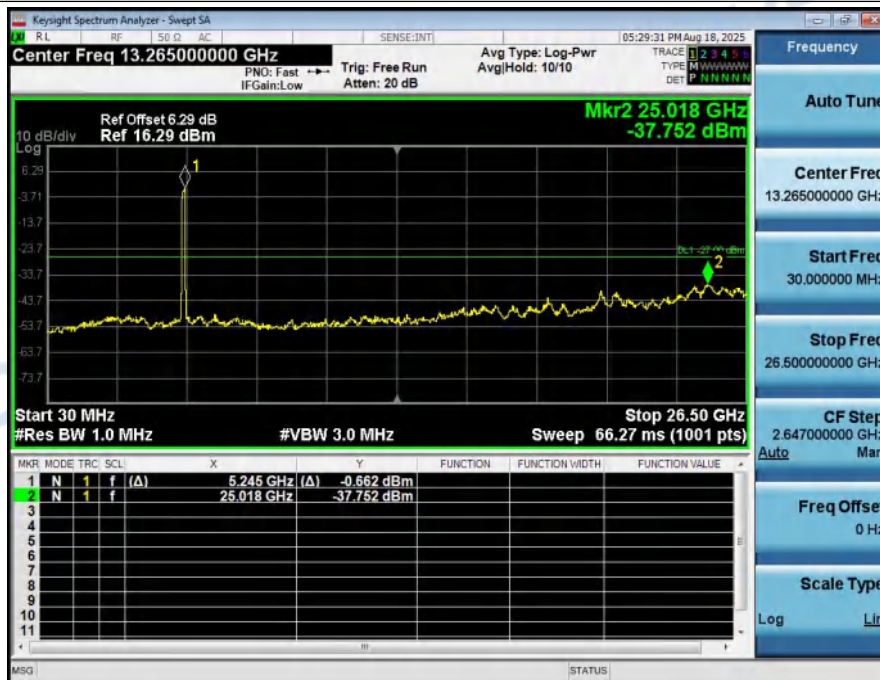

Spurious_Emission_NVNT_ANT1_802_11ax(HE80)_5210_80M

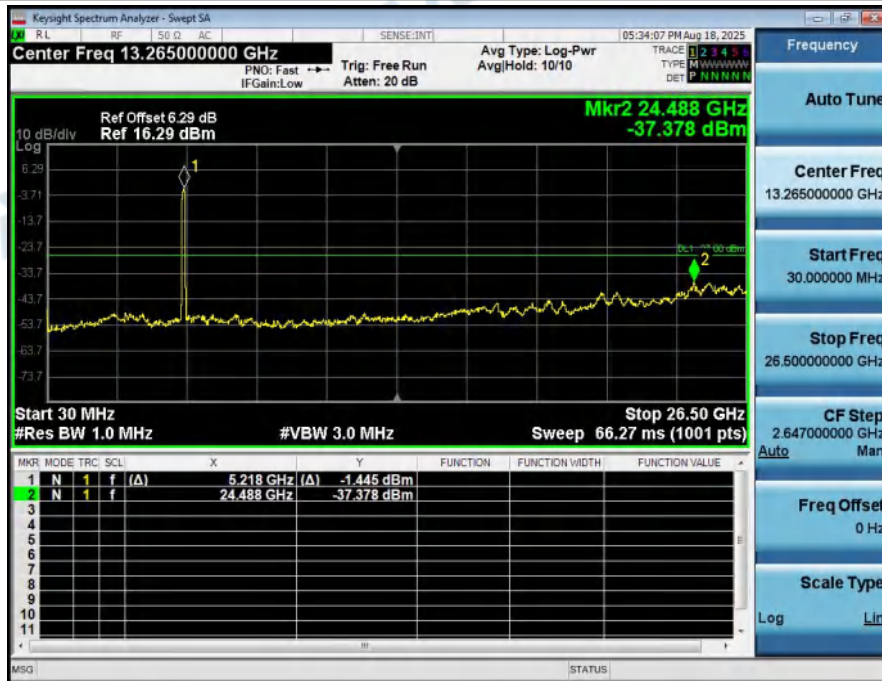

7. Frequency Stability

Condition	Antenna	Modulation	Frequency (MHz)	Fc(MHz)	Fl(MHz)	Fh(MHz)	Limit(MHz)	Result
55degrees C&&3.80V	ANT1	802.11a	5180.00	5180.038	5171.680	5188.396	5150~5250	Pass
45degrees C&&3.80V	ANT1	802.11a	5180.00	5180.034	5171.832	5188.236	5150~5250	Pass
35degrees C&&3.80V	ANT1	802.11a	5180.00	5180.032	5171.912	5188.152	5150~5250	Pass
25degrees C&&3.80V	ANT1	802.11a	5180.00	5180.032	5171.976	5188.088	5150~5250	Pass
15degrees C&&3.80V	ANT1	802.11a	5180.00	5180.026	5172.036	5188.016	5150~5250	Pass
5degrees C&&3.80V	ANT1	802.11a	5180.00	5180.028	5172.084	5187.972	5150~5250	Pass
-5degrees C&&3.80V	ANT1	802.11a	5180.00	5180.016	5172.132	5187.900	5150~5250	Pass
-15degrees C&&3.80V	ANT1	802.11a	5180.00	5180.026	5172.184	5187.868	5150~5250	Pass
25degrees C&&4.37V	ANT1	802.11a	5180.00	5180.024	5172.236	5187.812	5150~5250	Pass
25degrees C&&3.80V	ANT1	802.11a	5180.00	5180.030	5172.284	5187.776	5150~5250	Pass
25degrees C&&3.23V	ANT1	802.11a	5180.00	5180.034	5172.332	5187.736	5150~5250	Pass
55degrees C&&3.80V	ANT1	802.11a	5200.00	5200.048	5191.688	5208.408	5150~5250	Pass
45degrees C&&3.80V	ANT1	802.11a	5200.00	5200.044	5191.848	5208.240	5150~5250	Pass
35degrees C&&3.80V	ANT1	802.11a	5200.00	5200.048	5191.936	5208.160	5150~5250	Pass
25degrees C&&3.80V	ANT1	802.11a	5200.00	5200.044	5192.000	5208.088	5150~5250	Pass
15degrees C&&3.80V	ANT1	802.11a	5200.00	5200.044	5192.064	5208.024	5150~5250	Pass
5degrees C&&3.80V	ANT1	802.11a	5200.00	5200.058	5192.120	5207.996	5150~5250	Pass
-5degrees C&&3.80V	ANT1	802.11a	5200.00	5200.040	5192.168	5207.912	5150~5250	Pass
-15degrees C&&3.80V	ANT1	802.11a	5200.00	5200.052	5192.216	5207.888	5150~5250	Pass
25degrees C&&4.37V	ANT1	802.11a	5200.00	5200.034	5192.268	5207.800	5150~5250	Pass
25degrees C&&3.80V	ANT1	802.11a	5200.00	5200.034	5192.320	5207.748	5150~5250	Pass
25degrees C&&3.23V	ANT1	802.11a	5200.00	5200.060	5192.376	5207.744	5150~5250	Pass
55degrees C&&3.80V	ANT1	802.11a	5240.00	5240.040	5231.676	5248.404	5150~5250	Pass
45degrees C&&3.80V	ANT1	802.11a	5240.00	5240.032	5231.836	5248.228	5150~5250	Pass
35degrees C&&3.80V	ANT1	802.11a	5240.00	5240.032	5231.920	5248.144	5150~5250	Pass
25degrees C&&3.80V	ANT1	802.11a	5240.00	5240.026	5231.976	5248.076	5150~5250	Pass
15degrees C&&3.80V	ANT1	802.11a	5240.00	5240.024	5232.036	5248.012	5150~5250	Pass
5degrees C&&3.80V	ANT1	802.11a	5240.00	5240.020	5232.092	5247.948	5150~5250	Pass
-5degrees C&&3.80V	ANT1	802.11a	5240.00	5240.008	5232.140	5247.876	5150~5250	Pass
-15degrees C&&3.80V	ANT1	802.11a	5240.00	5240.014	5232.188	5247.840	5150~5250	Pass
25degrees C&&4.37V	ANT1	802.11a	5240.00	5240.016	5232.236	5247.796	5150~5250	Pass
25degrees C&&3.80V	ANT1	802.11a	5240.00	5240.014	5232.280	5247.748	5150~5250	Pass
25degrees C&&3.23V	ANT1	802.11a	5240.00	5240.016	5232.320	5247.712	5150~5250	Pass