

## **Appendix RF Test Data for BLE**

**Company:** : YEAHER INC.

**EUT** : Portable Computer

**FCC ID:** : 2BEMH-N15AB

**Model Number** : N15AB

**Report No.** : HTT202508371F04

**Reviewed By** : Heber He

## 1. Duty Cycle


### 1.1 Test Result

#### 1.1.1 Ant1


| Ant1 |         |                 |           |             |                |                                   |                       |
|------|---------|-----------------|-----------|-------------|----------------|-----------------------------------|-----------------------|
| Mode | TX Type | Frequency (MHz) | T_on (ms) | Period (ms) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | Max. DC Variation (%) |
| 1M   | SISO    | 2402            | 0.402     | 0.625       | 64.32          | 1.92                              | 0.02                  |
|      |         | 2440            | 0.401     | 0.625       | 64.16          | 1.93                              | 0.00                  |
|      |         | 2480            | 0.395     | 0.625       | 63.20          | 1.99                              | 0.00                  |
| 2M   | SISO    | 2402            | 0.210     | 0.625       | 33.60          | 4.74                              | 0.00                  |
|      |         | 2440            | 0.216     | 0.625       | 34.56          | 4.61                              | 0.00                  |
|      |         | 2480            | 0.216     | 0.625       | 34.56          | 4.61                              | 0.00                  |

# 1.2 Test Graph


## 1.2.1 Ant1

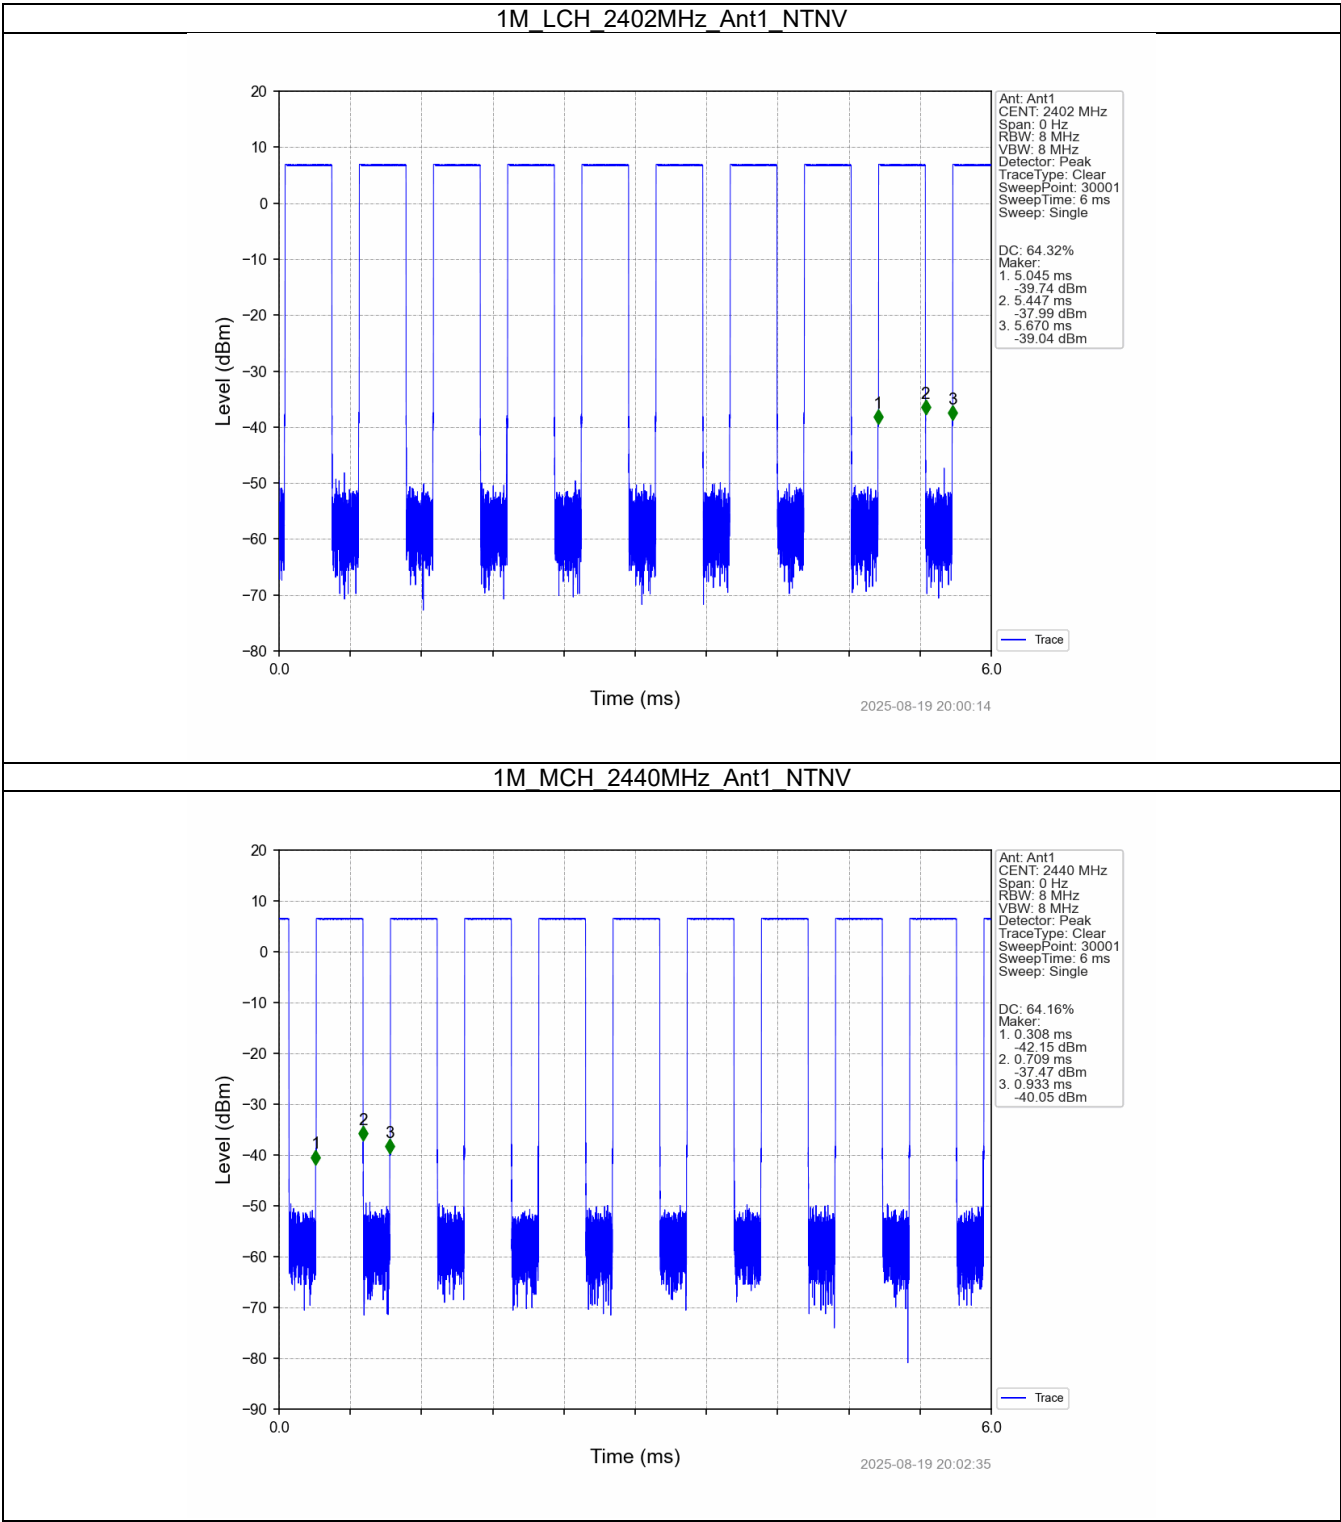


# 1M HCH 2480MHz Ant1 NTN

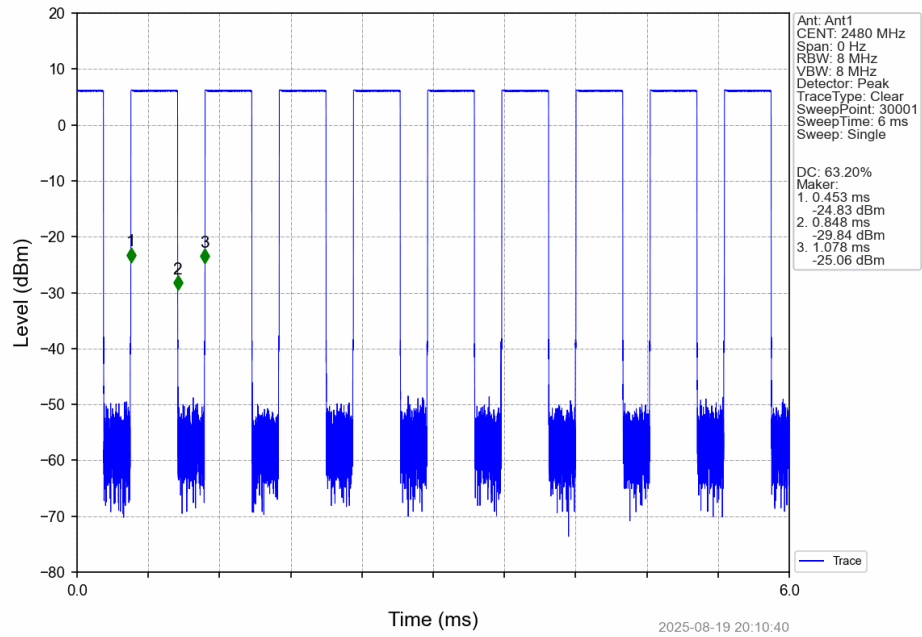


# 2M LCH 2402MHz Ant1 NTN

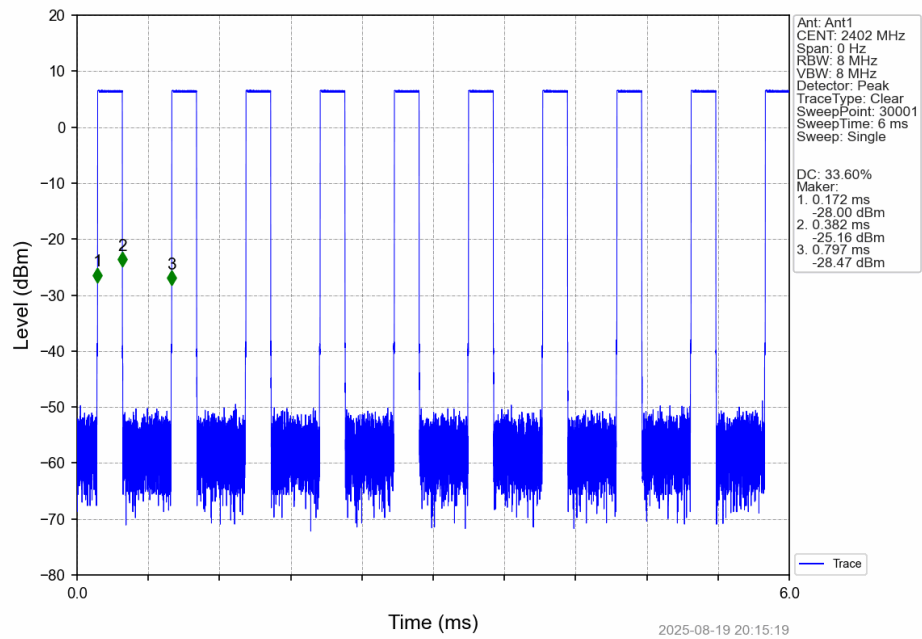

# 2M MCH 2440MHz Ant1 NTN

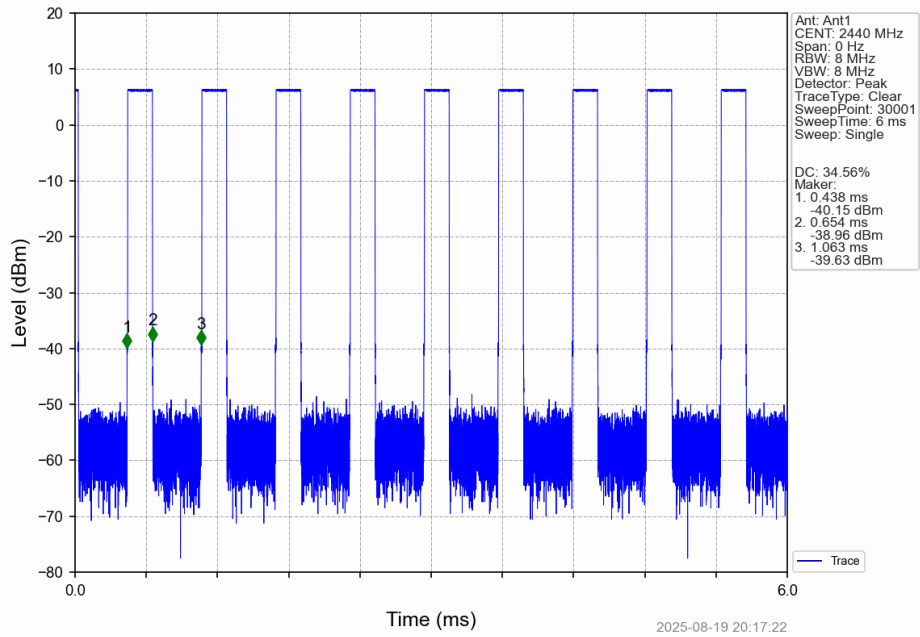

# 2M\_HCH\_2480MHz\_Ant1 NTN

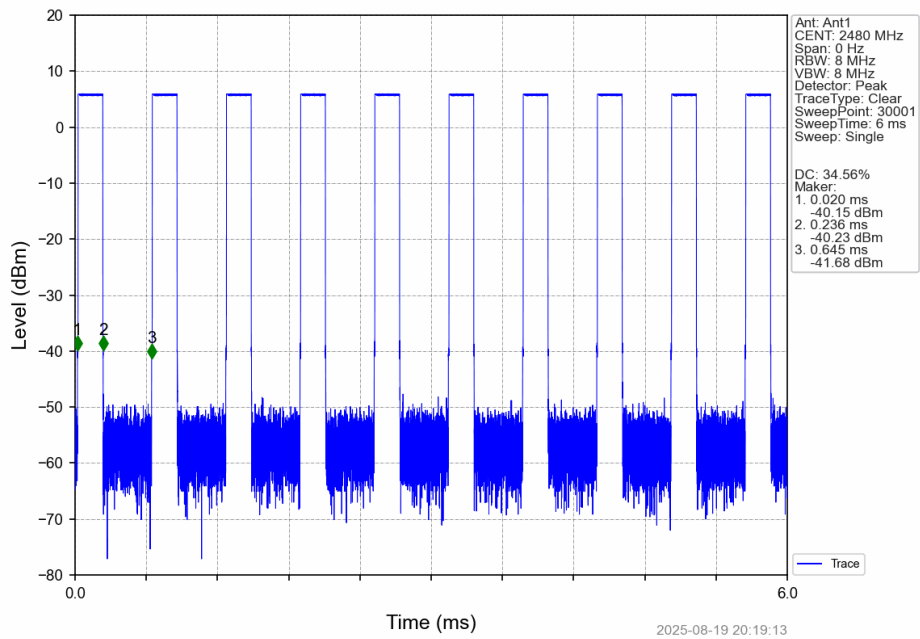

## 2. Bandwidth

### 2.1 Test Result

#### 2.1.1 OBW


| Mode | TX Type | Frequency (MHz) | ANT | 99% Occupied Bandwidth (MHz) |       | Verdict |
|------|---------|-----------------|-----|------------------------------|-------|---------|
|      |         |                 |     | Result                       | Limit |         |
| 1M   | SISO    | 2402            | 1   | 1.026                        | /     | Pass    |
|      |         | 2440            | 1   | 1.033                        | /     | Pass    |
|      |         | 2480            | 1   | 1.027                        | /     | Pass    |
| 2M   | SISO    | 2402            | 1   | 2.064                        | /     | Pass    |
|      |         | 2440            | 1   | 2.071                        | /     | Pass    |
|      |         | 2480            | 1   | 2.061                        | /     | Pass    |

#### 2.1.2 6dB BW


| Mode | TX Type | Frequency (MHz) | ANT | 6dB Bandwidth (MHz) |            | Verdict |
|------|---------|-----------------|-----|---------------------|------------|---------|
|      |         |                 |     | Result              | Limit      |         |
| 1M   | SISO    | 2402            | 1   | 0.660               | $\geq 0.5$ | Pass    |
|      |         | 2440            | 1   | 0.655               | $\geq 0.5$ | Pass    |
|      |         | 2480            | 1   | 0.663               | $\geq 0.5$ | Pass    |
| 2M   | SISO    | 2402            | 1   | 1.136               | $\geq 0.5$ | Pass    |
|      |         | 2440            | 1   | 1.144               | $\geq 0.5$ | Pass    |
|      |         | 2480            | 1   | 1.140               | $\geq 0.5$ | Pass    |

2.2 Test Graph


2.2.1 OBW

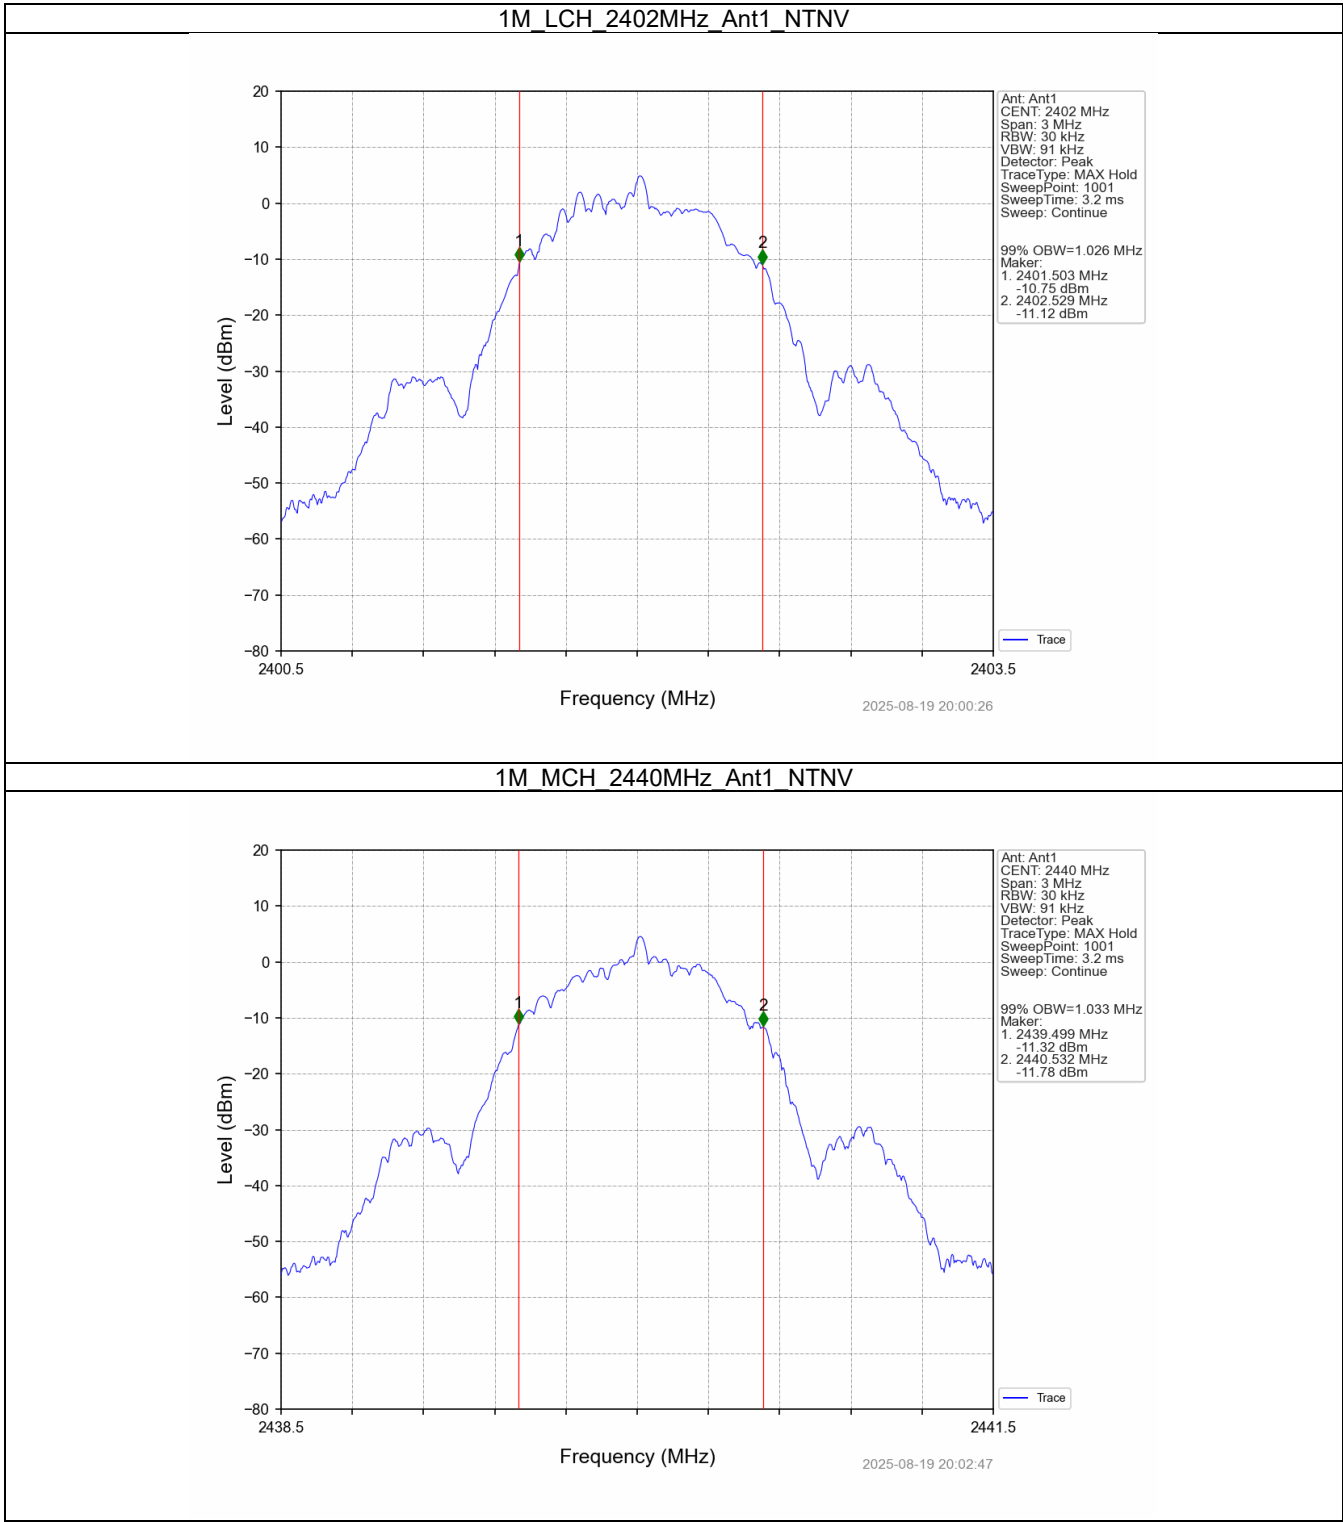

# 1M HCH 2480MHz Ant1 NTN

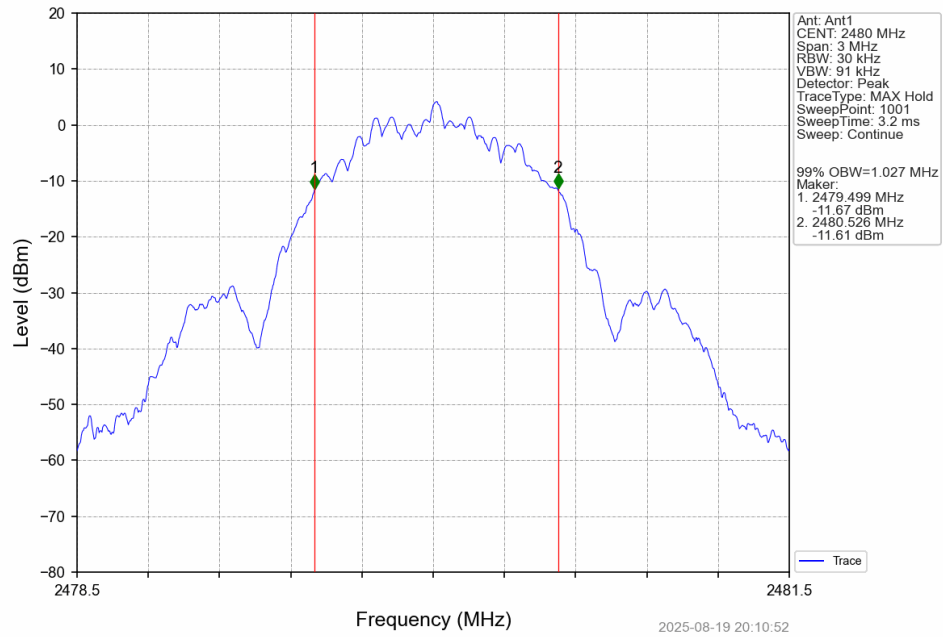


# 2M LCH 2402MHz Ant1 NTN

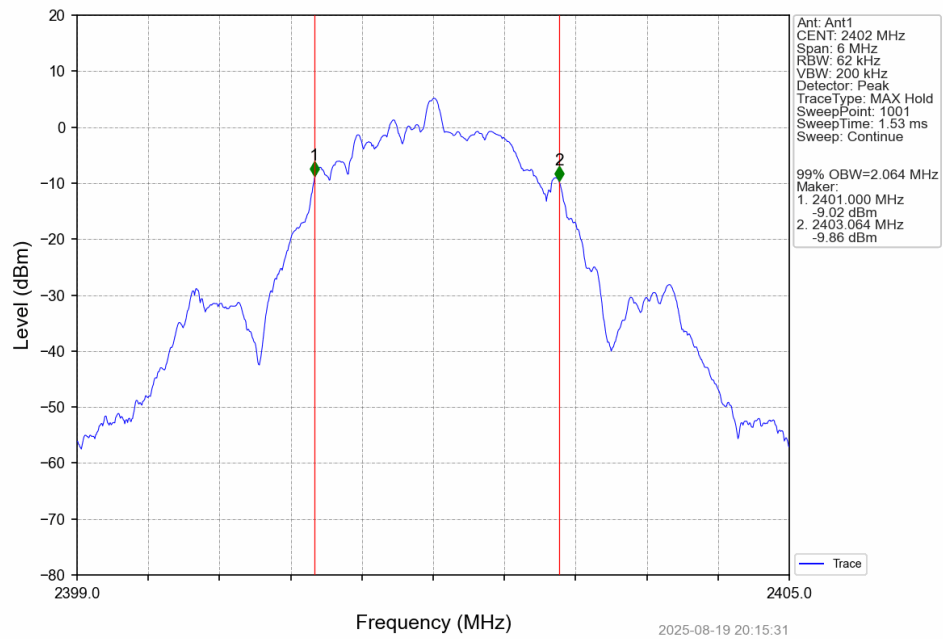





# 2M MCH 2440MHz Ant1 NTN

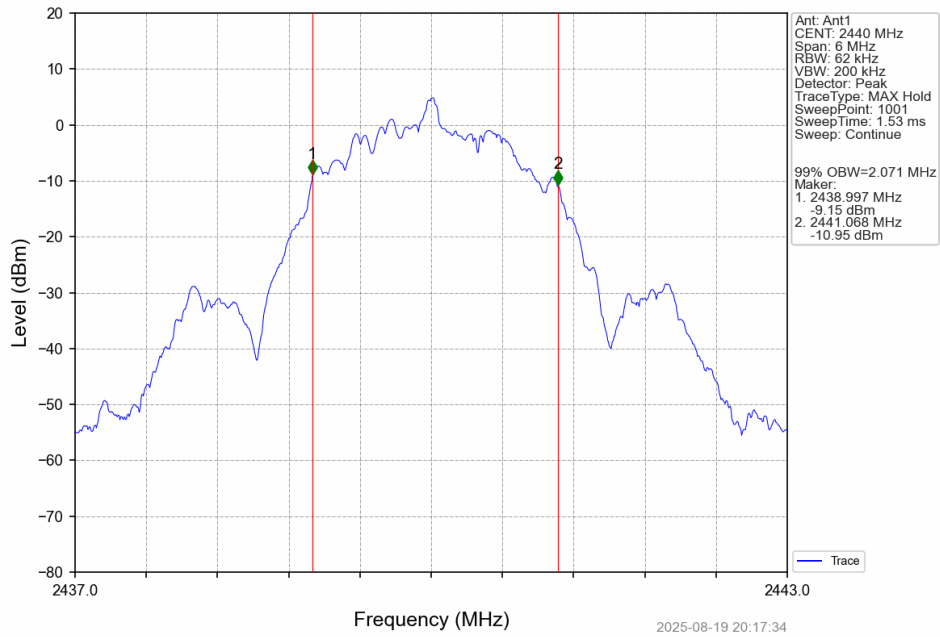


# 2M\_HCH\_2480MHz\_Ant1 NTN

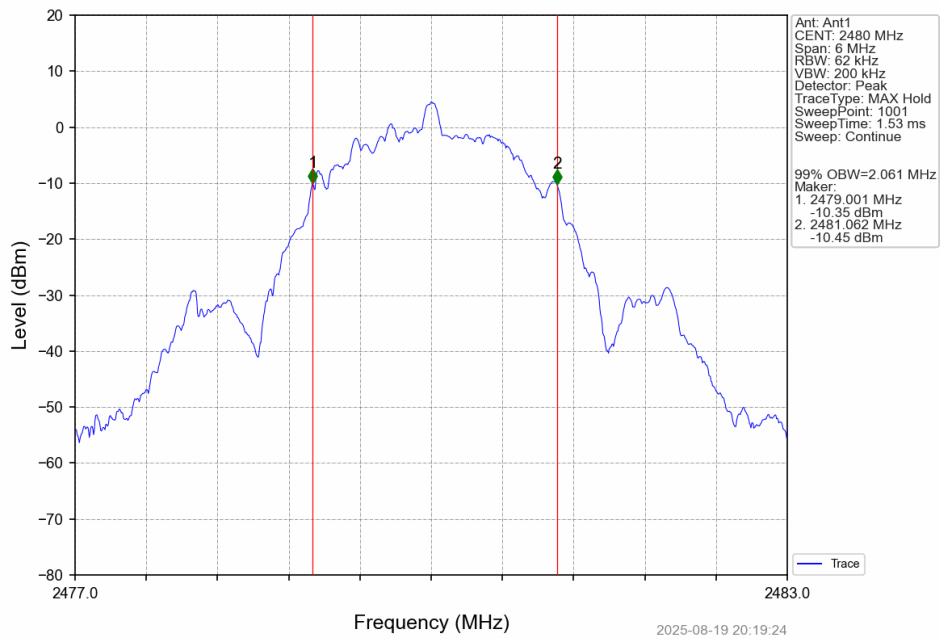


2.2.2 6dB BW

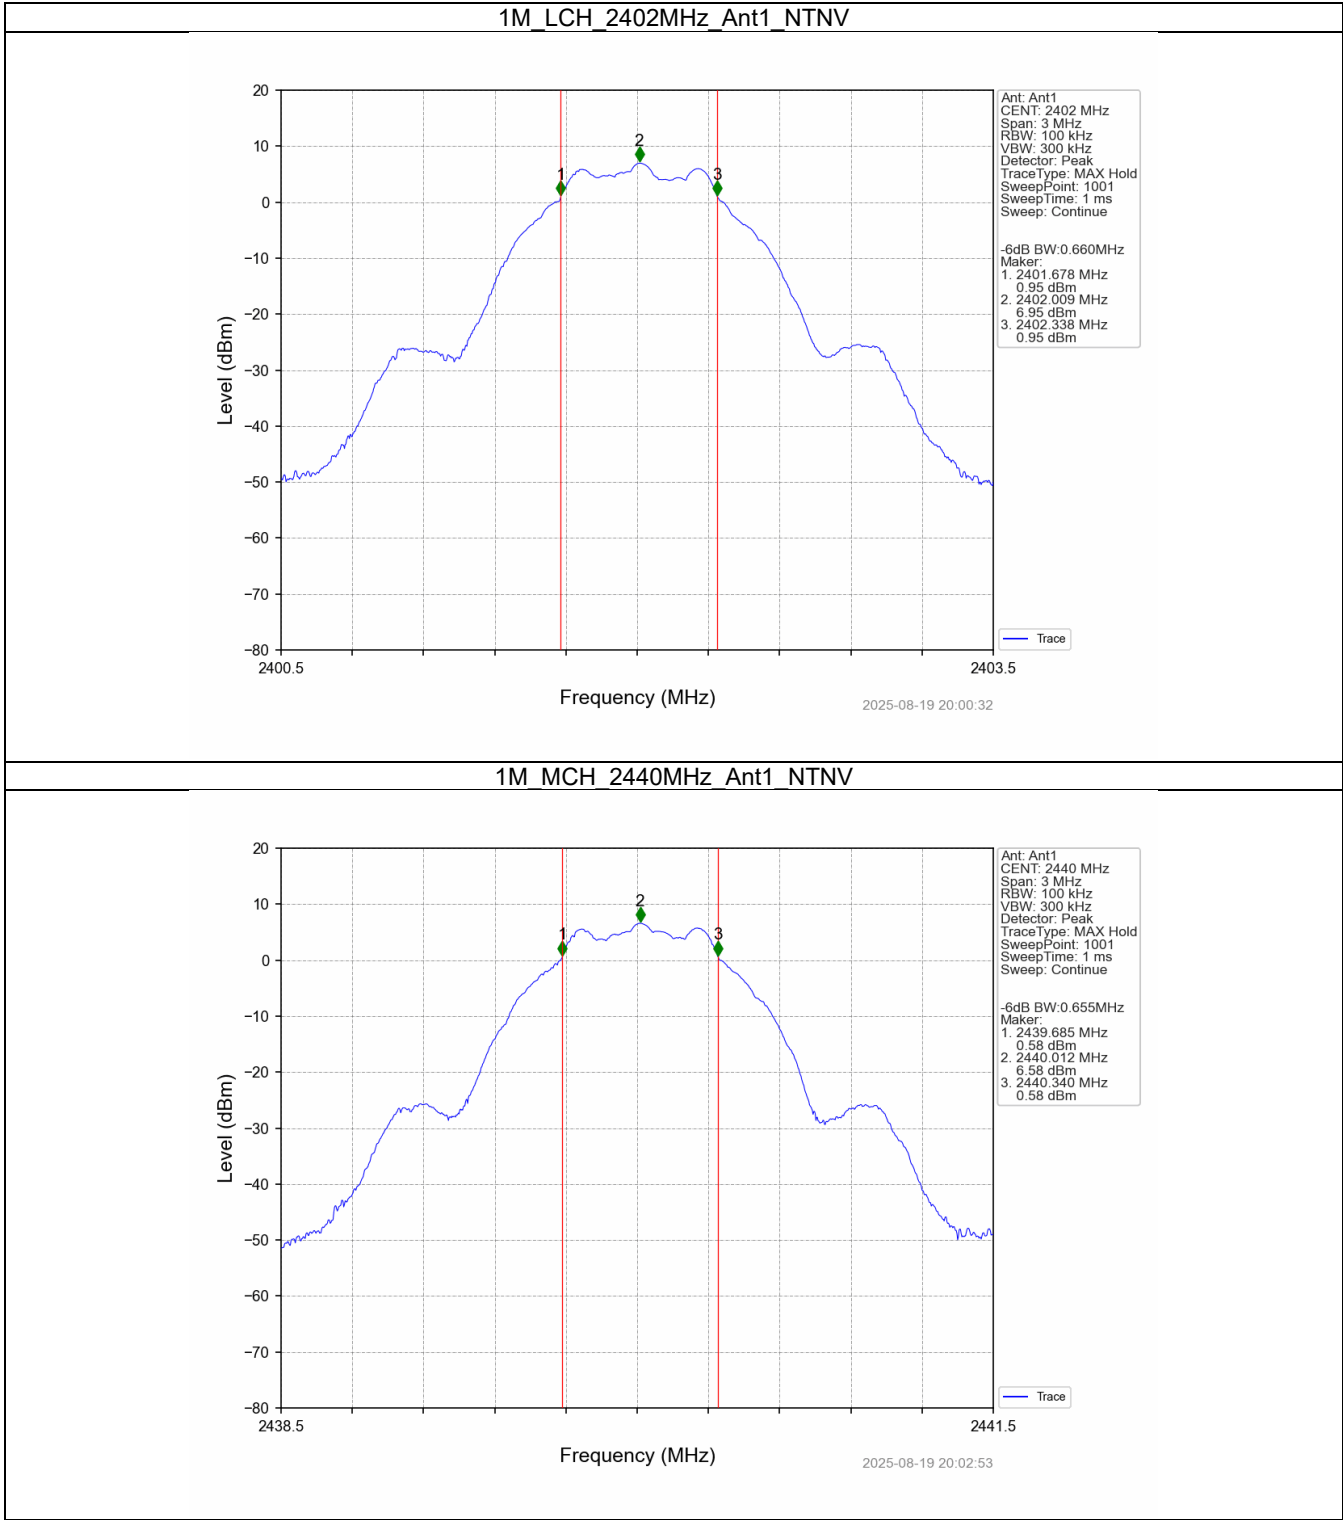


# 1M HCH 2480MHz Ant1 NTN

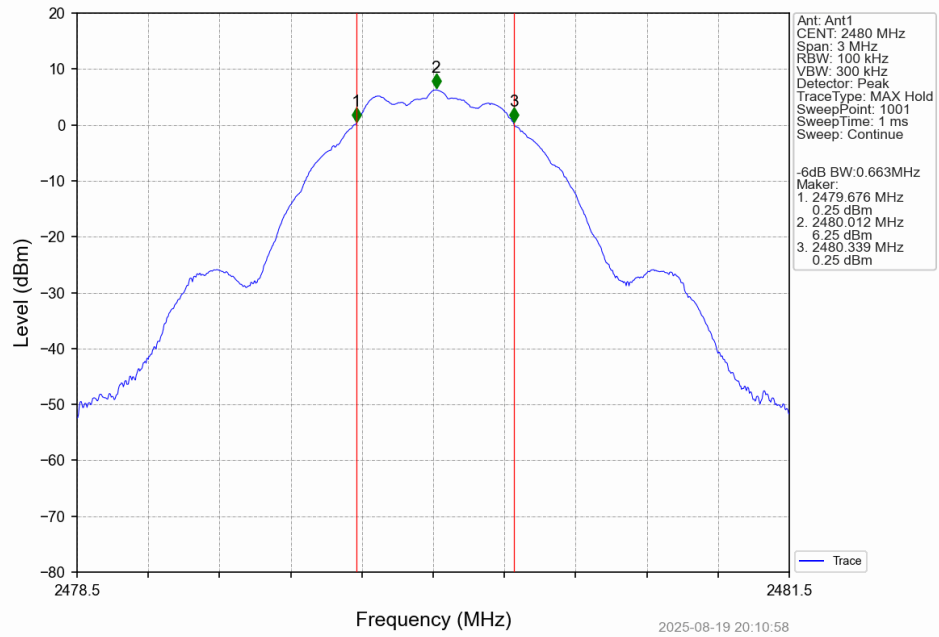


# 2M\_LCH\_2402MHz\_Ant1\_NTN

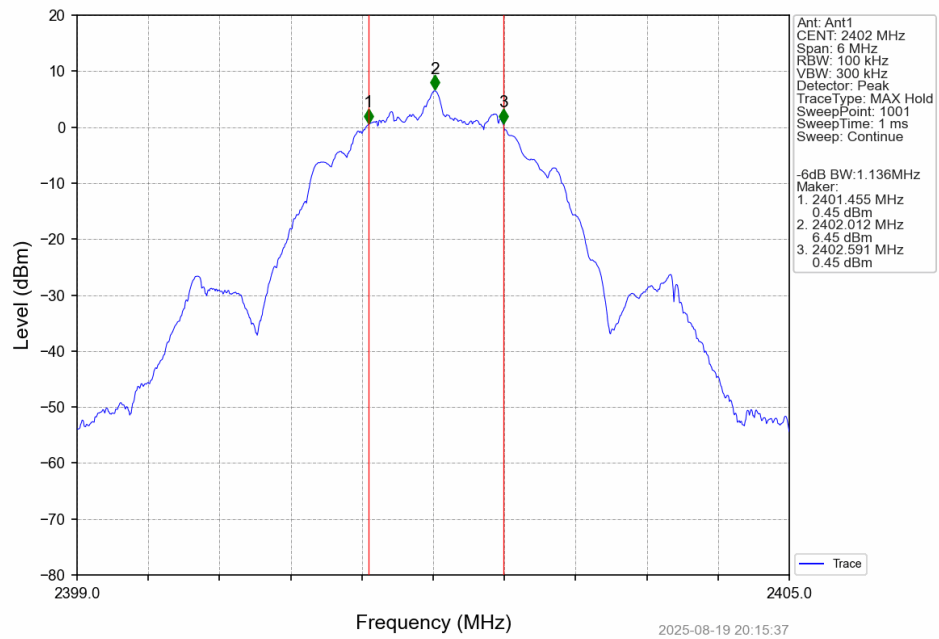

# 2M MCH 2440MHz Ant1 NTN

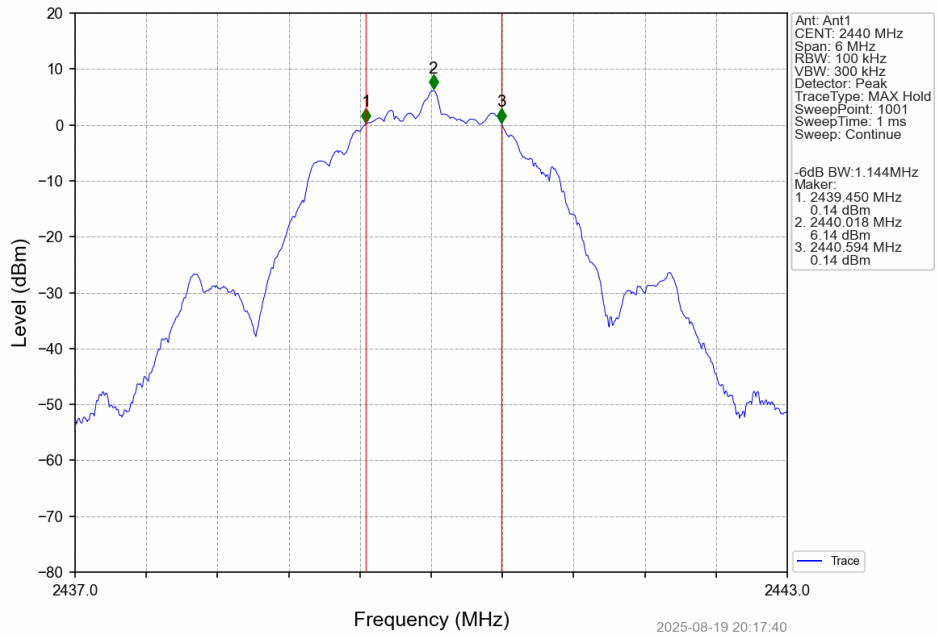

# 2M\_HCH\_2480MHz\_Ant1 NTN

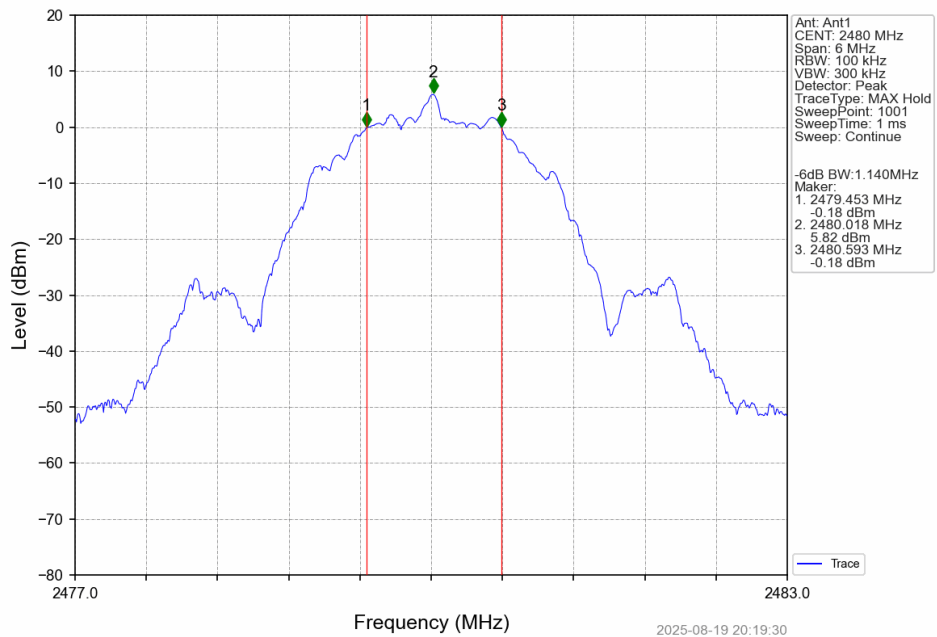

### 3. Maximum Conducted Output Power

#### 3.1 Test Result

##### 3.1.1 Power

| Mode | TX Type | Frequency (MHz) | Maximum Peak Conducted Output Power (dBm) |       | Verdict |
|------|---------|-----------------|-------------------------------------------|-------|---------|
|      |         |                 | ANT1                                      | Limit |         |
| 1M   | SISO    | 2402            | 3.96                                      | <=30  | Pass    |
|      |         | 2440            | 3.58                                      | <=30  | Pass    |
|      |         | 2480            | 3.26                                      | <=30  | Pass    |
| 2M   | SISO    | 2402            | 3.58                                      | <=30  | Pass    |
|      |         | 2440            | 3.30                                      | <=30  | Pass    |
|      |         | 2480            | 3.94                                      | <=30  | Pass    |

## 4. Maximum Power Spectral Density


### 4.1 Test Result

#### 4.1.1 PSD


| Mode | TX Type | Frequency (MHz) | Maximum PSD (dBm/3kHz) |       | Verdict |
|------|---------|-----------------|------------------------|-------|---------|
|      |         |                 | ANT1                   | Limit |         |
| 1M   | SISO    | 2402            | -8.45                  | <=8   | Pass    |
|      |         | 2440            | -9.89                  | <=8   | Pass    |
|      |         | 2480            | -8.34                  | <=8   | Pass    |
| 2M   | SISO    | 2402            | -10.78                 | <=8   | Pass    |
|      |         | 2440            | -12.62                 | <=8   | Pass    |
|      |         | 2480            | -11.46                 | <=8   | Pass    |

4.2 Test Graph


4.2.1 PSD

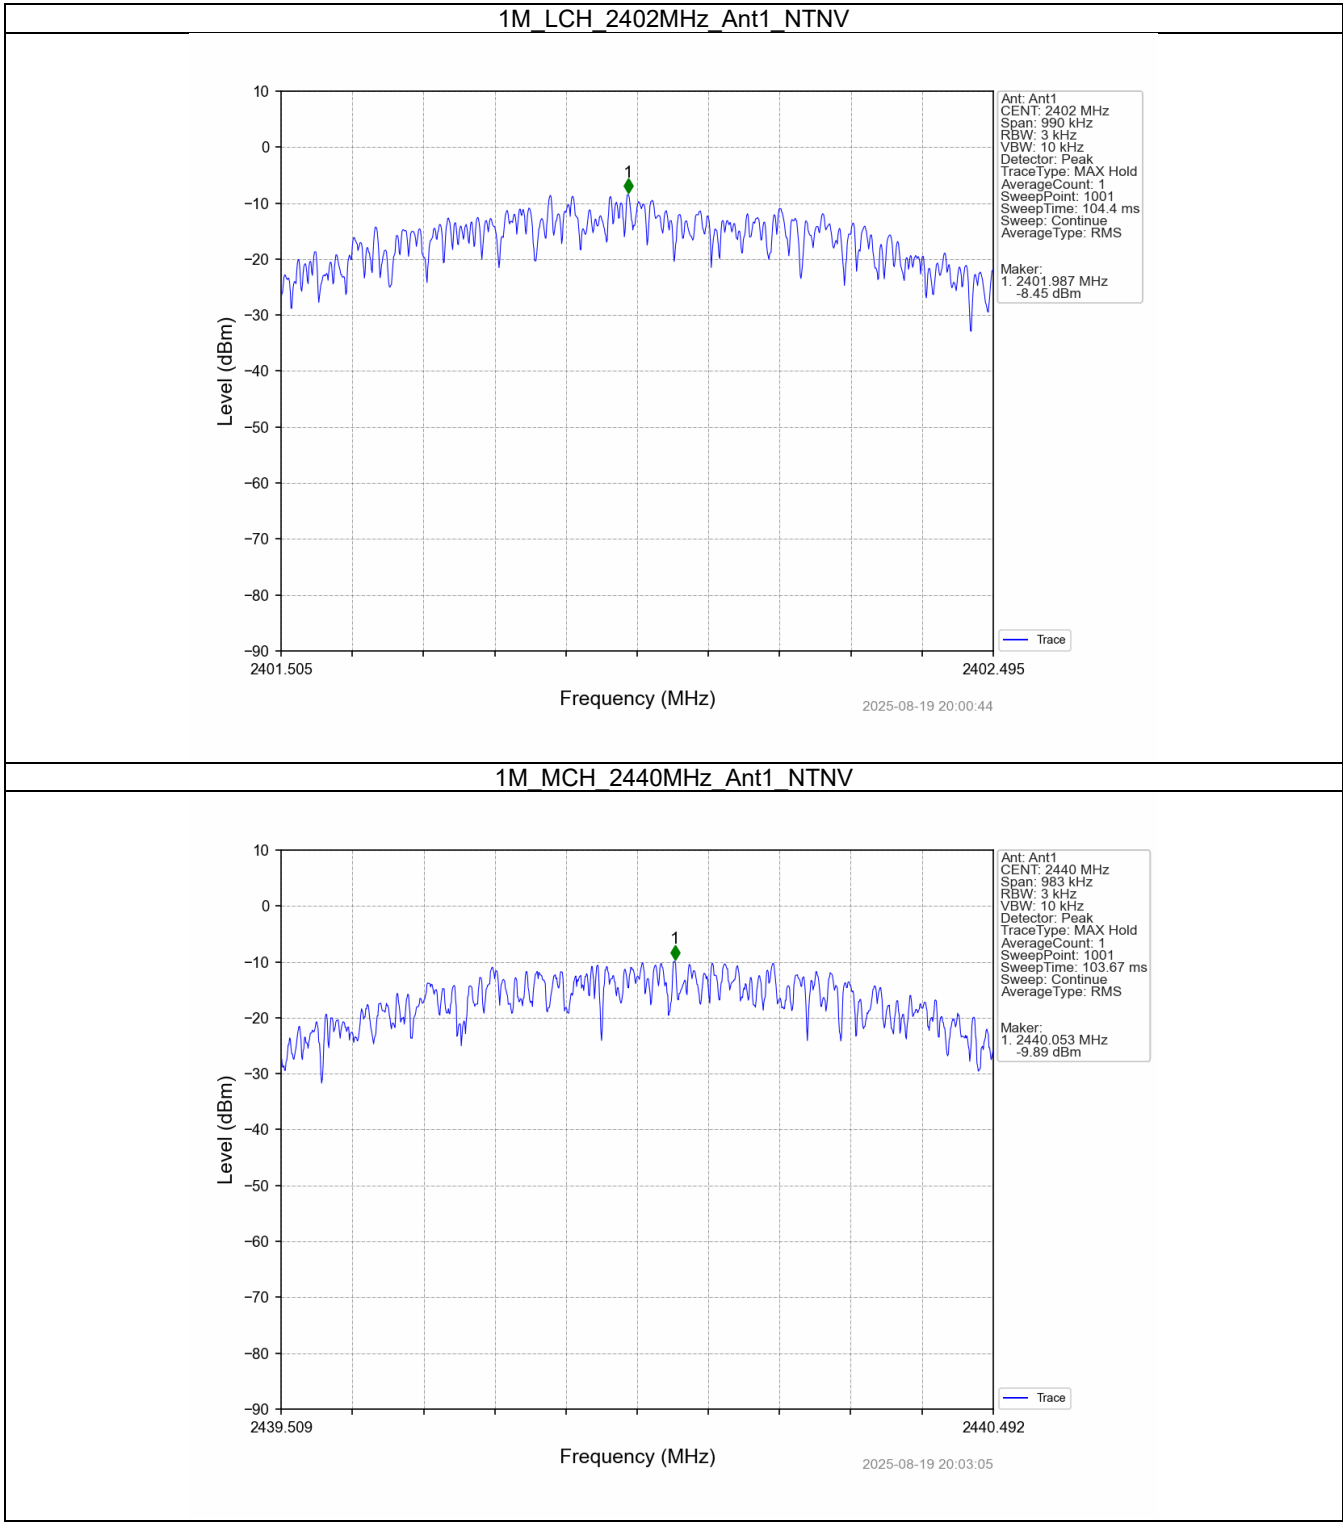

# 1M HCH 2480MHz Ant1 NTN

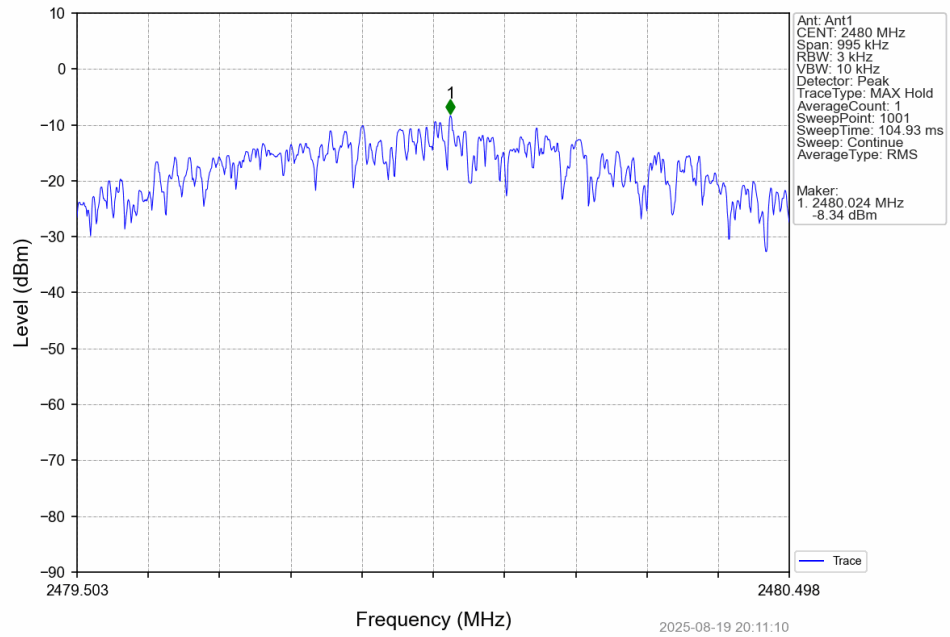


# 2M LCH 2402MHz Ant1 NTN

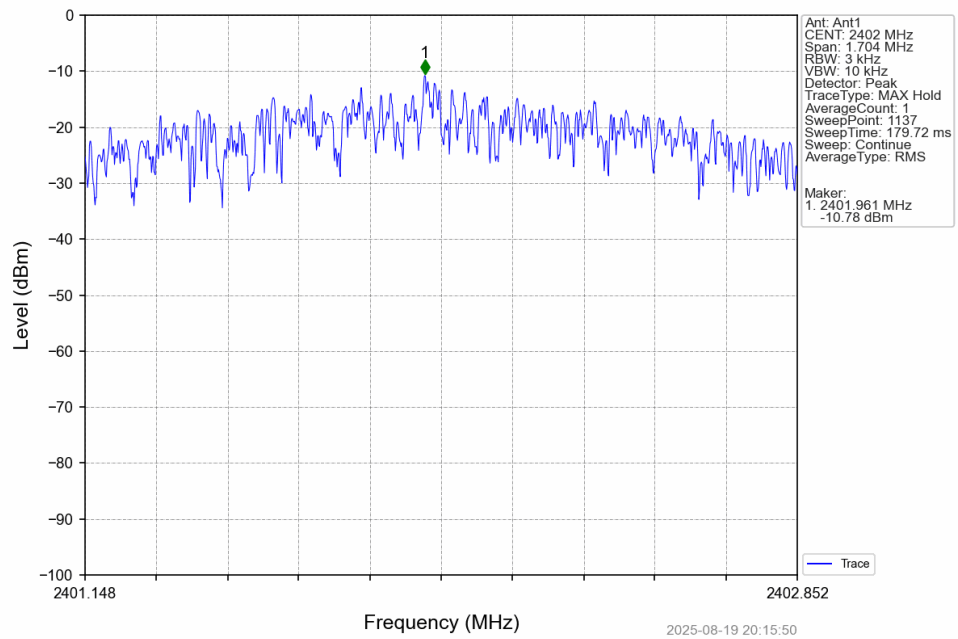




### 2M MCH 2440MHz Ant1 NTN

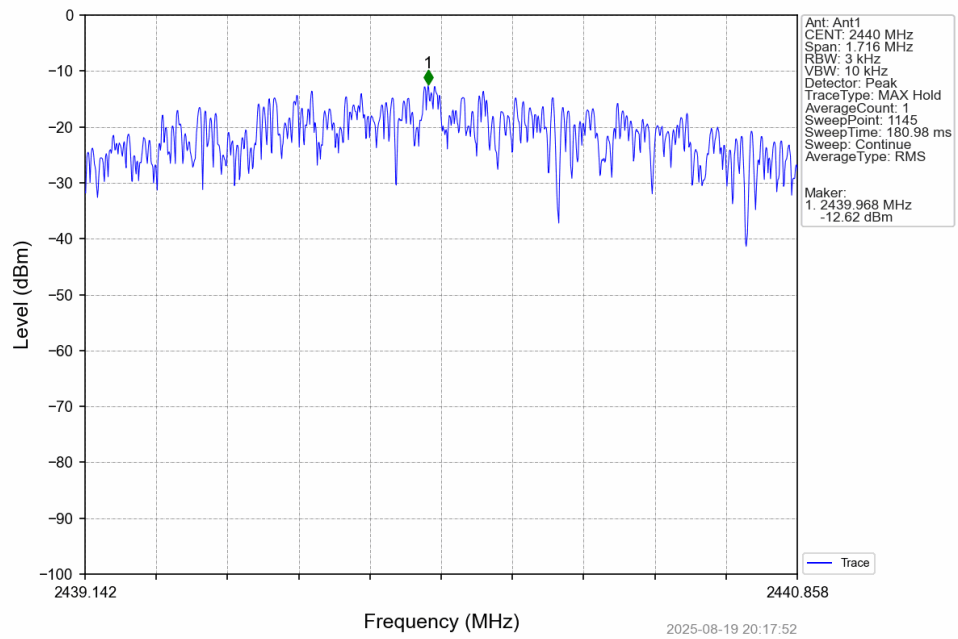

### 2M\_HCH\_2480MHz\_Ant1\_NTN

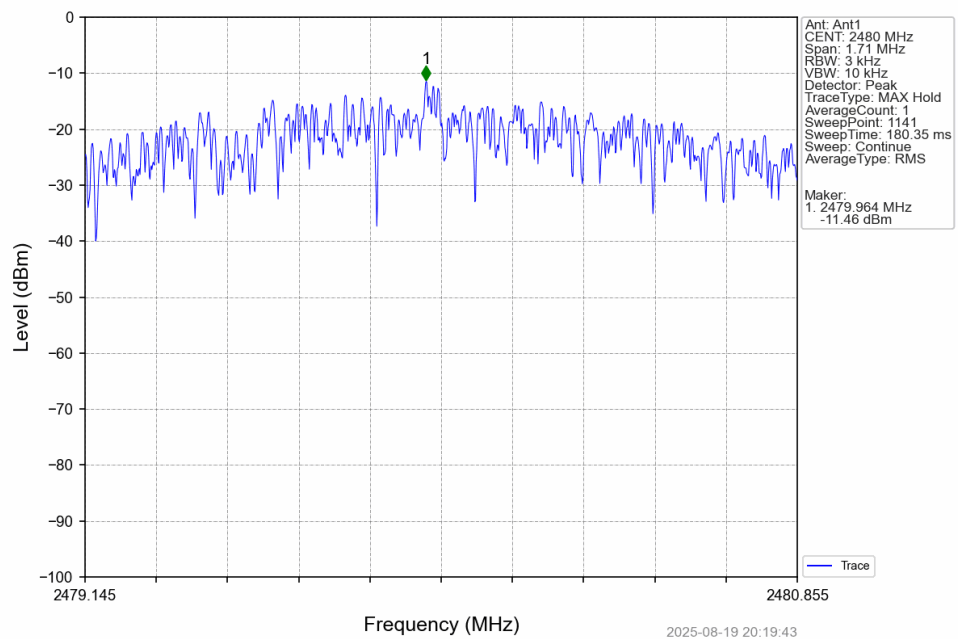

## 5. Unwanted Emissions In Non-restricted Frequency Bands

### 5.1 Test Result

#### 5.1.1 Ref


| Mode                                                                                                                                            | TX Type | Frequency (MHz) | ANT | Level of Reference (dBm) |
|-------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-----|--------------------------|
| 1M                                                                                                                                              | SISO    | 2402            | 1   | 6.93                     |
|                                                                                                                                                 |         | 2440            | 1   | 6.56                     |
|                                                                                                                                                 |         | 2480            | 1   | 6.24                     |
| 2M                                                                                                                                              | SISO    | 2402            | 1   | 6.44                     |
|                                                                                                                                                 |         | 2440            | 1   | 6.16                     |
|                                                                                                                                                 |         | 2480            | 1   | 5.79                     |
| Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level. |         |                 |     |                          |

#### 5.1.2 CSE


| Mode                                                                                                                                            | TX Type | Frequency (MHz) | ANT | Level of Reference (dBm) | Limit (dBm) | Verdict |
|-------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-----|--------------------------|-------------|---------|
| 1M                                                                                                                                              | SISO    | 2402            | 1   | 6.93                     | -13.07      | Pass    |
|                                                                                                                                                 |         | 2440            | 1   | 6.93                     | -13.07      | Pass    |
|                                                                                                                                                 |         | 2480            | 1   | 6.93                     | -13.07      | Pass    |
| 2M                                                                                                                                              | SISO    | 2402            | 1   | 6.44                     | -13.56      | Pass    |
|                                                                                                                                                 |         | 2440            | 1   | 6.44                     | -13.56      | Pass    |
|                                                                                                                                                 |         | 2480            | 1   | 6.44                     | -13.56      | Pass    |
| Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level. |         |                 |     |                          |             |         |

5.2 Test Graph


5.2.1 Ref

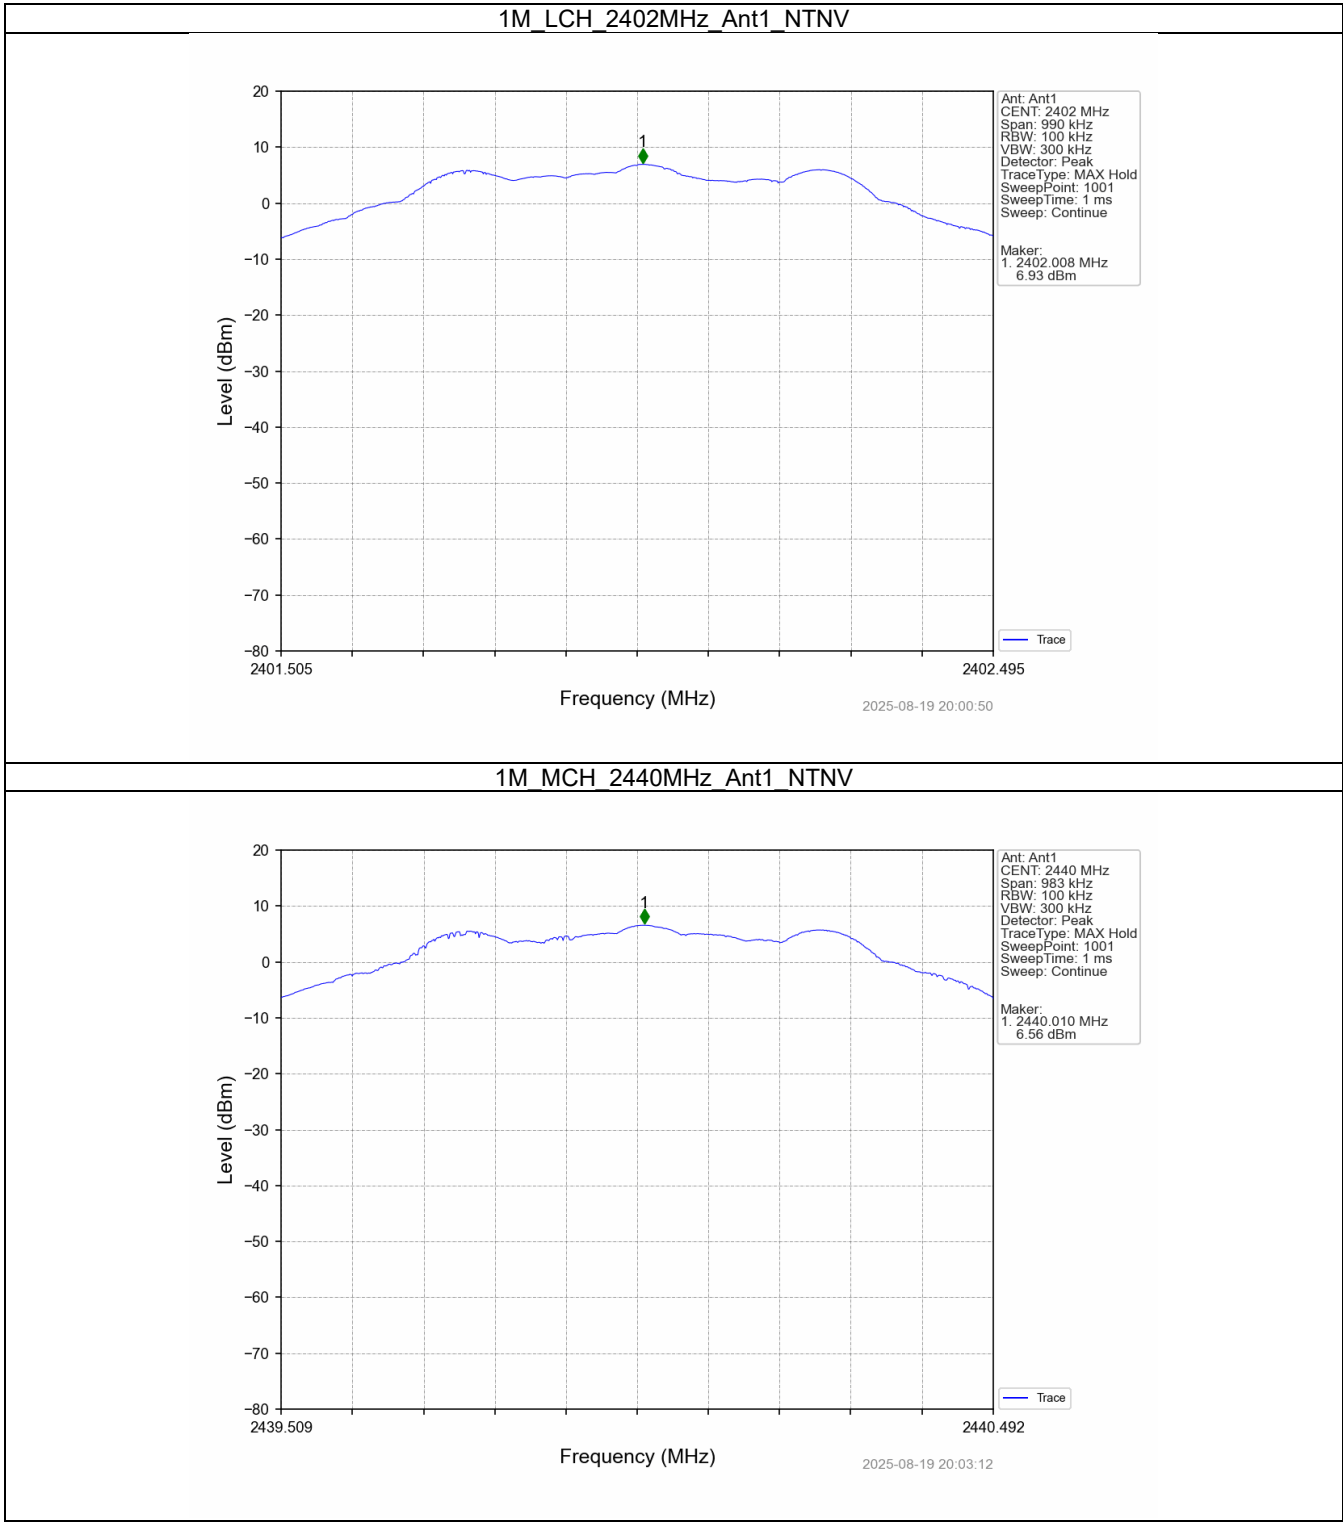


### 1M HCH 2480MHz Ant1 NTN

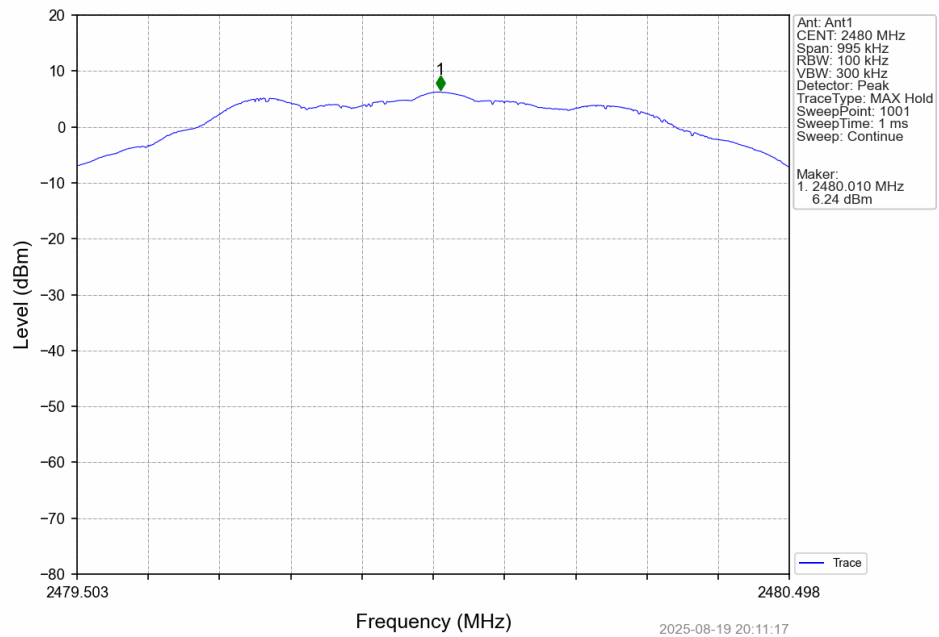


### 2M\_LCH\_2402MHz\_Ant1\_NTN

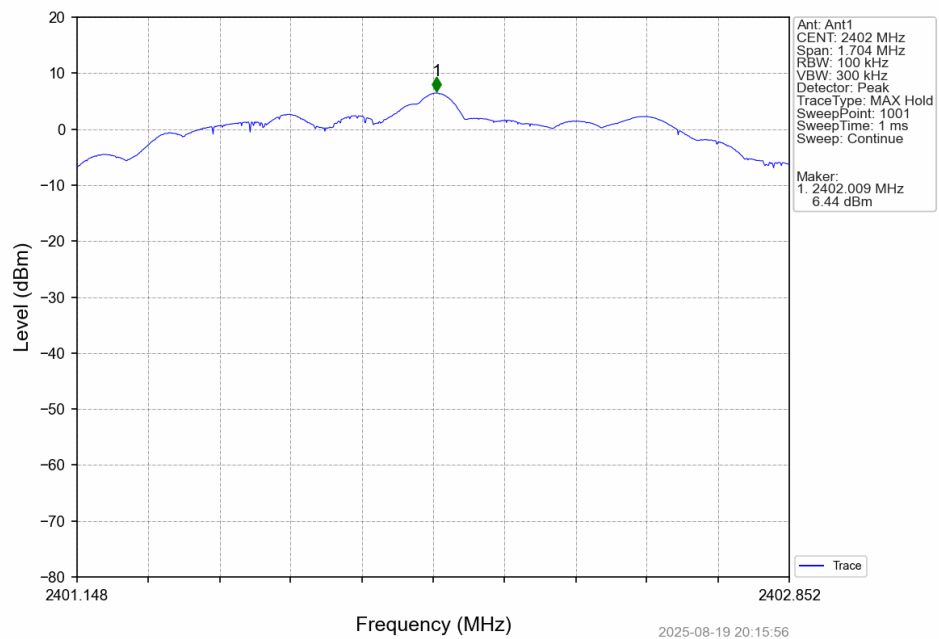


### 2M MCH 2440MHz Ant1 NTN

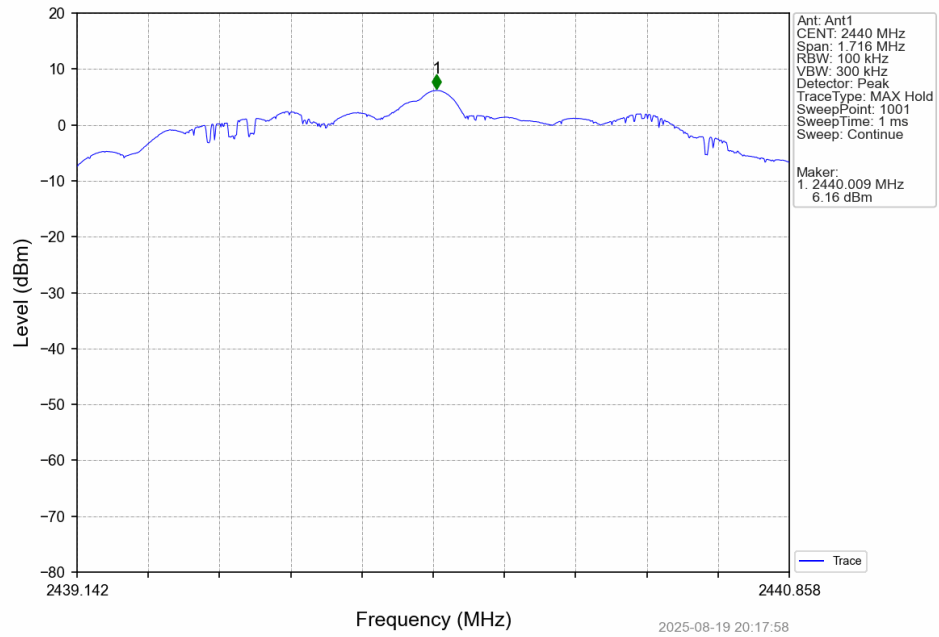


### 2M\_HCH\_2480MHz\_Ant1\_NTN

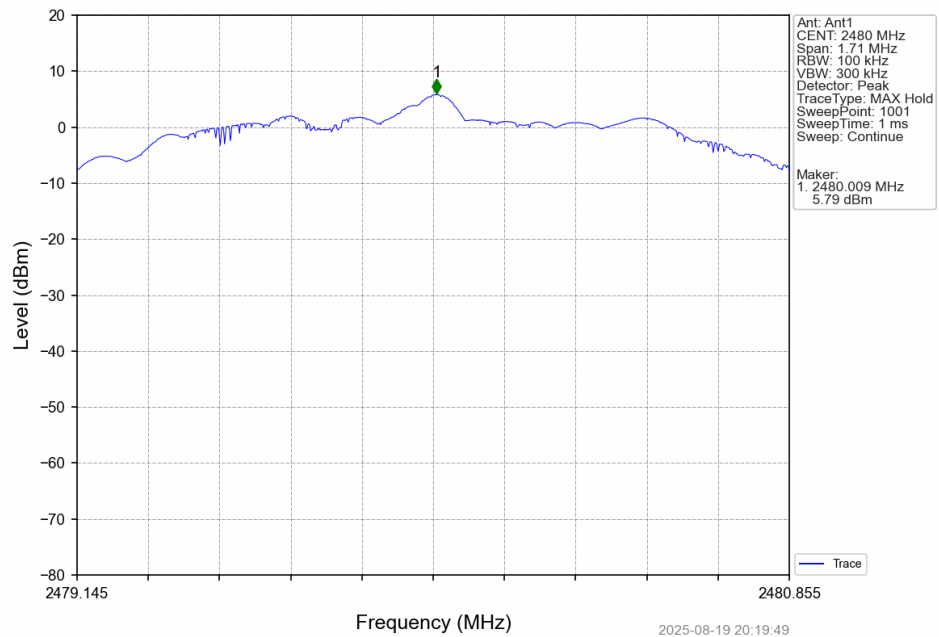


5.2.2 CSE

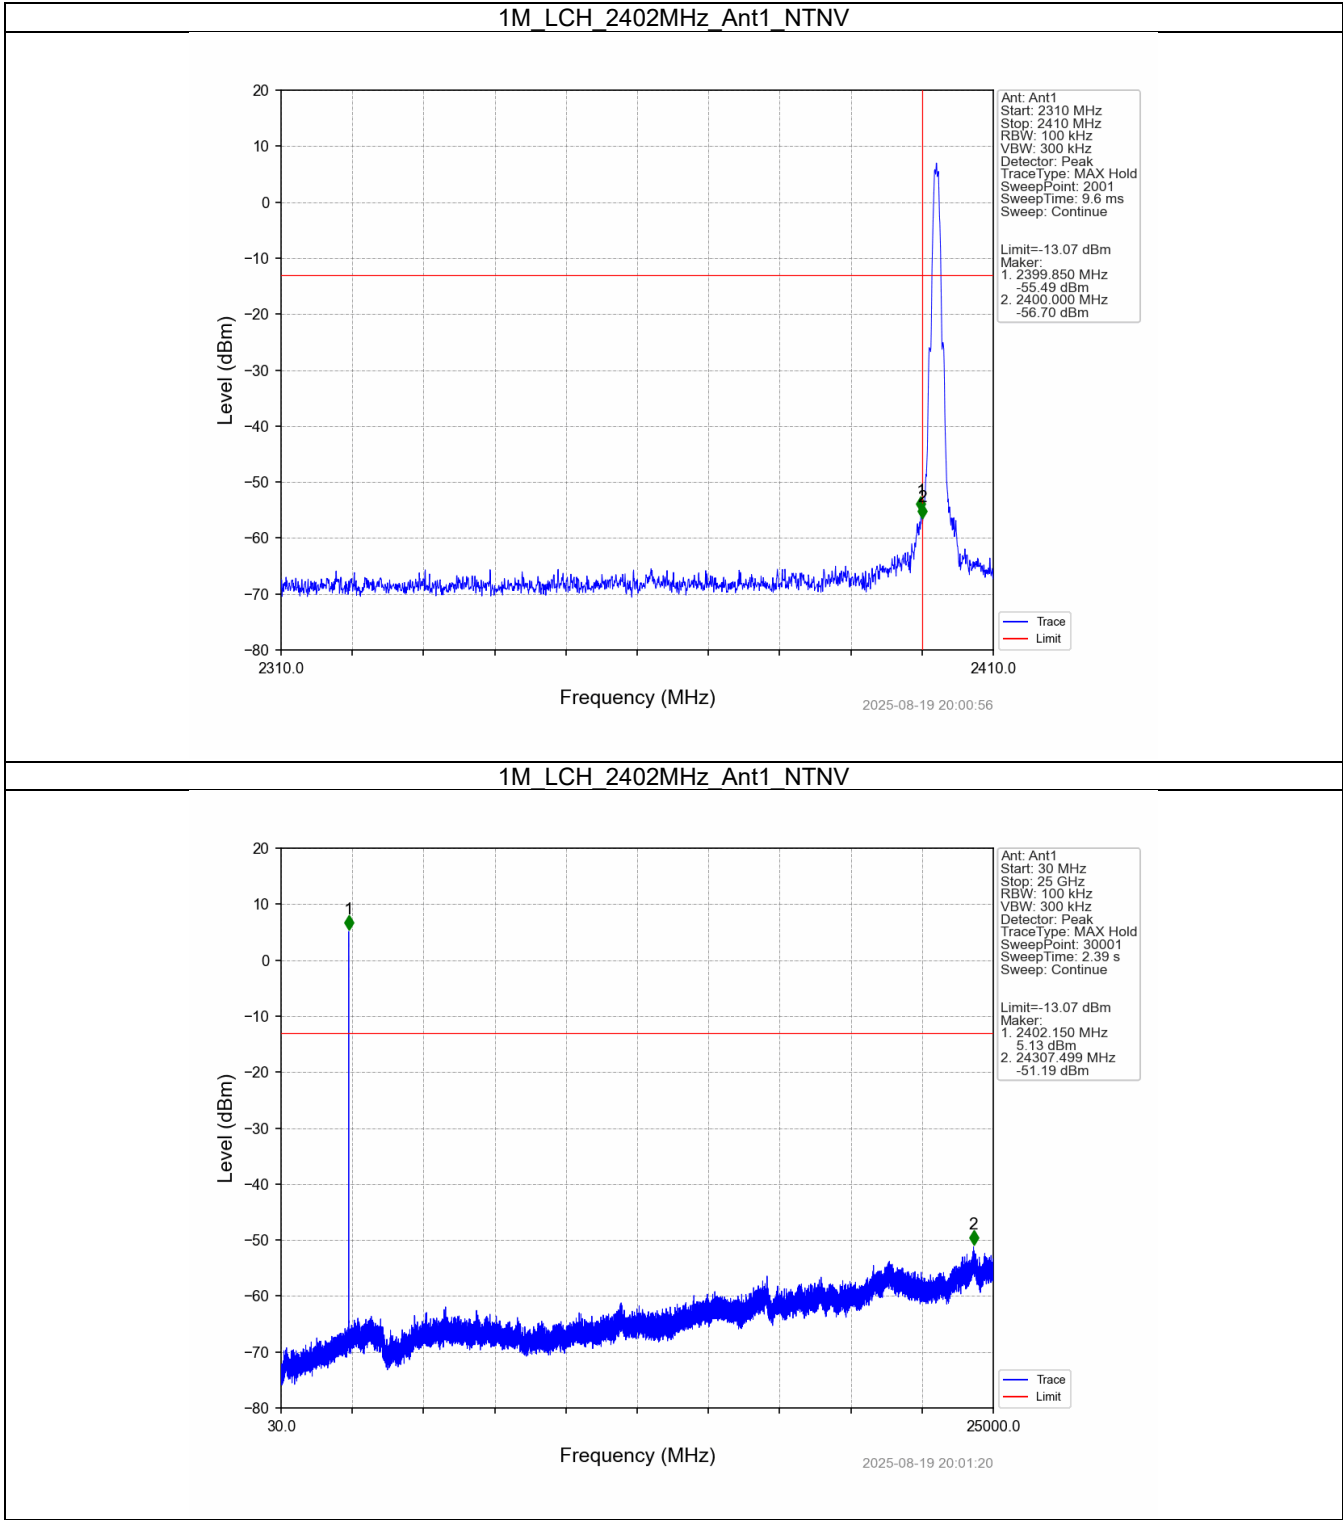


# 1M MCH 2440MHz Ant1 NTN

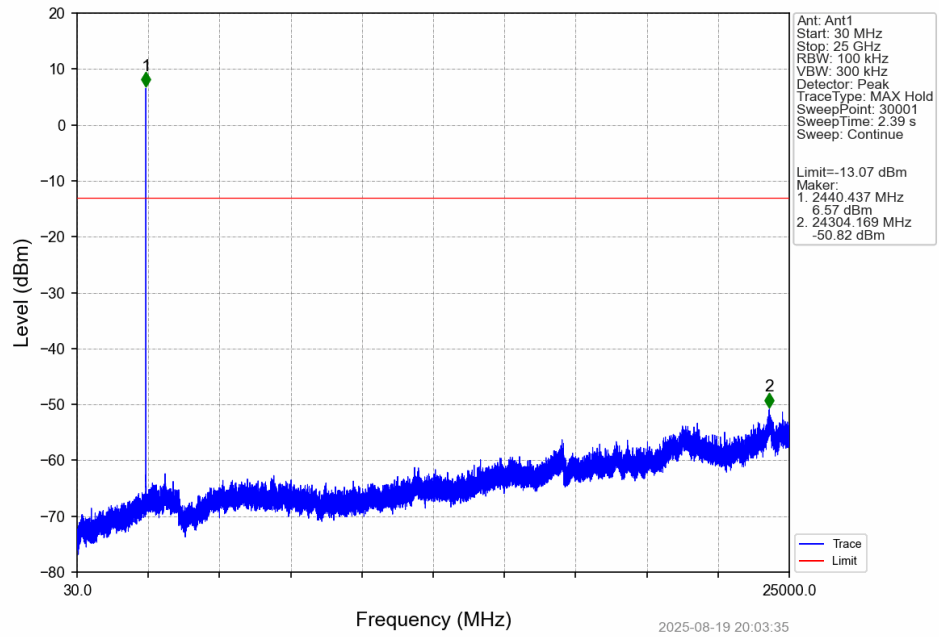


# 1M\_HCH\_2480MHz\_Ant1 NTN

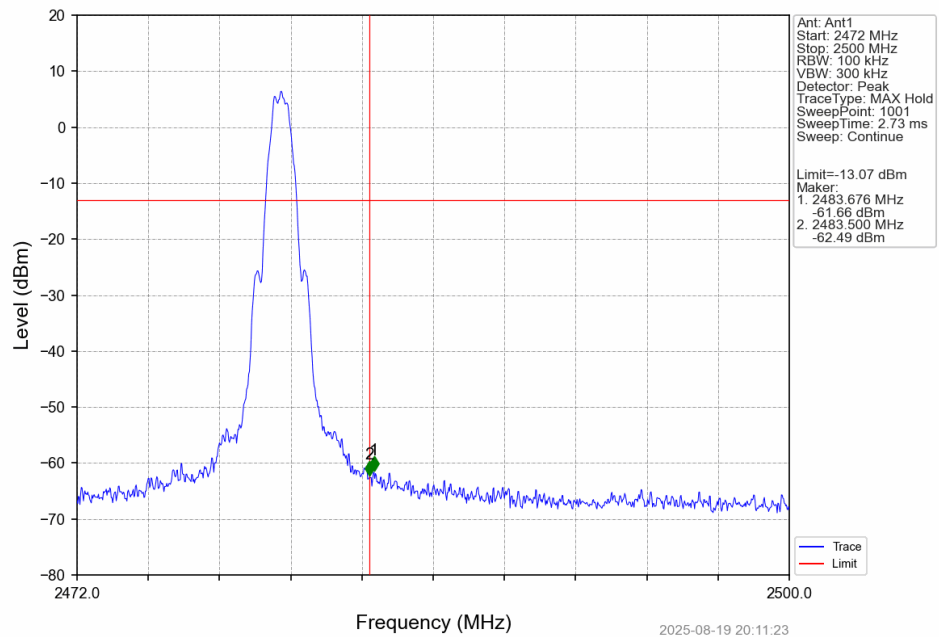

# 1M HCH 2480MHz Ant1 NTN

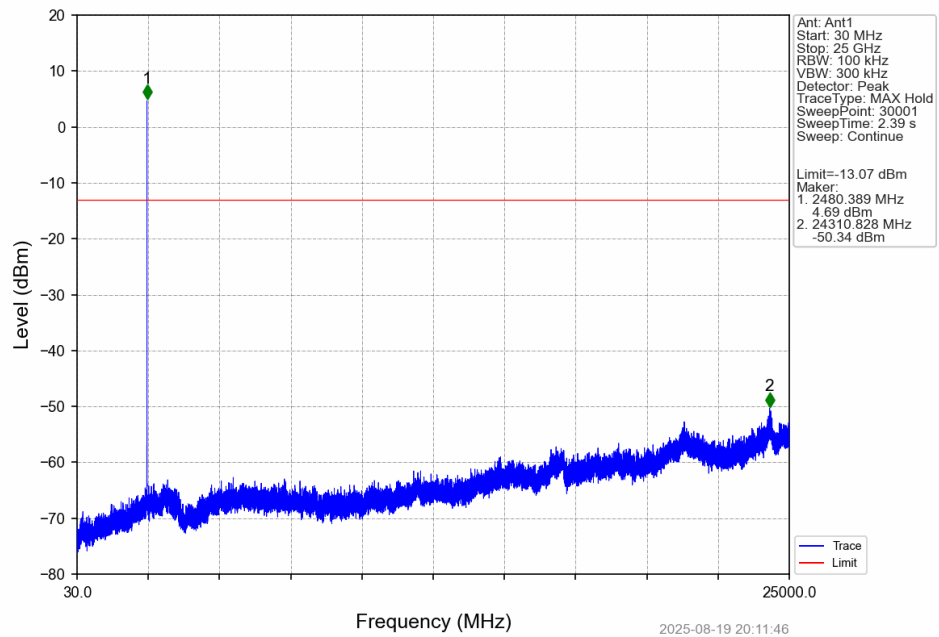


# 2M LCH 2402MHz Ant1 NTN

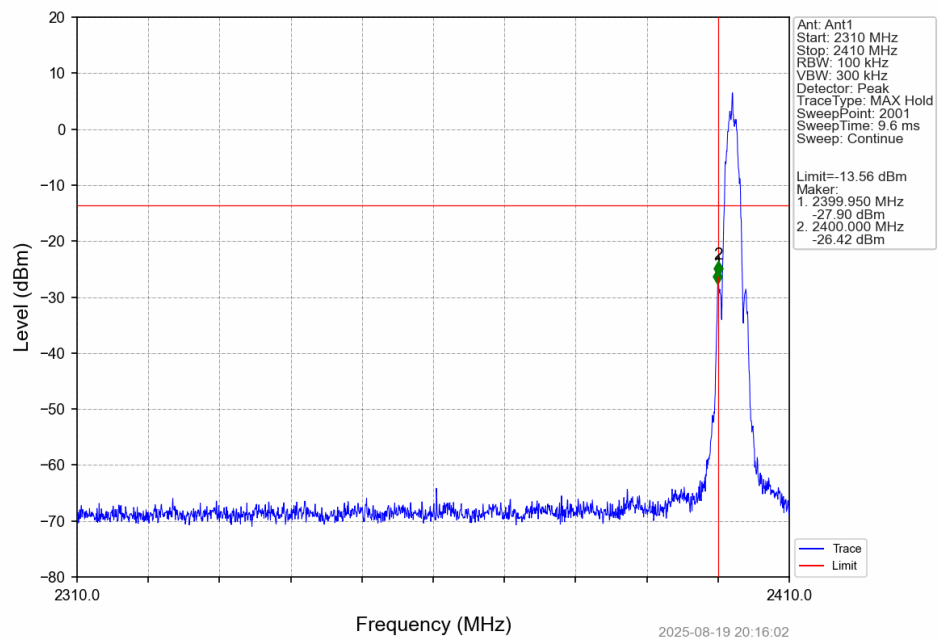





# 2M LCH 2402MHz Ant1 NTN

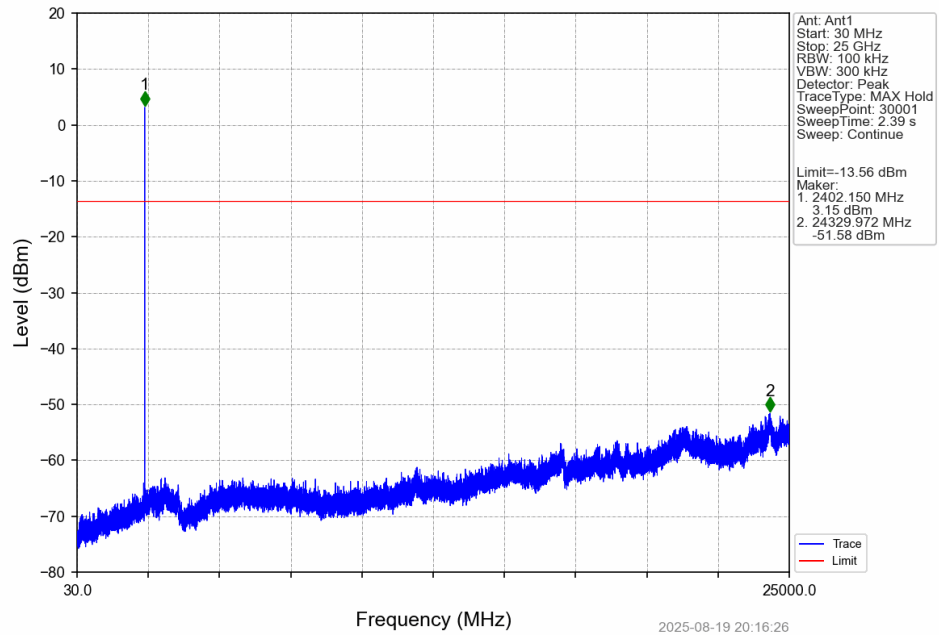

# 2M\_MCH 2440MHz Ant1 NTN

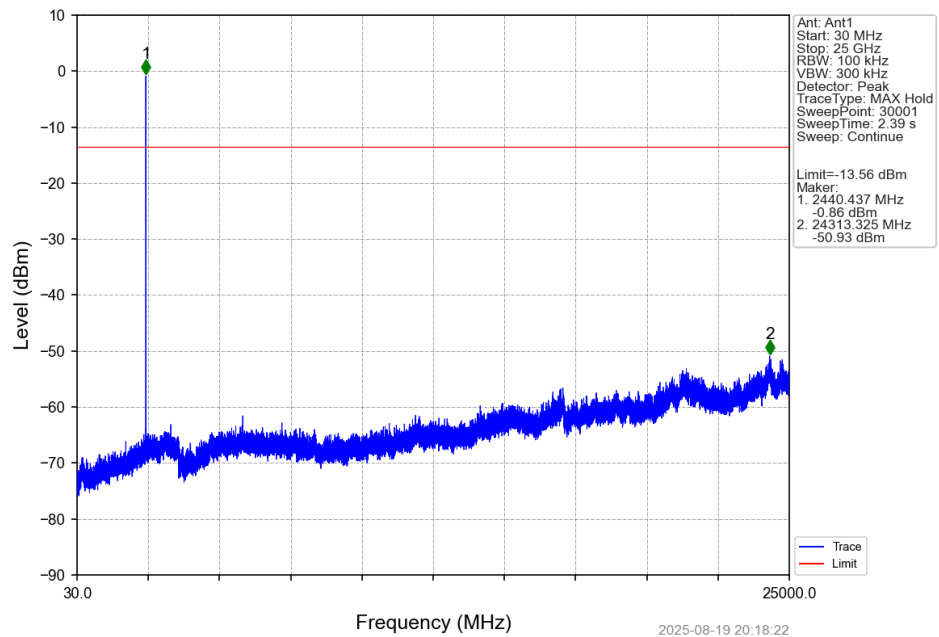

# 2M HCH 2480MHz Ant1 NTN

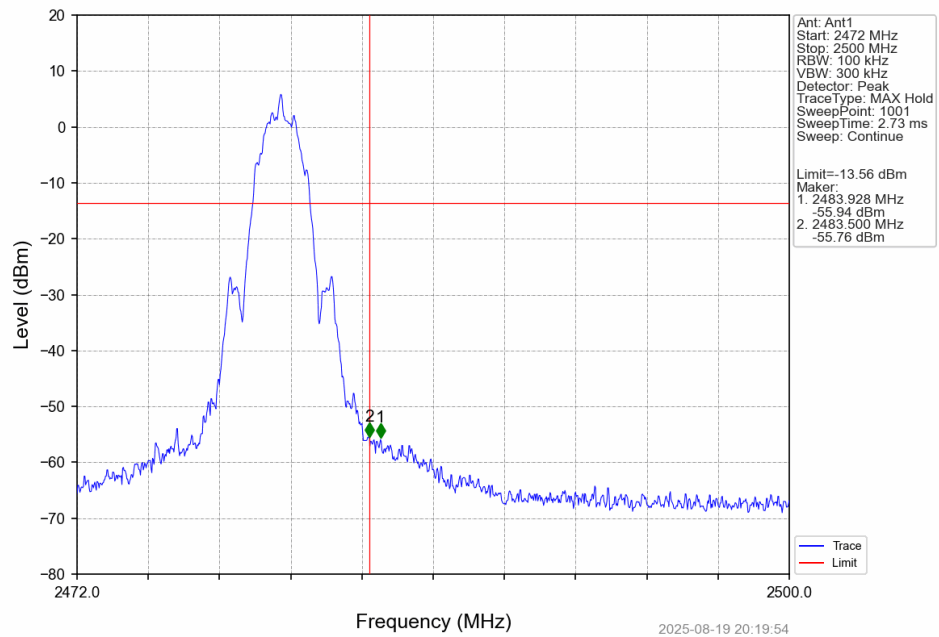

# 2M\_HCH\_2480MHz\_Ant1\_NTN

