

RF Test Data for 2.4G Wi-Fi (Conducted Measurements)

General Description of EUT	
EUT Name:	Digital Wireless Backup Camera System
Model:	RCVT070
Sample ID:	HC-C-202412-0085-01-01
Test Standard:	FCC Part 15.247
Environmental Conditions	
Ambient Temperature:	24.3℃
Ambient Humidity:	43%RH
Test Power Supply:	DC 10V
Test Engineer:	Zkn.zhou
Note: For a more detailed features description, please refer to the report TBR-C-202412-0085-6	

Contents



1: DTS Bandwidth.....	3
1.1 Test Result	3
1.2 Test Graphs	4
2: Occupied Channel Bandwidth	6
2.1 Test Result	6
2.2 Test Graphs	7
3: Maximum conducted output power.....	9
3.1 Test Result Average	9
4: Maximum power spectral density	10
4.1 Test Result	10
4.2 Test Graphs	11
5: Band edge measurements	13
5.1 Test Result	13
5.2 Test Graphs	14
6: Conducted Spurious Emission.....	16
6.1 Test Result	16
6.2 Test Graphs	17
7: Duty Cycle	21
7.1 Test Result	21
7.2 Test Graphs	22
8: Emissions in Restricted Bands.....	24
8.1 Test Result	24
8.2 Test Graphs	26

1: DTS Bandwidth

1.1 Test Result



TestMode	Ant.	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.96	2406.96	2416.92	0.5	PASS
11B	Ant1	2437	9.72	2431.96	2441.68	0.5	PASS
11B	Ant1	2462	9.84	2456.96	2466.80	0.5	PASS
11G	Ant1	2412	16.36	2403.80	2420.16	0.5	PASS
11G	Ant1	2437	16.44	2428.76	2445.20	0.5	PASS
11G	Ant1	2462	16.36	2453.80	2470.16	0.5	PASS
11N20SISO	Ant1	2412	17.80	2403.08	2420.88	0.5	PASS
11N20SISO	Ant1	2437	17.60	2428.20	2445.80	0.5	PASS
11N20SISO	Ant1	2462	17.60	2453.20	2470.80	0.5	PASS
11AX20SISO	Ant1	2412	19.00	2402.48	2421.48	0.5	PASS
11AX20SISO	Ant1	2437	19.00	2427.48	2446.48	0.5	PASS
11AX20SISO	Ant1	2462	19.00	2452.48	2471.48	0.5	PASS

1.2 Test Graphs

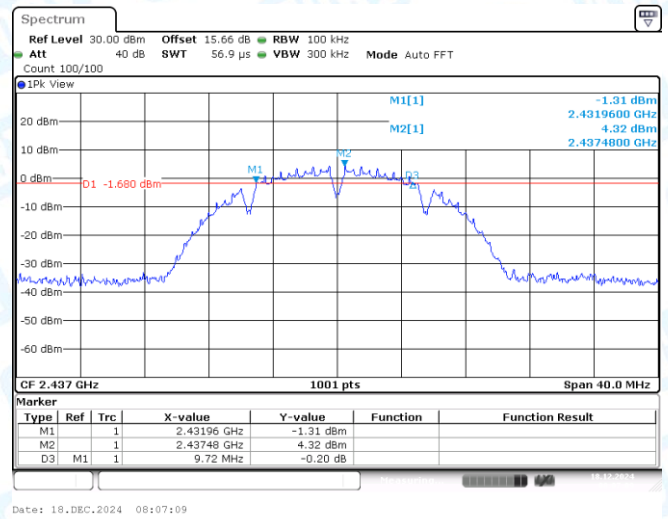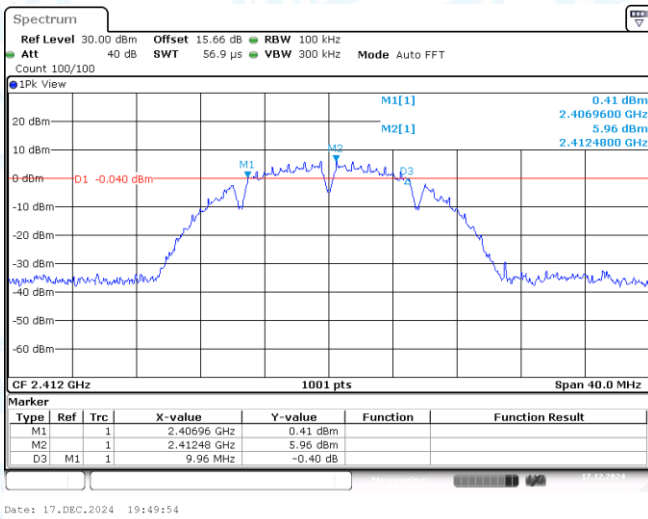



11B-Ant1-2412-PASS

11B-Ant1-2437-PASS

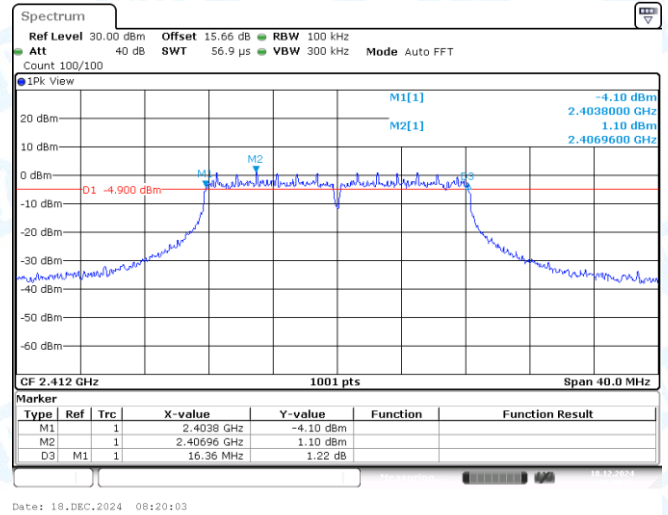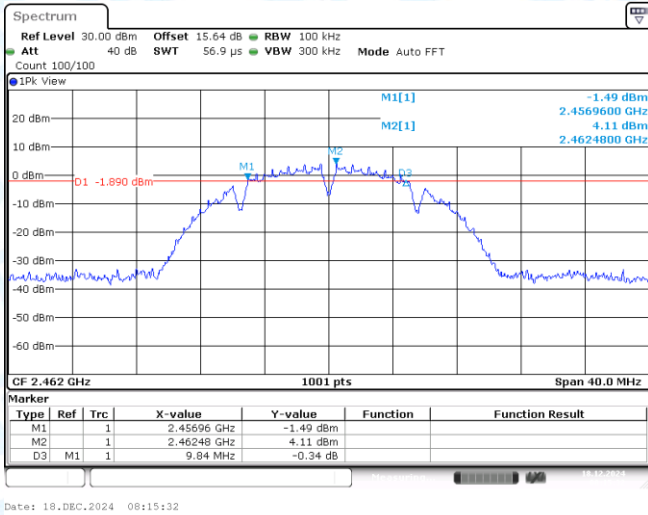



11B-Ant1-2462-PASS

11G-Ant1-2412-PASS

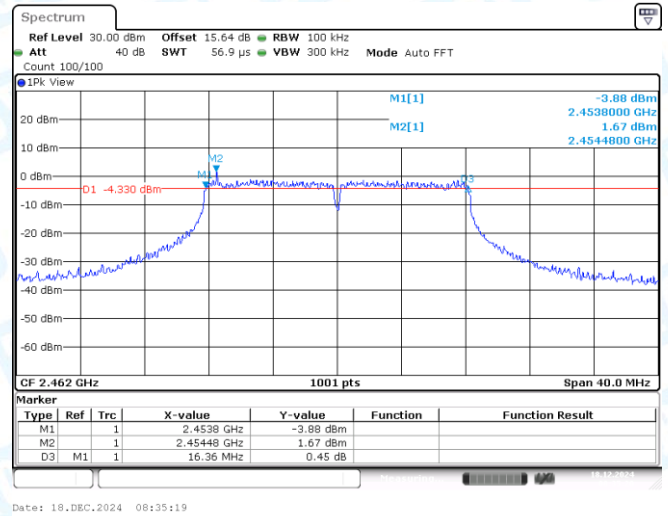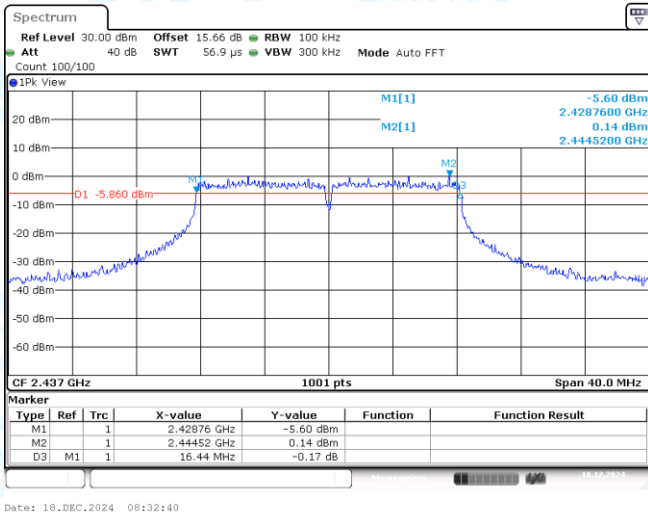



11G-Ant1-2437-PASS

11G-Ant1-2462-PASS

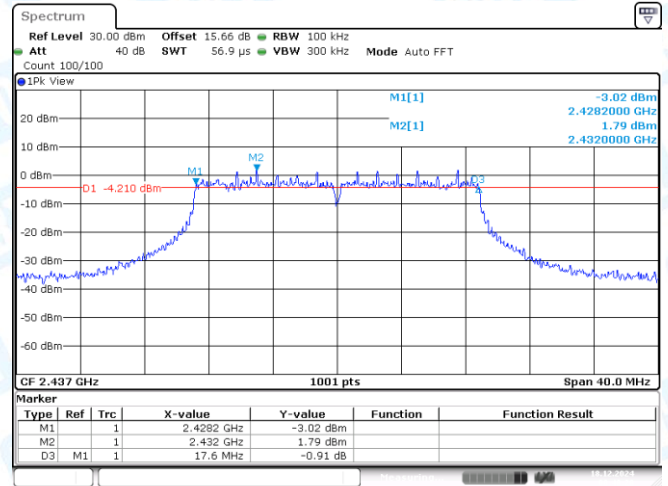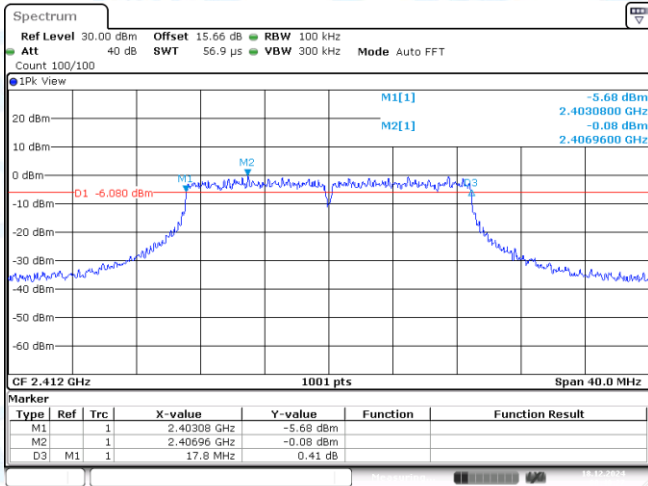



11N20SISO-Ant1-2412-PASS

11N20SISO-Ant1-2437-PASS

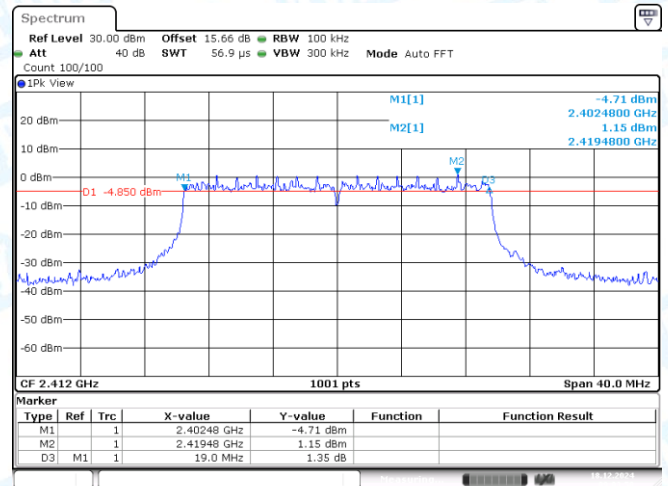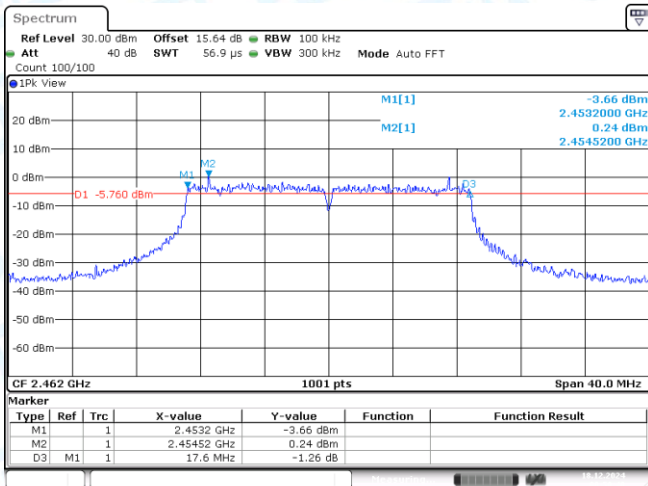

11N20SISO-Ant1-2462-PASS

11AX20SISO-Ant1-2412-PASS

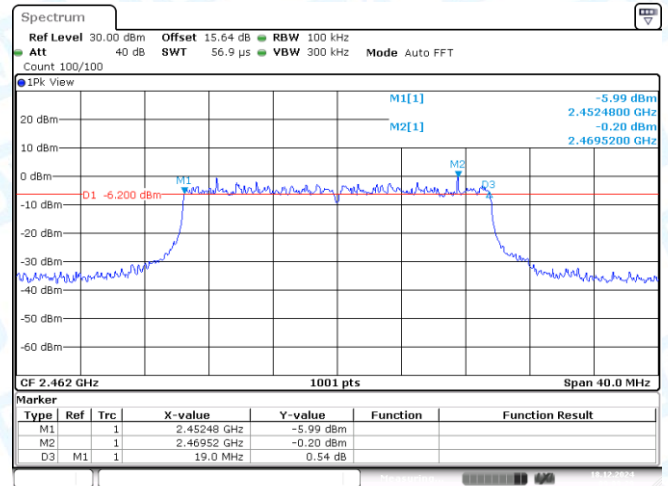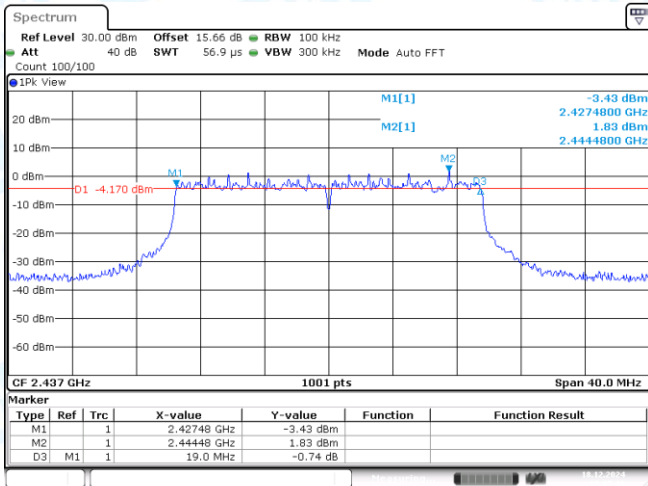

11AX20SISO-Ant1-2437-PASS


11AX20SISO-Ant1-2462-PASS

2: Occupied Channel Bandwidth


2.1 Test Result

TestMode	Ant.	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	15.105	2404.4875	2419.5924	---	---
11B	Ant1	2437	15.185	2429.4076	2444.5924	---	---
11B	Ant1	2462	15.225	2454.3676	2469.5924	---	---
11G	Ant1	2412	17.622	2403.1289	2420.7512	---	---
11G	Ant1	2437	17.223	2428.2488	2445.4715	---	---
11G	Ant1	2462	17.822	2452.8492	2470.6713	---	---
11N20SISO	Ant1	2412	18.621	2402.6893	2421.3107	---	---
11N20SISO	Ant1	2437	18.701	2427.3696	2446.0709	---	---
11N20SISO	Ant1	2462	18.302	2452.7692	2471.0709	---	---
11AX20SISO	Ant1	2412	19.141	2402.4496	2421.5904	---	---
11AX20SISO	Ant1	2437	19.341	2427.3297	2446.6703	---	---
11AX20SISO	Ant1	2462	19.221	2452.4096	2471.6304	---	---


2.2 Test Graphs

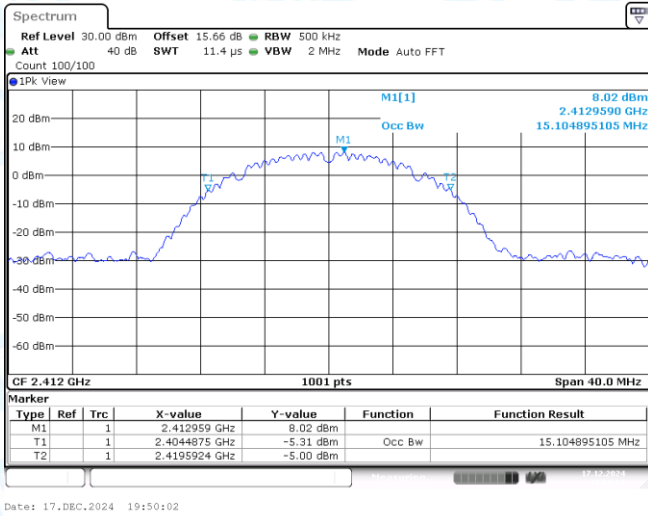


11B-Ant1-2412

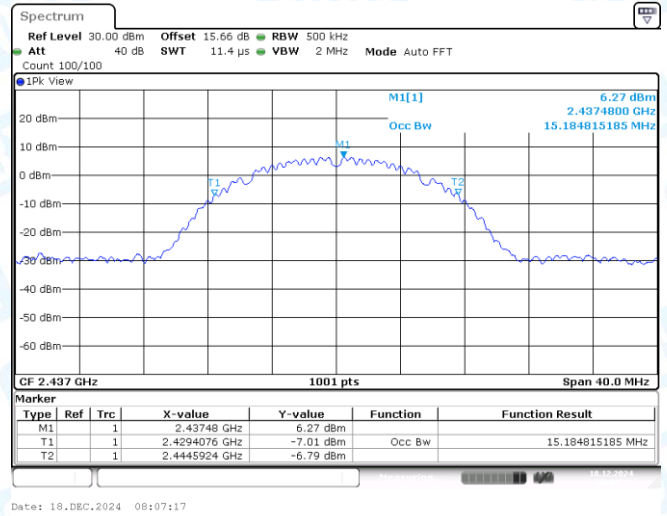


11B-Ant1-2437

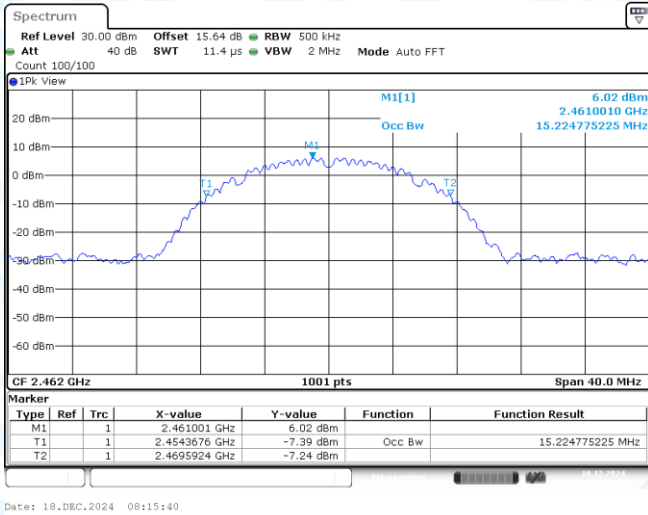


11B-Ant1-2462

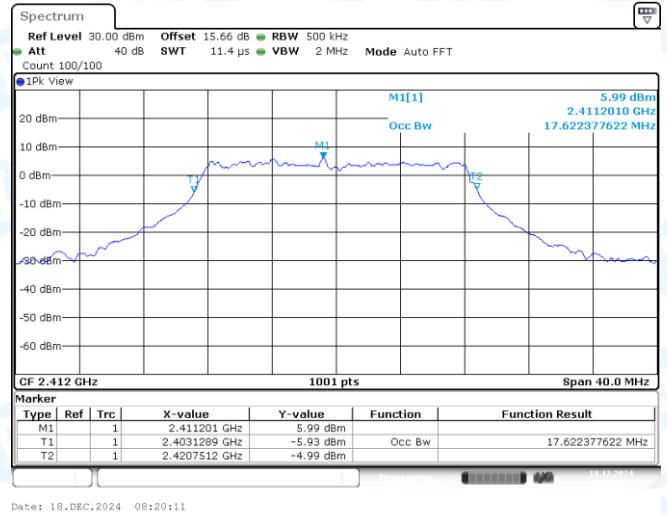


11G-Ant1-2412

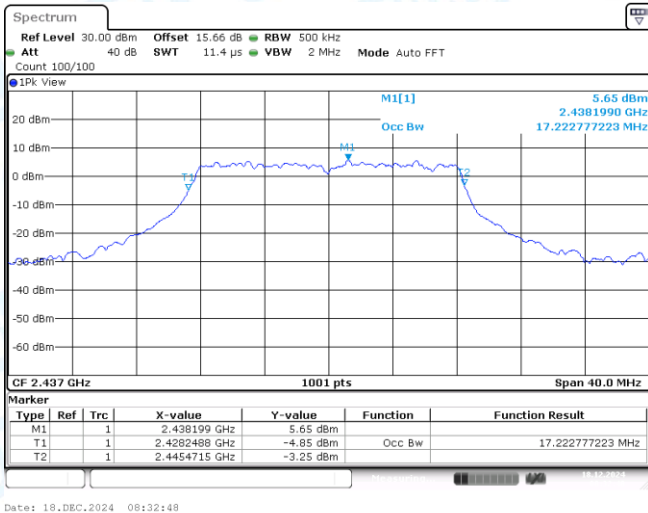

11G-Ant1-2437

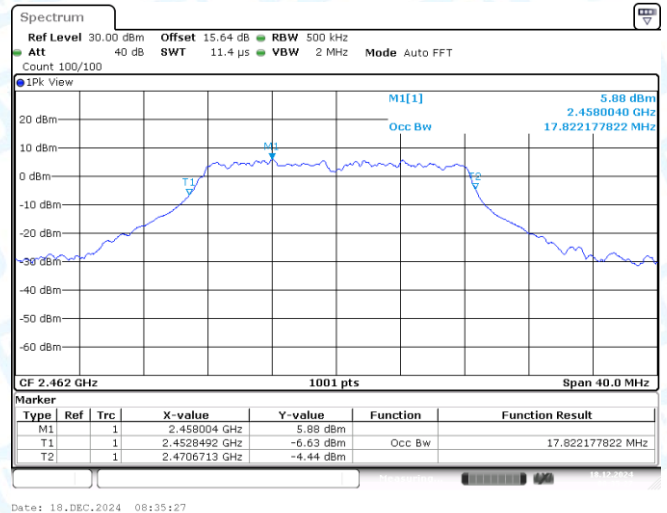


11G-Ant1-2462

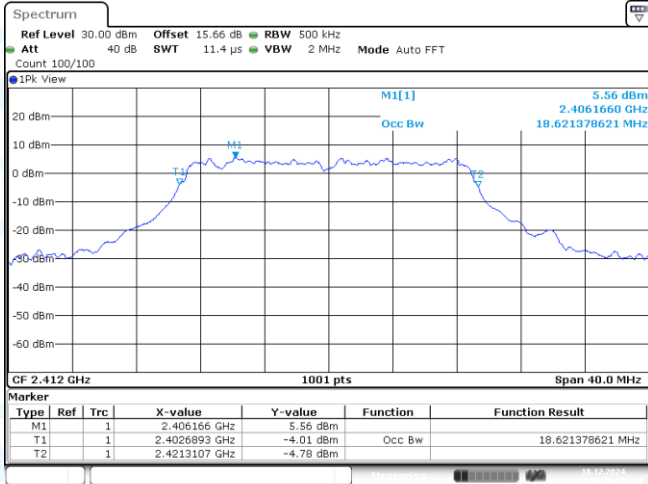


Date: 18.DEC.2024 08:40:35

11N20SISO-Ant1-2412

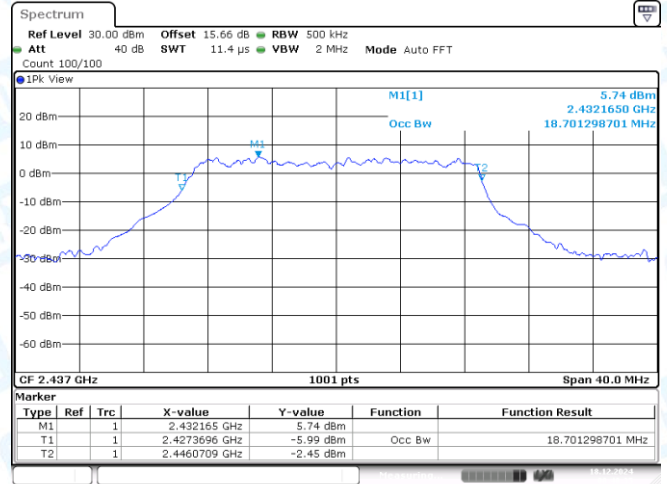


Date: 18.DEC.2024 08:48:35

11N20SISO-Ant1-2437

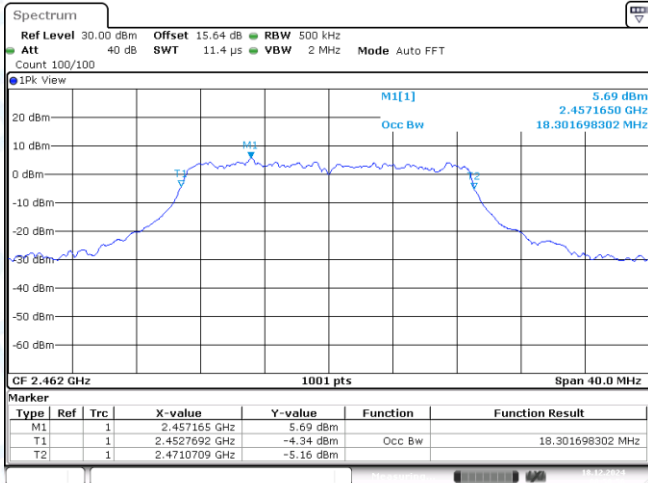


Date: 18.DEC.2024 08:50:56

11N20SISO-Ant1-2462

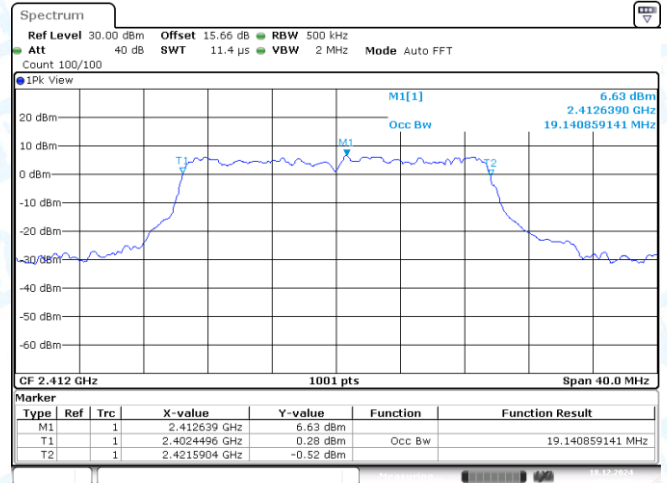


Date: 18.DEC.2024 09:04:06

11AX20SISO-Ant1-2412

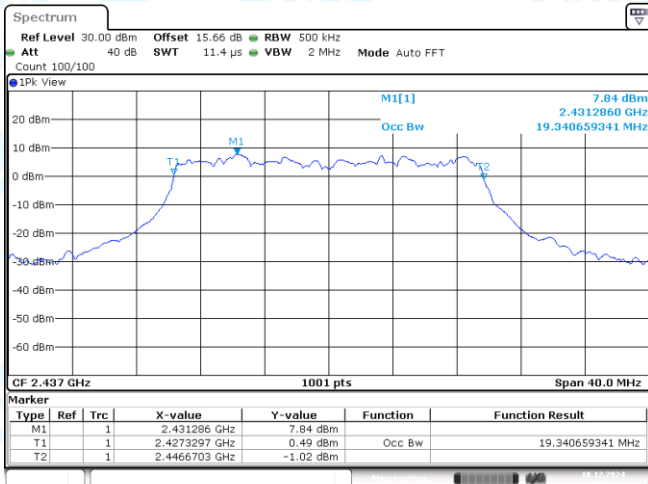

Date: 18.DEC.2024 09:07:24

11AX20SISO-Ant1-2437

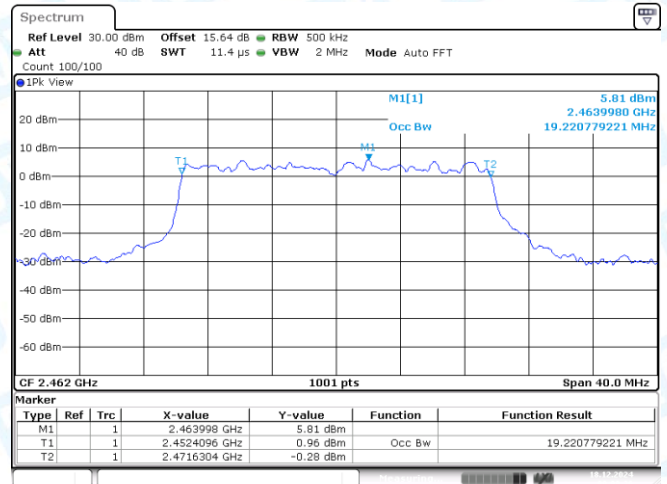

Date: 18.DEC.2024 09:09:36

11AX20SISO-Ant1-2462

3: Maximum conducted output power

3.1 Test Result

Test Mode	Ant.	Frequency [MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	13.64	≤30.00	PASS
11B	Ant1	2437	13.60	≤30.00	PASS
11B	Ant1	2462	13.71	≤30.00	PASS
11G	Ant1	2412	12.77	≤30.00	PASS
11G	Ant1	2437	12.81	≤30.00	PASS
11G	Ant1	2462	12.06	≤30.00	PASS
11N20SISO	Ant1	2412	12.91	≤30.00	PASS
11N20SISO	Ant1	2437	12.88	≤30.00	PASS
11N20SISO	Ant1	2462	11.35	≤30.00	PASS
11AX20SISO	Ant1	2412	13.00	≤30.00	PASS
11AX20SISO	Ant1	2437	13.13	≤30.00	PASS
11AX20SISO	Ant1	2462	11.47	≤30.00	PASS


4: Maximum power spectral density


4.1 Test Result

TestMode	Ant.	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-10.51	≤8.00	PASS
11B	Ant1	2437	-10.63	≤8.00	PASS
11B	Ant1	2462	-10.57	≤8.00	PASS
11G	Ant1	2412	-13.71	≤8.00	PASS
11G	Ant1	2437	-14.45	≤8.00	PASS
11G	Ant1	2462	-14.74	≤8.00	PASS
11N20SISO	Ant1	2412	-14.20	≤8.00	PASS
11N20SISO	Ant1	2437	-14.13	≤8.00	PASS
11N20SISO	Ant1	2462	-16.24	≤8.00	PASS
11AX20SISO	Ant1	2412	-13.46	≤8.00	PASS
11AX20SISO	Ant1	2437	-13.95	≤8.00	PASS
11AX20SISO	Ant1	2462	-15.01	≤8.00	PASS

Note: The Duty Cycle Factor is compensated in the graph.


4.2 Test Graphs

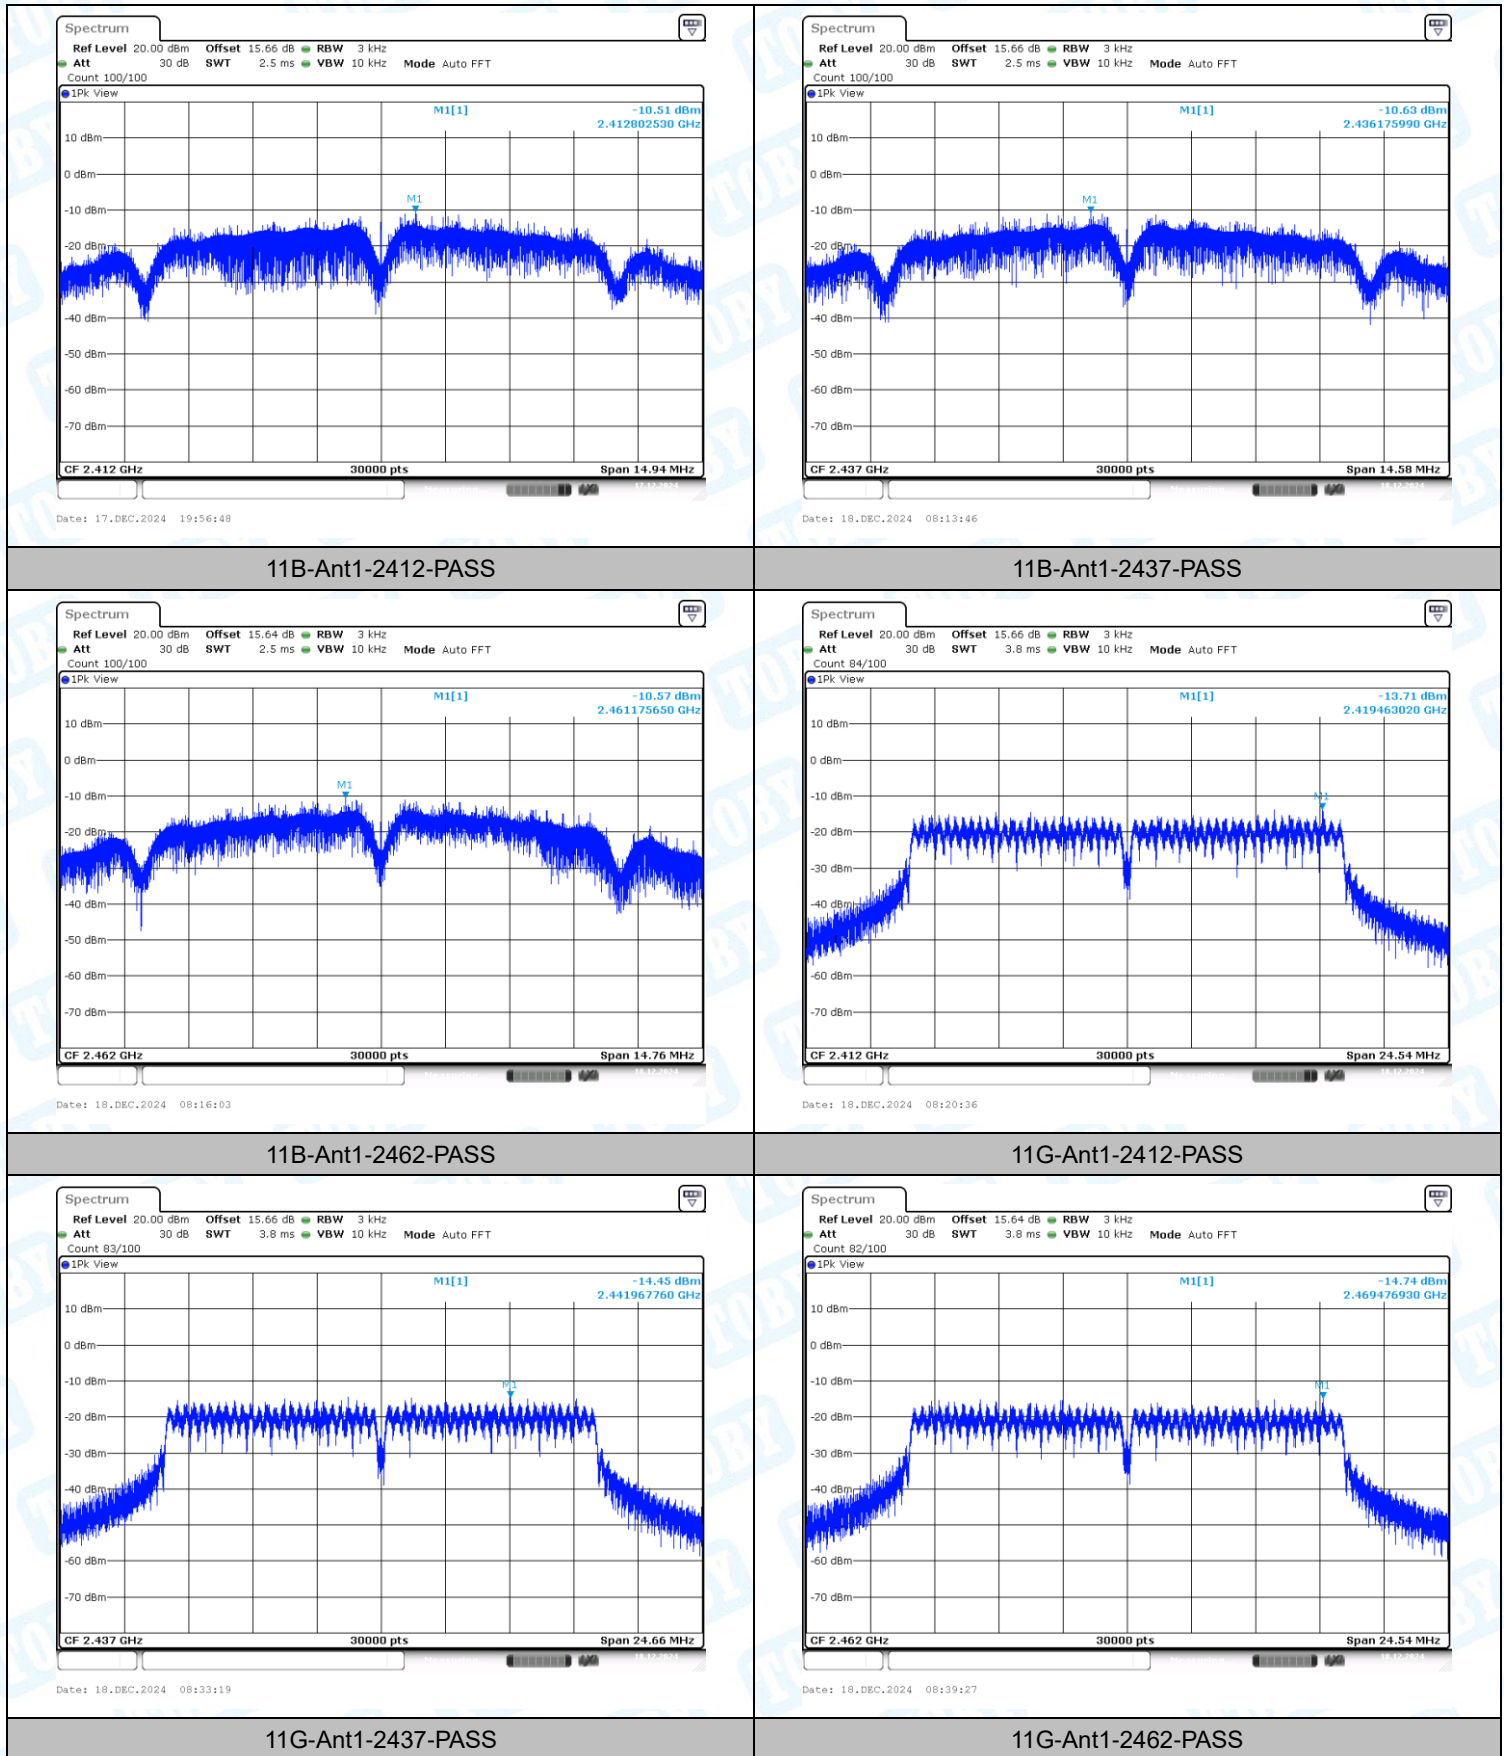

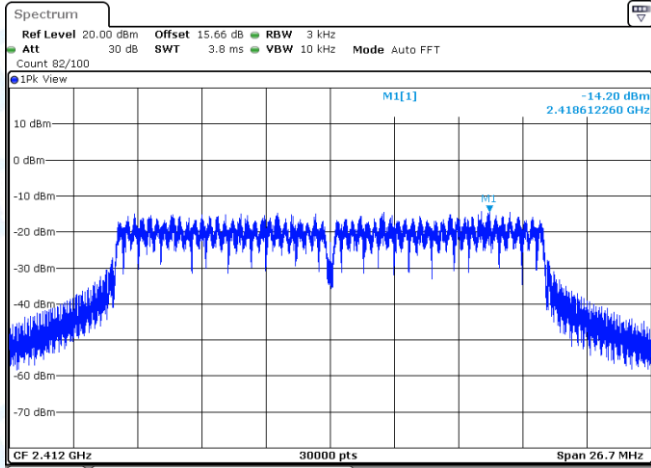


Date: 18.DEC.2024 08:45:50

11N20SISO-Ant1-2412-PASS

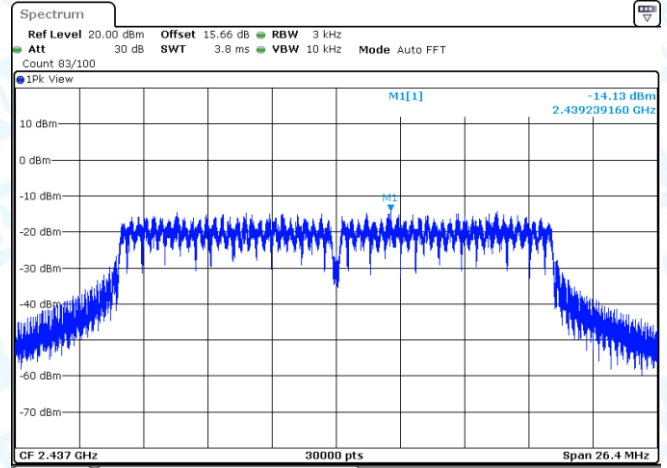


Date: 18.DEC.2024 08:48:58

11N20SISO-Ant1-2437-PASS

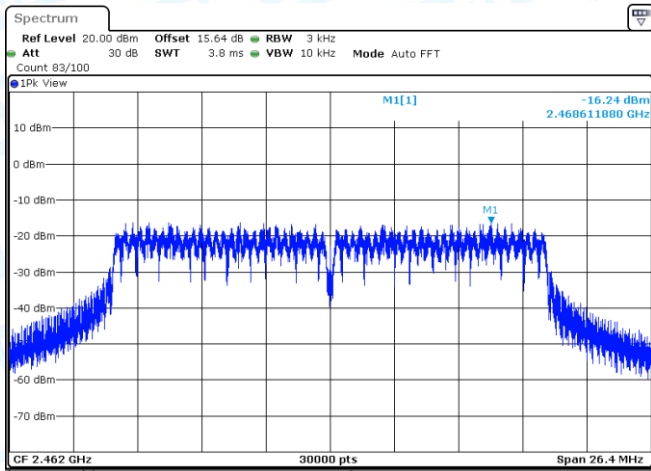


Date: 18.DEC.2024 09:01:43

11N20SISO-Ant1-2462-PASS

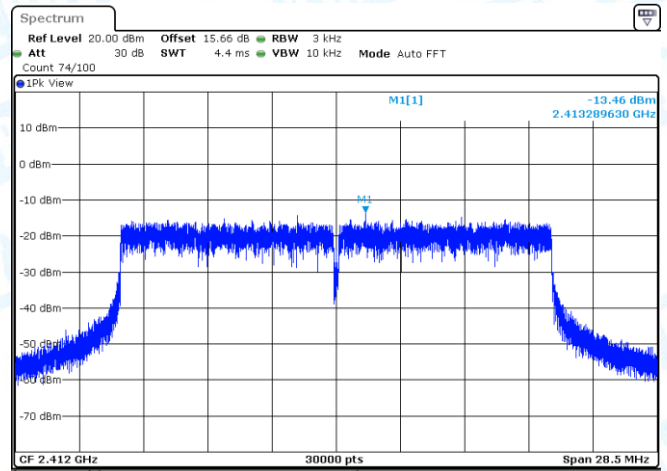


Date: 18.DEC.2024 09:04:26

11AX20SISO-Ant1-2412-PASS

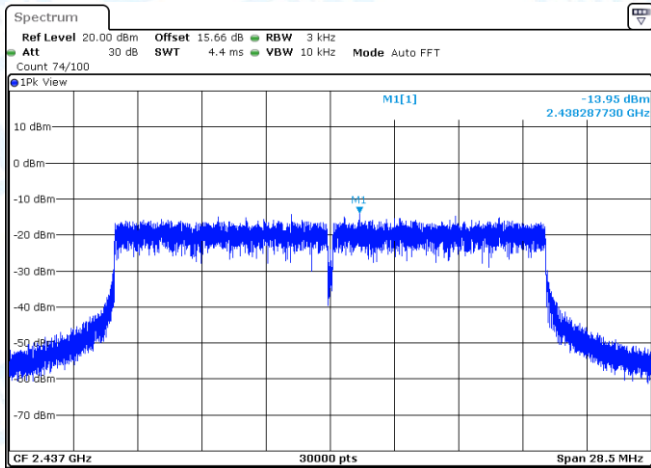

Date: 18.DEC.2024 09:07:47

11AX20SISO-Ant1-2437-PASS

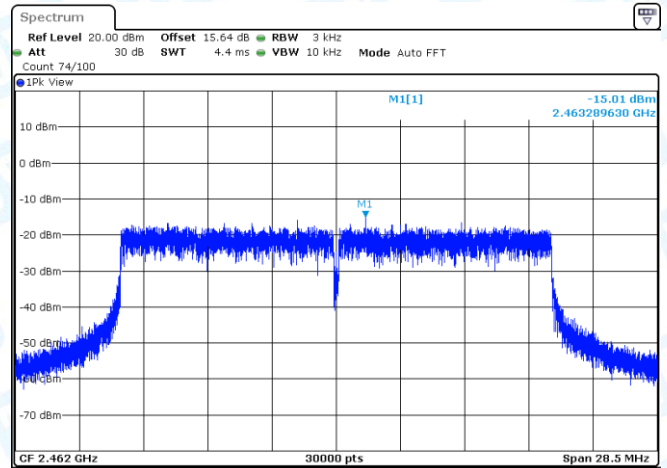

Date: 18.DEC.2024 09:14:37



11AX20SISO-Ant1-2462-PASS

5: Band edge measurements

5.1 Test Result



TestMode	Ant.	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	5.87	-39.98	≤-14.13	PASS
11B	Ant1	High	2462	4.28	-48.08	≤-15.72	PASS
11G	Ant1	Low	2412	1.59	-29.14	≤-18.41	PASS
11G	Ant1	High	2462	1.53	-45.93	≤-18.47	PASS
11N20SISO	Ant1	Low	2412	1.10	-29.49	≤-18.9	PASS
11N20SISO	Ant1	High	2462	0.66	-44.44	≤-19.34	PASS
11AX20SISO	Ant1	Low	2412	0.70	-29.4	≤-19.3	PASS
11AX20SISO	Ant1	High	2462	-0.07	-44.45	≤-20.07	PASS

5.2 Test Graphs

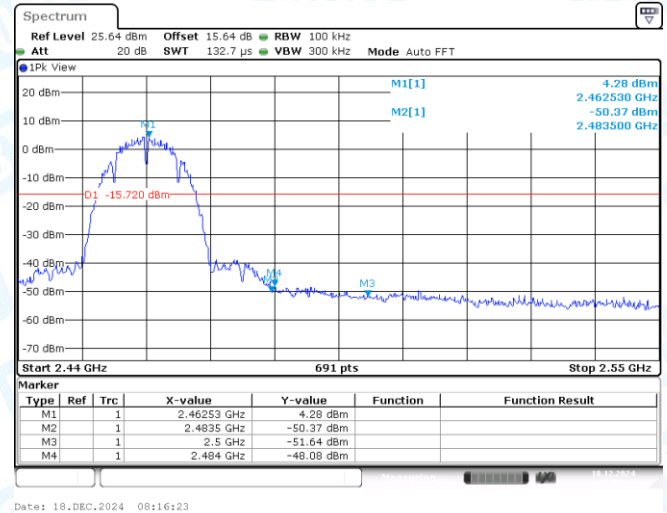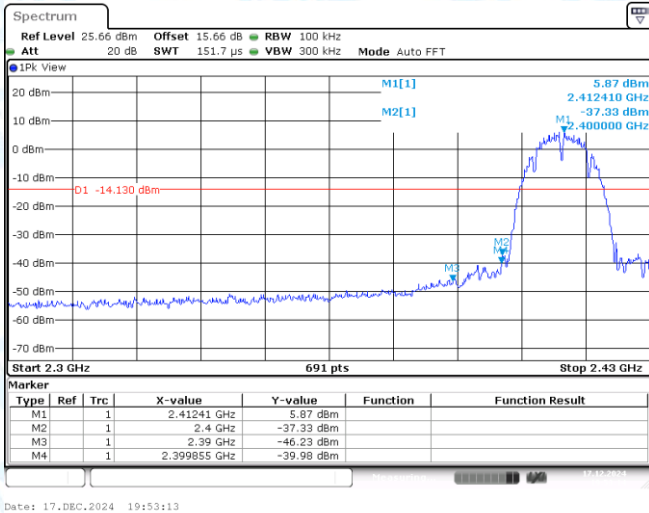



11B-Ant1-2412-PASS

11B-Ant1-2462-PASS

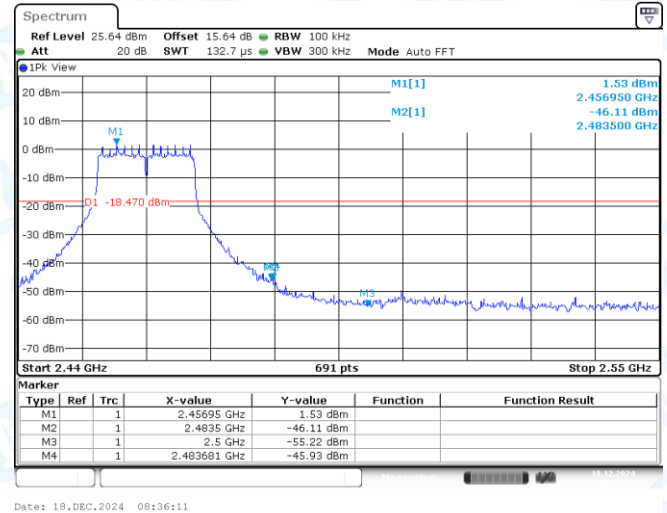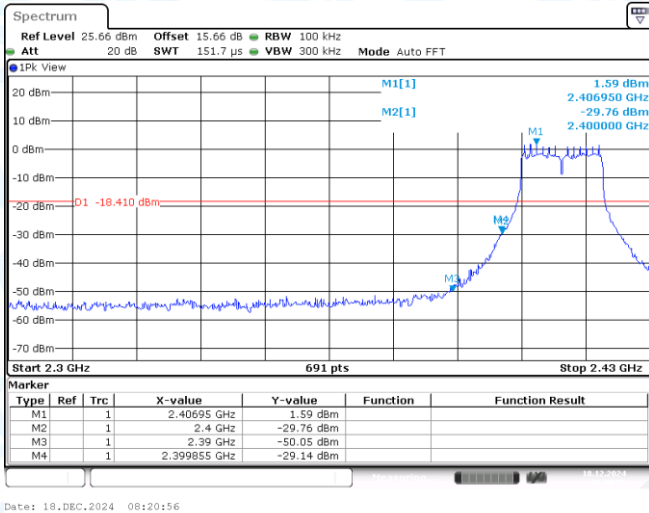


11G-Ant1-2412-PASS

11G-Ant1-2462-PASS

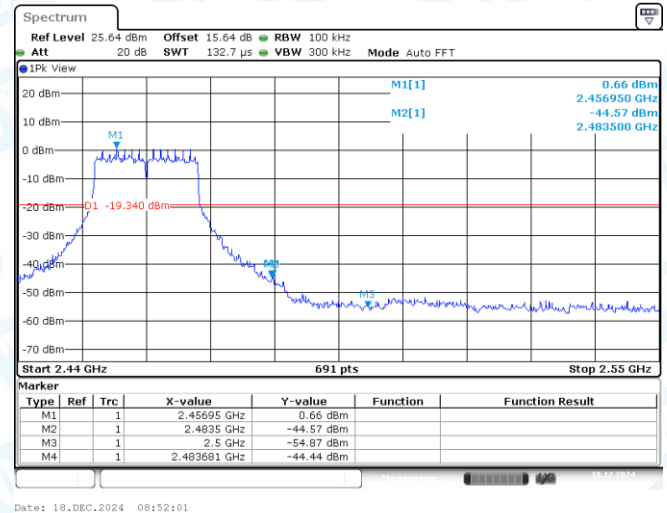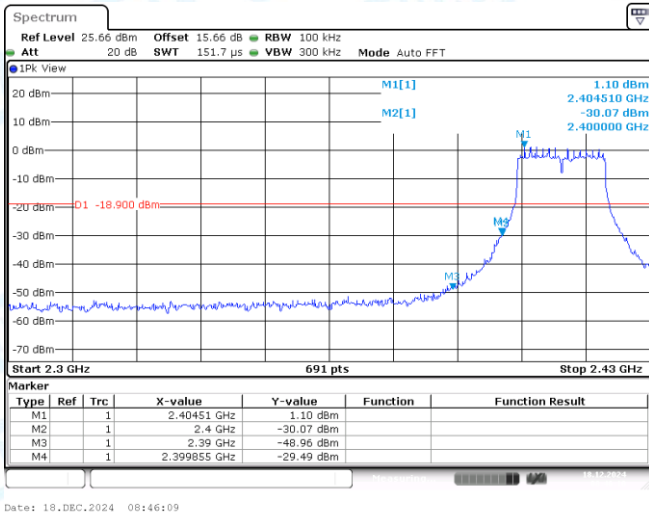


11N20SISO-Ant1-2412-PASS

11N20SISO-Ant1-2462-PASS

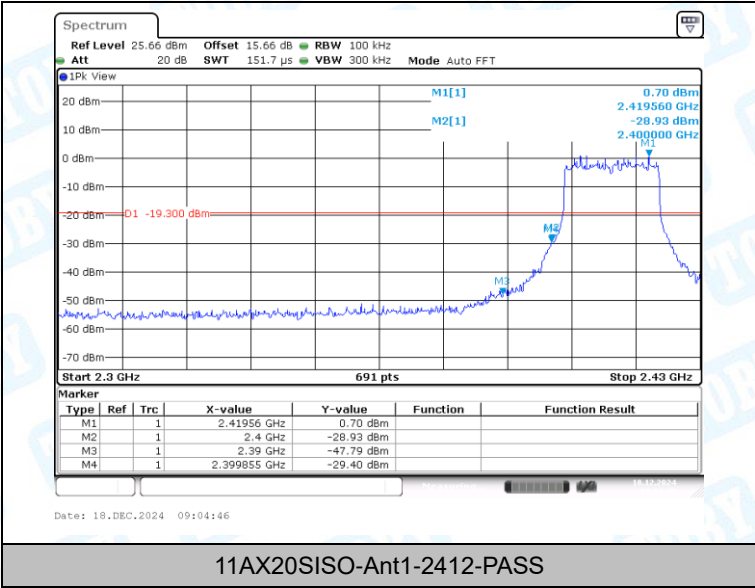

11AX20SISO-Ant1-2412-PASS

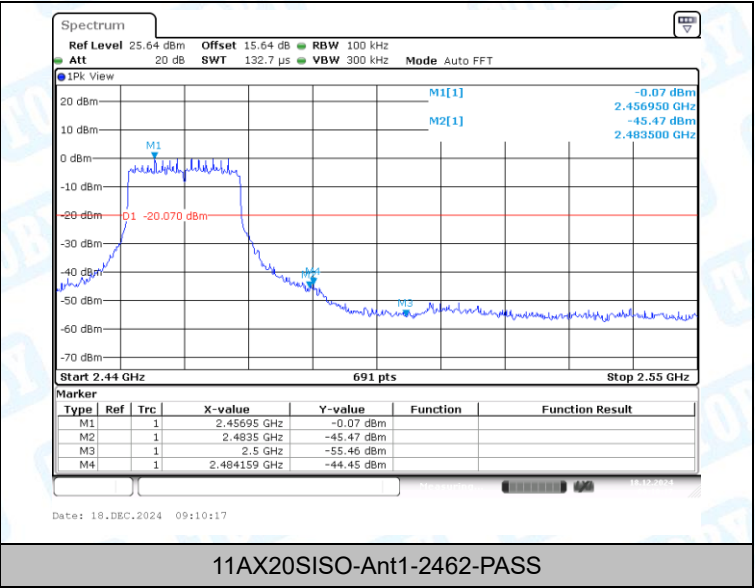


11AX20SISO-Ant1-2462-PASS

6: Conducted Spurious Emission


6.1 Test Result

TestMode	Ant.	Frequency [MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	30~1000	6.11	-50.23	≤-13.89	PASS
11B	Ant1	2412	1000~26500	6.11	-41.19	≤-13.89	PASS
11B	Ant1	2437	30~1000	4.25	-50.76	≤-15.75	PASS
11B	Ant1	2437	1000~26500	4.25	-41.62	≤-15.75	PASS
11B	Ant1	2462	30~1000	4.10	-51.65	≤-15.9	PASS
11B	Ant1	2462	1000~26500	4.10	-40.97	≤-15.9	PASS
11G	Ant1	2412	30~1000	2.03	-50.99	≤-17.97	PASS
11G	Ant1	2412	1000~26500	2.03	-40.56	≤-17.97	PASS
11G	Ant1	2437	30~1000	1.84	-50.72	≤-18.16	PASS
11G	Ant1	2437	1000~26500	1.84	-40.89	≤-18.16	PASS
11G	Ant1	2462	30~1000	2.01	-51.44	≤-17.99	PASS
11G	Ant1	2462	1000~26500	2.01	-40.24	≤-17.99	PASS
11N20SISO	Ant1	2412	30~1000	2.11	-50.3	≤-17.89	PASS
11N20SISO	Ant1	2412	1000~26500	2.11	-41.16	≤-17.89	PASS
11N20SISO	Ant1	2437	30~1000	2.01	-51.38	≤-17.99	PASS
11N20SISO	Ant1	2437	1000~26500	2.01	-40.66	≤-17.99	PASS
11N20SISO	Ant1	2462	30~1000	0.88	-50.15	≤-19.12	PASS
11N20SISO	Ant1	2462	1000~26500	0.88	-41.25	≤-19.12	PASS
11AX20SISO	Ant1	2412	30~1000	1.70	-51.02	≤-18.3	PASS
11AX20SISO	Ant1	2412	1000~26500	1.70	-39.87	≤-18.3	PASS
11AX20SISO	Ant1	2437	30~1000	1.59	-50.41	≤-18.41	PASS
11AX20SISO	Ant1	2437	1000~26500	1.59	-40.19	≤-18.41	PASS
11AX20SISO	Ant1	2462	30~1000	0.01	-50.57	≤-19.99	PASS
11AX20SISO	Ant1	2462	1000~26500	0.01	-40.52	≤-19.99	PASS


6.2 Test Graphs

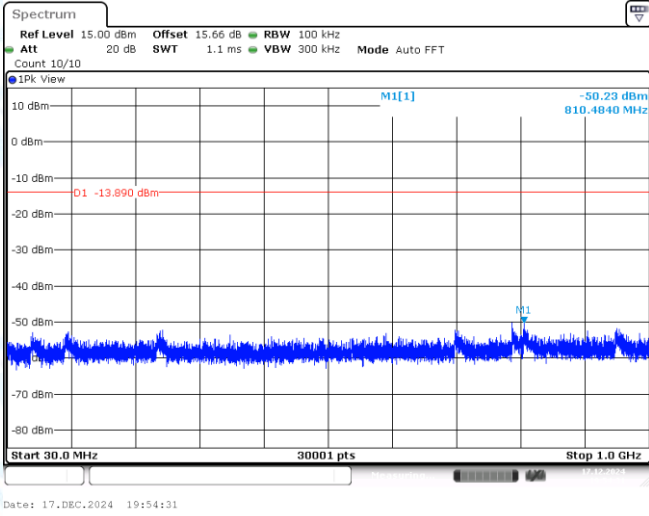


11B-Ant1-2412-30~1000-PASS

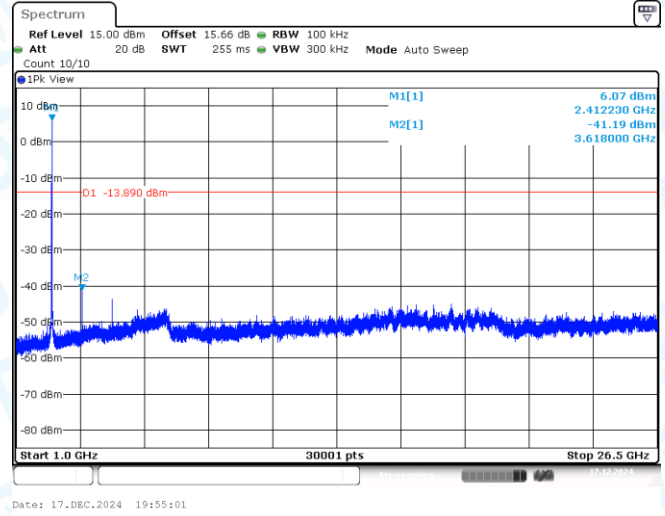


11B-Ant1-2412-1000~26500-PASS

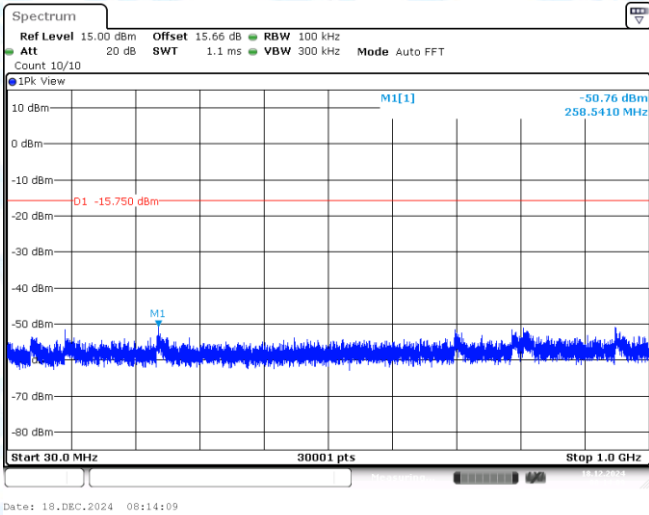


11B-Ant1-2437-30~1000-PASS

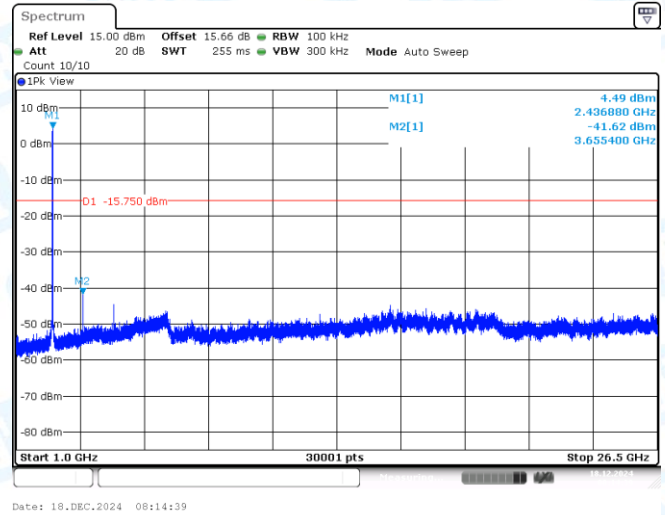



11B-Ant1-2437-1000~26500-PASS

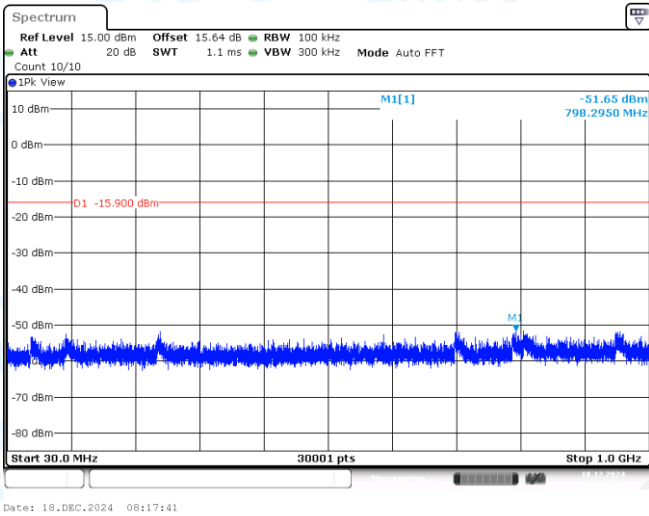

11B-Ant1-2462-30~1000-PASS


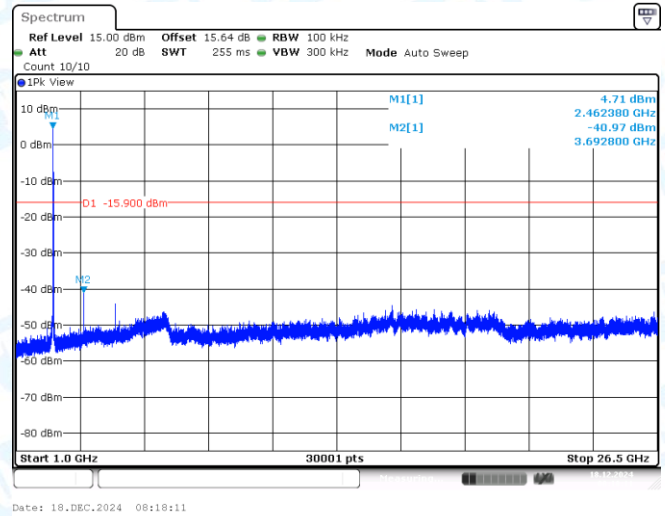


11B-Ant1-2462-1000~26500-PASS

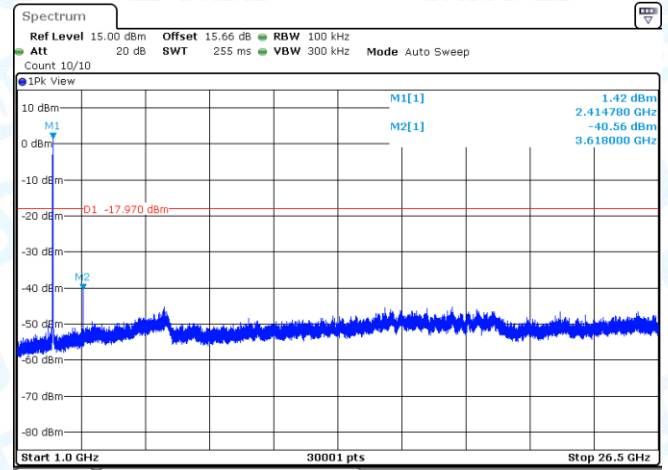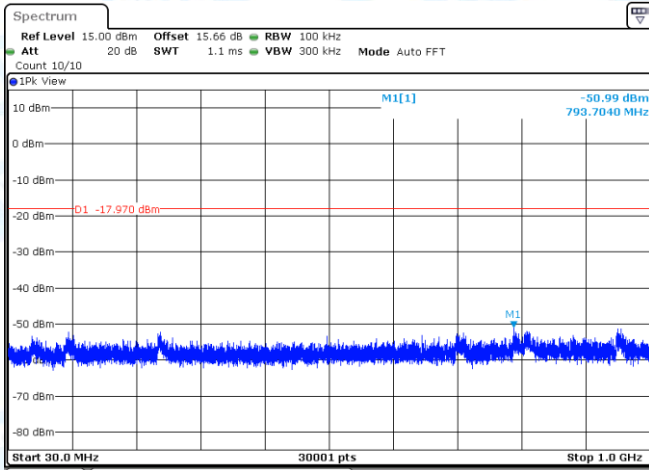



11G-Ant1-2412-30~1000-PASS

11G-Ant1-2412-1000~26500-PASS

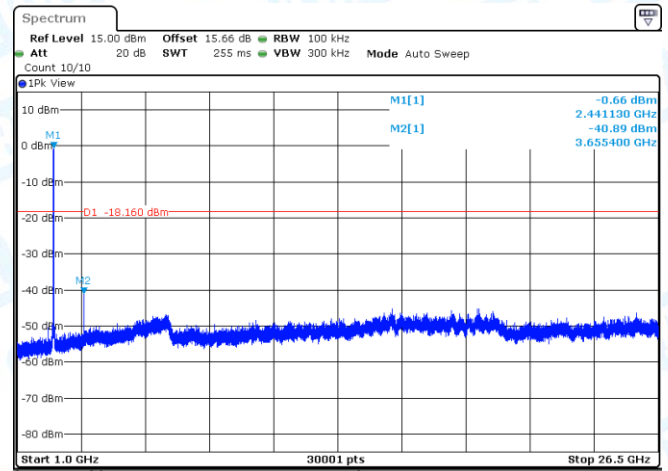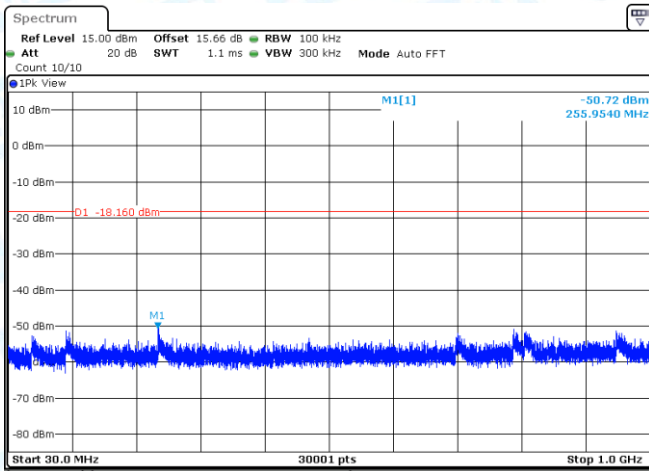


11G-Ant1-2437-30~1000-PASS

11G-Ant1-2437-1000~26500-PASS

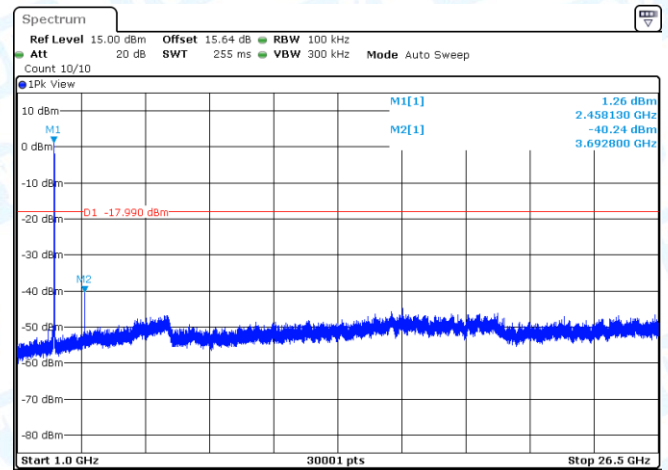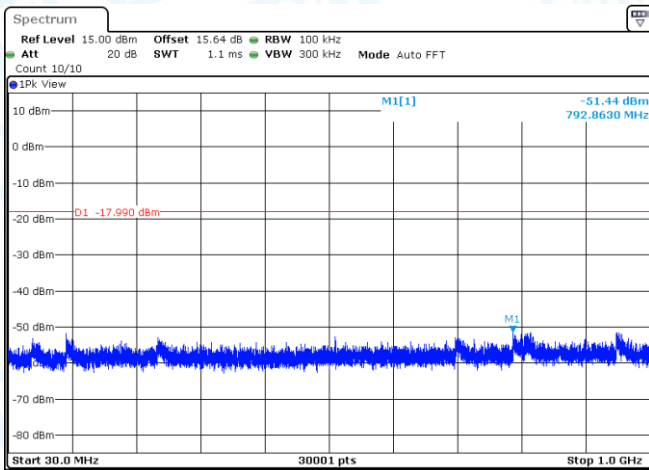


11G-Ant1-2462-30~1000-PASS

11G-Ant1-2462-1000~26500-PASS

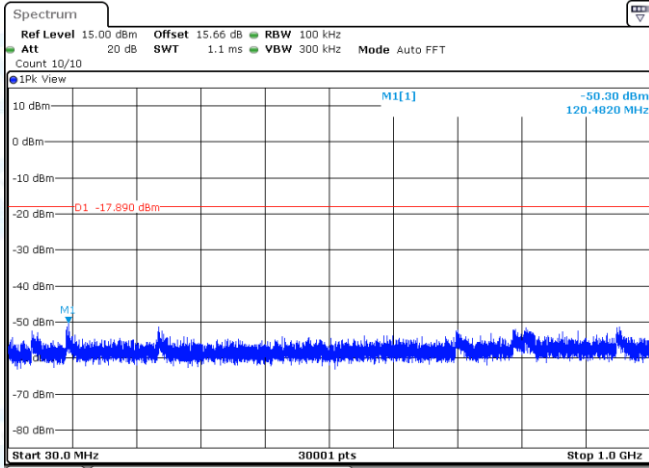


Date: 18.DEC.2024 08:47:27

11N20SISO-Ant1-2412-30~1000-PASS

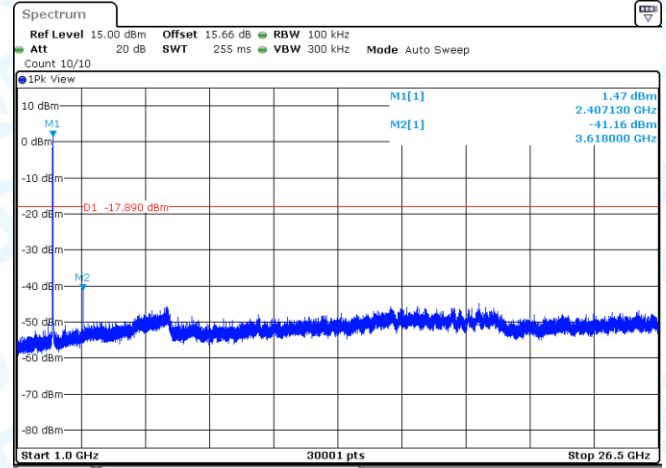


Date: 18.DEC.2024 08:47:57

11N20SISO-Ant1-2412-1000~26500-PASS

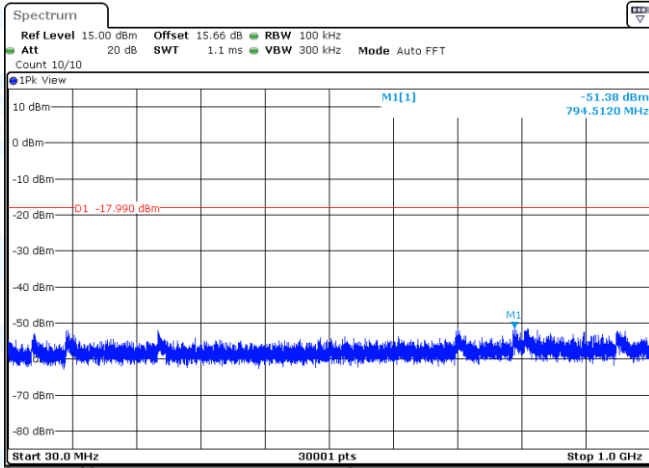


Date: 18.DEC.2024 08:49:21

11N20SISO-Ant1-2437-30~1000-PASS

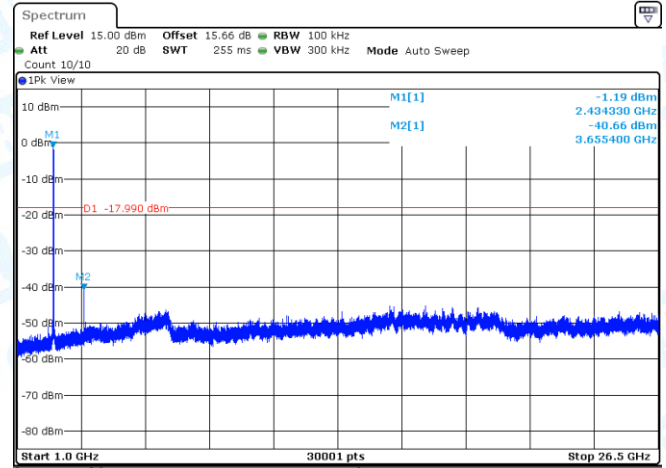


Date: 18.DEC.2024 08:49:51

11N20SISO-Ant1-2437-1000~26500-PASS

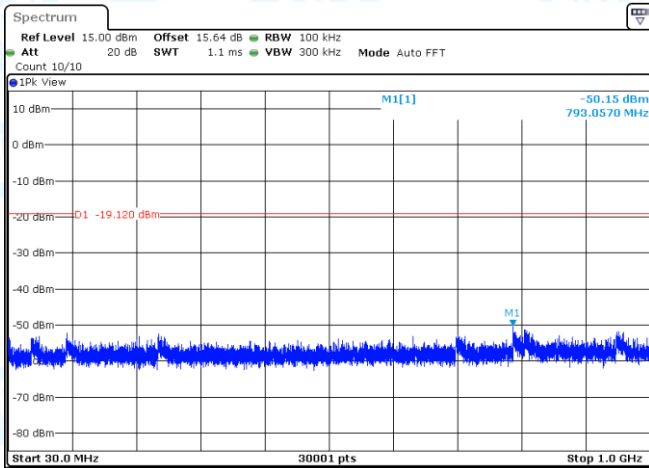



Date: 18.DEC.2024 08:53:20

11N20SISO-Ant1-2462-30~1000-PASS

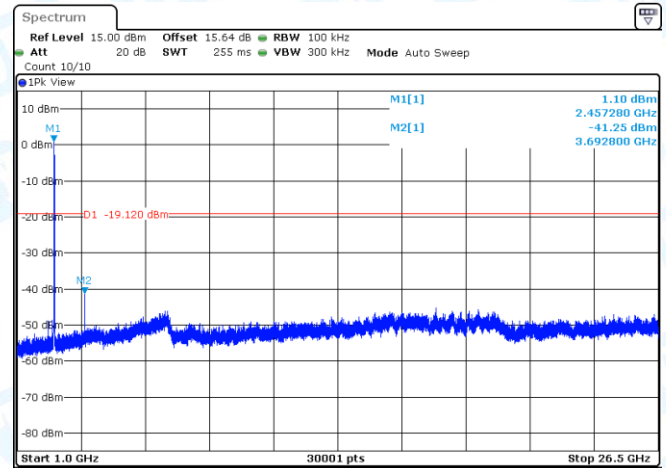



Date: 18.DEC.2024 08:53:49

11N20SISO-Ant1-2462-1000~26500-PASS

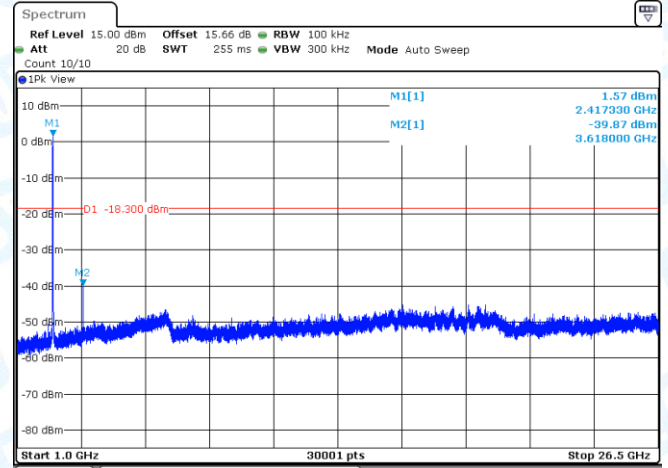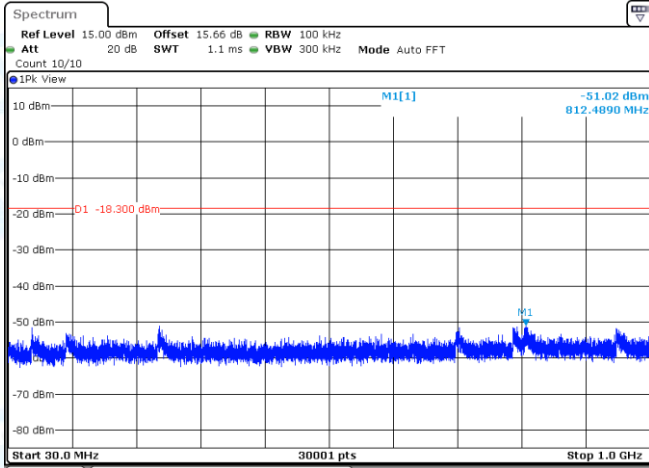



11AX20SISO-Ant1-2412-30~1000-PASS

11AX20SISO-Ant1-2412-1000~26500-PASS

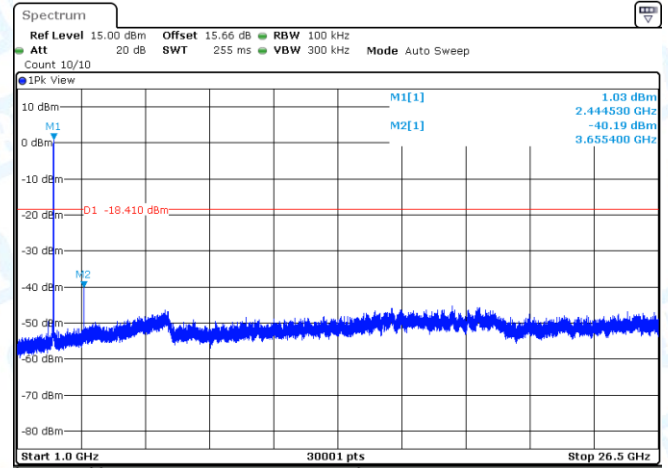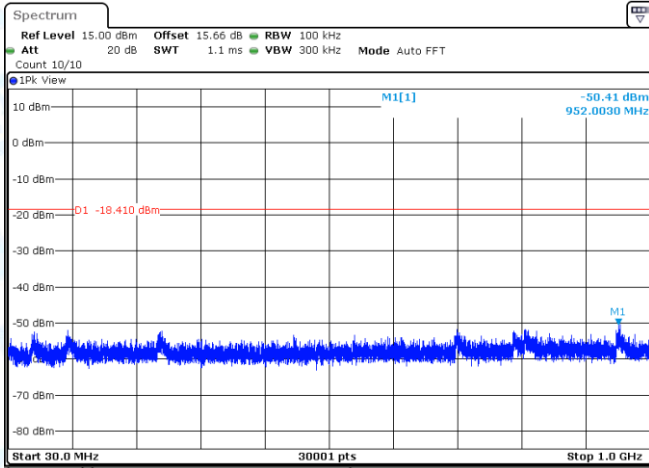

11AX20SISO-Ant1-2437-30~1000-PASS

11AX20SISO-Ant1-2437-1000~26500-PASS

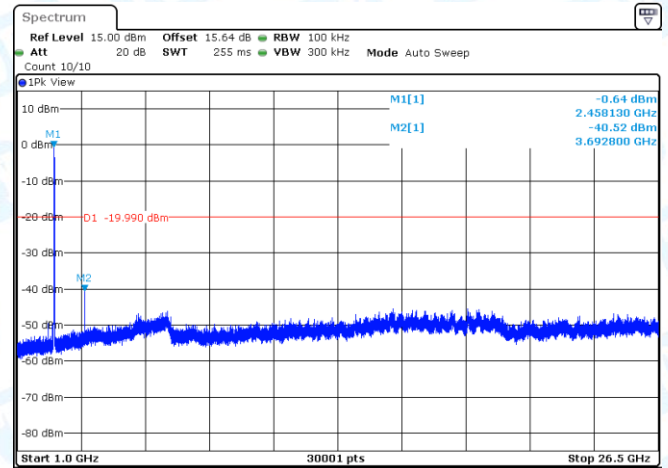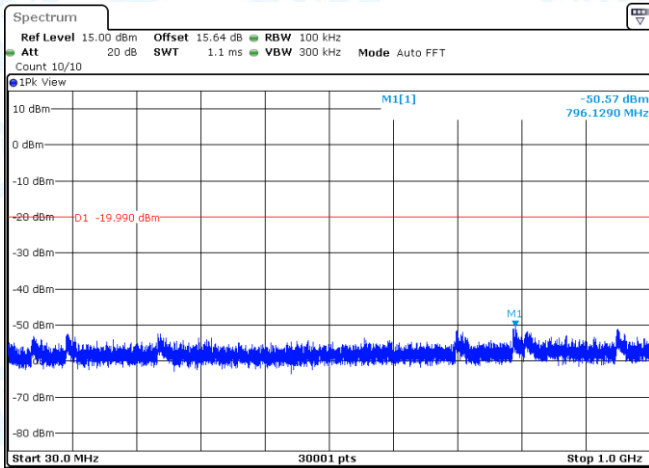

11AX20SISO-Ant1-2462-30~1000-PASS

11AX20SISO-Ant1-2462-1000~26500-PASS

7: Duty Cycle

7.1 Test Result



TestMode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	DC Factory	1/T [kHz]
11B	Ant1	2412	8.19	8.21	99.76	0.01	0.12
11B	Ant1	2437	8.19	8.21	99.76	0.01	0.12
11B	Ant1	2462	8.19	8.20	99.88	0.01	0.12
11G	Ant1	2412	1.35	1.37	98.54	0.06	0.74
11G	Ant1	2437	1.36	1.38	98.55	0.06	0.74
11G	Ant1	2462	1.35	1.37	98.54	0.06	0.74
11N20SISO	Ant1	2412	1.27	1.29	98.45	0.07	0.79
11N20SISO	Ant1	2437	1.27	1.29	98.45	0.07	0.79
11N20SISO	Ant1	2462	1.27	1.29	98.45	0.07	0.79
11AX20SISO	Ant1	2412	0.98	1.00	98.00	0.09	1.02
11AX20SISO	Ant1	2437	0.98	1.00	98.00	0.09	1.02
11AX20SISO	Ant1	2462	0.98	1.00	98.00	0.09	1.02

Note: 1, Duty Cycle= Transmission Duration/ Transmission Period



2, DC Factory=10*Log₁₀(1/Duty Cycle)

3, 1/T=1/ Transmission Duration



7.2 Test Graphs

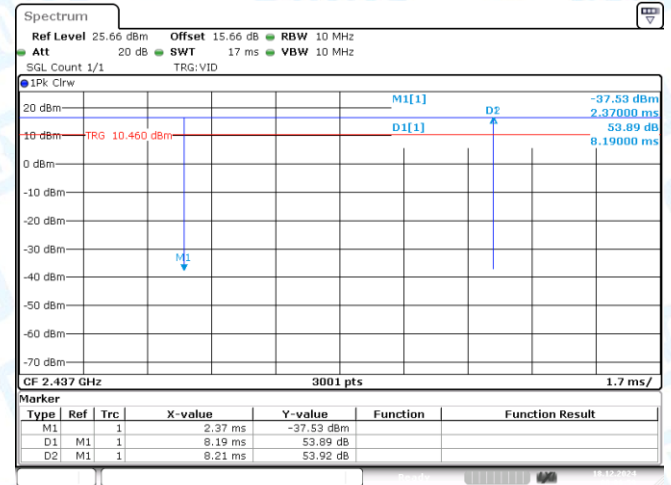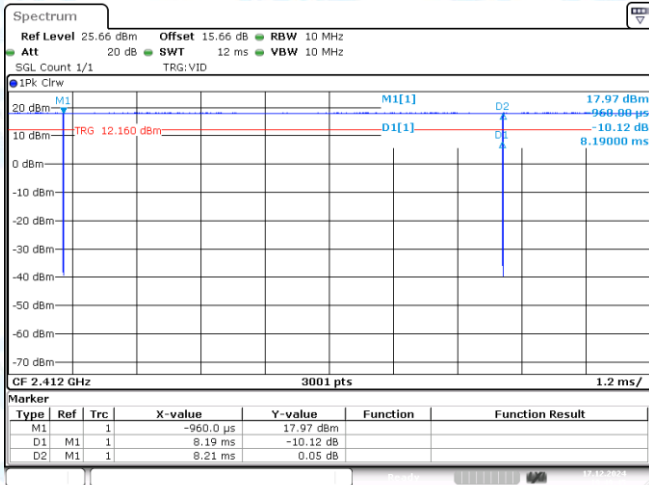

NTNV-11B-Ant1-2412

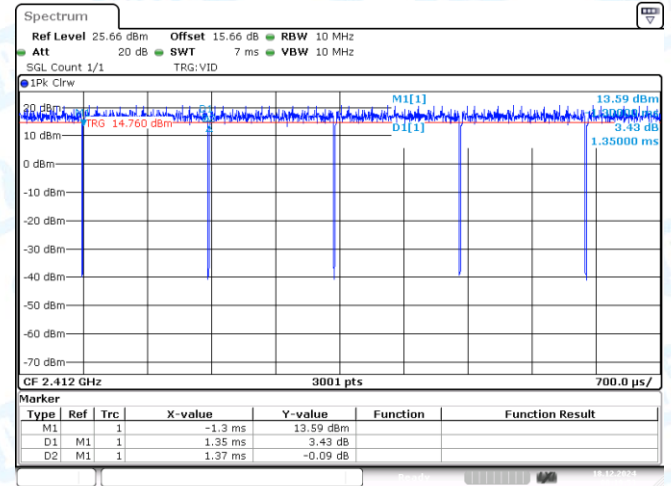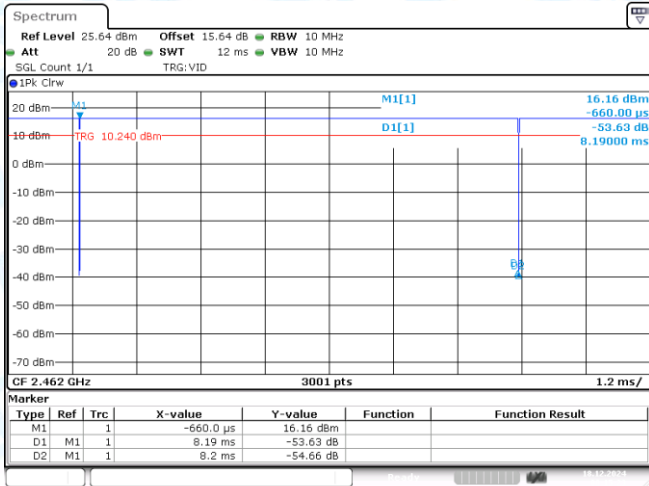


NTNV-11B-Ant1-2462

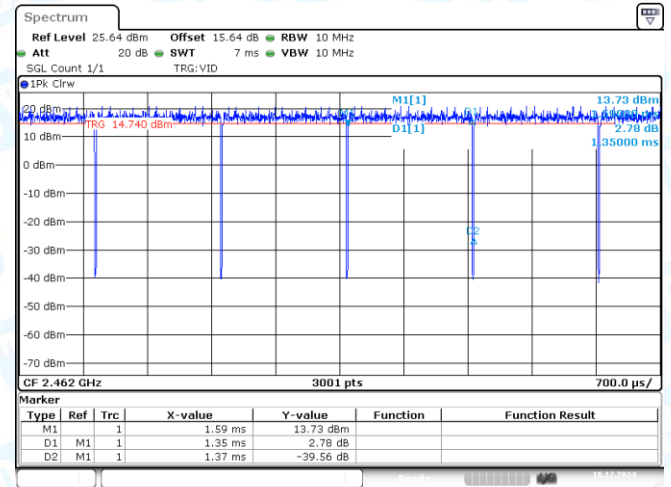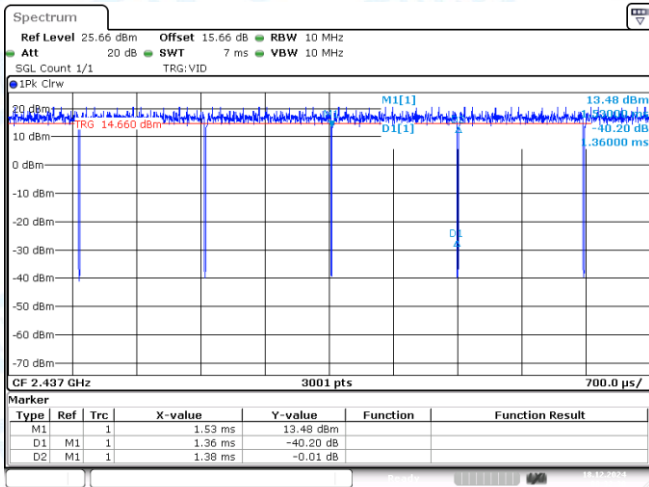


NTNV-11G-Ant1-2437

NTNV-11G-Ant1-2462

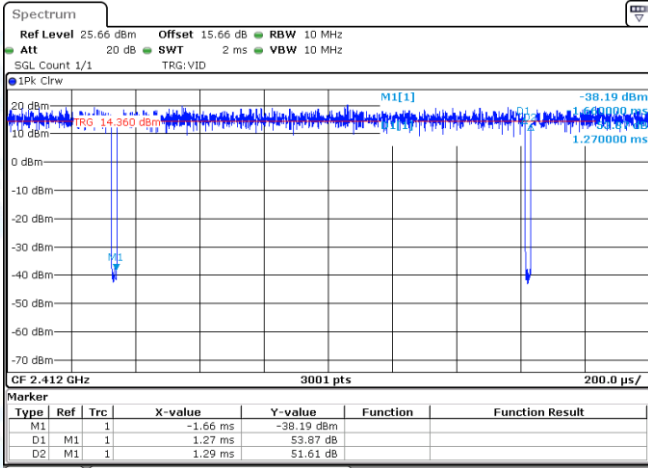


Date: 18.DEC.2024 08:40:18

NTNV-11N20SISO-Ant1-2412

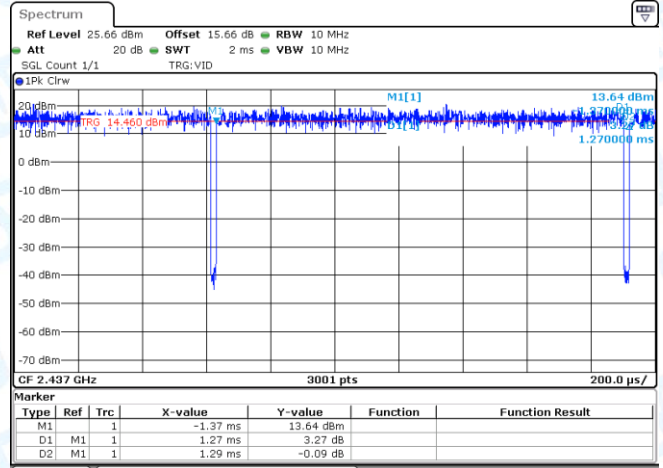


Date: 18.DEC.2024 08:48:18

NTNV-11N20SISO-Ant1-2437

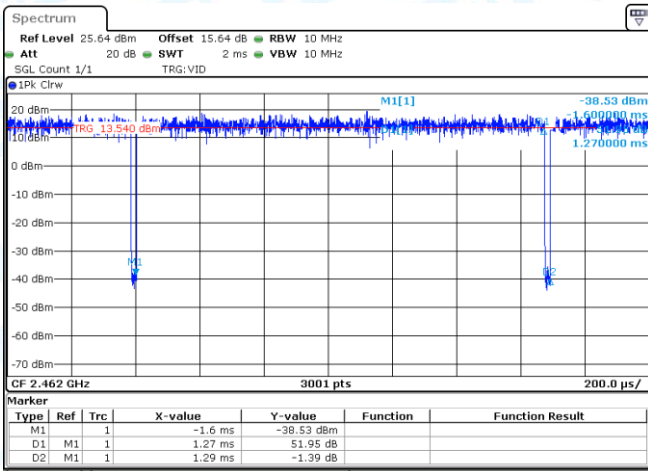


Date: 18.DEC.2024 08:50:38

NTNV-11N20SISO-Ant1-2462

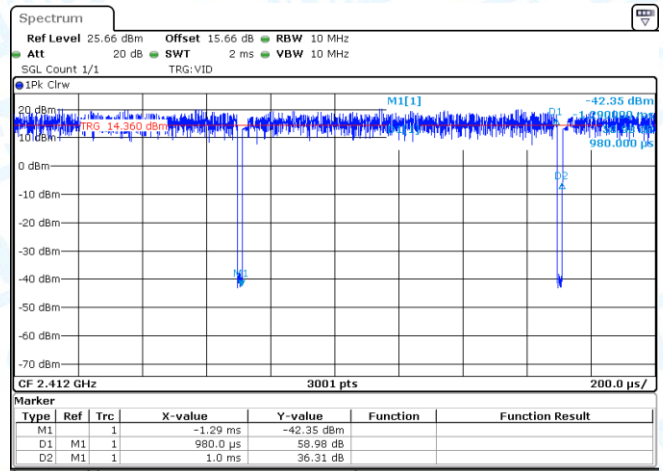


Date: 18.DEC.2024 09:03:48

NTNV-11AX20SISO-Ant1-2412

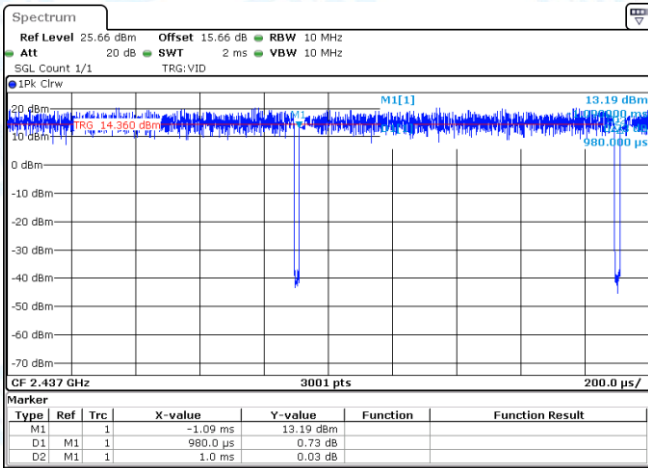

Date: 18.DEC.2024 09:07:07

NTNV-11AX20SISO-Ant1-2437

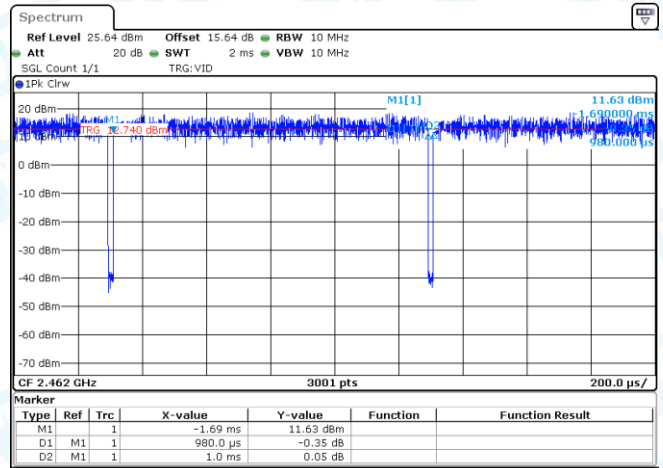

Date: 18.DEC.2024 09:09:19

NTNV-11AX20SISO-Ant1-2462

8: Emissions in Restricted Bands

8.1 Test Result



TestMode	Ant.	ChName	Freq. [MHz]	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11B	Ant1	Low	2412	Peak	2390.000	-31.92	≤-21.20	63.28	≤74	PASS
11B	Ant1	Low	2412	Peak	2310.000	-41.22	≤-21.20	53.98	≤74	PASS
11B	Ant1	Low	2412	Peak	2387.609	-30.59	≤-21.20	64.61	≤74	PASS
11B	Ant1	Low	2412	AV	2390.000	-42.25	≤-41.20	52.95	≤54	PASS
11B	Ant1	Low	2412	AV	2310.000	-50.32	≤-41.20	44.88	≤54	PASS
11B	Ant1	Low	2412	AV	2388.551	-41.63	≤-41.20	53.57	≤54	PASS
11B	Ant1	High	2462	Peak	2483.500	-33.67	≤-21.20	61.53	≤74	PASS
11B	Ant1	High	2462	Peak	2500.000	-37.38	≤-21.20	57.82	≤74	PASS
11B	Ant1	High	2462	Peak	2485.275	-33.38	≤-21.20	61.82	≤74	PASS
11B	Ant1	High	2462	AV	2483.500	-42.11	≤-41.20	53.09	≤54	PASS
11B	Ant1	High	2462	AV	2500.000	-46.18	≤-41.20	49.02	≤54	PASS
11B	Ant1	High	2462	AV	2483.522	-42.11	≤-41.20	53.09	≤54	PASS
11G	Ant1	Low	2412	Peak	2390.000	-32.71	≤-21.20	62.49	≤74	PASS
11G	Ant1	Low	2412	Peak	2310.000	-41.74	≤-21.20	53.46	≤74	PASS
11G	Ant1	Low	2412	Peak	2389.681	-32.44	≤-21.20	62.76	≤74	PASS
11G	Ant1	Low	2412	AV	2390.000	-43.43	≤-41.20	51.77	≤54	PASS
11G	Ant1	Low	2412	AV	2310.000	-51.99	≤-41.20	43.21	≤54	PASS
11G	Ant1	Low	2412	AV	2389.870	-43.64	≤-41.20	51.56	≤54	PASS
11G	Ant1	High	2462	Peak	2483.500	-29.48	≤-21.20	65.72	≤74	PASS
11G	Ant1	High	2462	Peak	2500.000	-40.5	≤-21.20	54.70	≤74	PASS
11G	Ant1	High	2462	Peak	2483.522	-29.48	≤-21.20	65.72	≤74	PASS
11G	Ant1	High	2462	AV	2483.500	-42.04	≤-41.20	53.16	≤54	PASS
11G	Ant1	High	2462	AV	2500.000	-50.73	≤-41.20	44.47	≤54	PASS
11G	Ant1	High	2462	AV	2483.522	-42.04	≤-41.20	53.16	≤54	PASS
11N20SISO	Ant1	Low	2412	Peak	2390.000	-28.55	≤-21.20	66.65	≤74	PASS
11N20SISO	Ant1	Low	2412	Peak	2310.000	-43.68	≤-21.20	51.52	≤74	PASS
11N20SISO	Ant1	Low	2412	Peak	2389.870	-28.71	≤-21.20	66.49	≤74	PASS
11N20SISO	Ant1	Low	2412	AV	2390.000	-42.64	≤-41.20	52.56	≤54	PASS
11N20SISO	Ant1	Low	2412	AV	2310.000	-52.09	≤-41.20	43.11	≤54	PASS
11N20SISO	Ant1	Low	2412	AV	2389.870	-42.87	≤-41.20	52.33	≤54	PASS
11N20SISO	Ant1	High	2462	Peak	2483.500	-26.8	≤-21.20	68.40	≤74	PASS
11N20SISO	Ant1	High	2462	Peak	2500.000	-41.78	≤-21.20	53.42	≤74	PASS
11N20SISO	Ant1	High	2462	Peak	2484.159	-25.99	≤-21.20	69.21	≤74	PASS
11N20SISO	Ant1	High	2462	AV	2483.500	-41.45	≤-41.20	53.75	≤54	PASS
11N20SISO	Ant1	High	2462	AV	2500.000	-51.01	≤-41.20	44.19	≤54	PASS
11N20SISO	Ant1	High	2462	AV	2483.522	-41.45	≤-41.20	53.75	≤54	PASS
11AX20SISO	Ant1	Low	2412	Peak	2390.000	-29.16	≤-21.20	66.04	≤74	PASS
11AX20SISO	Ant1	Low	2412	Peak	2310.000	-42.86	≤-21.20	52.34	≤74	PASS
11AX20SISO	Ant1	Low	2412	Peak	2389.116	-28.37	≤-21.20	66.83	≤74	PASS
11AX20SISO	Ant1	Low	2412	AV	2390.000	-42.16	≤-41.20	53.04	≤54	PASS

11AX20SISO	Ant1	Low	2412	AV	2310.000	-51.91	≤-41.20	43.29	≤54	PASS
11AX20SISO	Ant1	Low	2412	AV	2388.928	-41.7	≤-41.20	53.50	≤54	PASS
11AX20SISO	Ant1	High	2462	Peak	2483.500	-26.61	≤-21.20	68.59	≤74	PASS
11AX20SISO	Ant1	High	2462	Peak	2500.000	-42.65	≤-21.20	52.55	≤74	PASS
11AX20SISO	Ant1	High	2462	Peak	2484.957	-23.17	≤-21.20	72.03	≤74	PASS
11AX20SISO	Ant1	High	2462	AV	2483.500	-42.64	≤-41.20	52.56	≤54	PASS
11AX20SISO	Ant1	High	2462	AV	2500.000	-51.46	≤-41.20	43.74	≤54	PASS
11AX20SISO	Ant1	High	2462	AV	2483.522	-42.64	≤-41.20	52.56	≤54	PASS



Note:

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a), The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.



8.2 Test Graphs

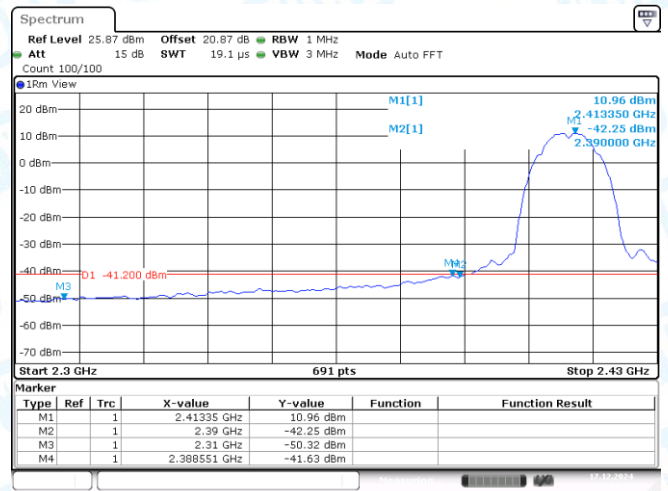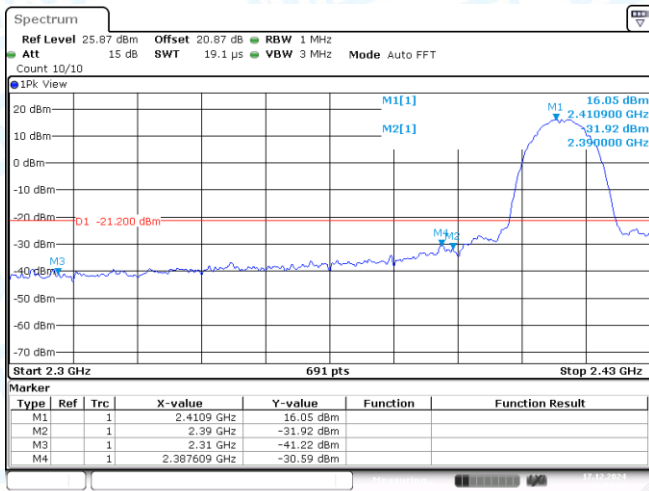

11B-Ant1-2412-PASS

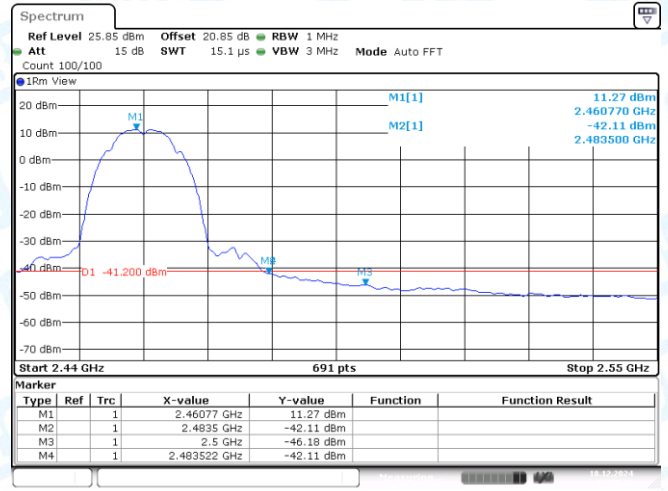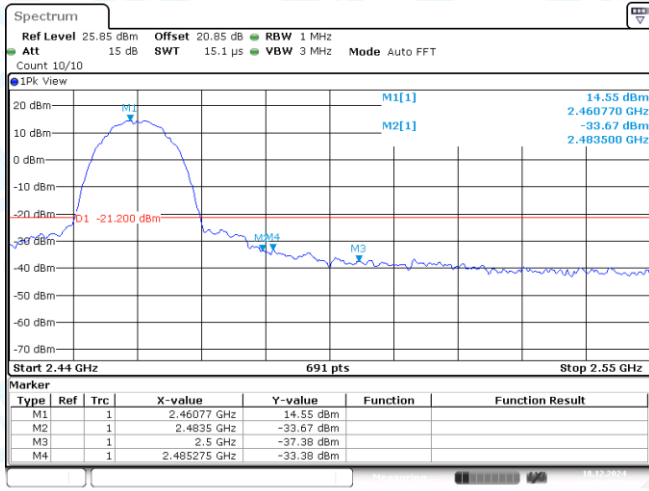


11B-Ant1-2462-PASS

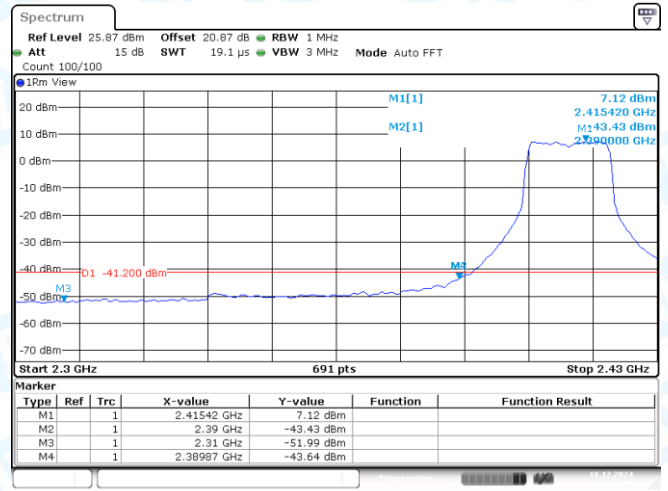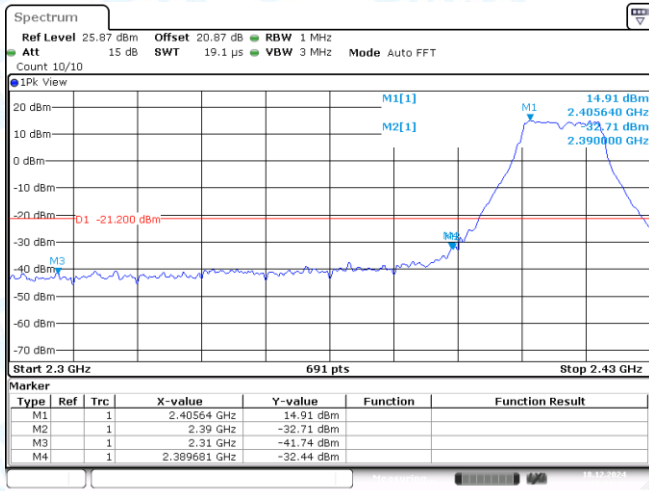


11G-Ant1-2412-PASS

11G-Ant1-2412-PASS

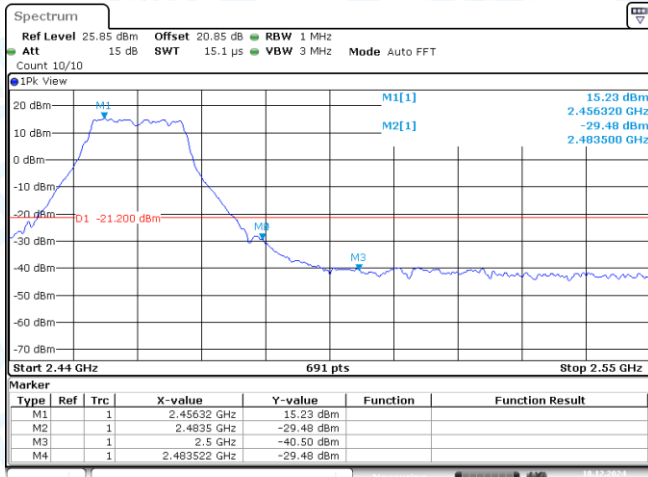


Date: 18.DEC.2024 08:36:57

11G-Ant1-2462-PASS

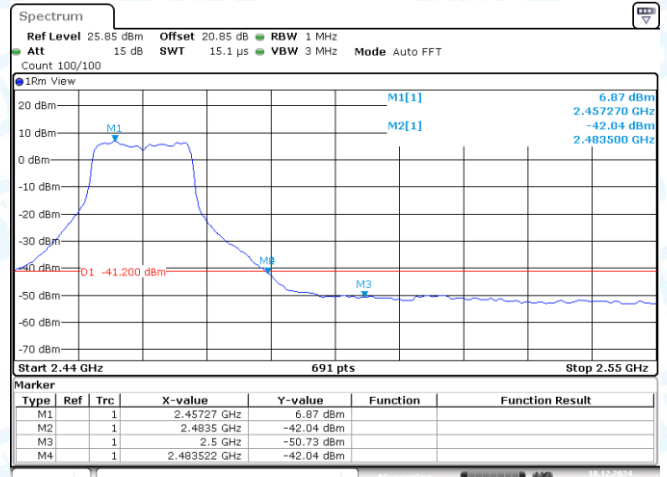


Date: 18.DEC.2024 08:38:47

11G-Ant1-2462-PASS

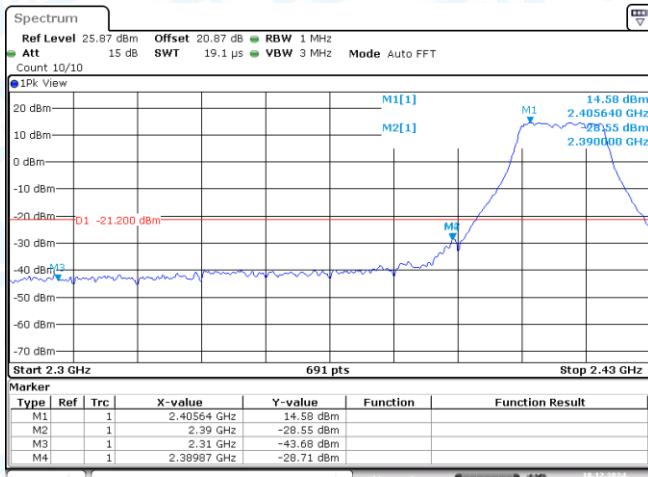


Date: 18.DEC.2024 08:46:55

11N20SISO-Ant1-2412-PASS

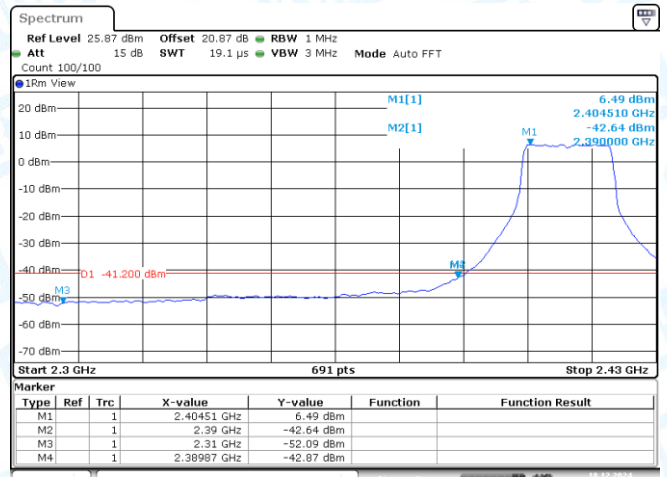


Date: 18.DEC.2024 08:47:12

11N20SISO-Ant1-2412-PASS

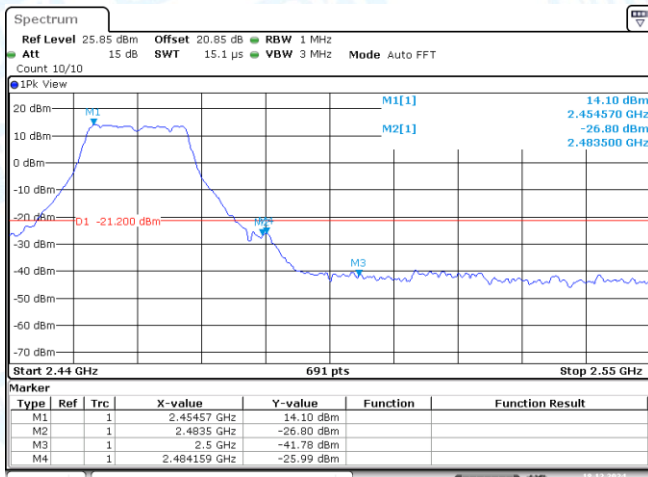



Date: 18.DEC.2024 08:52:48

11N20SISO-Ant1-2462-PASS

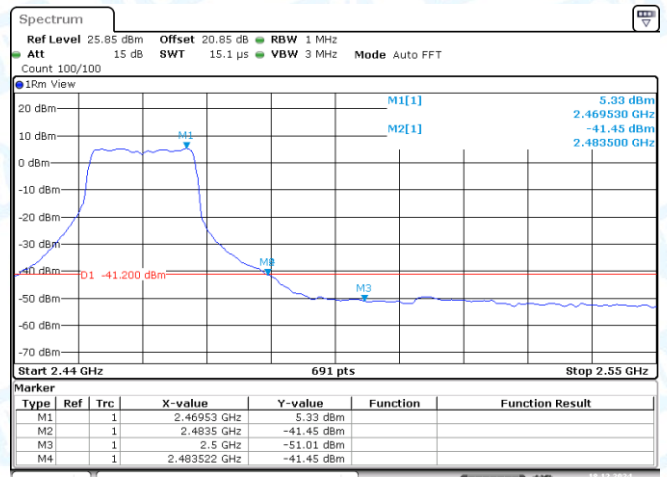



Date: 18.DEC.2024 09:00:53

11N20SISO-Ant1-2462-PASS

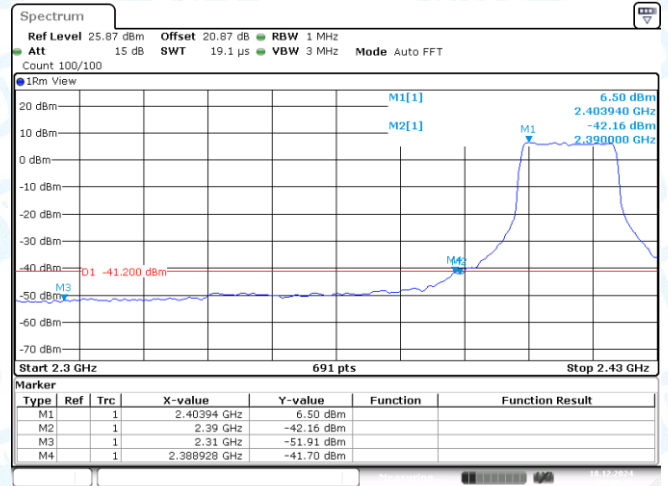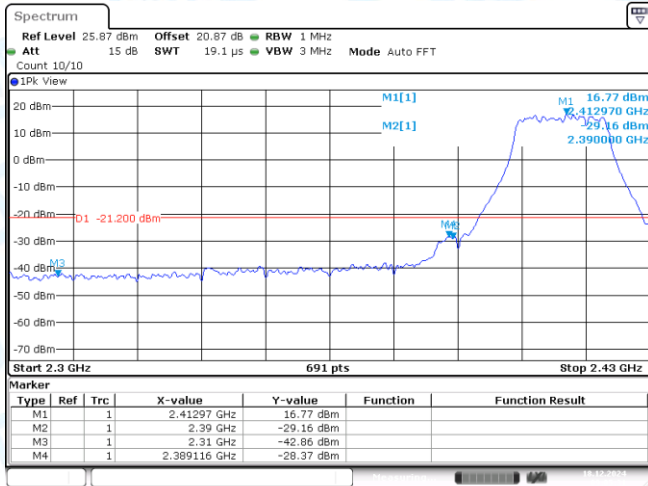

11AX20SISO-Ant1-2412-PASS

11AX20SISO-Ant1-2412-PASS

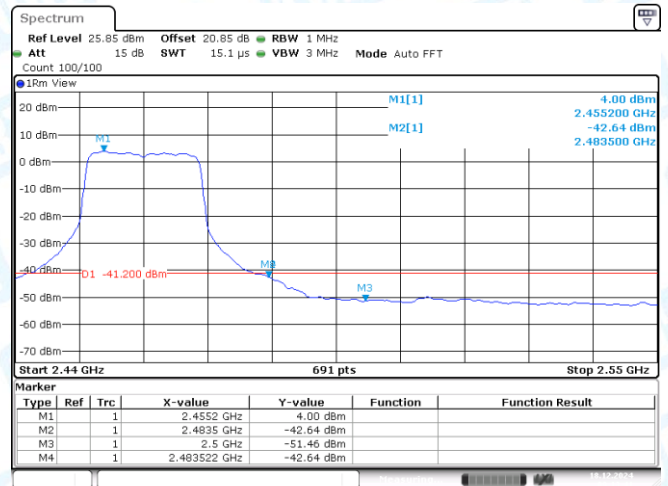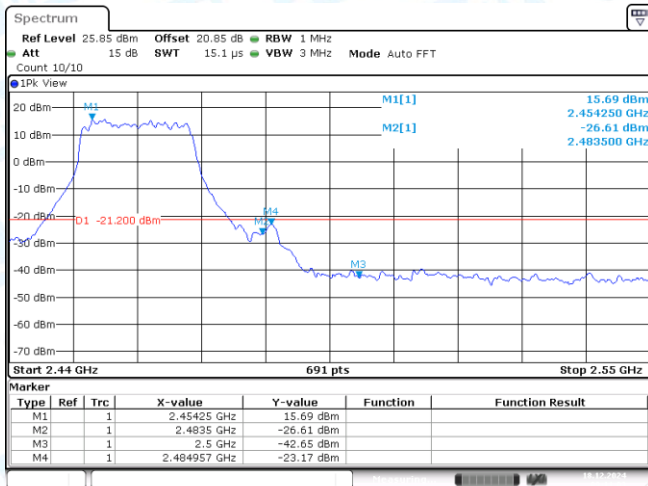

11AX20SISO-Ant1-2462-PASS

11AX20SISO-Ant1-2462-PASS

-----END OF THE REPORT-----