


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	28.87	PASS
EGPRS1900 1 Slot	661	1880	28.58	PASS
EGPRS1900 1 Slot	810	1909.8	28.62	PASS
EGPRS1900 2 Slot	512	1850.2	28.80	PASS
EGPRS1900 2 Slot	661	1880	28.36	PASS
EGPRS1900 2 Slot	810	1909.8	28.03	PASS
EGPRS1900 3 Slot	512	1850.2	25.05	PASS
EGPRS1900 3 Slot	661	1880	24.34	PASS
EGPRS1900 3 Slot	810	1909.8	24.08	PASS
EGPRS1900 4 Slot	512	1850.2	23.01	PASS
EGPRS1900 4 Slot	661	1880	22.75	PASS
EGPRS1900 4 Slot	810	1909.8	22.36	PASS
EGPRS850 1 Slot	128	824.2	26.30	PASS
EGPRS850 1 Slot	189	836.4	26.35	PASS
EGPRS850 1 Slot	251	848.8	26.29	PASS
EGPRS850 2 Slot	128	824.2	25.18	PASS
EGPRS850 2 Slot	189	836.4	25.61	PASS
EGPRS850 2 Slot	251	848.8	25.12	PASS
EGPRS850 3 Slot	128	824.2	22.80	PASS
EGPRS850 3 Slot	189	836.4	23.42	PASS
EGPRS850 3 Slot	251	848.8	23.01	PASS
EGPRS850 4 Slot	128	824.2	20.32	PASS
EGPRS850 4 Slot	189	836.4	20.56	PASS
EGPRS850 4 Slot	251	848.8	20.49	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	5.181023891	13.00	PASS
EGPRS1900	661	1880	5.439103774	13.00	PASS
EGPRS1900	810	1909.8	6.226504673	13.00	PASS
EGPRS850	128	824.2	10.17924947	13.00	PASS
EGPRS850	189	836.4	9.558897516	13.00	PASS
EGPRS850	251	848.8	9.613612836	13.00	PASS


EGPRS1900 Channel=512

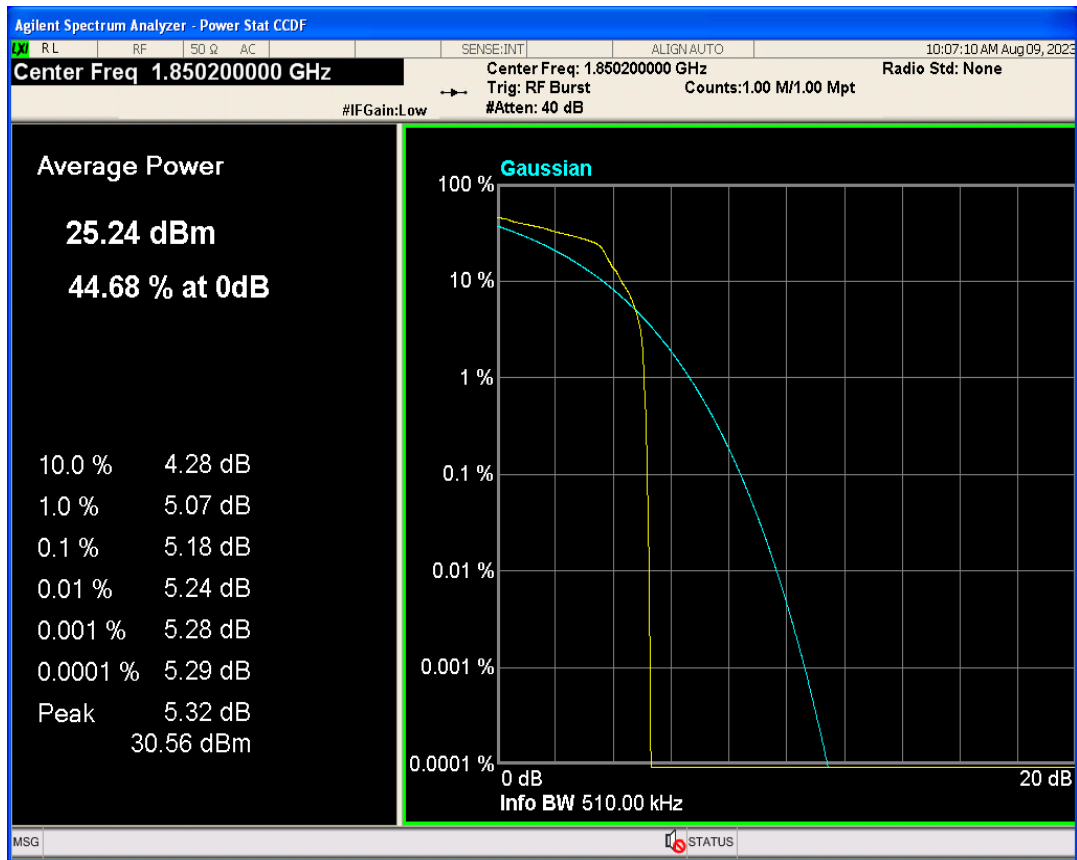


EGPRS1900 Channel=661

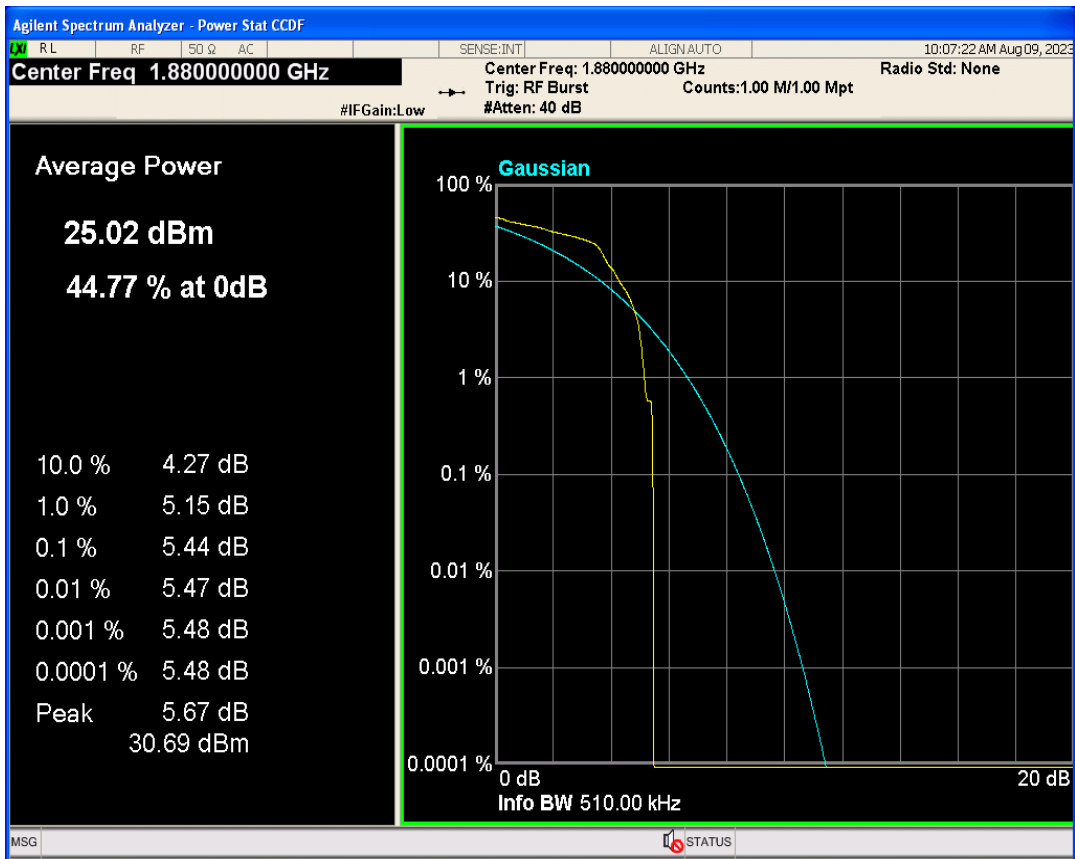


EGPRS1900 Channel=810

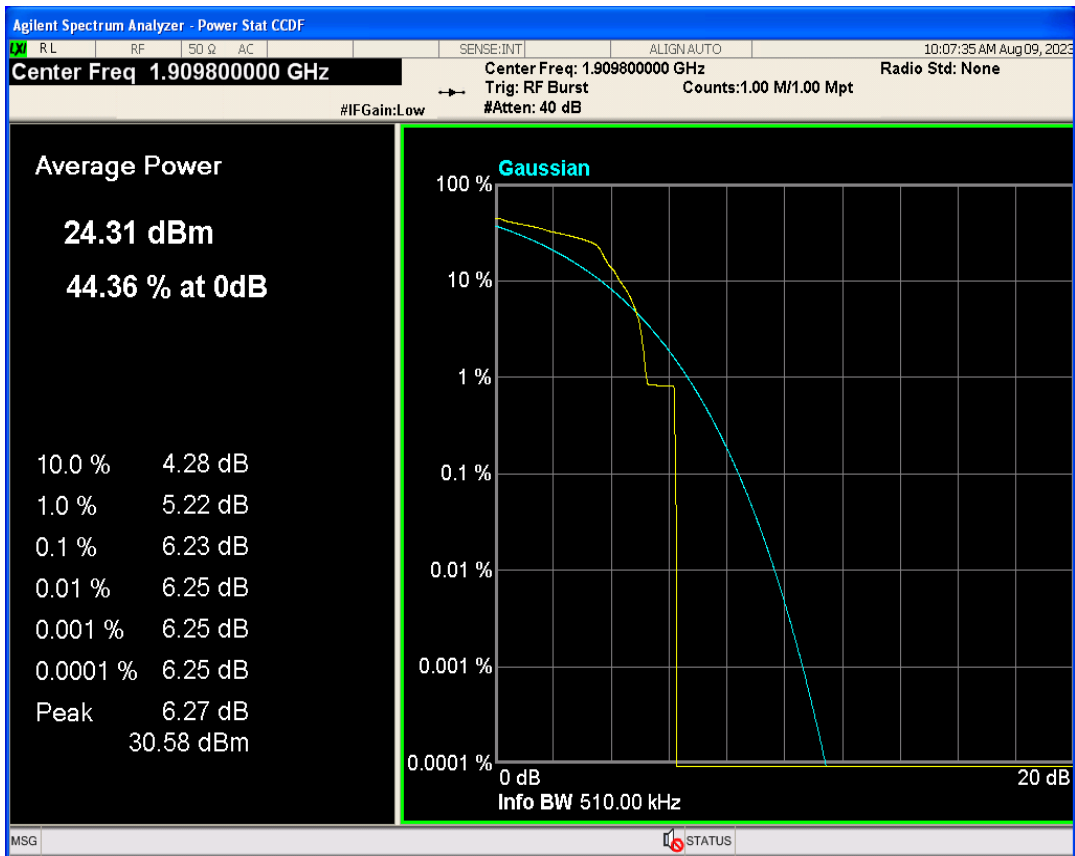


EGPRS850 Channel=189

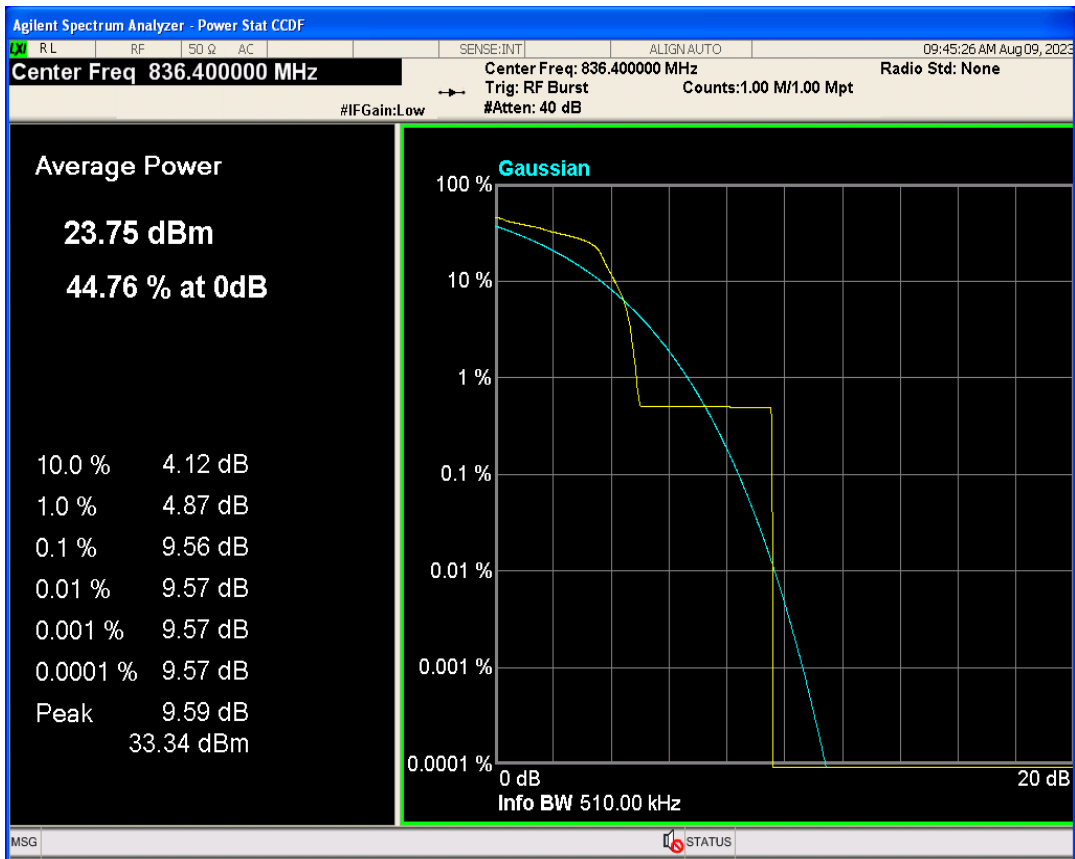

EGPRS850 Channel=128

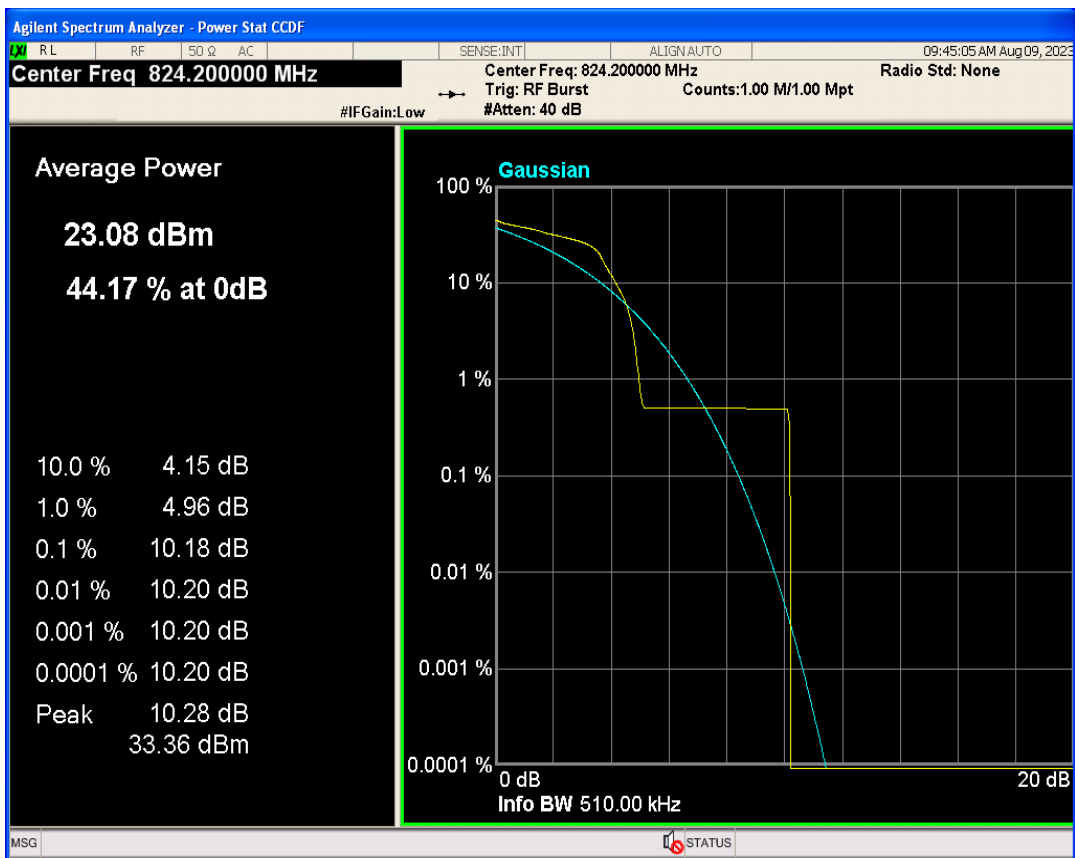


EGPRS850 Channel=251

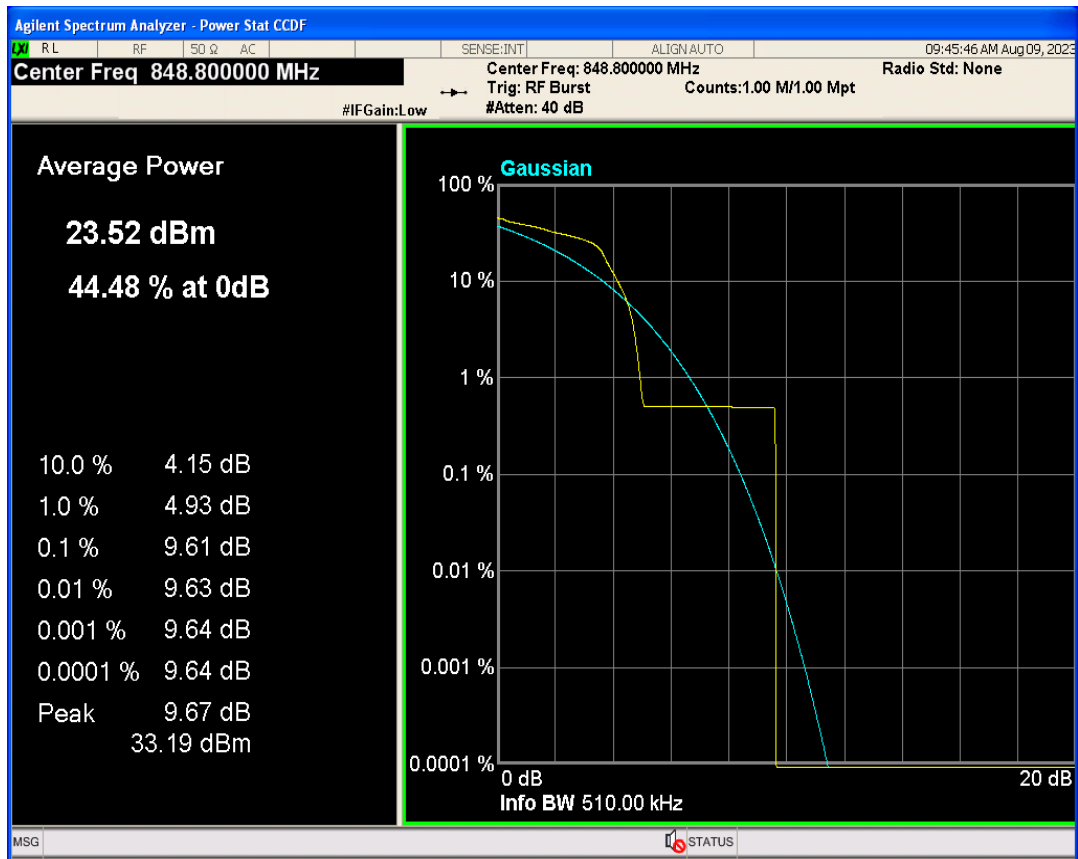


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	249.957	312.560	PASS
EGPRS1900	661	1880	256.057	318.090	PASS
EGPRS1900	810	1909.8	256.551	315.064	PASS
EGPRS850	128	824.2	239.633	291.525	PASS
EGPRS850	189	836.4	245.426	312.773	PASS
EGPRS850	251	848.8	249.783	307.314	PASS


EGPRS1900 Channel=512

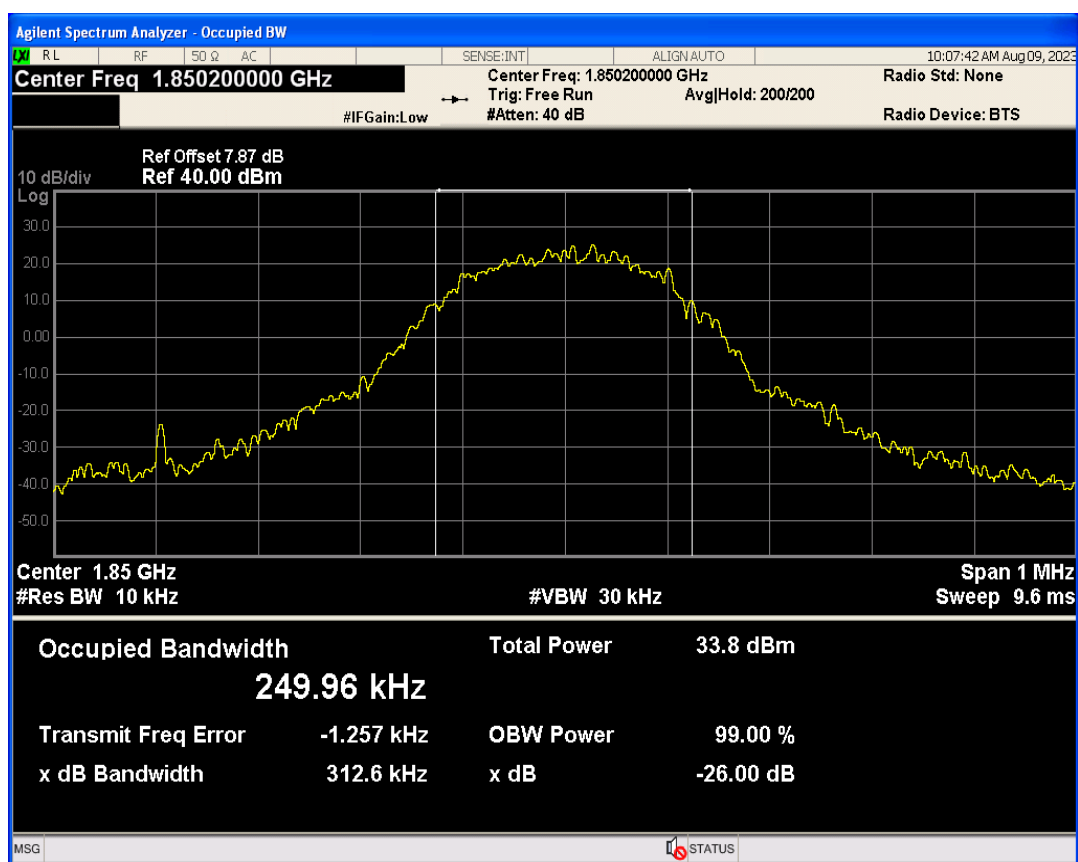


EGPRS1900 Channel=661

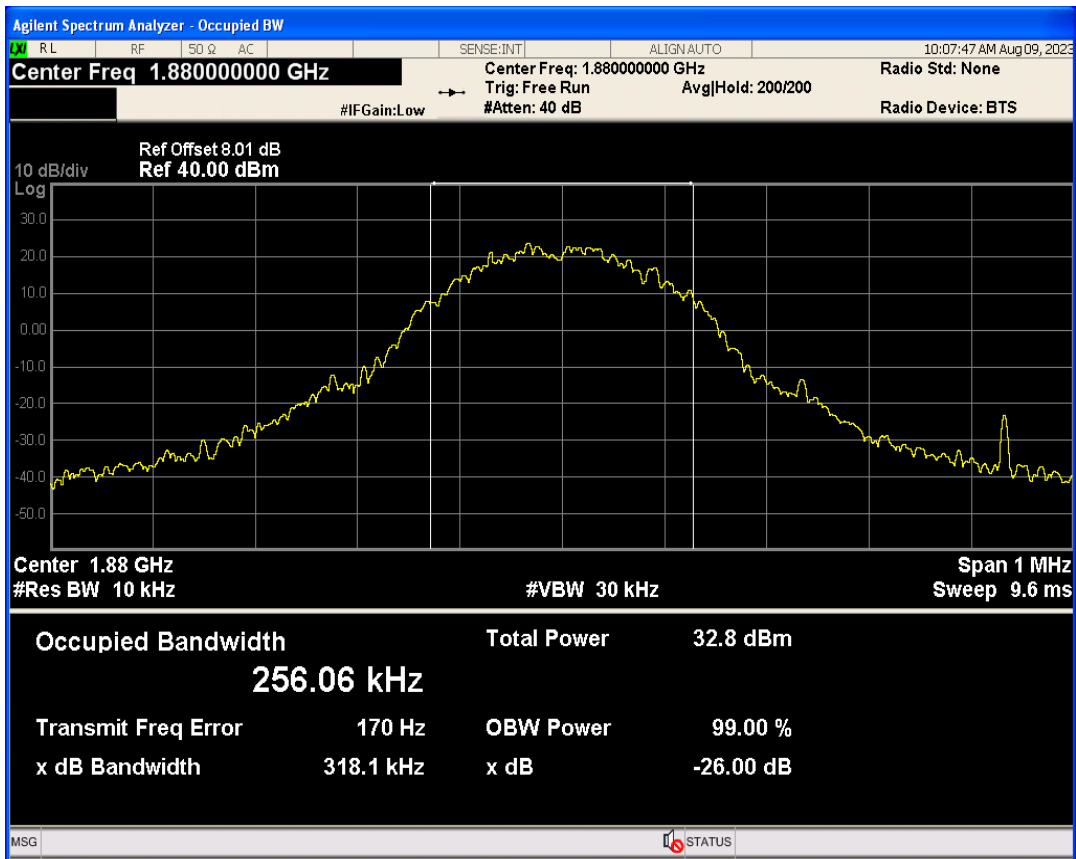


EGPRS1900 Channel=810

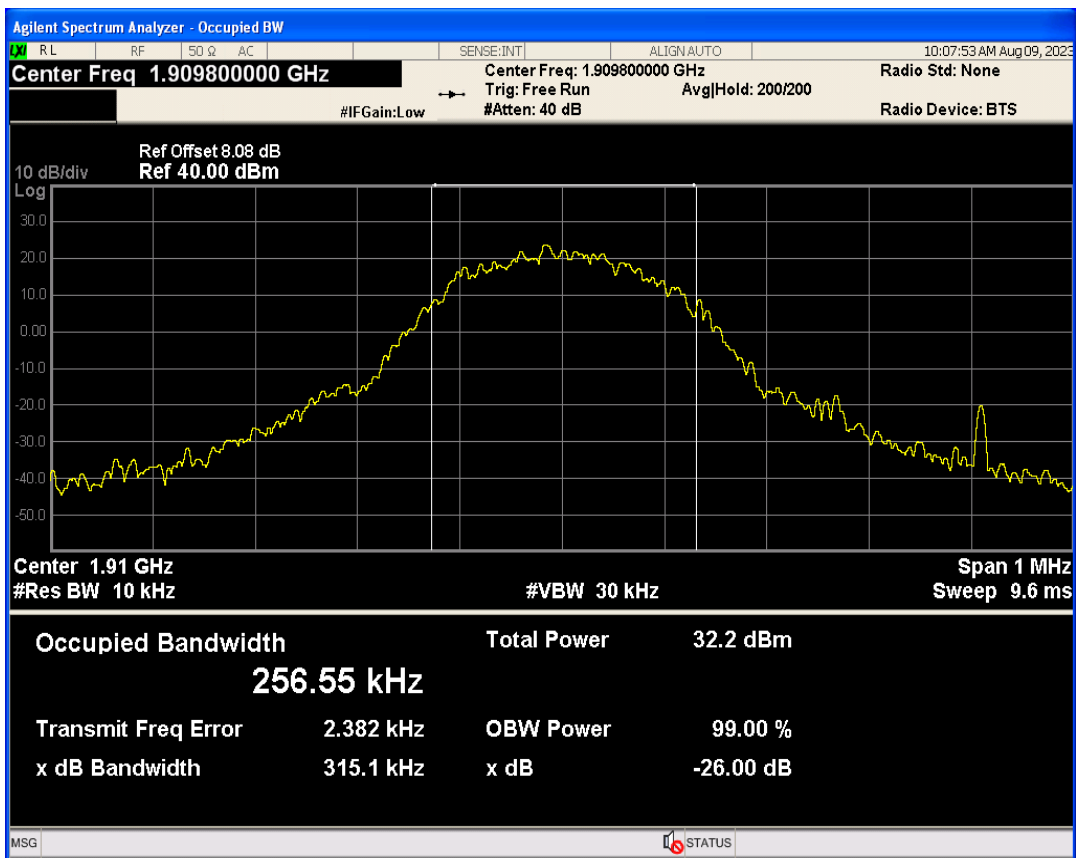


EGPRS850 Channel=128

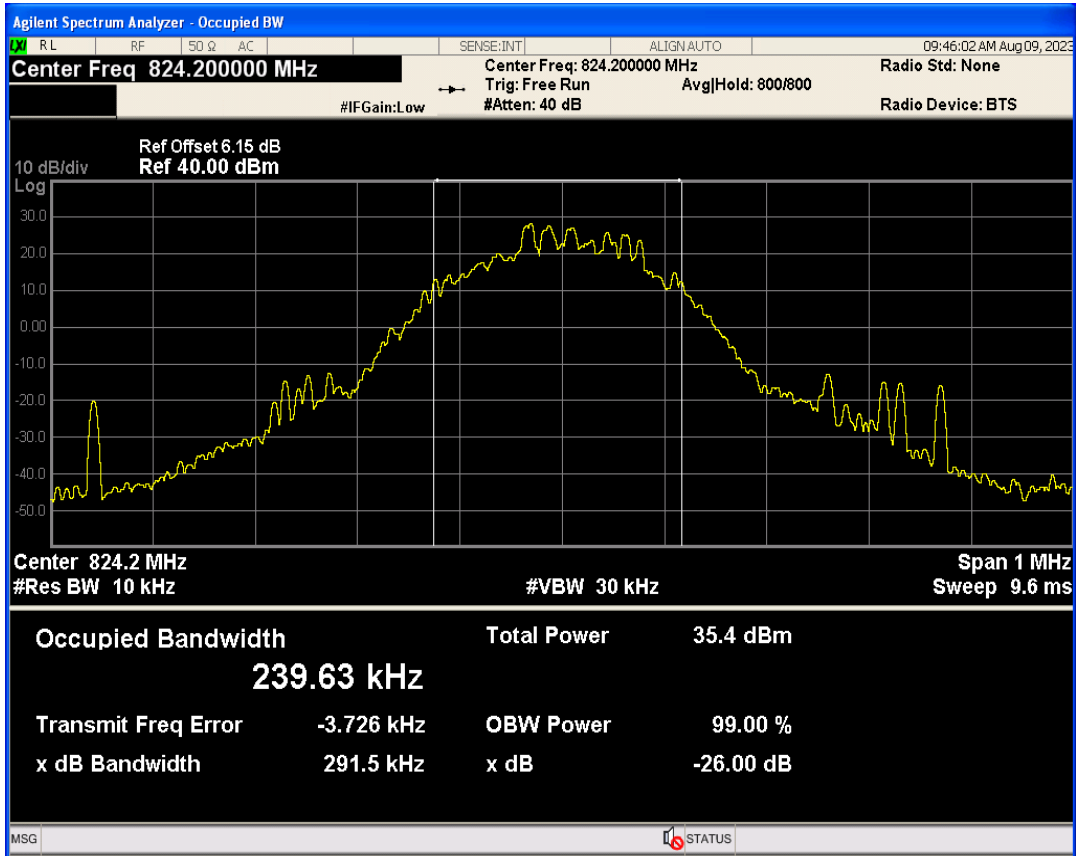

EGPRS850 Channel=251

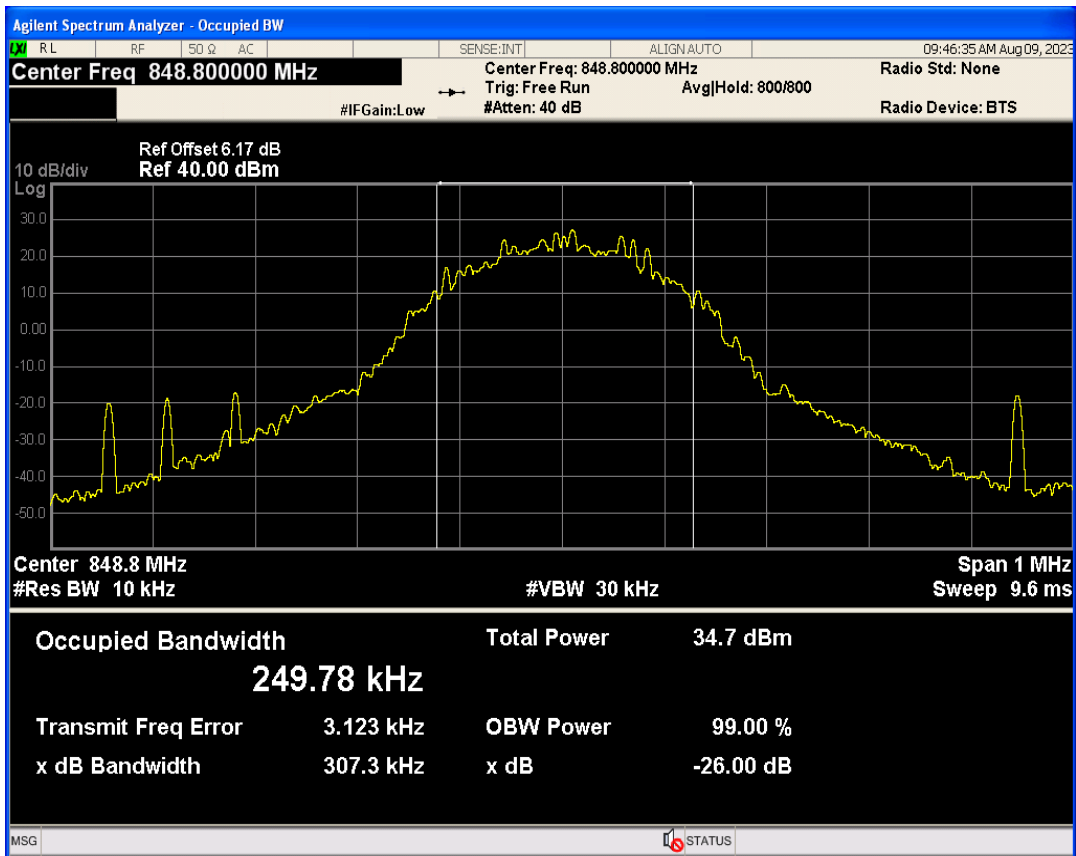


EGPRS850 Channel=189

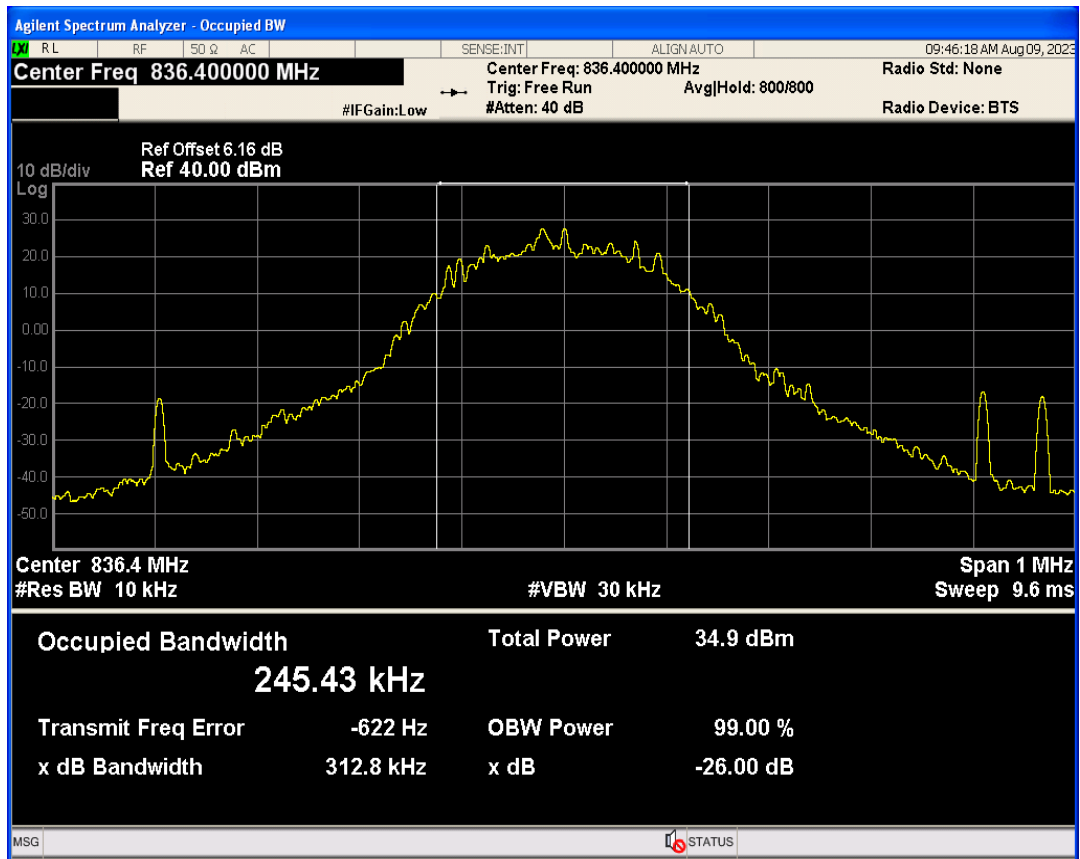


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.99	-32.67	-13	PASS
EGPRS1900	810	1909.8	1910.01	-35.70	-13	PASS
EGPRS850	128	824.2	823.99	-37.03	-13	PASS
EGPRS850	251	848.8	849.01	-36.90	-13	PASS


EGPRS1900 Channel=512

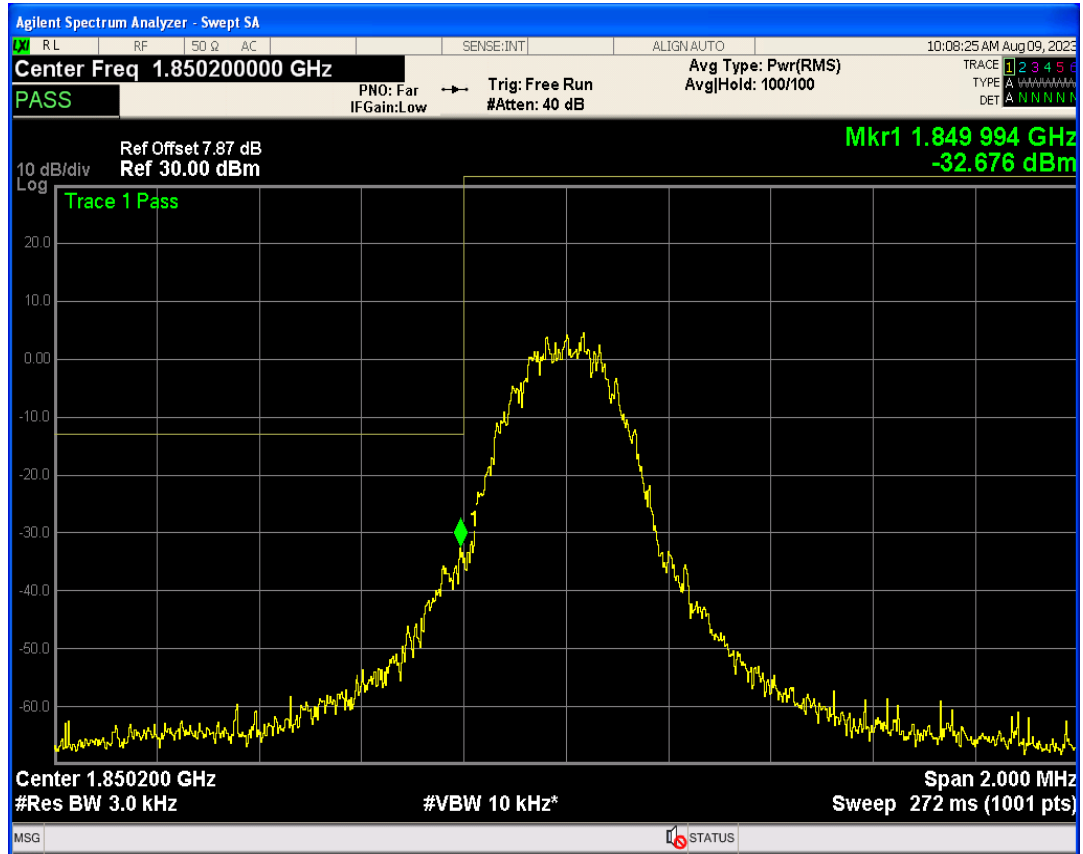


EGPRS1900 Channel=810

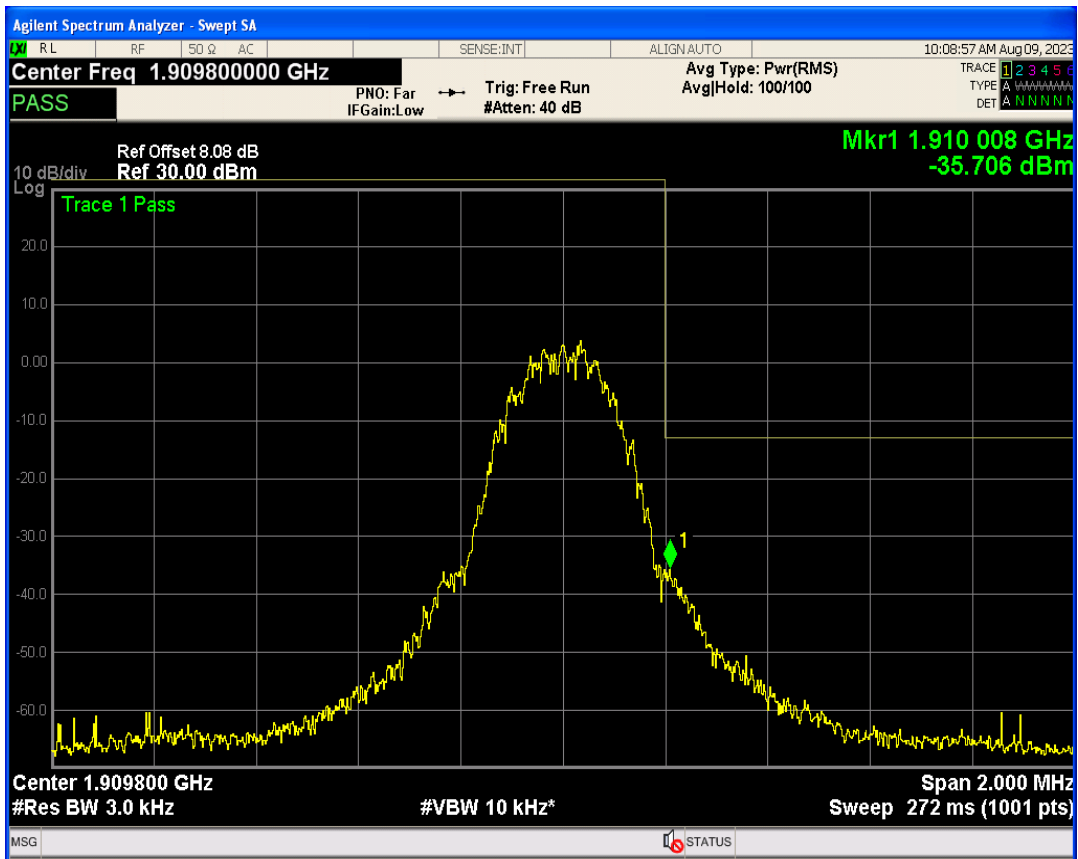

EGPRS850 Channel=128

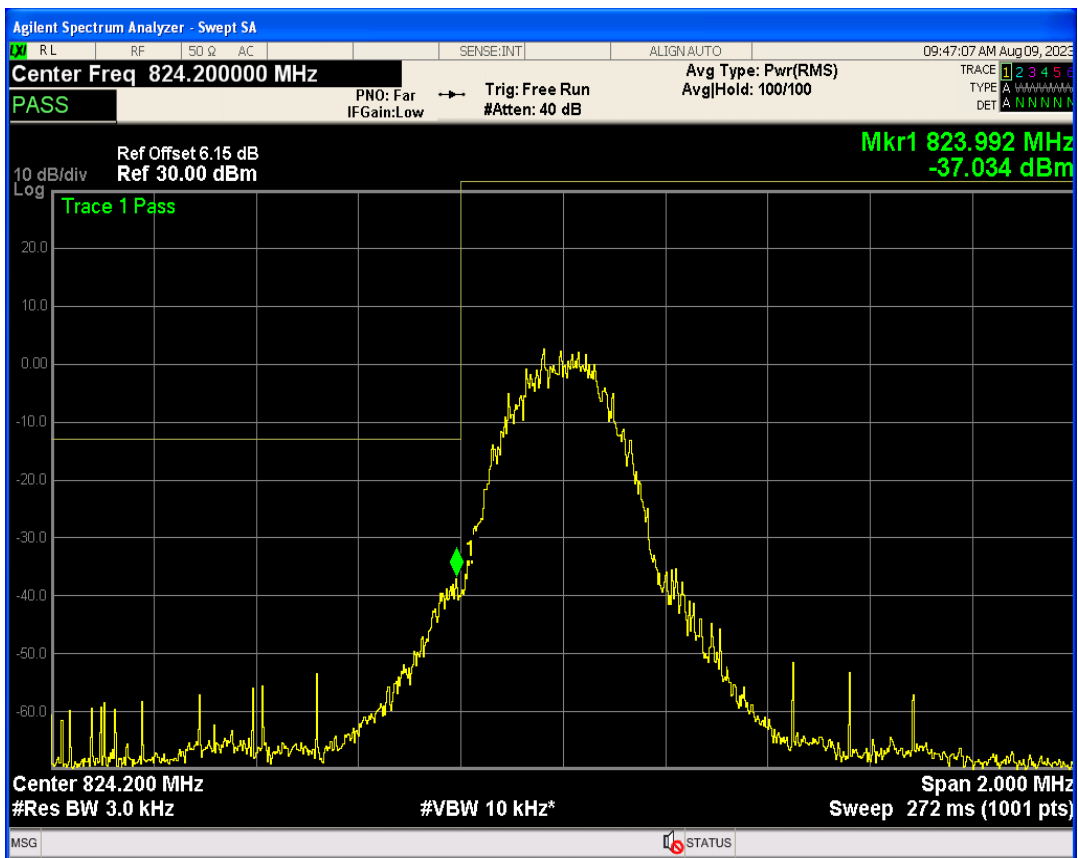


EGPRS850 Channel=251

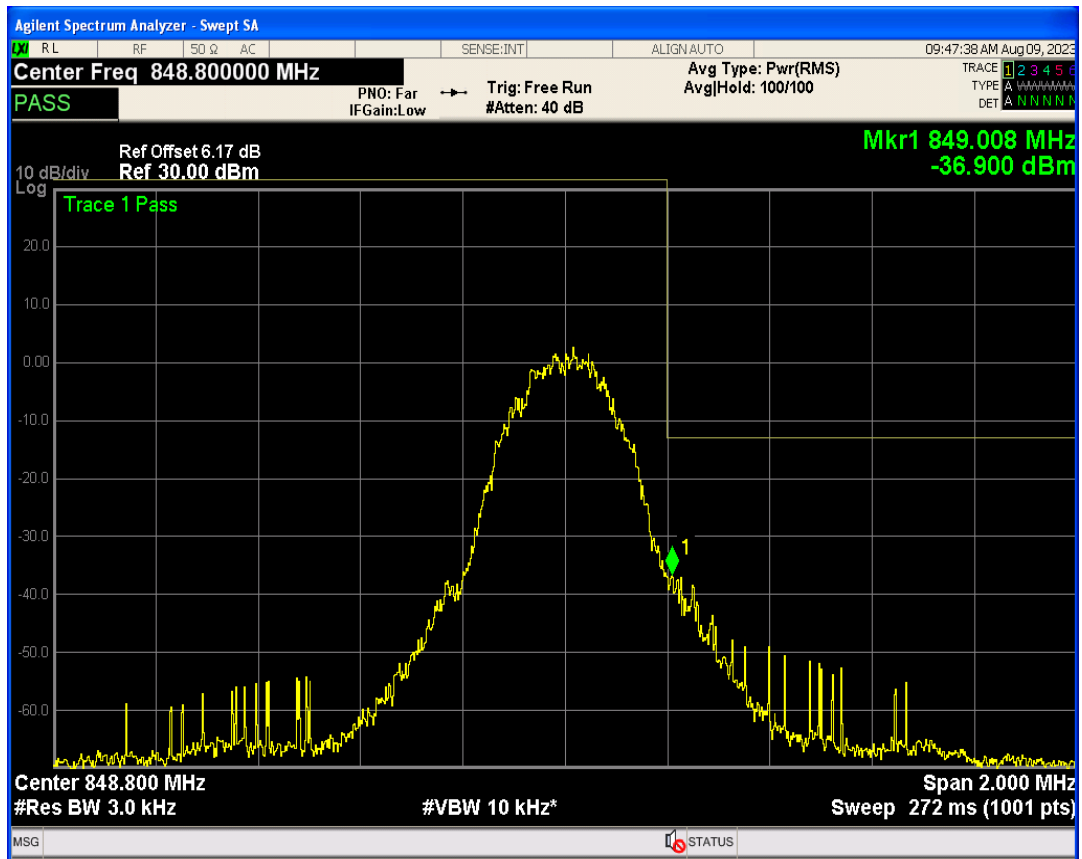


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	26014.28	-18.44	-13	PASS
EGPRS1900	661	1880	25922.95	-17.83	-13	PASS
EGPRS1900	810	1909.8	25787.30	-17.58	-13	PASS
EGPRS850	128	824.2	25932.22	-20.75	-13	PASS
EGPRS850	189	836.4	25980.53	-19.59	-13	PASS
EGPRS850	251	848.8	26010.97	-20.34	-13	PASS


EGPRS1900 Channel=512

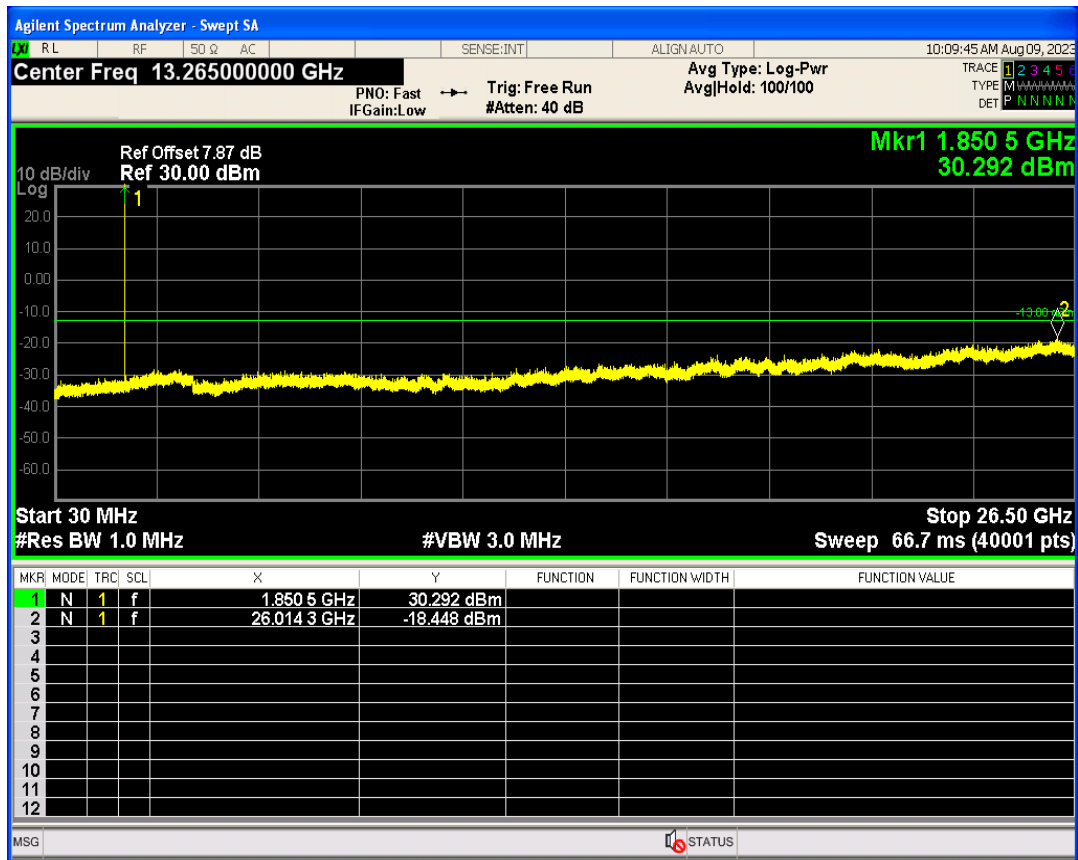


EGPRS1900 Channel=661

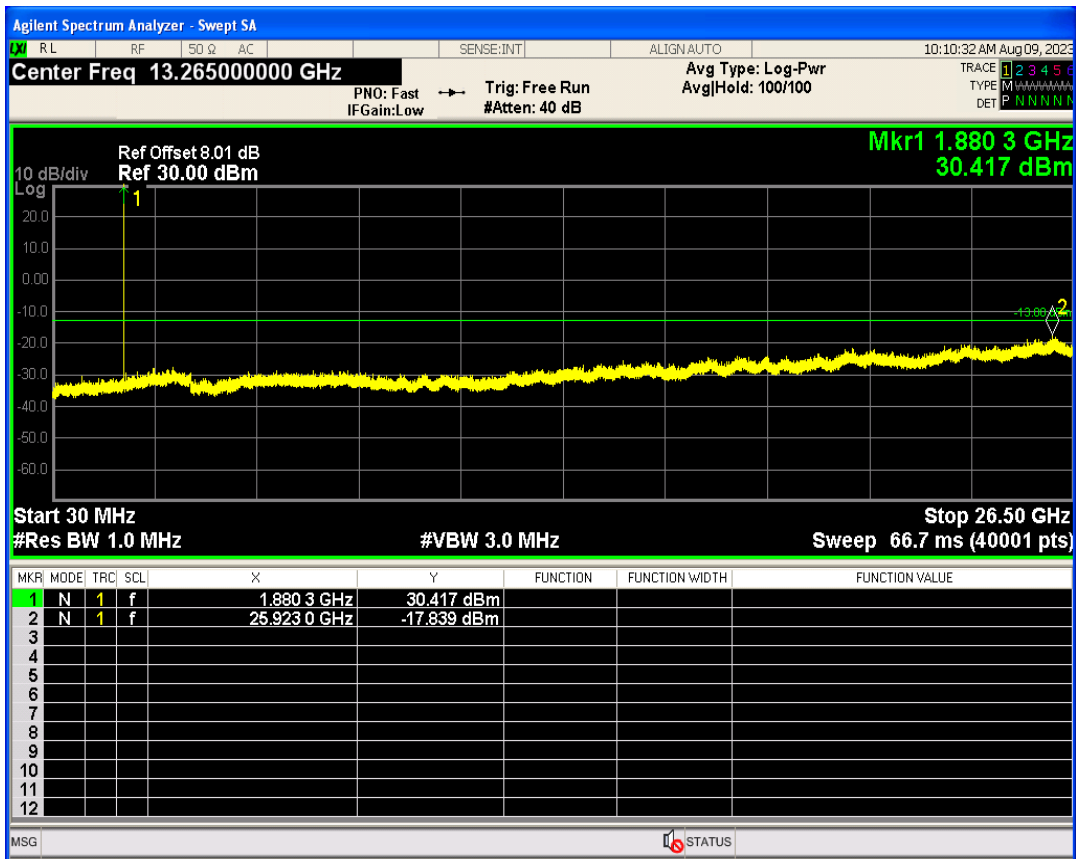


EGPRS1900 Channel=810

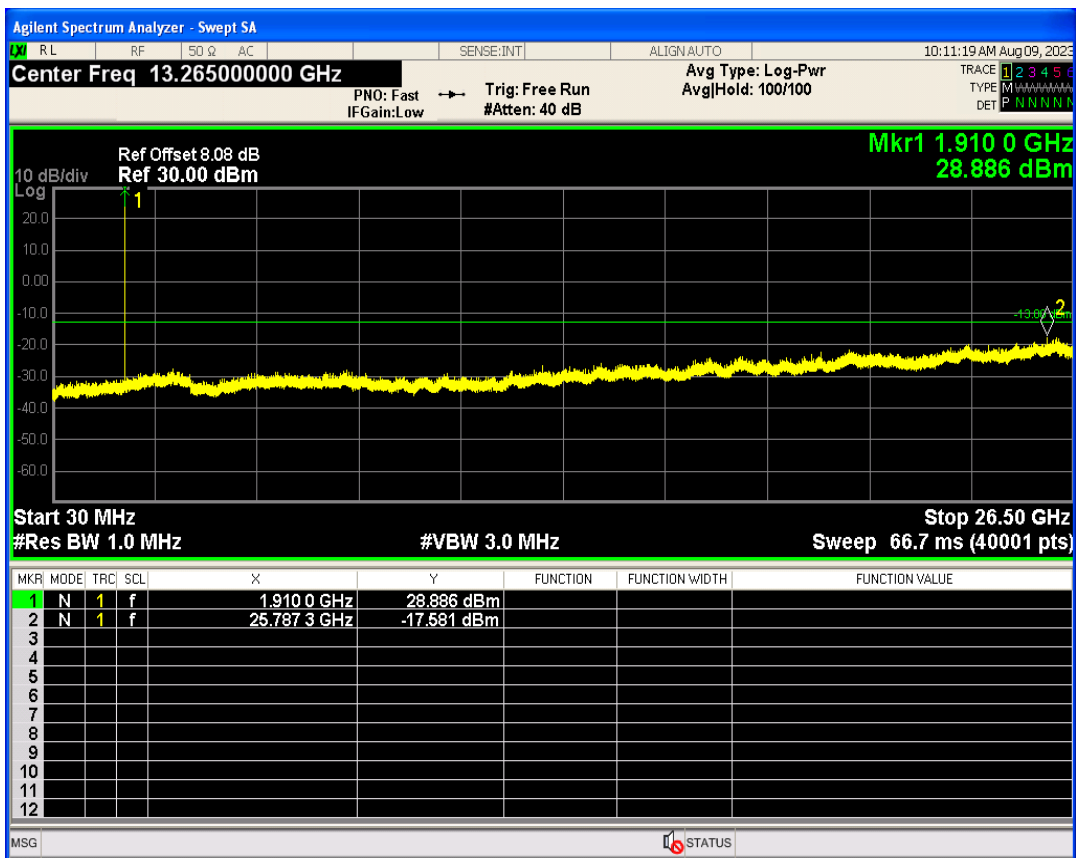


EGPRS850 Channel=128

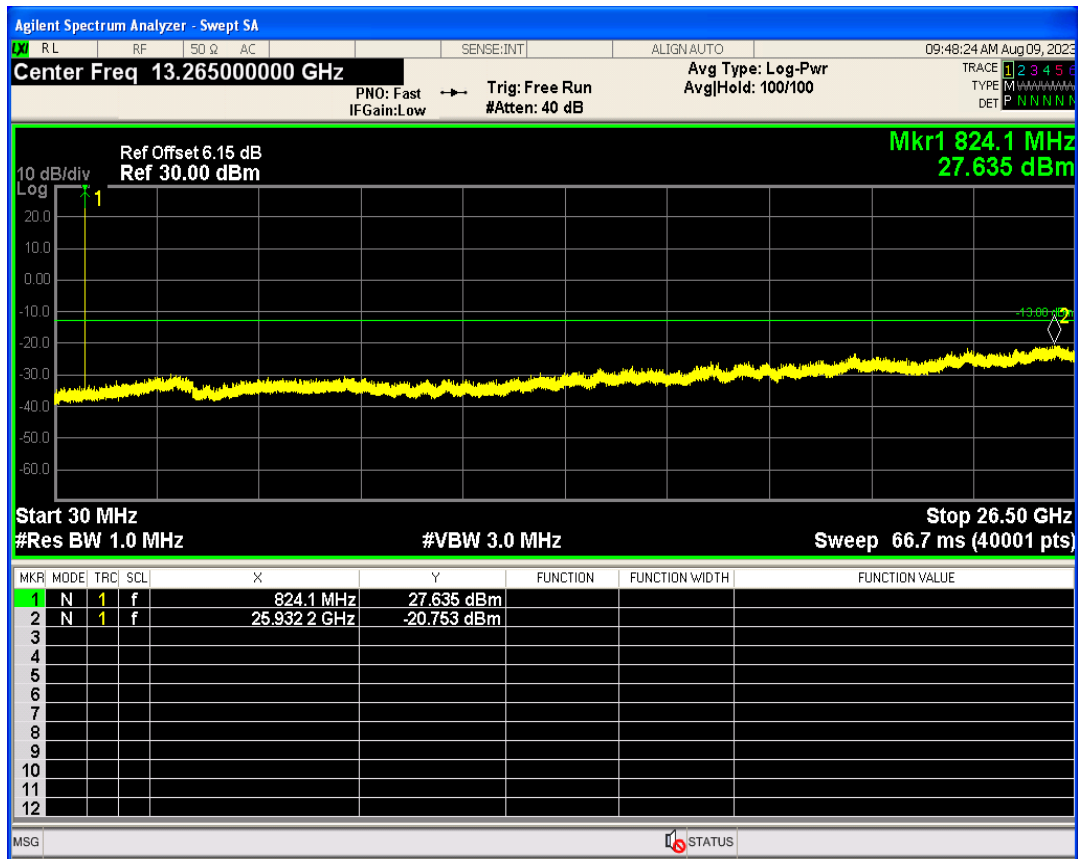

EGPRS850 Channel=189

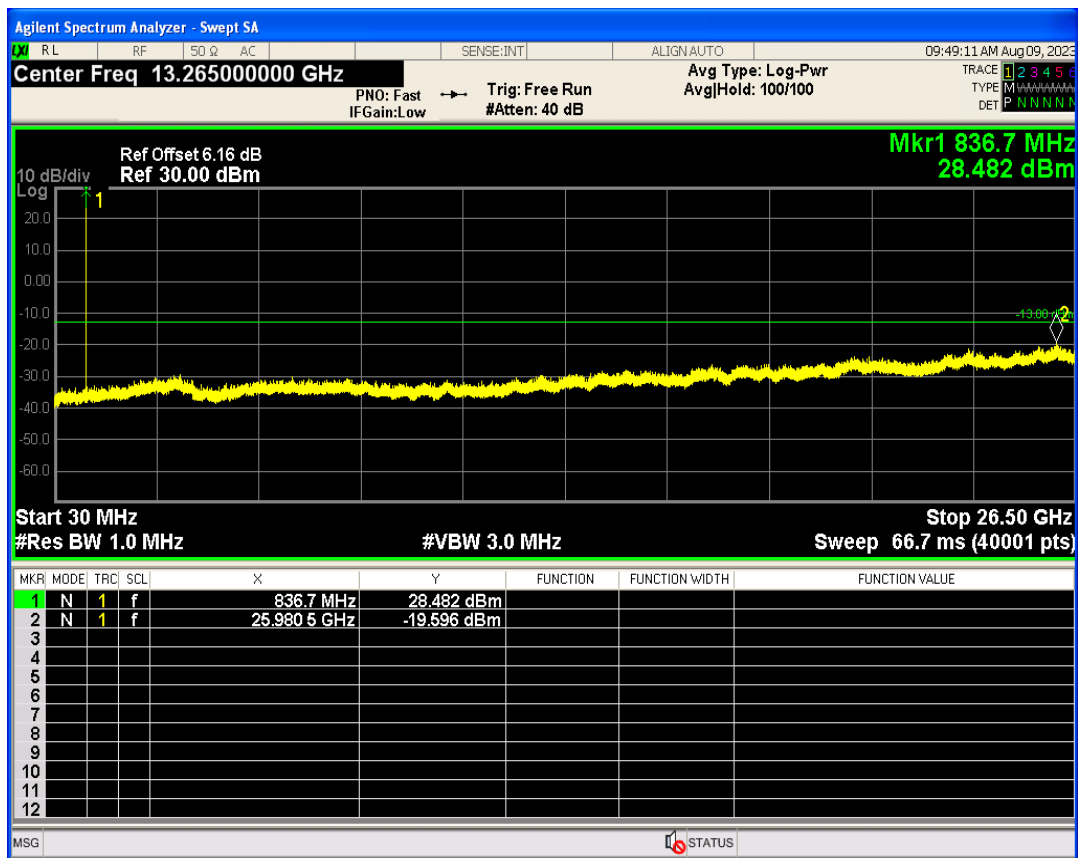

EGPRS850 Channel=251

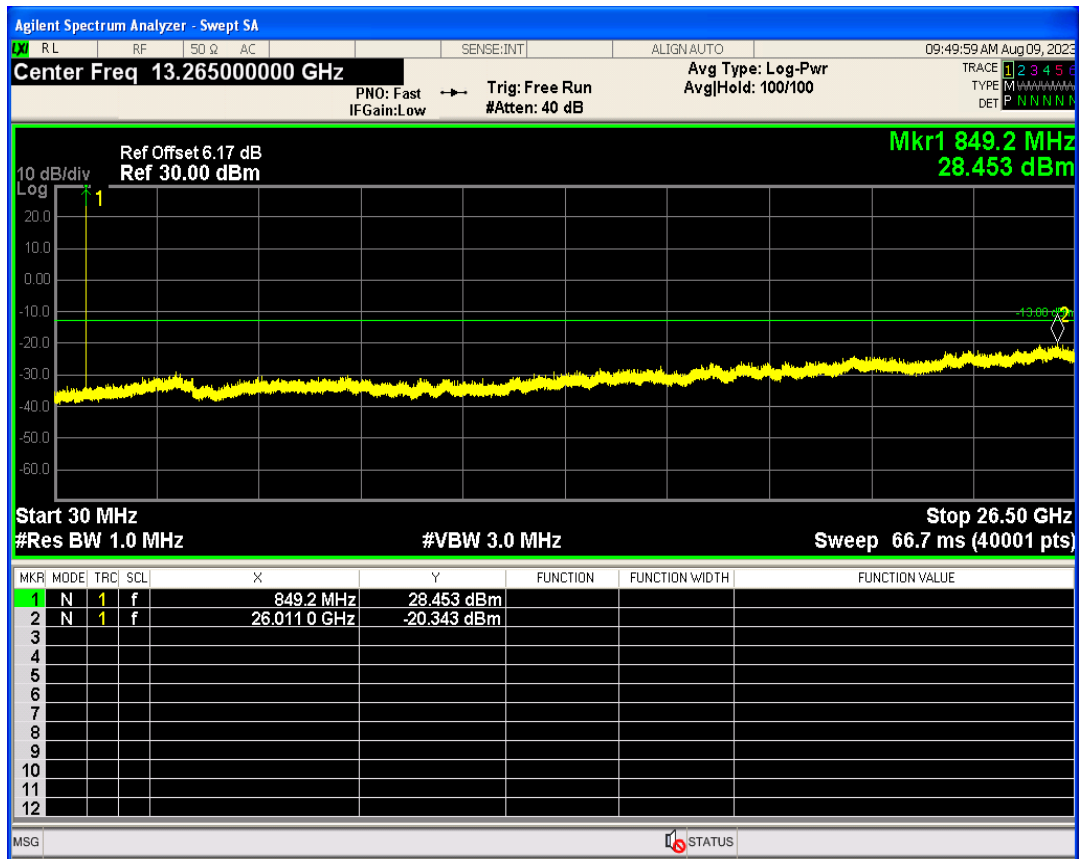


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GPRS1900 1 Slot	512	1850.2	31.10	PASS
GPRS1900 1 Slot	661	1880	31.14	PASS
GPRS1900 1 Slot	810	1909.8	31.18	PASS
GPRS1900 2 Slot	512	1850.2	28.99	PASS
GPRS1900 2 Slot	661	1880	28.82	PASS
GPRS1900 2 Slot	810	1909.8	28.54	PASS
GPRS1900 3 Slot	512	1850.2	27.35	PASS
GPRS1900 3 Slot	661	1880	27.18	PASS
GPRS1900 3 Slot	810	1909.8	26.93	PASS
GPRS1900 4 Slot	512	1850.2	25.20	PASS
GPRS1900 4 Slot	661	1880	25.02	PASS
GPRS1900 4 Slot	810	1909.8	24.71	PASS
GPRS850 1 Slot	128	824.2	33.42	PASS
GPRS850 1 Slot	189	836.4	33.66	PASS
GPRS850 1 Slot	251	848.8	33.57	PASS
GPRS850 2 Slot	128	824.2	31.51	PASS
GPRS850 2 Slot	189	836.4	31.54	PASS
GPRS850 2 Slot	251	848.8	31.38	PASS
GPRS850 3 Slot	128	824.2	29.56	PASS
GPRS850 3 Slot	189	836.4	29.61	PASS
GPRS850 3 Slot	251	848.8	29.48	PASS
GPRS850 4 Slot	128	824.2	27.34	PASS
GPRS850 4 Slot	189	836.4	27.42	PASS
GPRS850 4 Slot	251	848.8	27.30	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.655605096	13.00	PASS
GPRS1900	661	1880	2.646457399	13.00	PASS
GPRS1900	810	1909.8	2.667050512	13.00	PASS
GPRS850	128	824.2	2.651744186	13.00	PASS
GPRS850	189	836.4	2.659993742	13.00	PASS
GPRS850	251	848.8	2.647255685	13.00	PASS


GPRS1900 Channel=512

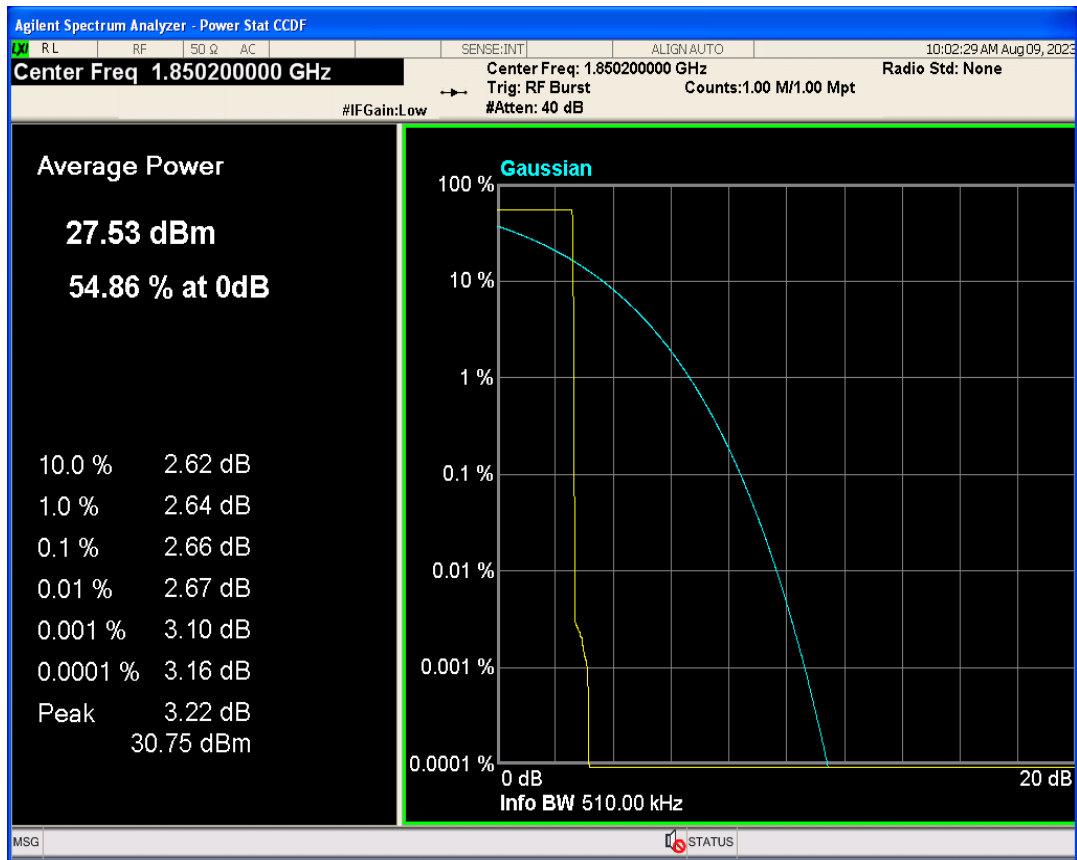


GPRS1900 Channel=661

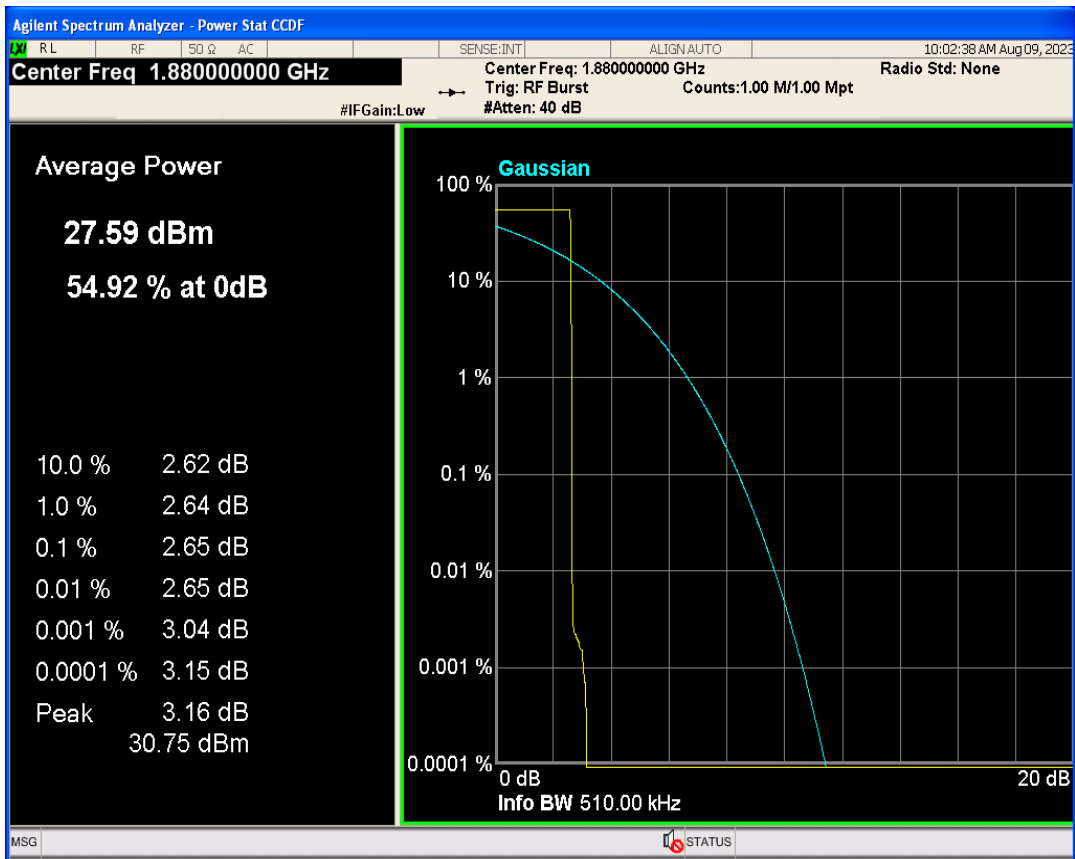


GPRS1900 Channel=810

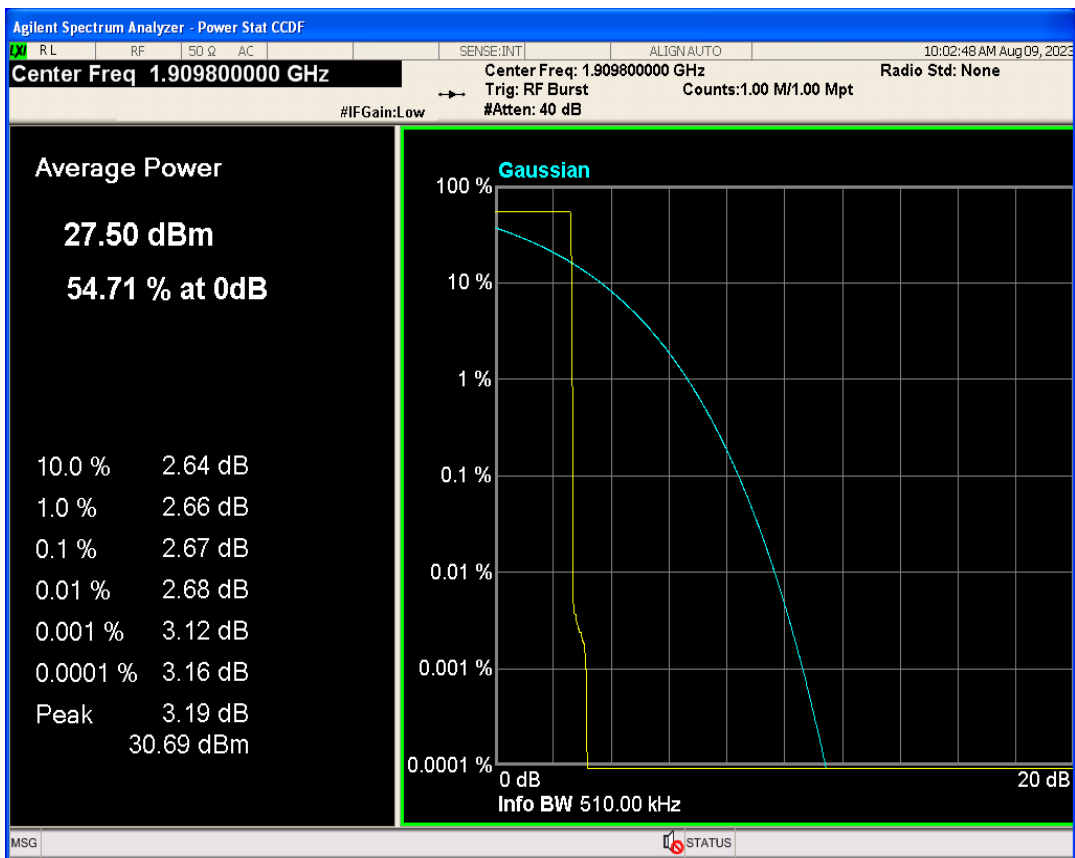


GPRS850 Channel=189

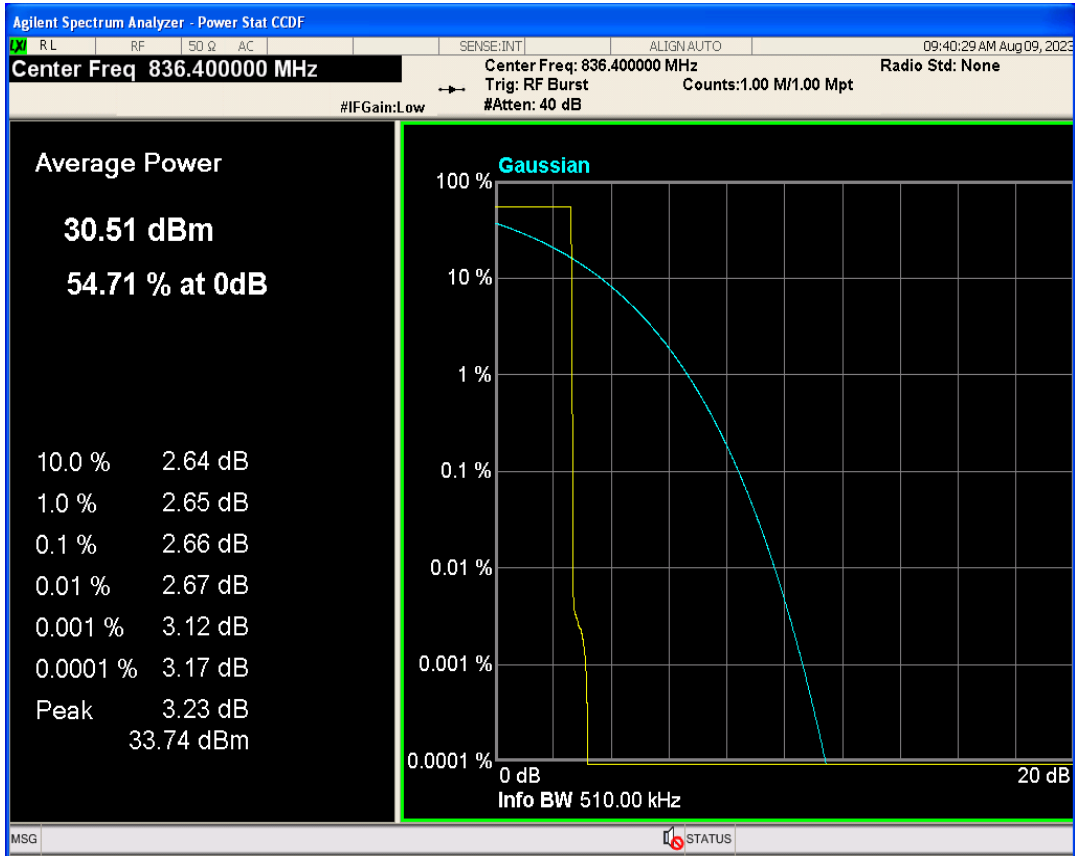

GPRS850 Channel=128

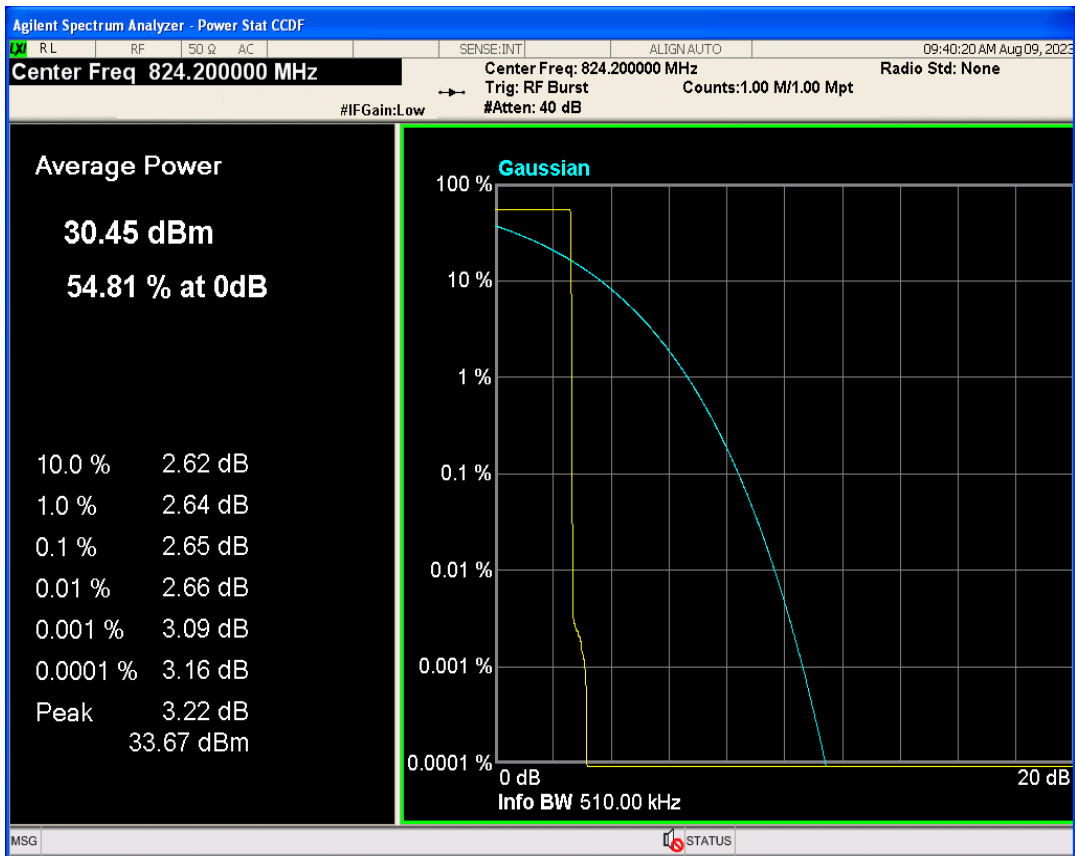


GPRS850 Channel=251

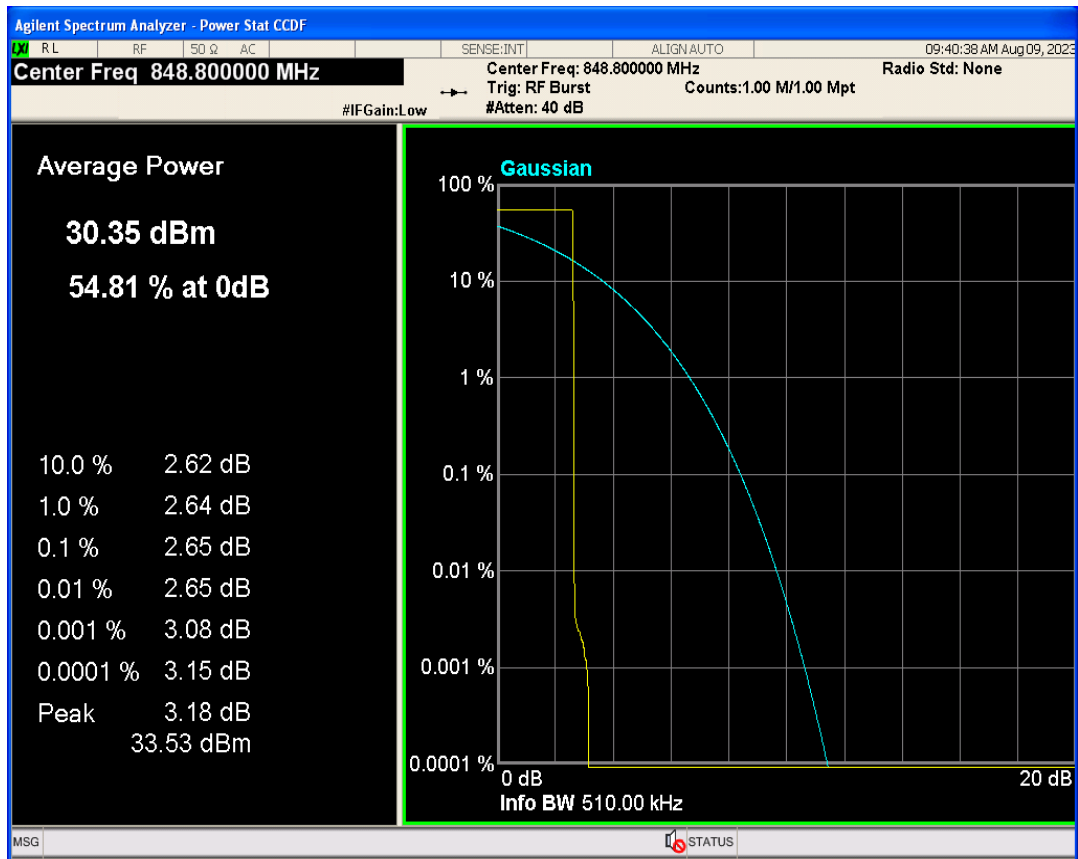


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	243.287	309.769	PASS
GPRS1900	661	1880	240.301	320.593	PASS
GPRS1900	810	1909.8	247.015	313.348	PASS
GPRS850	128	824.2	237.646	314.341	PASS
GPRS850	189	836.4	242.644	311.577	PASS
GPRS850	251	848.8	238.473	315.088	PASS


GPRS1900 Channel=512

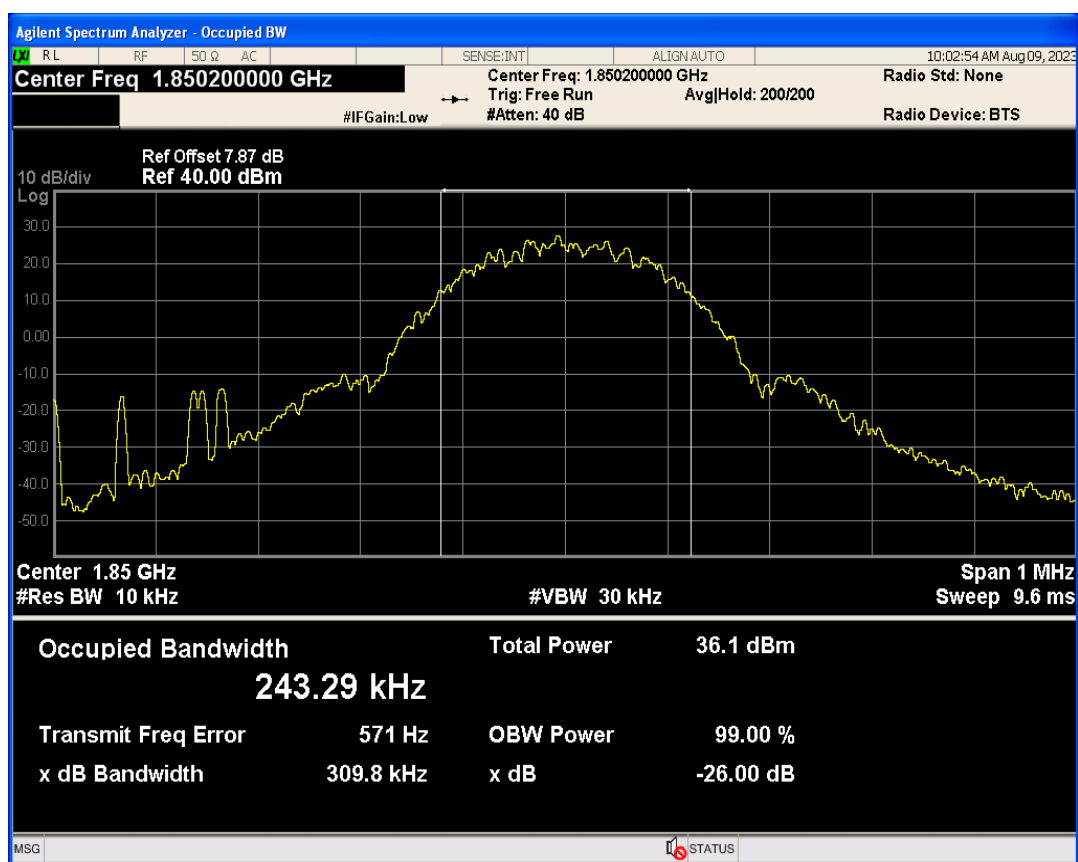


GPRS1900 Channel=661

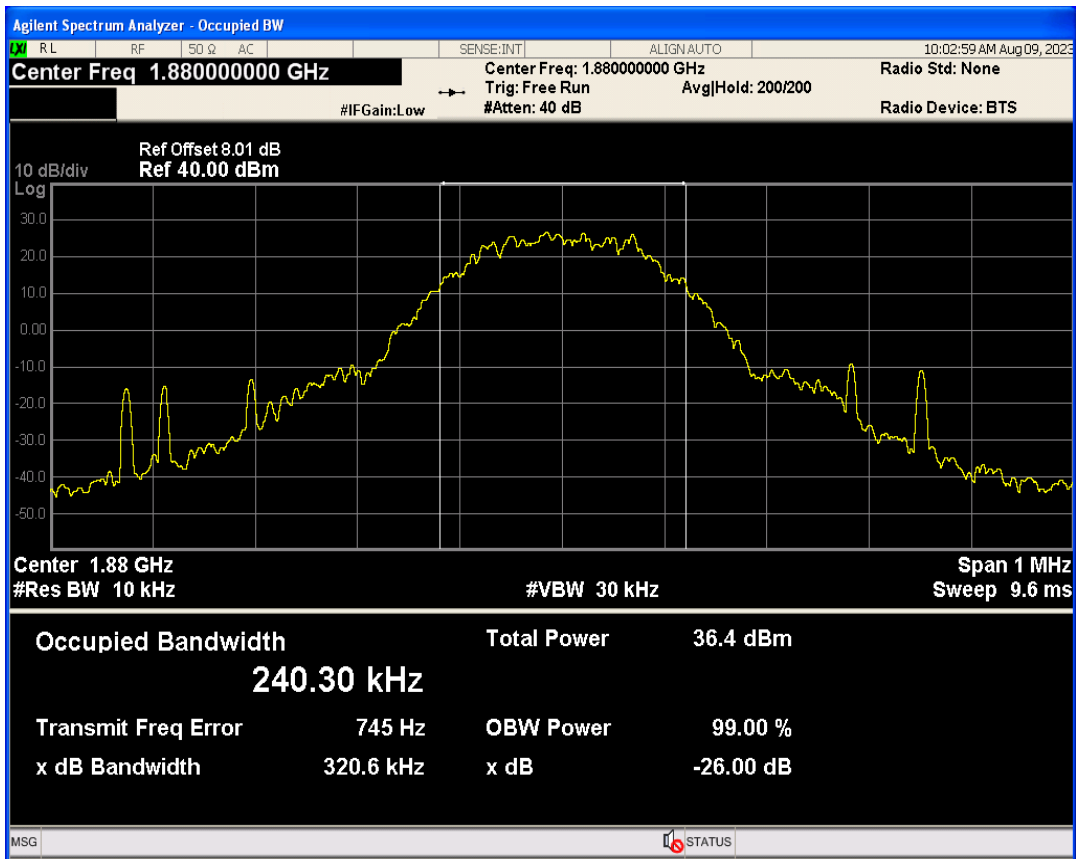


GPRS1900 Channel=810

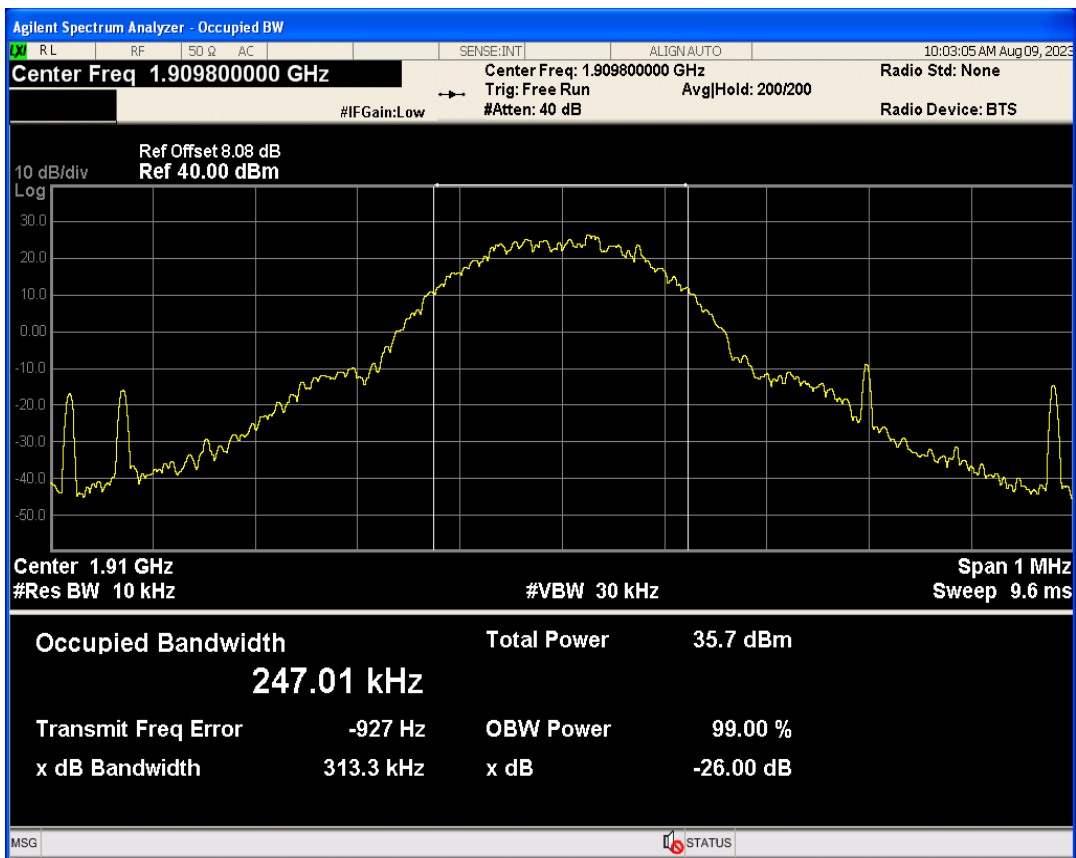


GPRS850 Channel=189

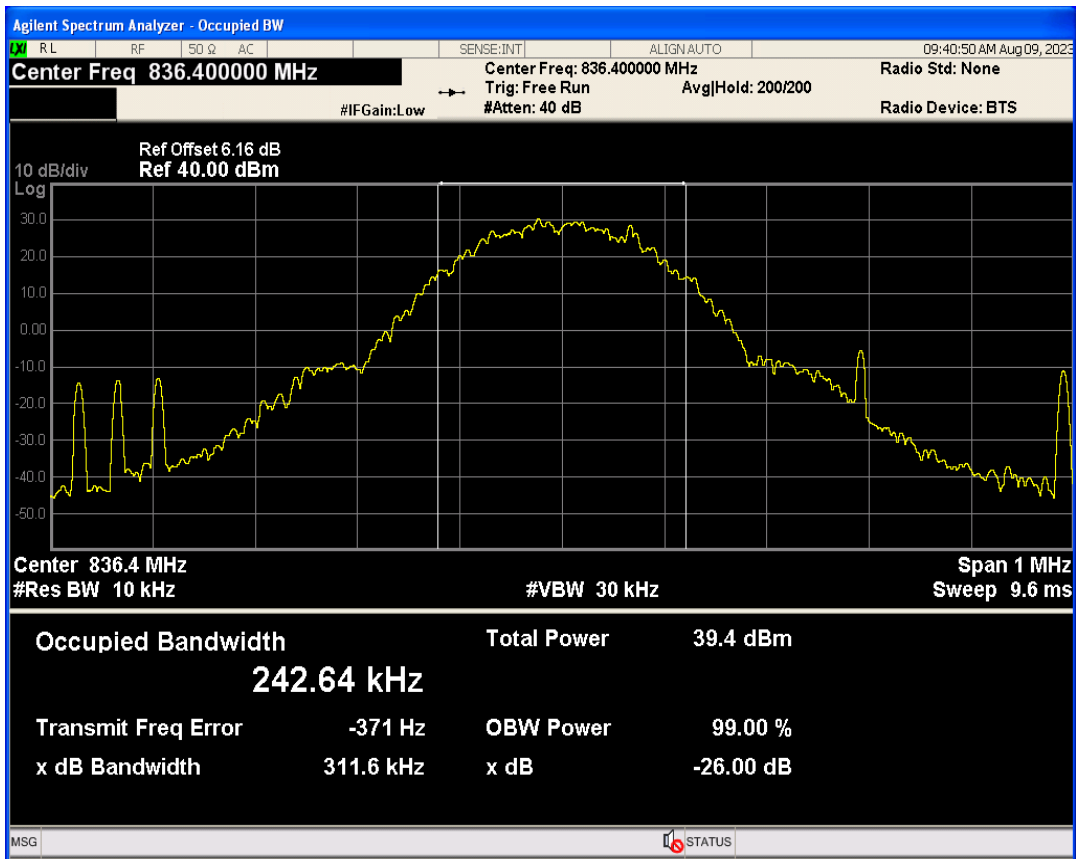

GPRS850 Channel=128

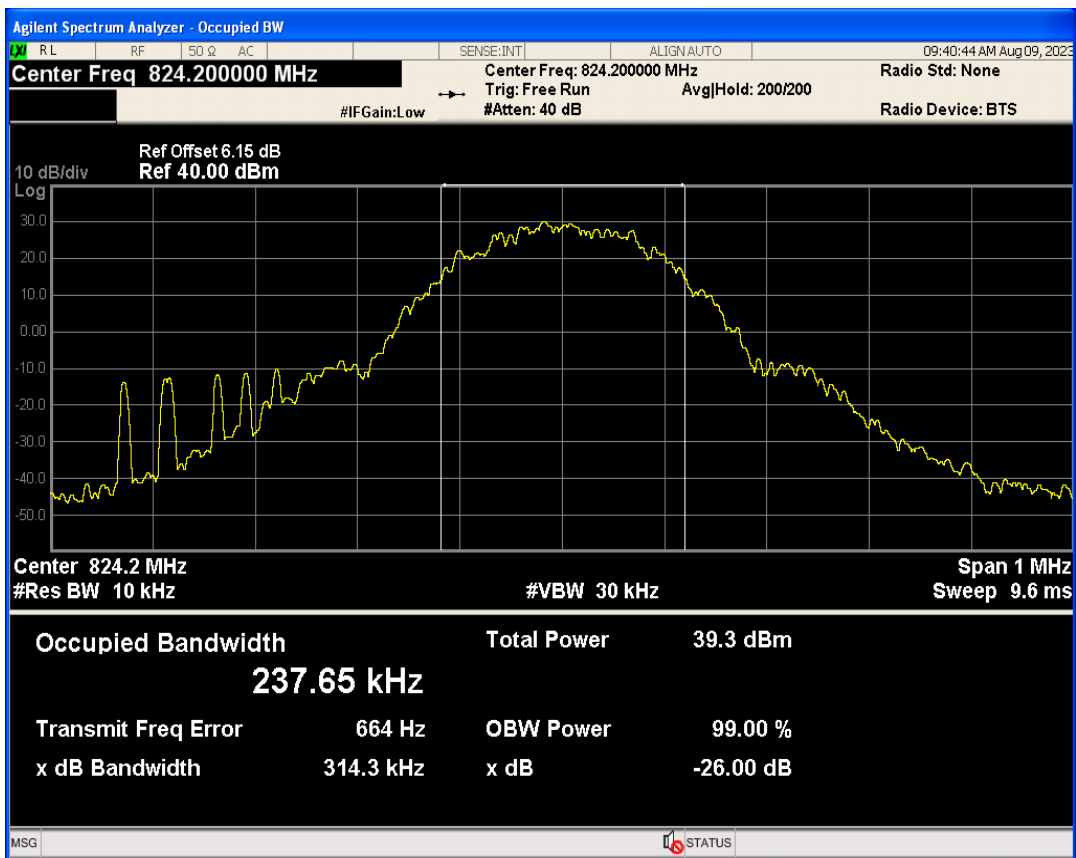


GPRS850 Channel=251

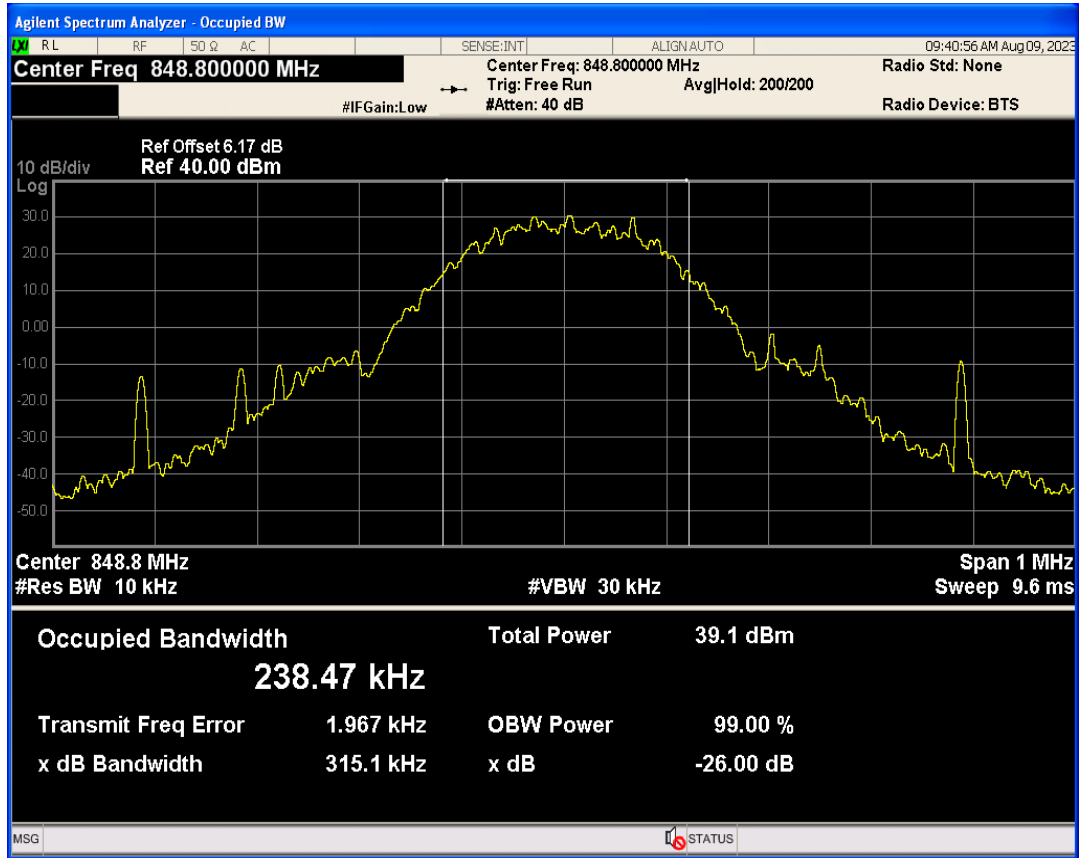


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1850.00	-29.68	-13	PASS
GPRS1900	810	1909.8	1910.02	-30.63	-13	PASS
GPRS850	128	824.2	824.00	-27.19	-13	PASS
GPRS850	251	848.8	849.03	-26.77	-13	PASS


GPRS1900 Channel=810

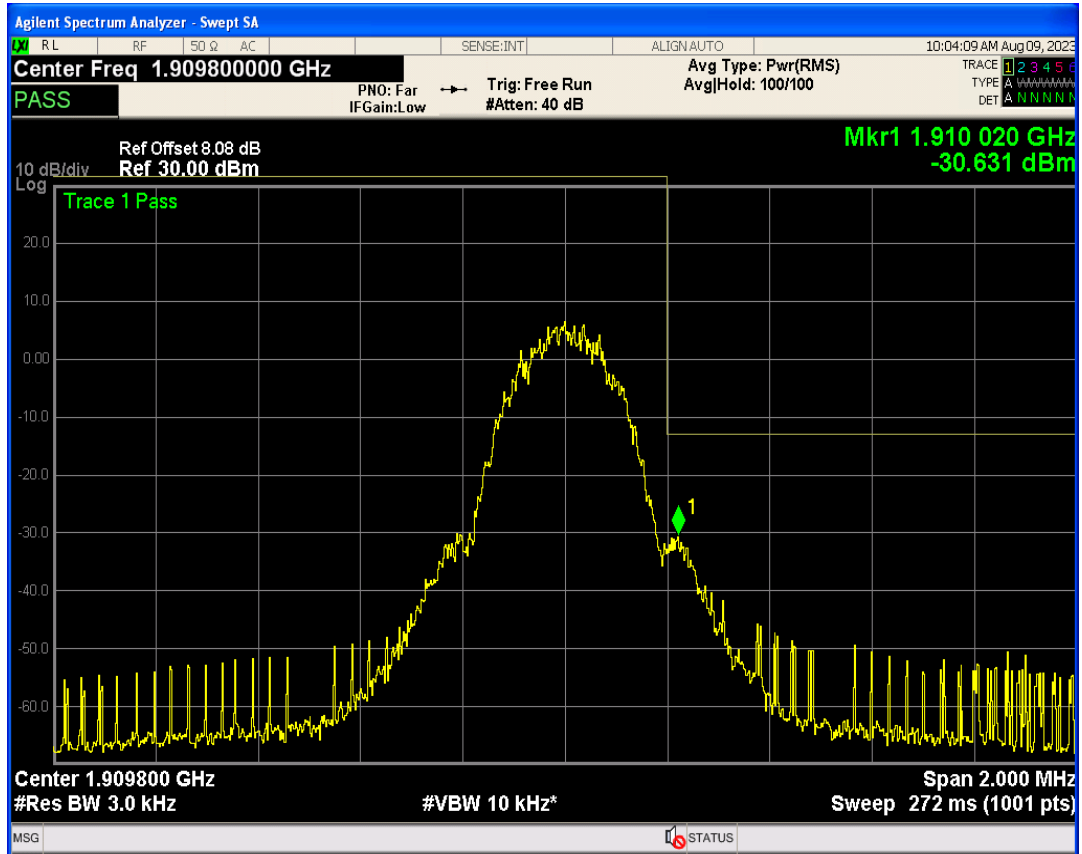


GPRS1900 Channel=512

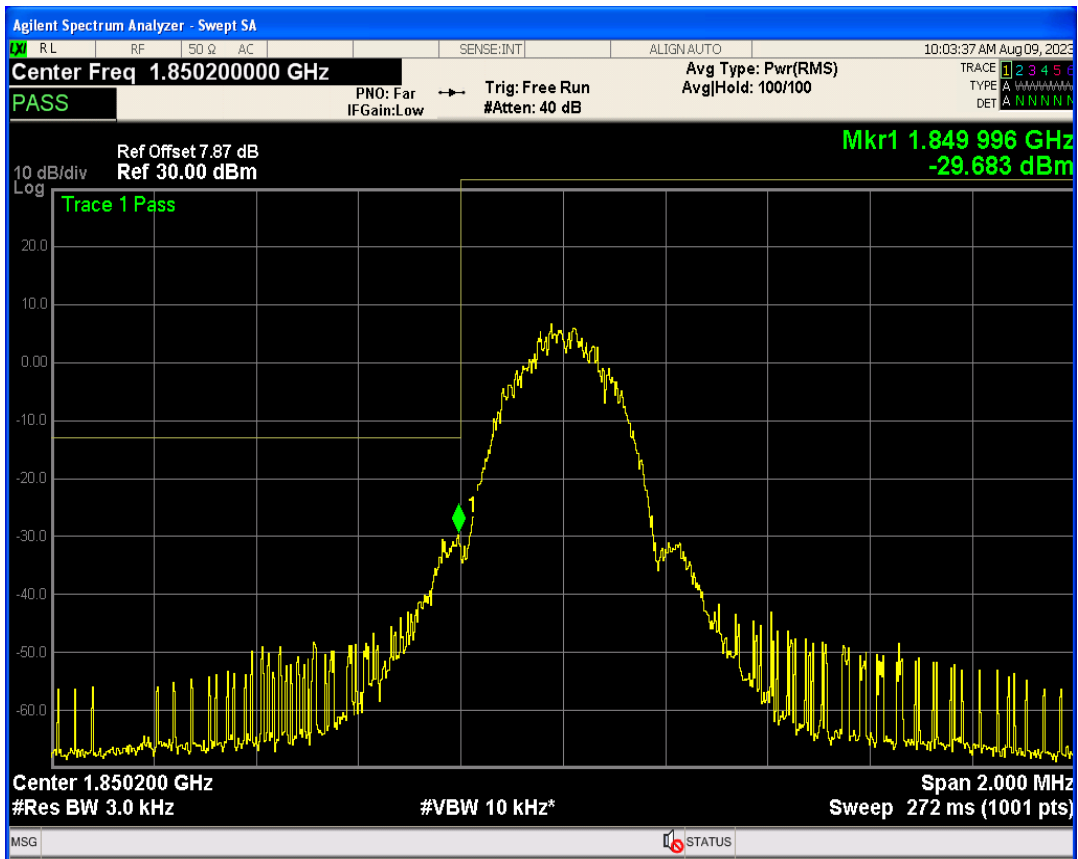

GPRS850 Channel=128

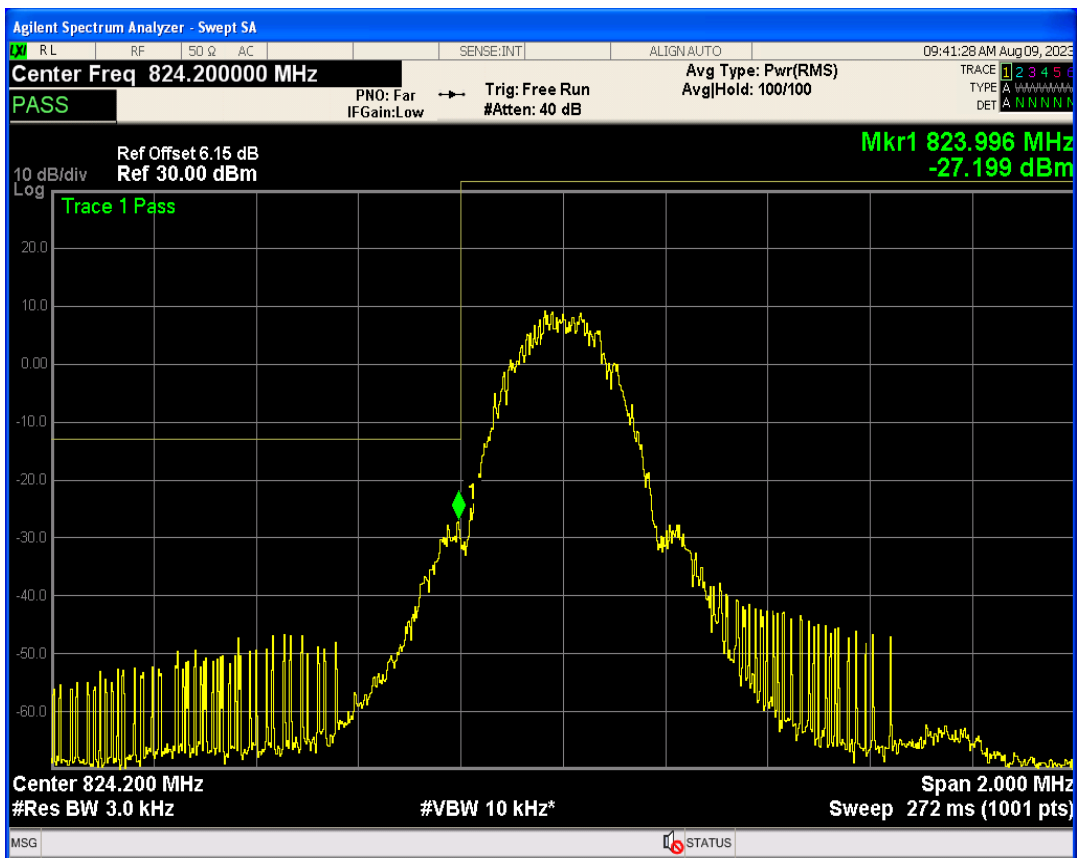


GPRS850 Channel=251

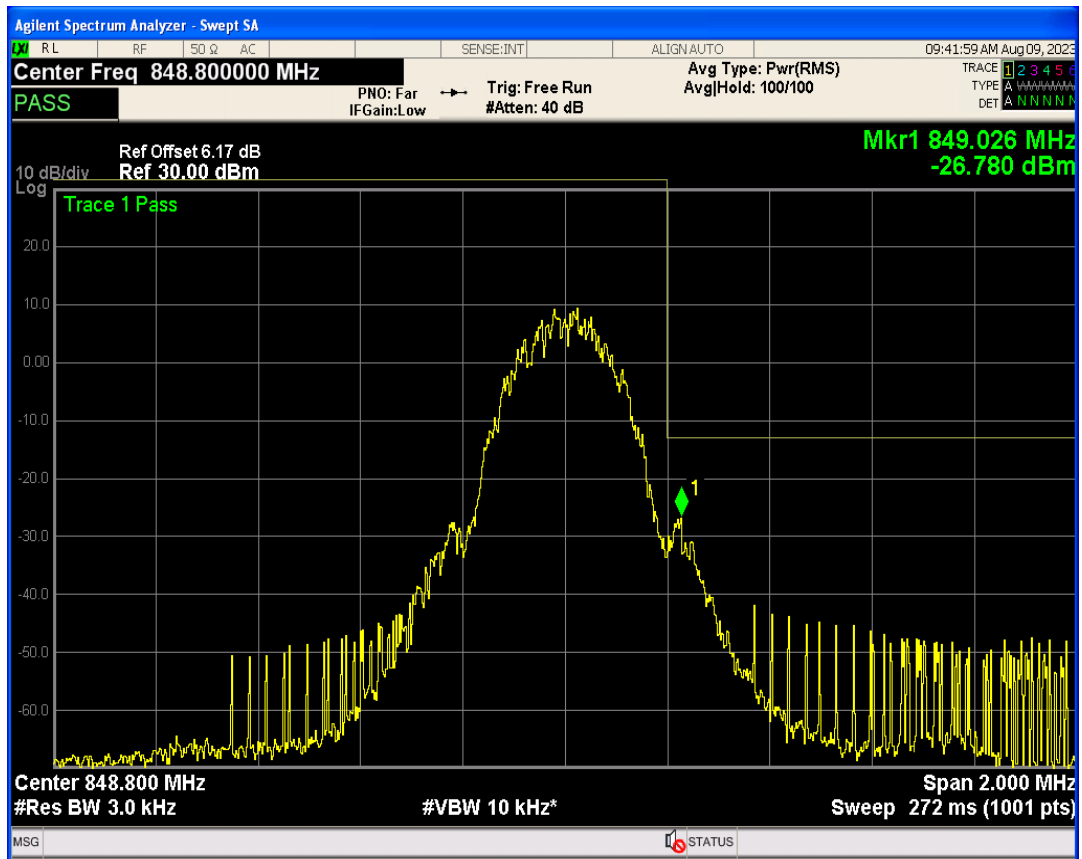


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25893.18	-18.36	-13	PASS
GPRS1900	661	1880	25887.88	-18.24	-13	PASS
GPRS1900	810	1909.8	25556.34	-18.34	-13	PASS
GPRS850	128	824.2	25761.49	-20.25	-13	PASS
GPRS850	189	836.4	25973.91	-20.01	-13	PASS
GPRS850	251	848.8	26103.61	-19.93	-13	PASS


GPRS1900 Channel=512

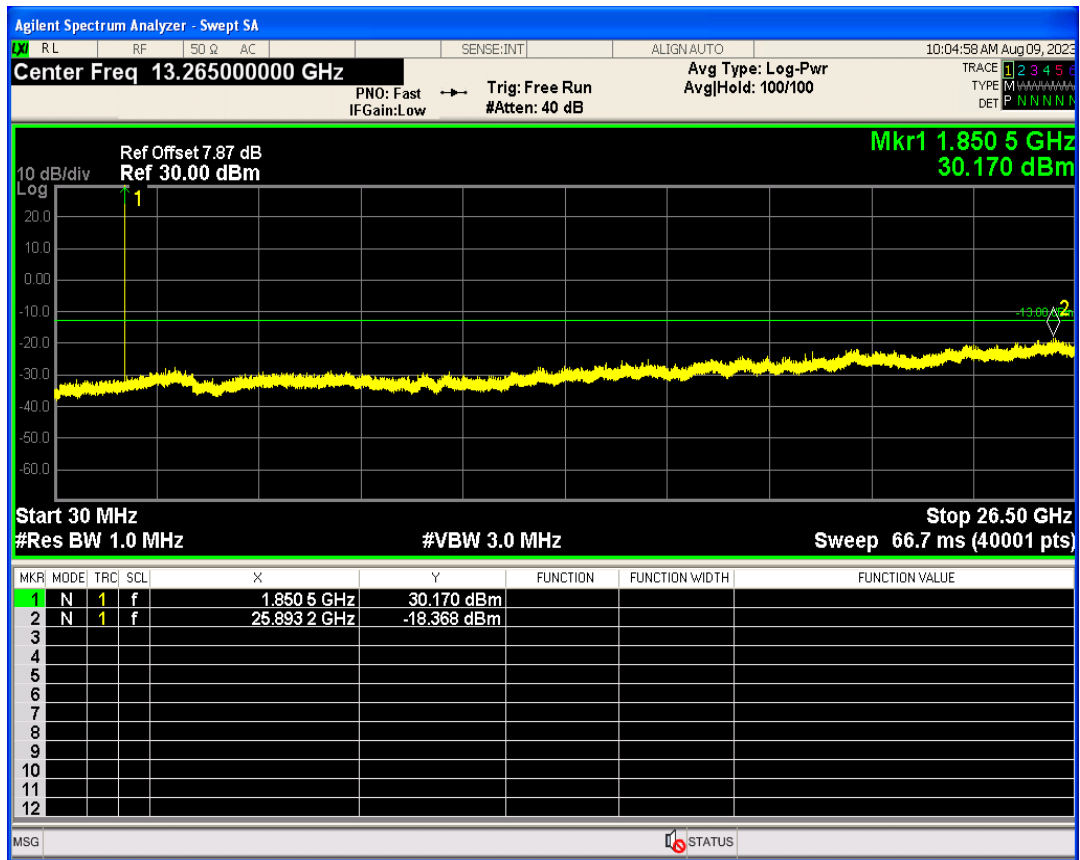


GPRS1900 Channel=661

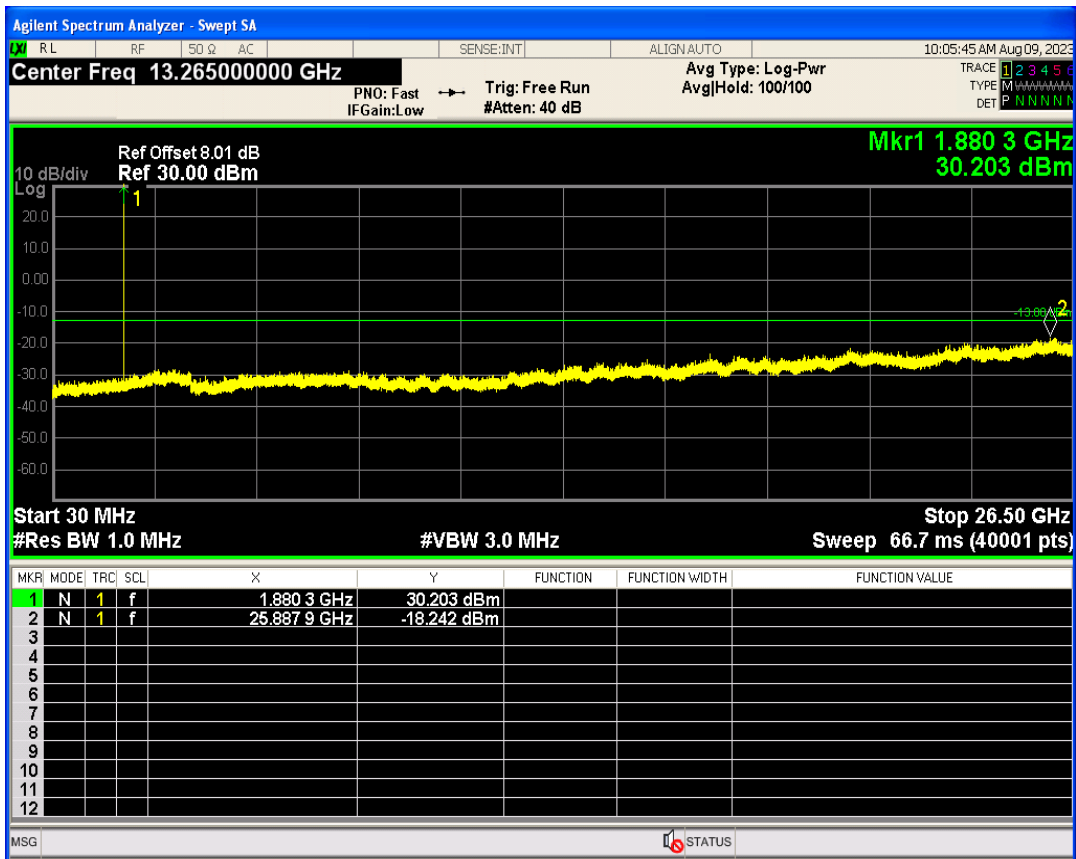


GPRS1900 Channel=810

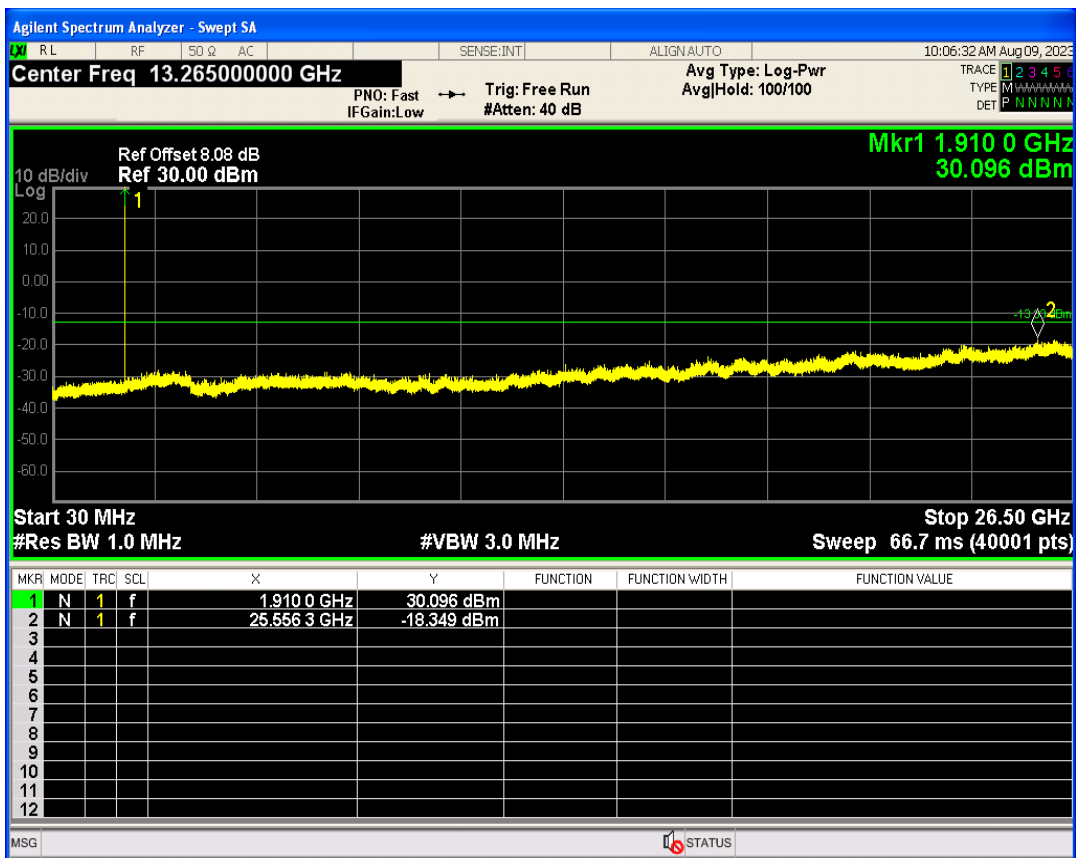


GPRS850 Channel=128

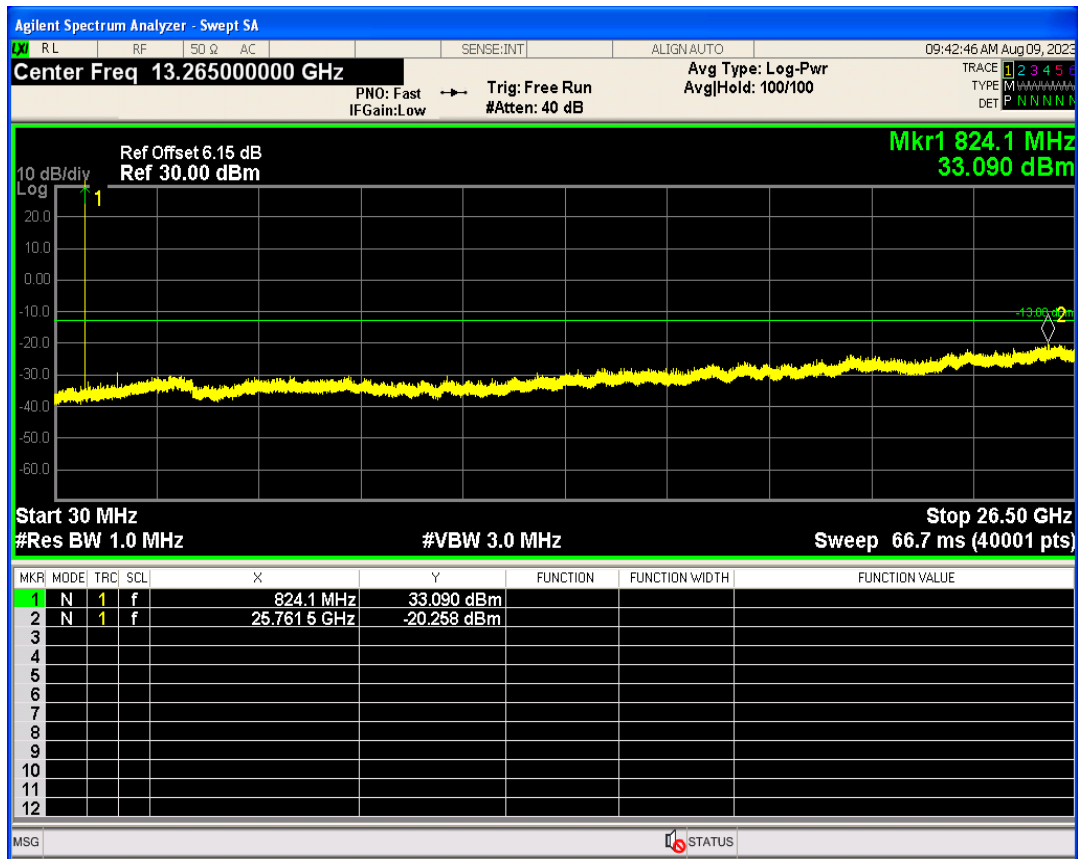

GPRS850 Channel=189

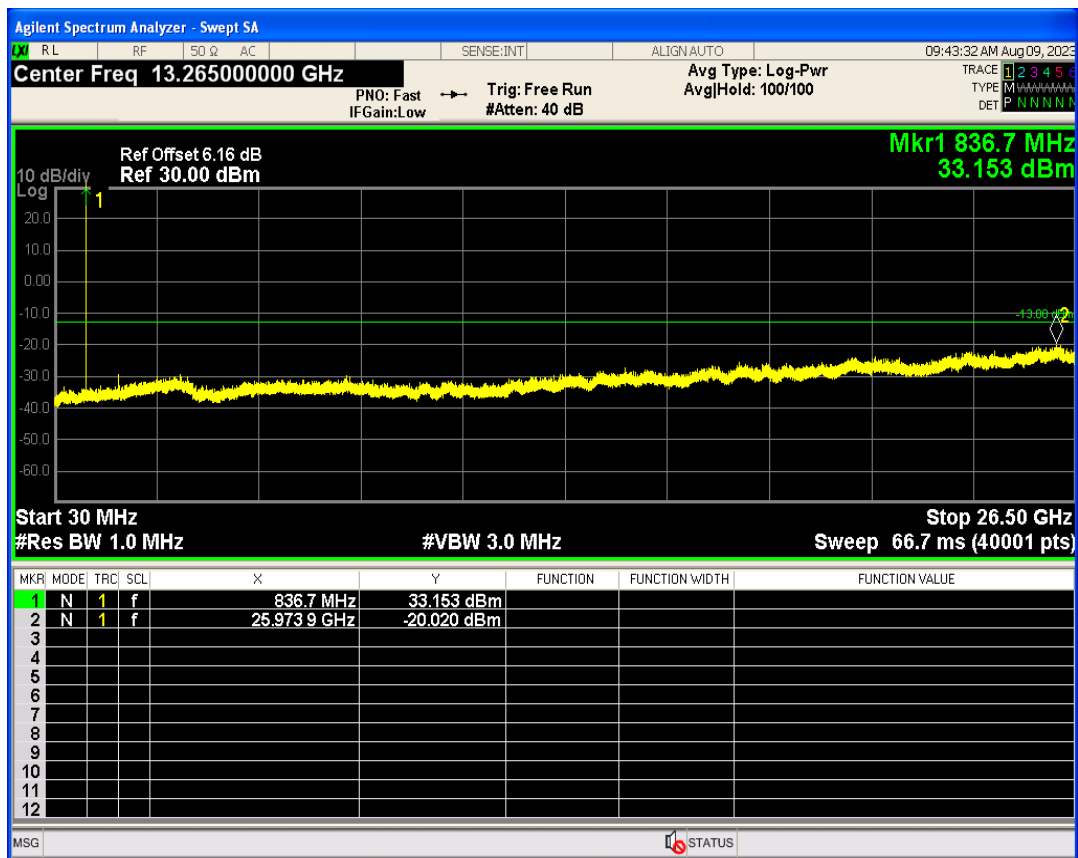

GPRS850 Channel=251

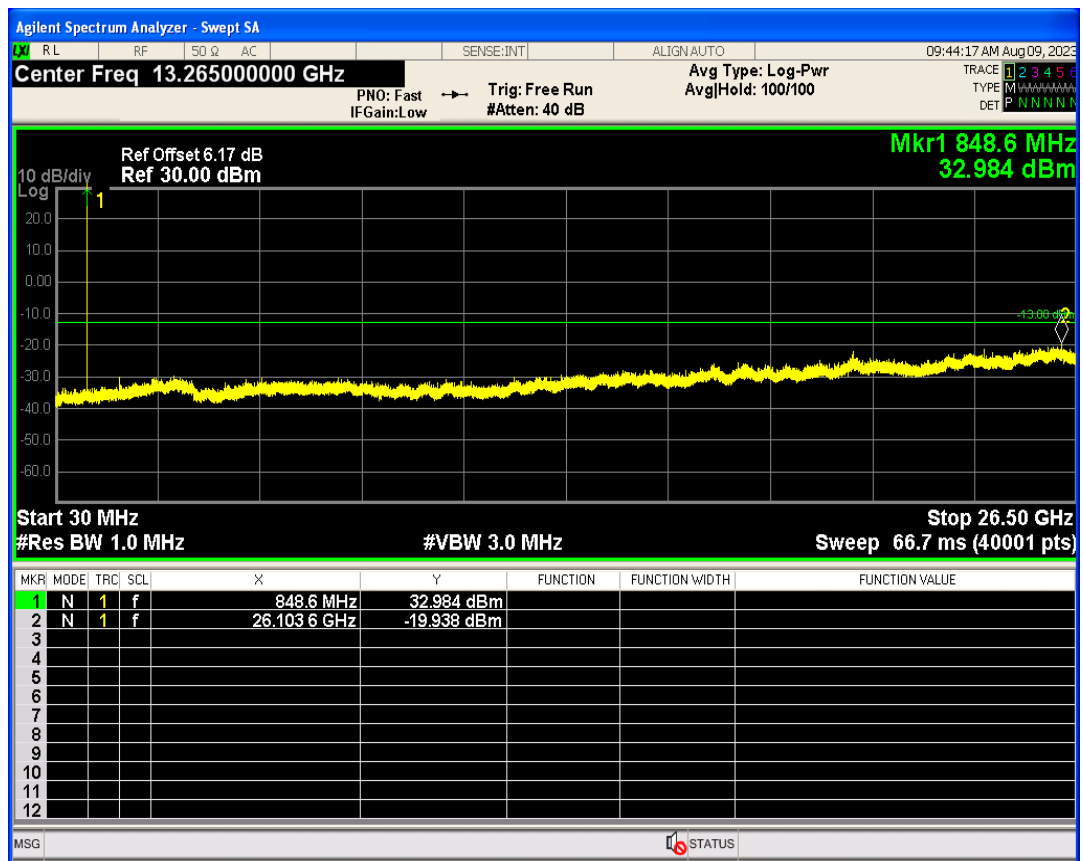

Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
GSM1900	512	1850.2	31.11	PASS
GSM1900	661	1880	31.16	PASS
GSM1900	810	1909.8	31.19	PASS
GSM850	128	824.2	33.41	PASS
GSM850	189	836.4	33.64	PASS
GSM850	251	848.8	33.55	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.61	13	PASS
GSM1900	661	1880	2.62	13	PASS
GSM1900	810	1909.8	2.61	13	PASS
GSM850	128	824.2	2.62	13	PASS
GSM850	189	836.4	2.62	13	PASS
GSM850	251	848.8	2.61	13	PASS


GSM1900 Channel=512




GSM1900 Channel=661

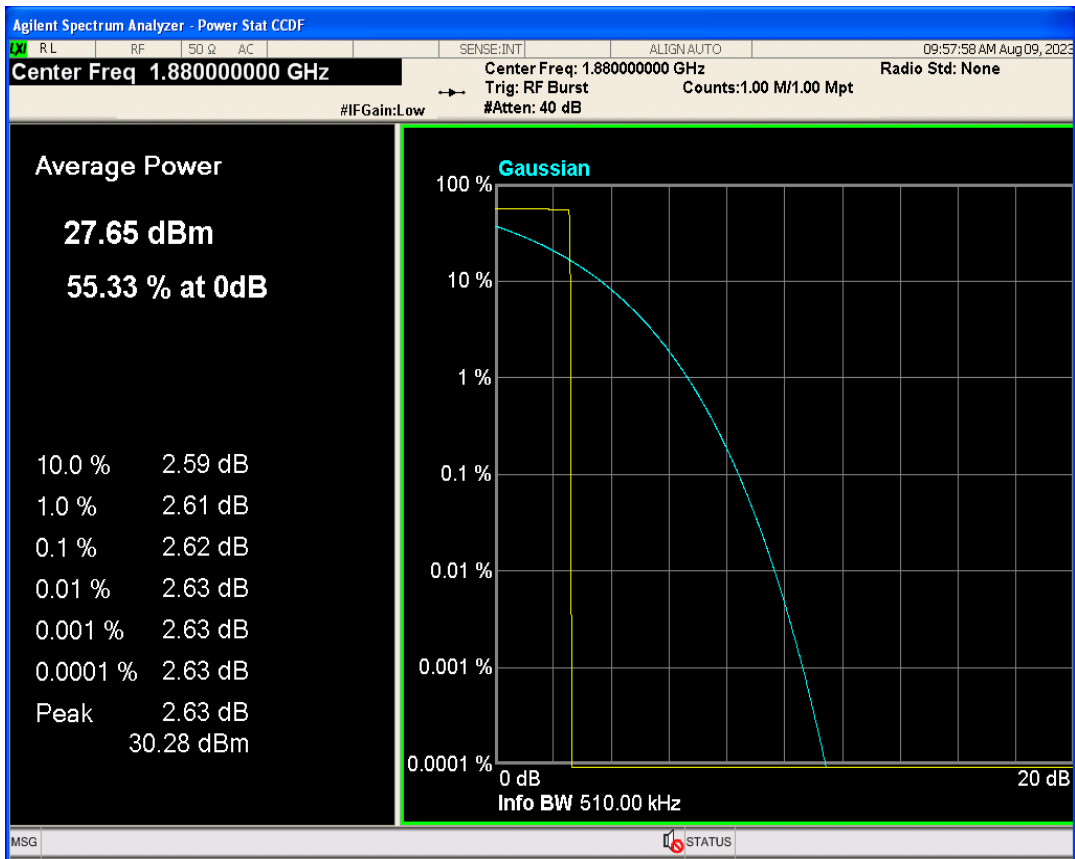


GSM1900 Channel=810

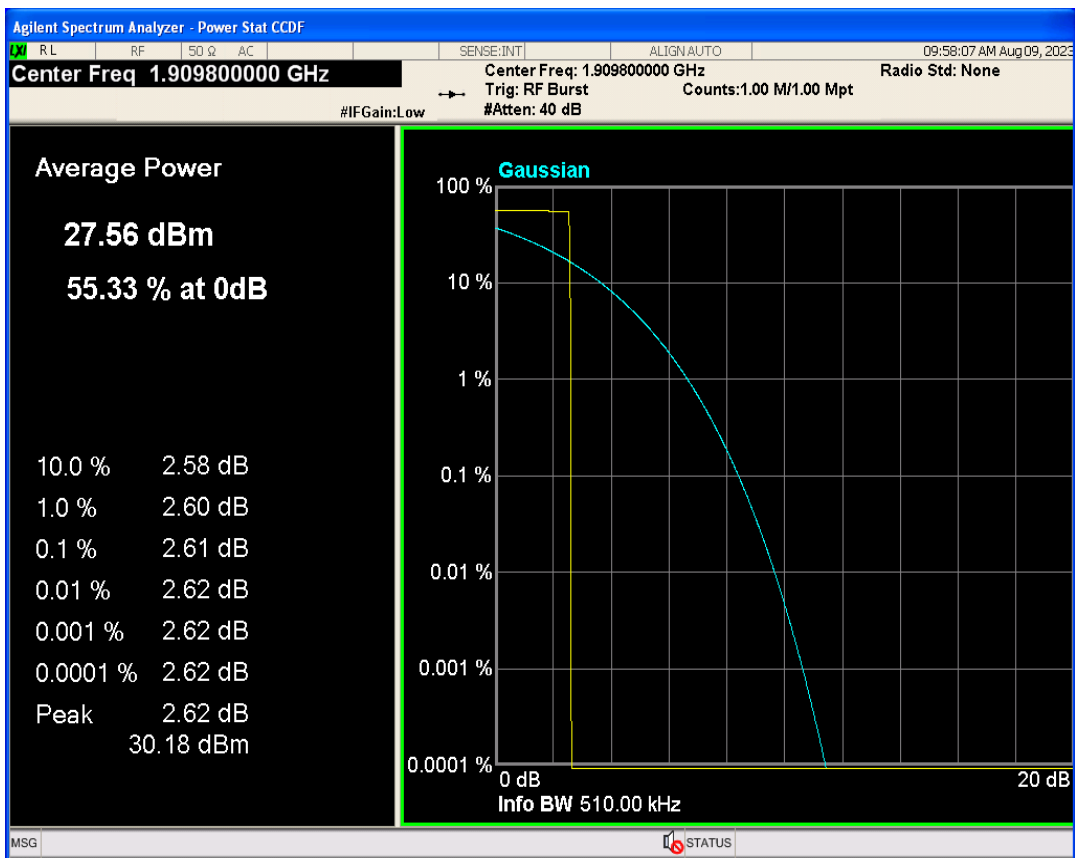

GSM850 Channel=128

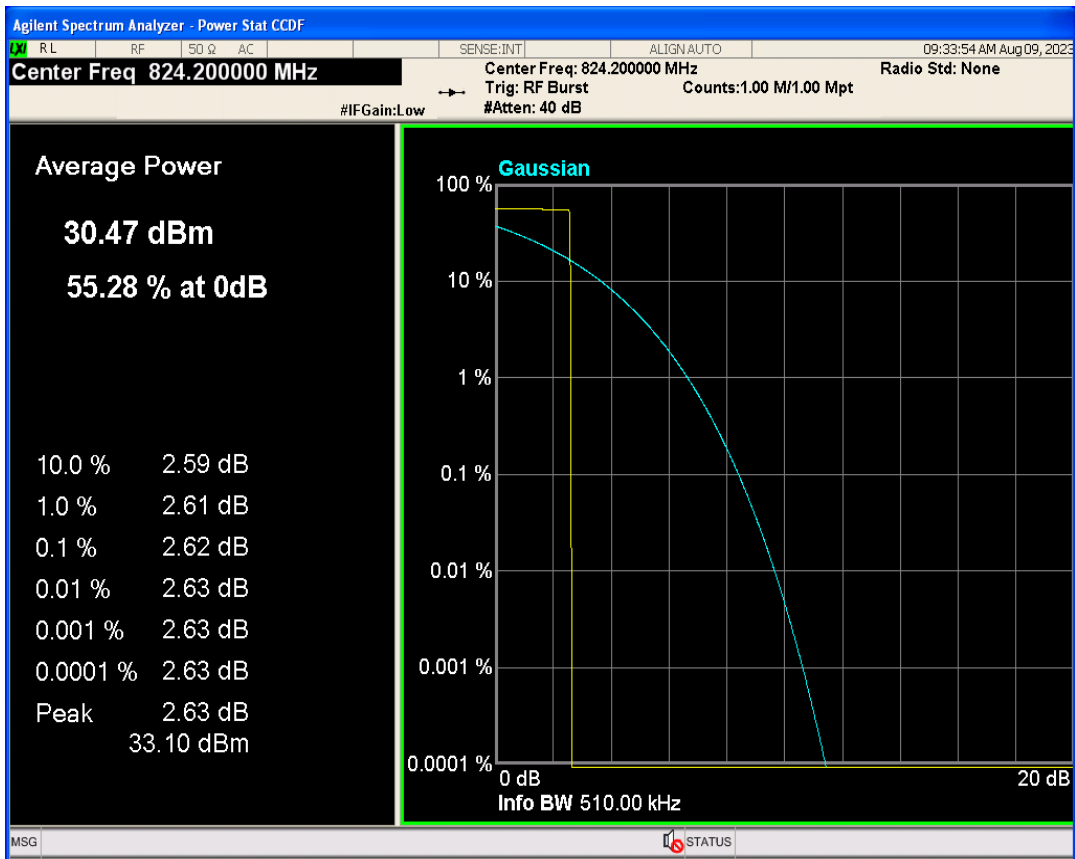

GSM850 Channel=189

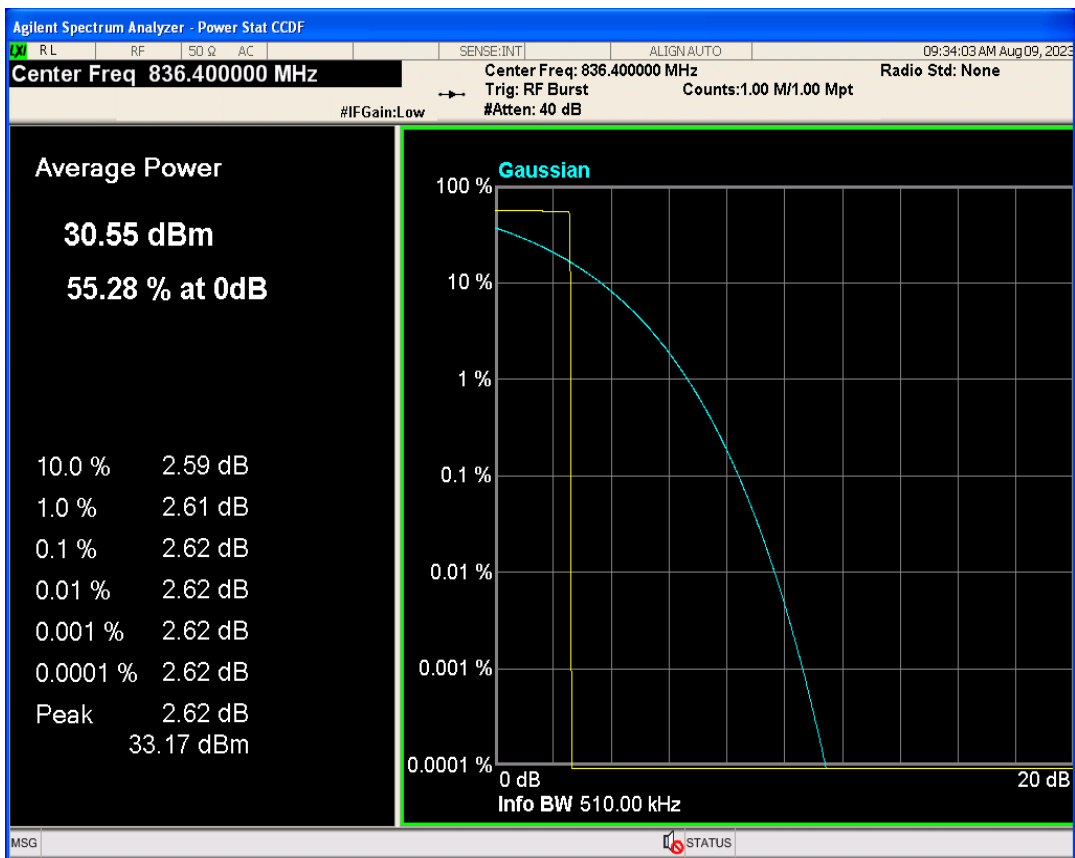


GSM850 Channel=251




Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	244.783	310.497	PASS
GSM1900	661	1880	244.845	317.645	PASS
GSM1900	810	1909.8	243.441	317.881	PASS
GSM850	128	824.2	243.702	310.955	PASS
GSM850	189	836.4	250.064	316.205	PASS
GSM850	251	848.8	247.434	319.260	PASS


GSM1900 Channel=512

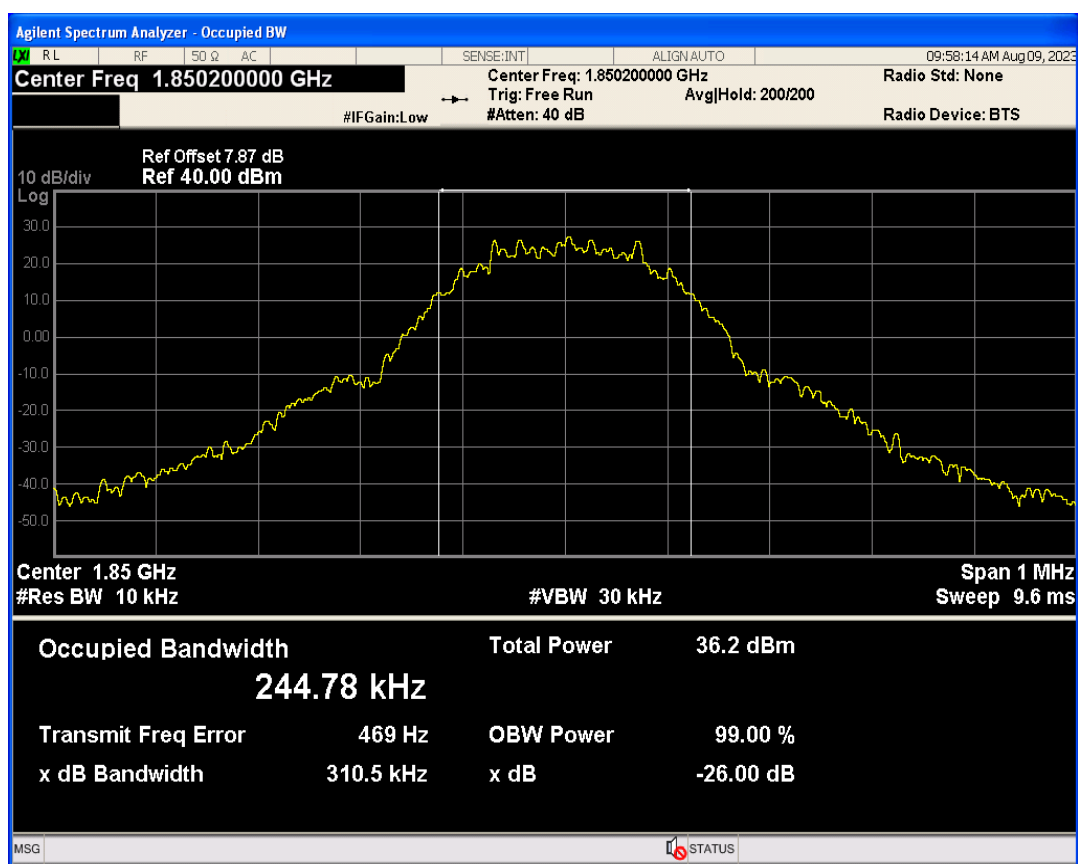


GSM1900 Channel=661

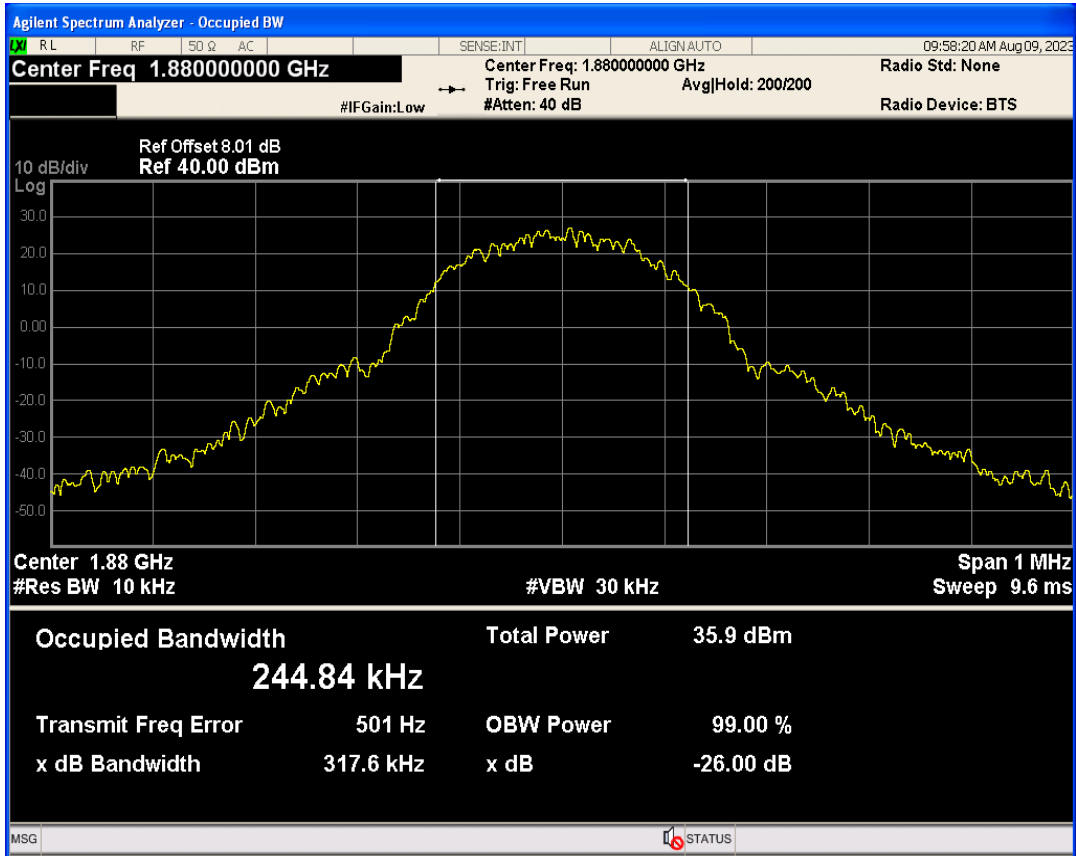


GSM1900 Channel=810

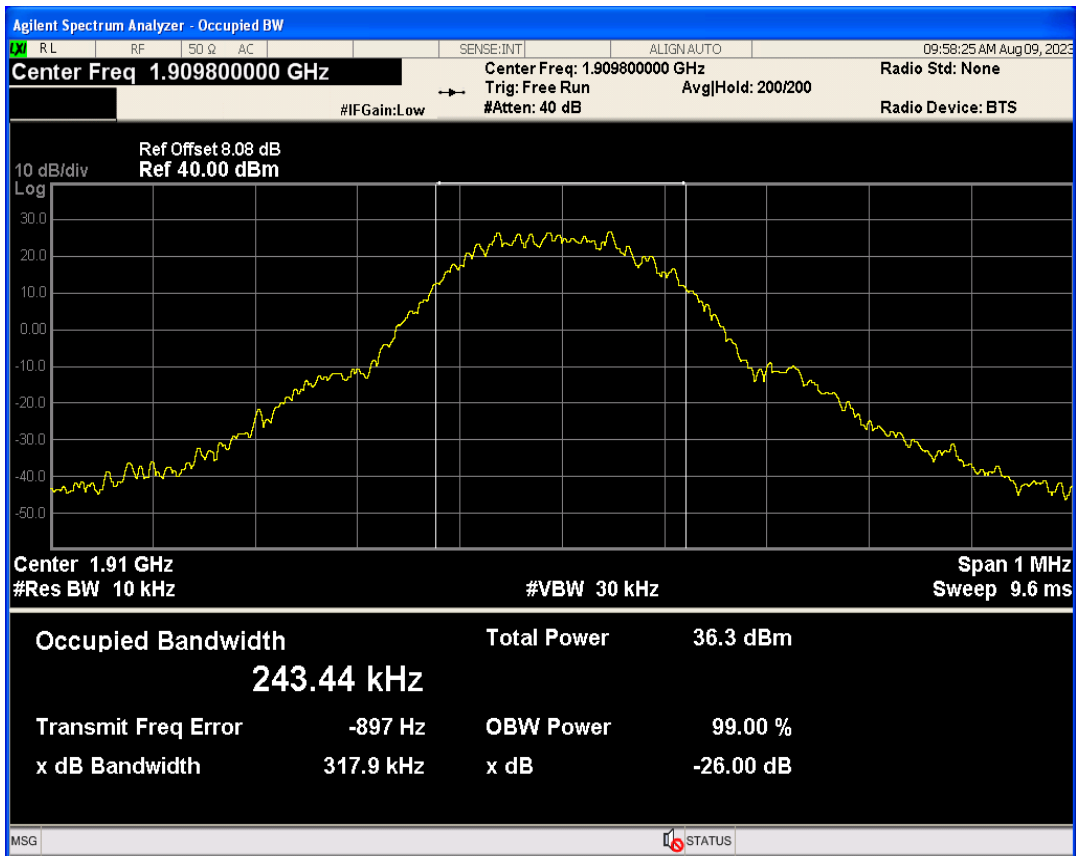


GSM850 Channel=128

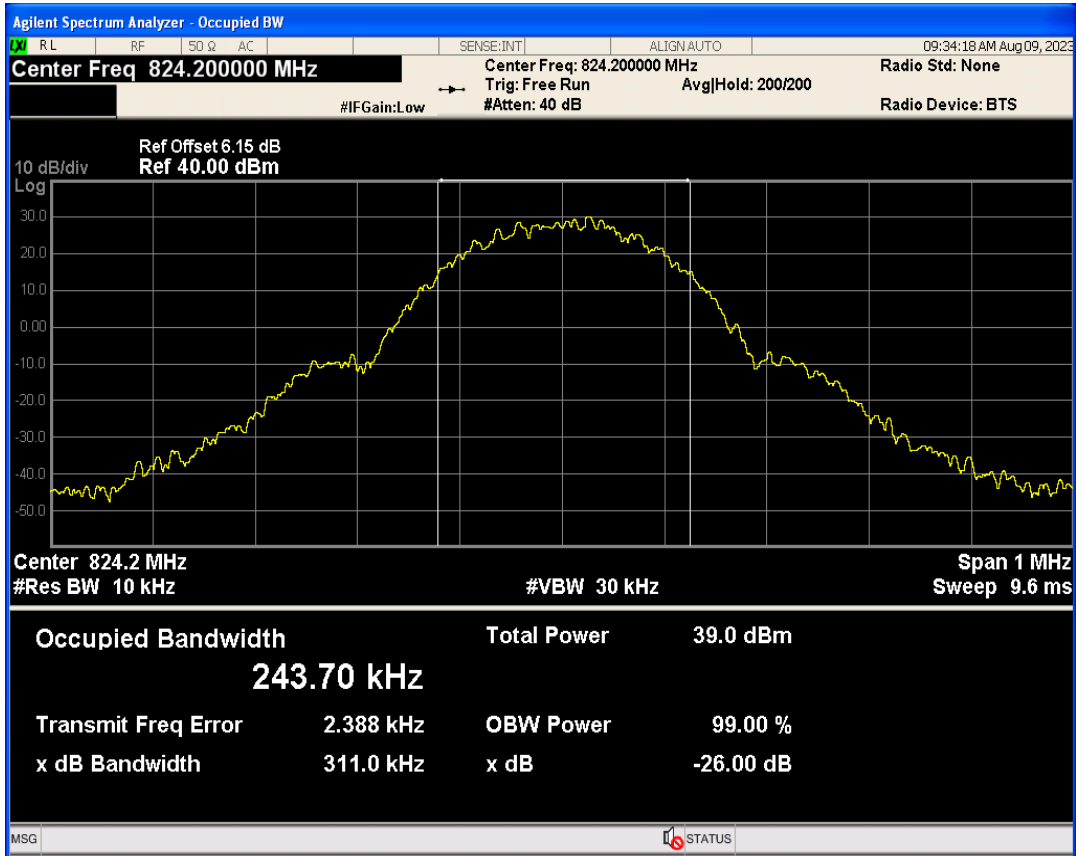

GSM850 Channel=189

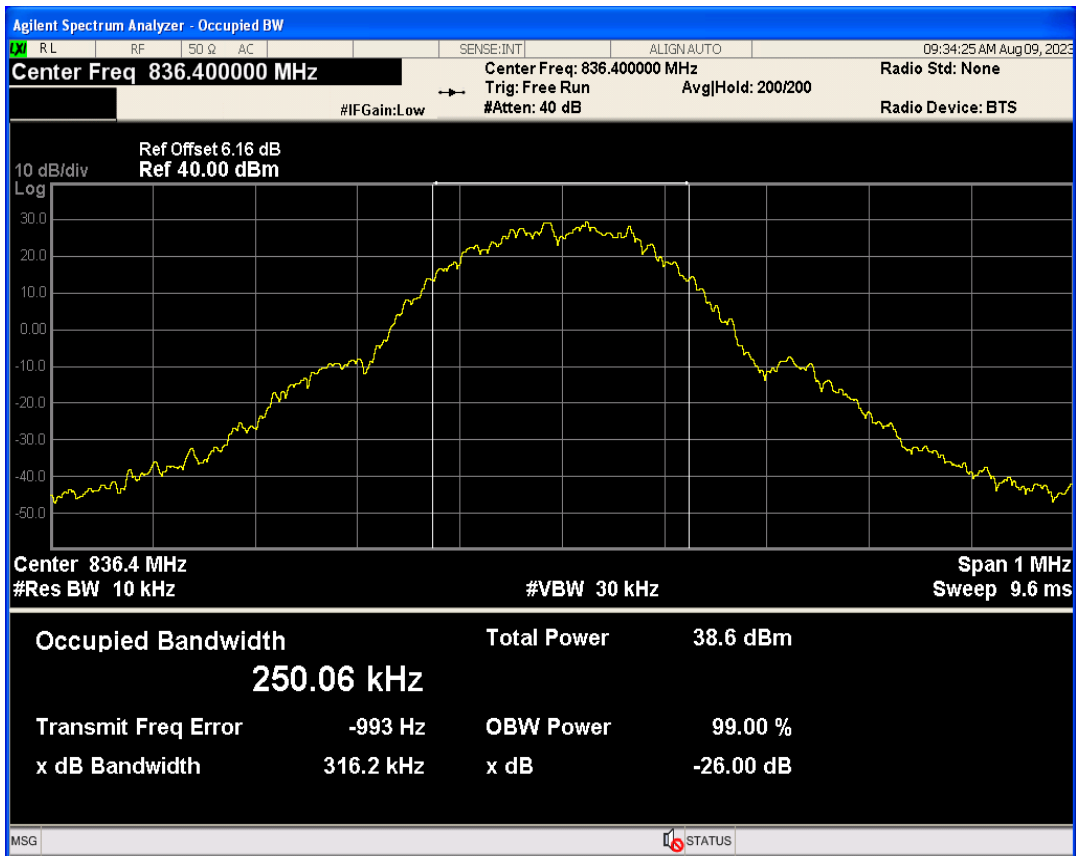


GSM850 Channel=251

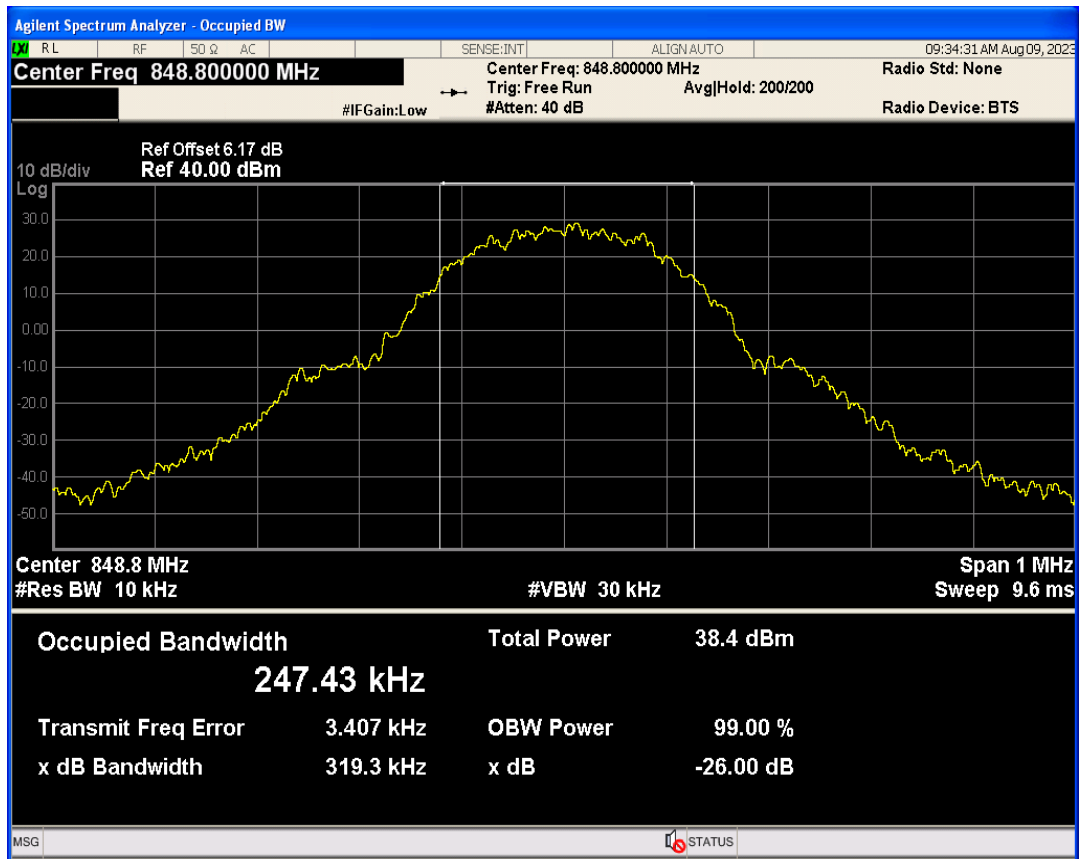


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.98	-29.31	-13	PASS
GSM1900	810	1909.8	1910.02	-28.17	-13	PASS
GSM850	128	824.2	823.98	-26.73	-13	PASS
GSM850	251	848.8	849.02	-25.51	-13	PASS


GSM1900 Channel=512

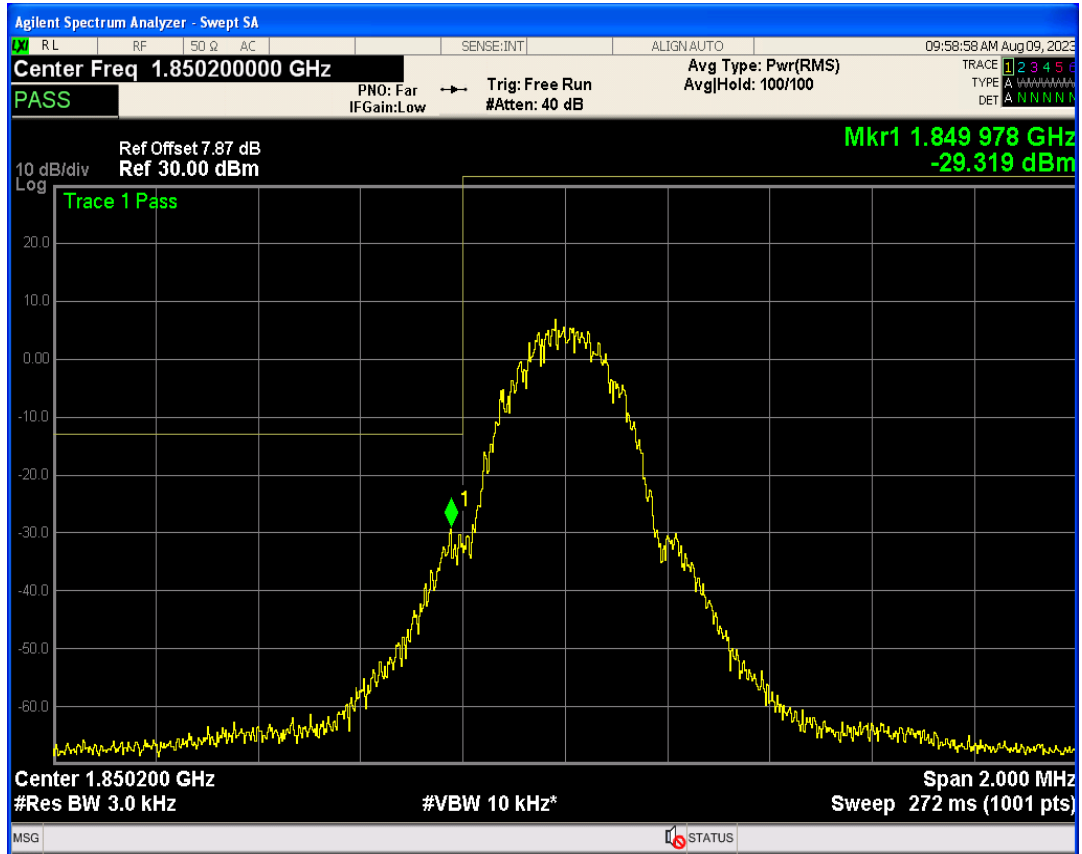


GSM1900 Channel=810

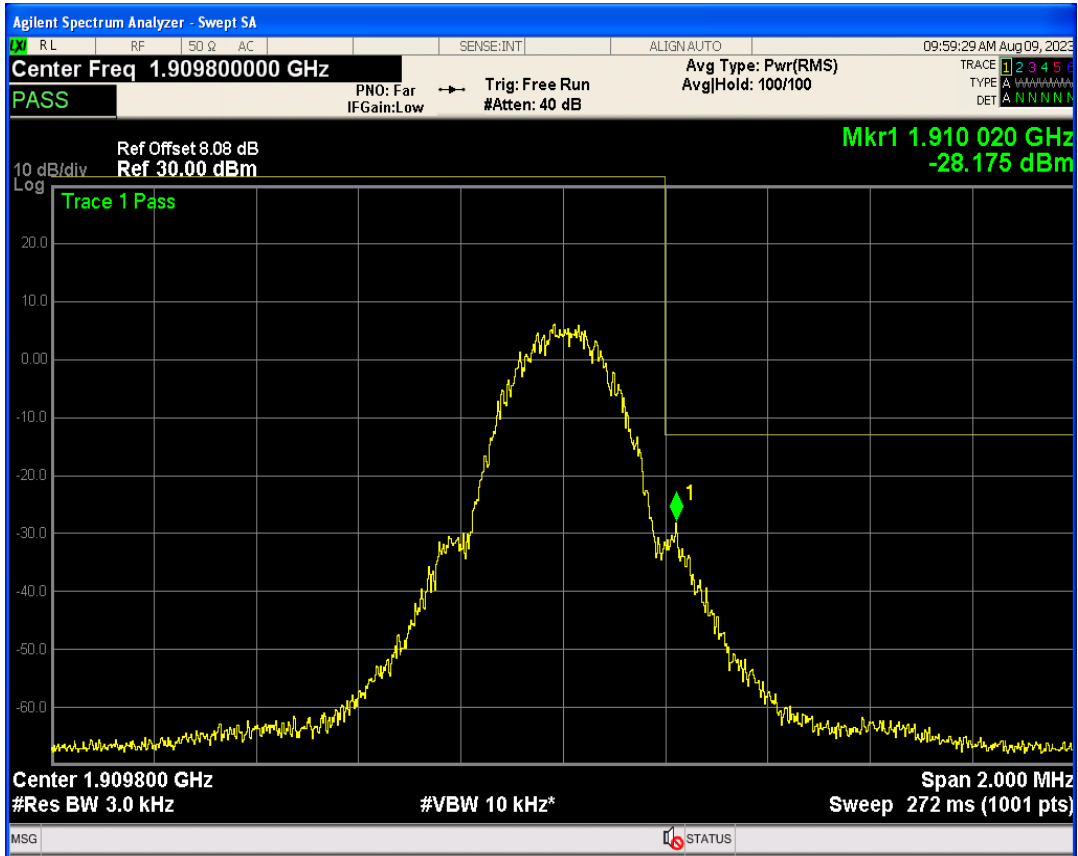

GSM850 Channel=128

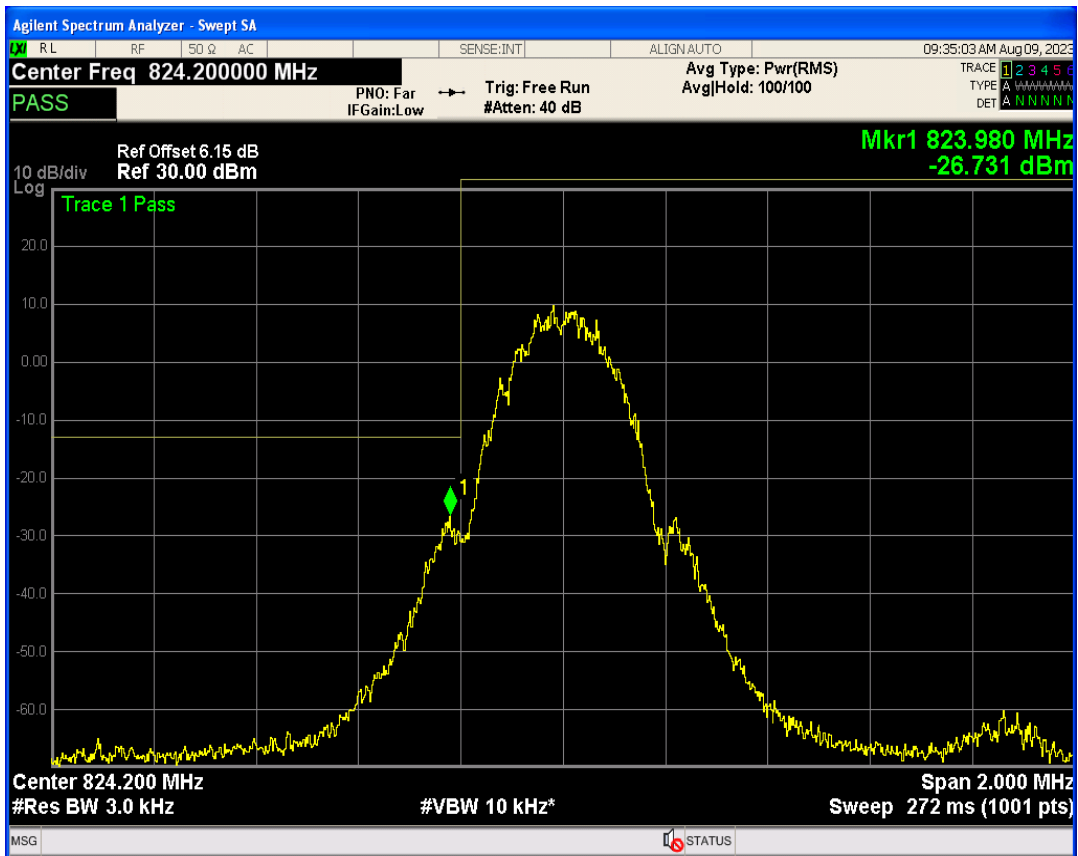


GSM850 Channel=251

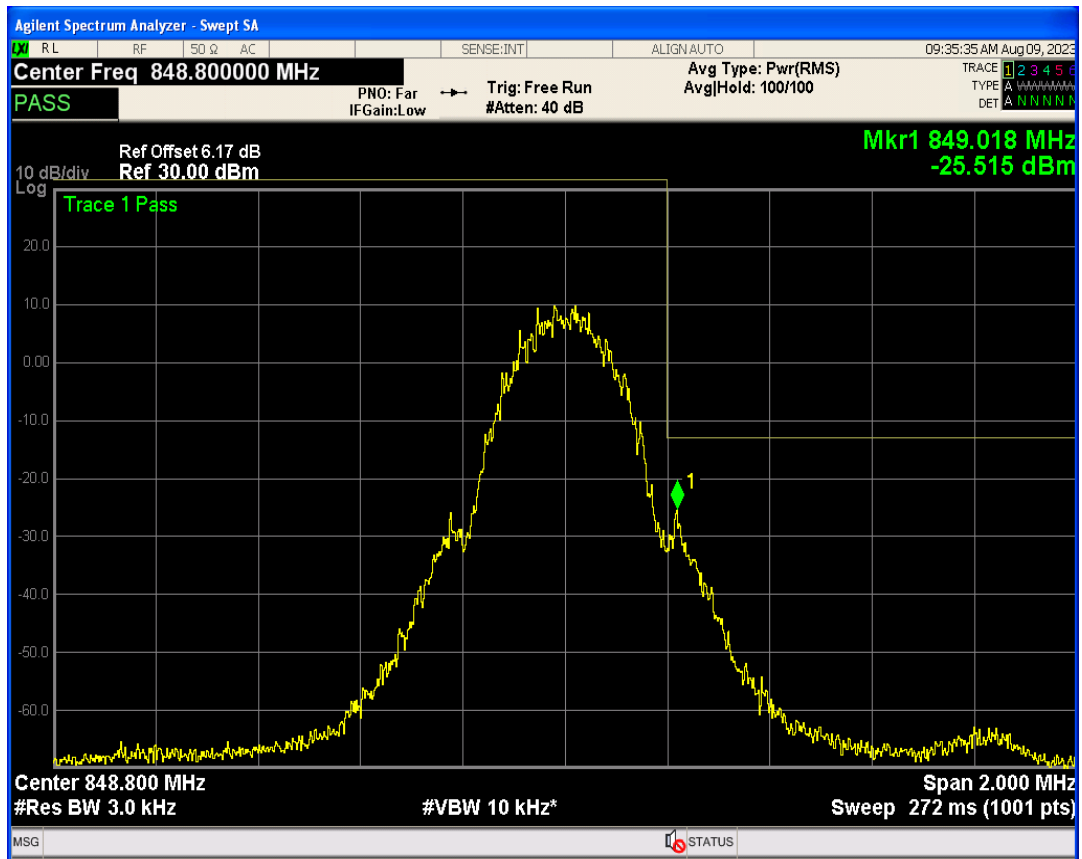


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	25951.41	-18.53	-13	PASS
GSM1900	661	1880	25910.38	-18.10	-13	PASS
GSM1900	810	1909.8	25968.61	-17.93	-13	PASS
GSM850	128	824.2	25919.65	-20.10	-13	PASS
GSM850	189	836.4	26018.91	-20.23	-13	PASS
GSM850	251	848.8	26254.49	-19.73	-13	PASS


GSM1900 Channel=512

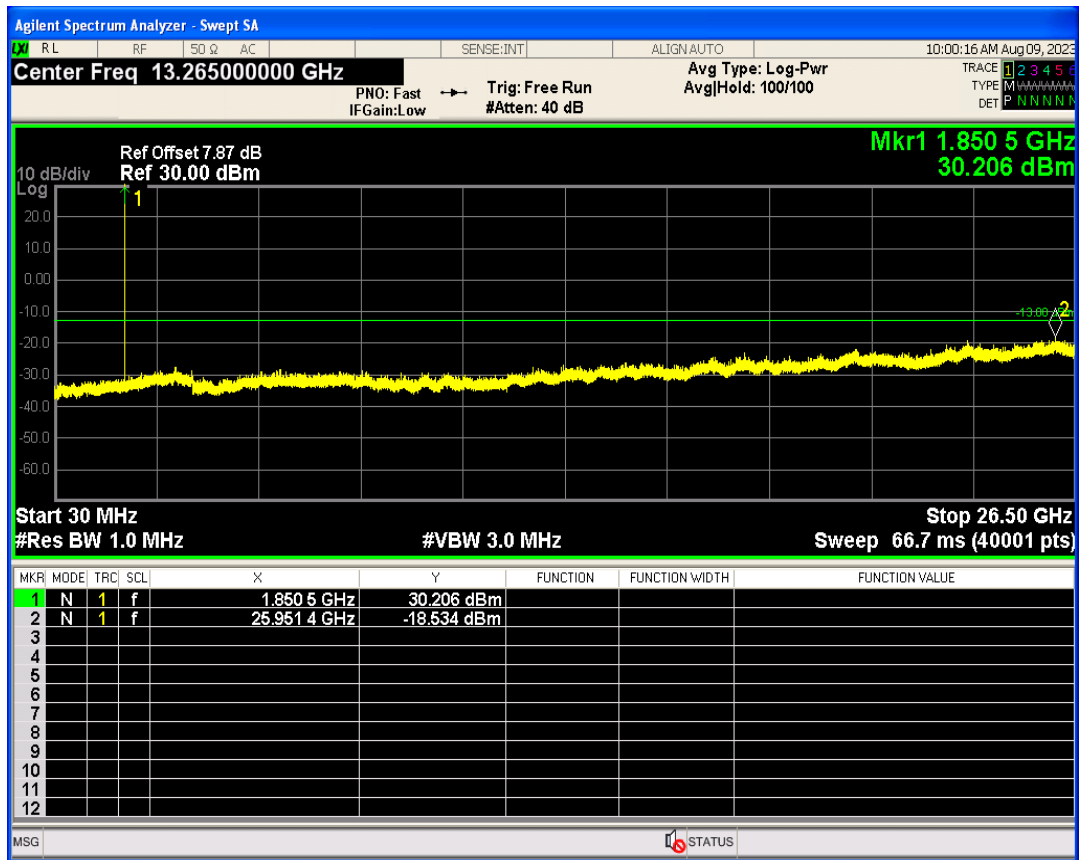


GSM1900 Channel=661

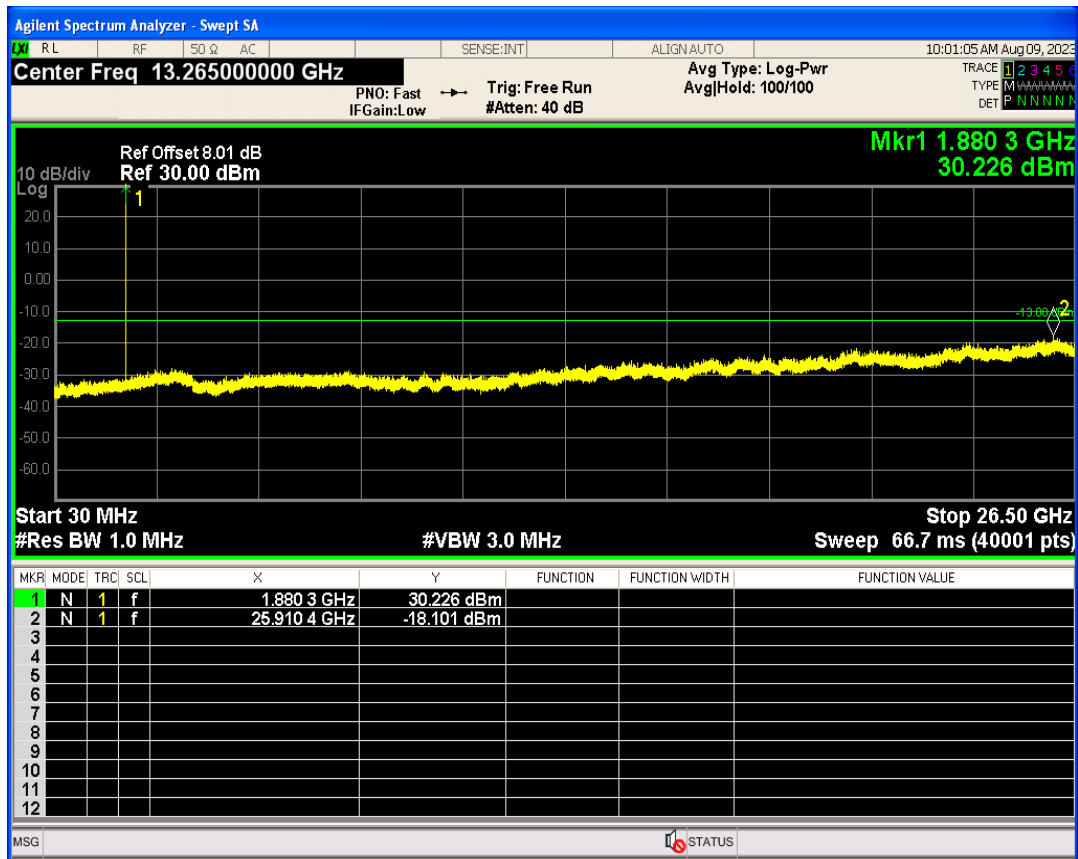


GSM1900 Channel=810

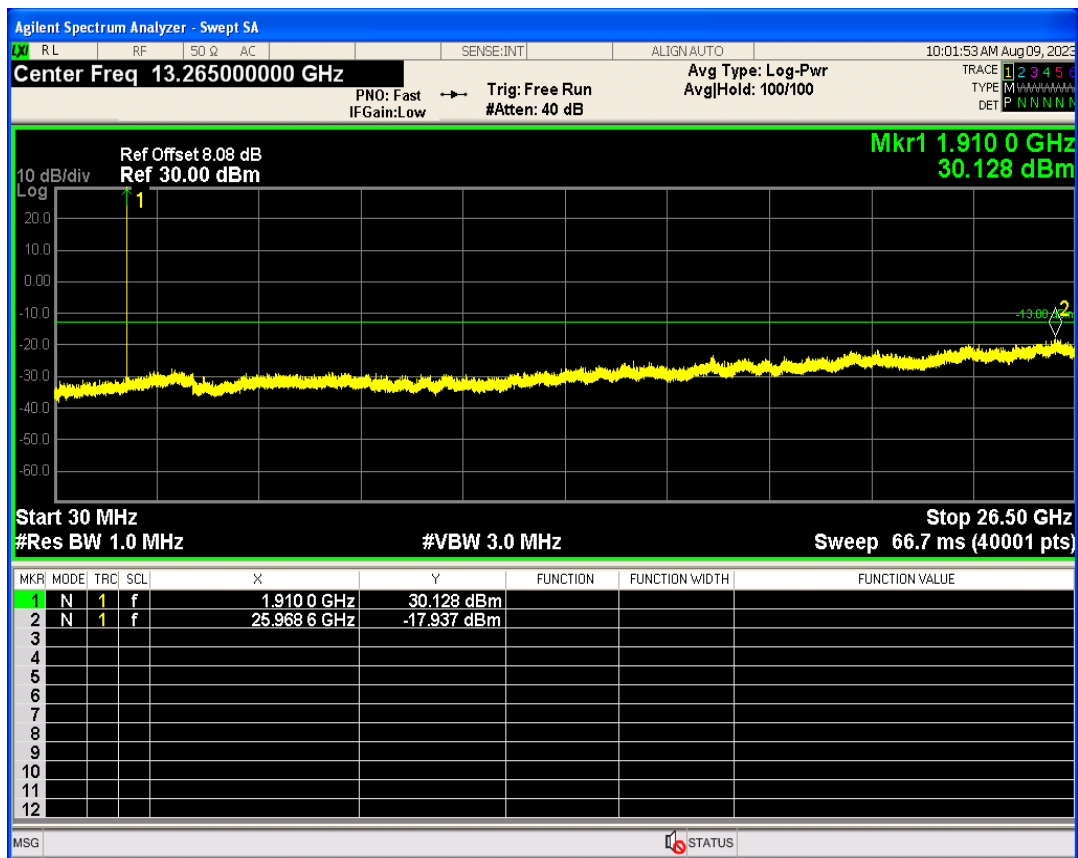

GSM850 Channel=128

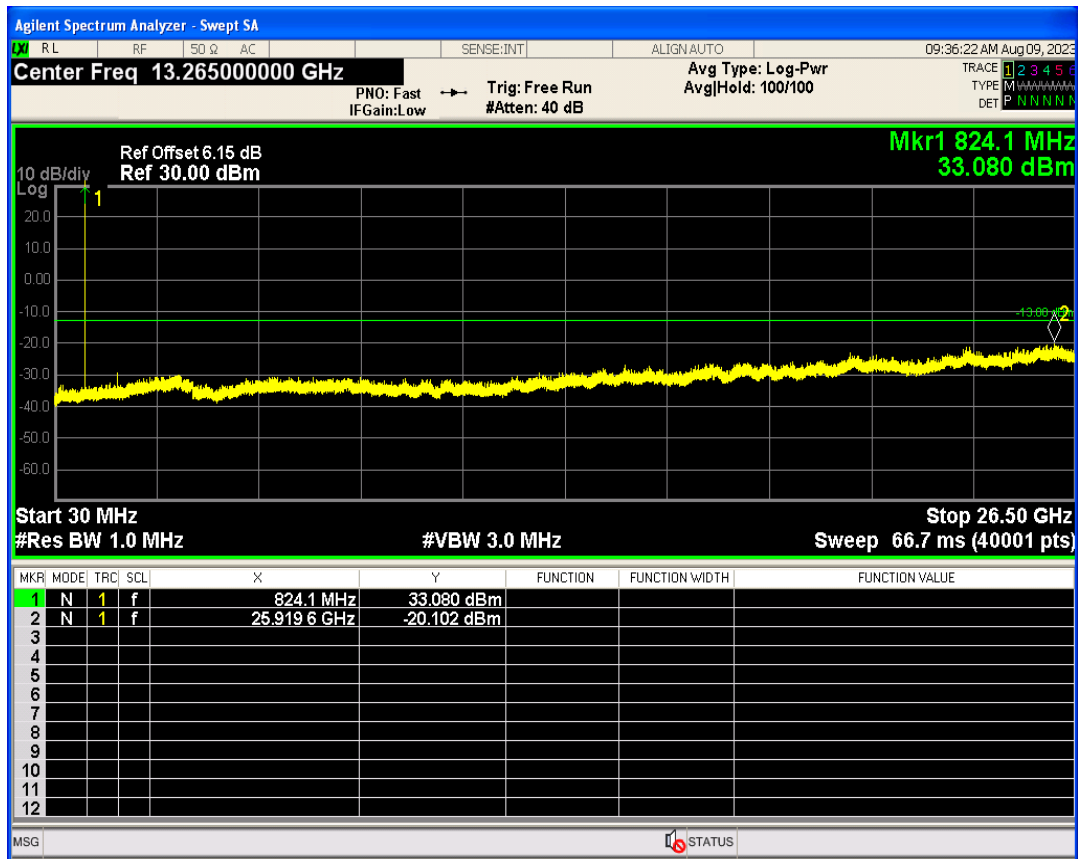

GSM850 Channel=189

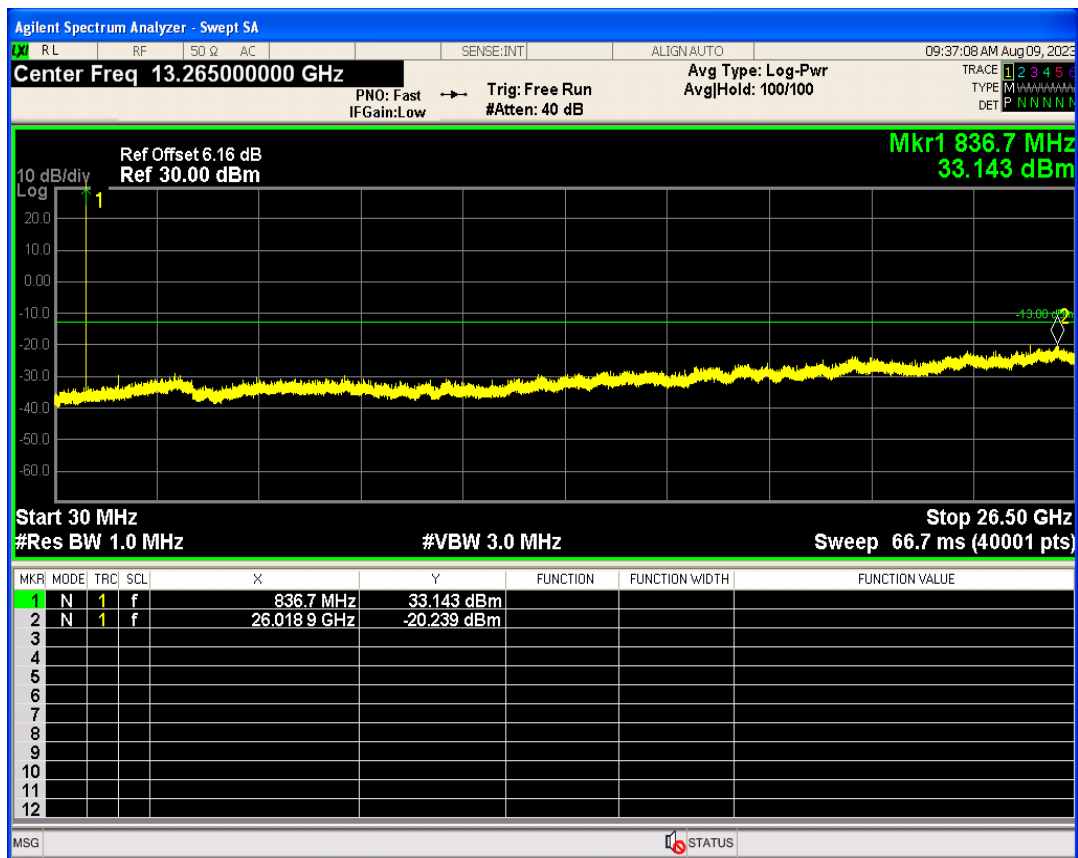

GSM850 Channel=251

