


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

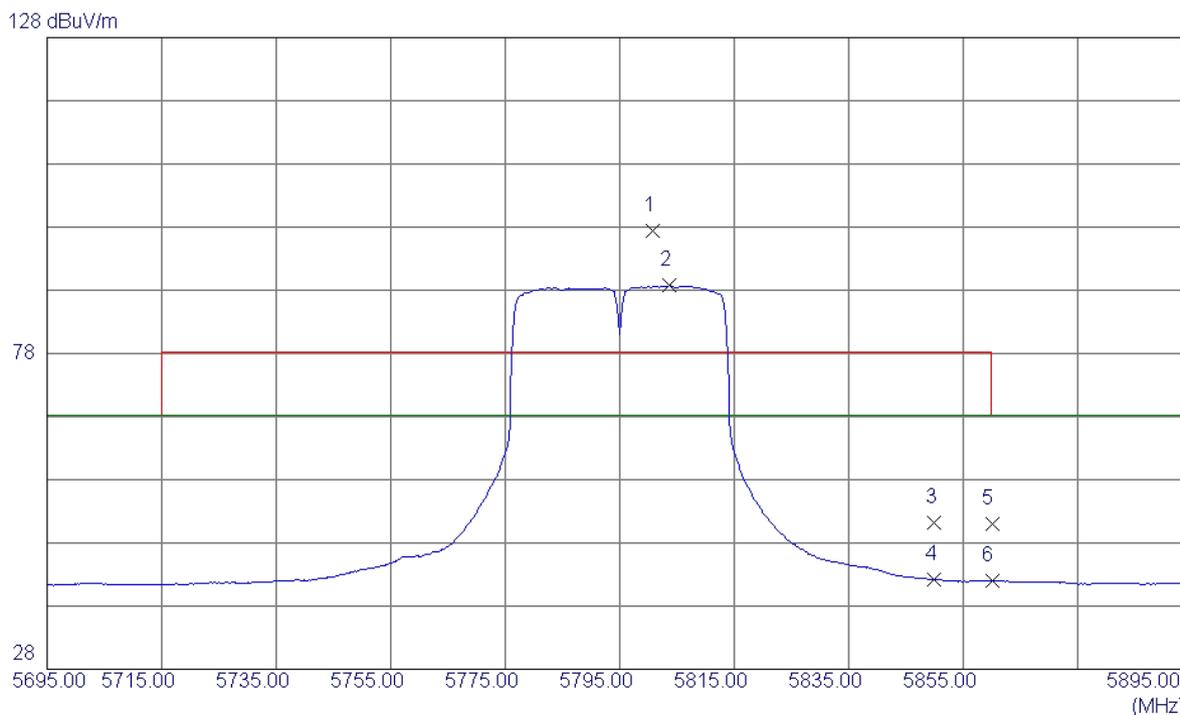

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5800.8000	61.77	35.58	97.35	78.30	19.05	Peak	No Limit
2	5803.6000	53.15	35.59	88.74	68.30	20.44	AVG	No Limit
3	5850.0000	15.57	35.66	51.23	78.30	-27.07	Peak	
4	5850.0000	6.56	35.66	42.22	68.30	-26.08	AVG	
5	5860.0000	15.29	35.68	50.97	78.30	-27.33	Peak	
6	5860.0000	6.24	35.68	41.92	68.30	-26.38	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

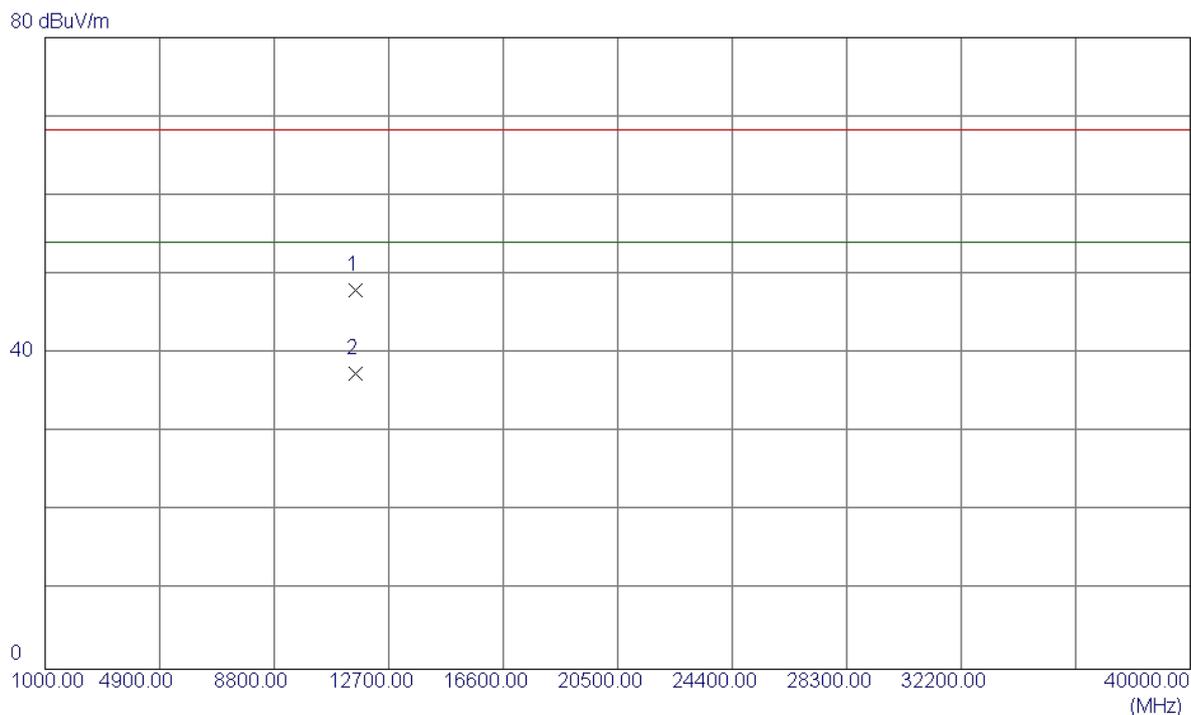

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.7400	30.94	17.08	48.02	68.30	-20.28	Peak	
2	11590.7400	20.38	17.08	37.46	54.00	-16.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

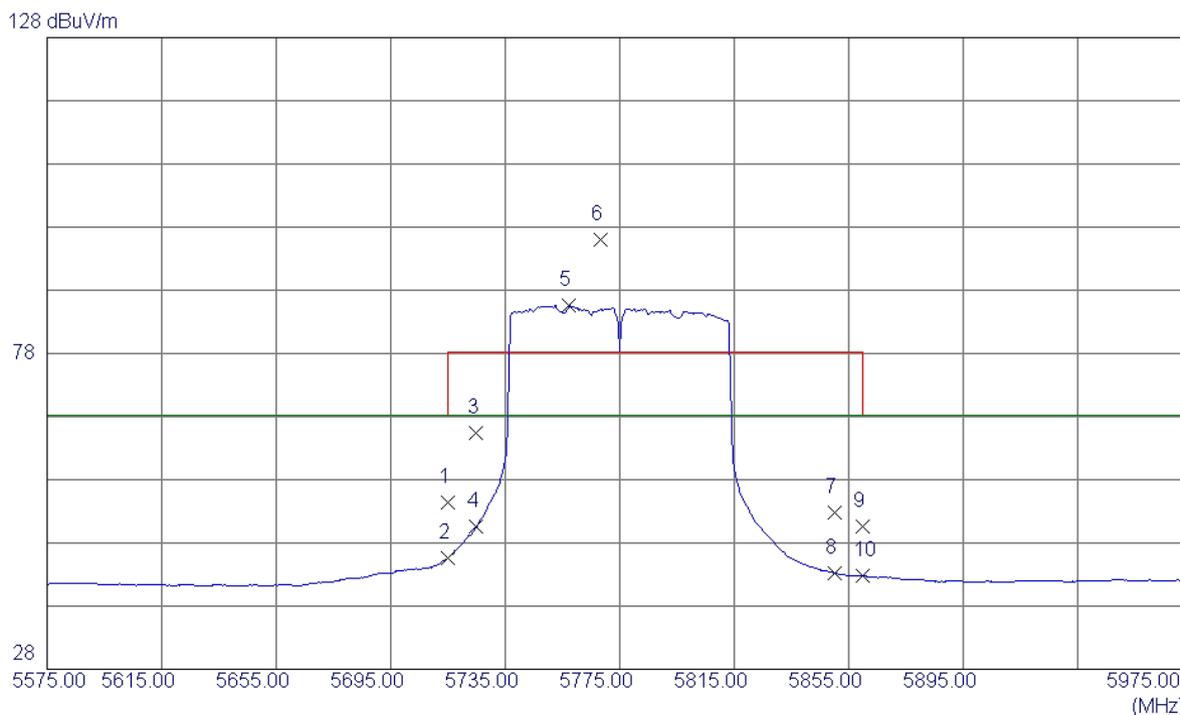

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	18.93	35.44	54.37	68.30	-13.93	Peak	
2	5715.0000	10.19	35.44	45.63	68.30	-22.67	AVG	
3	5725.0000	29.89	35.46	65.35	78.30	-12.95	Peak	
4	5725.0000	15.12	35.46	50.58	68.30	-17.72	AVG	
5	5757.4000	50.04	35.51	85.55	68.30	17.25	AVG	No Limit
6	5768.2000	60.49	35.53	96.02	78.30	17.72	Peak	No Limit
7	5850.0000	17.14	35.66	52.80	78.30	-25.50	Peak	
8	5850.0000	7.57	35.66	43.23	68.30	-25.07	AVG	
9	5860.0000	14.95	35.68	50.63	78.30	-27.67	Peak	
10	5860.0000	7.12	35.68	42.80	68.30	-25.50	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

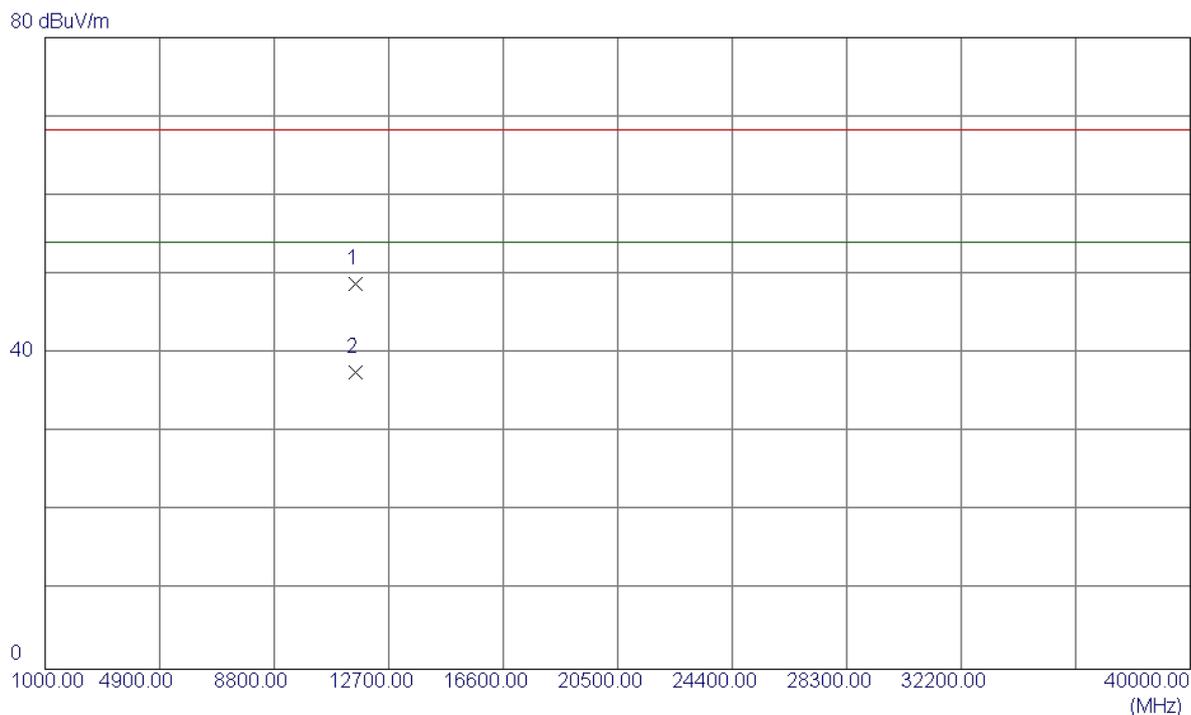

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11552.7859	31.78	17.02	48.80	68.30	-19.50	Peak	
2	11552.7560	20.52	17.02	37.54	54.00	-16.46	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

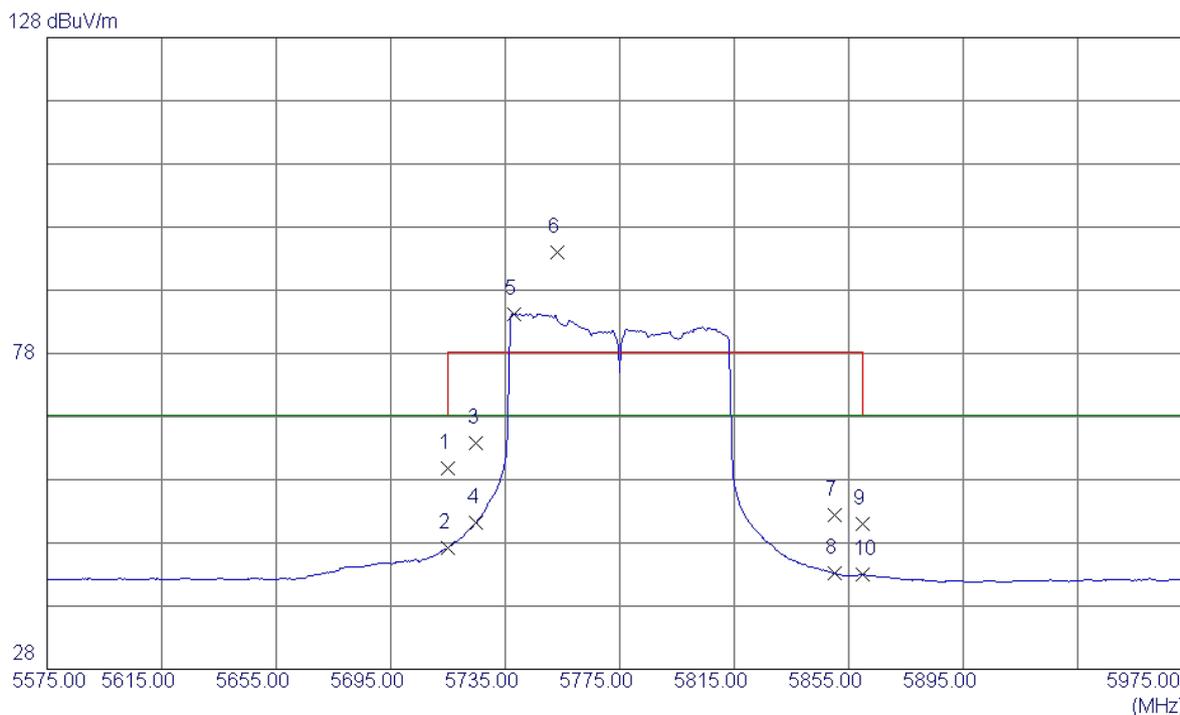

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	24.30	35.44	59.74	68.30	-8.56	Peak	
2	5715.0000	11.75	35.44	47.19	68.30	-21.11	AVG	
3	5725.0000	28.27	35.46	63.73	78.30	-14.57	Peak	
4	5725.0000	15.83	35.46	51.29	68.30	-17.01	AVG	
5	5738.2000	48.75	35.48	84.23	68.30	15.93	AVG	No Limit
6	5753.4000	58.48	35.51	93.99	78.30	15.69	Peak	No Limit
7	5850.0000	16.78	35.66	52.44	78.30	-25.86	Peak	
8	5850.0000	7.51	35.66	43.17	68.30	-25.13	AVG	
9	5860.0000	15.27	35.68	50.95	78.30	-27.35	Peak	
10	5860.0000	7.27	35.68	42.95	68.30	-25.35	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

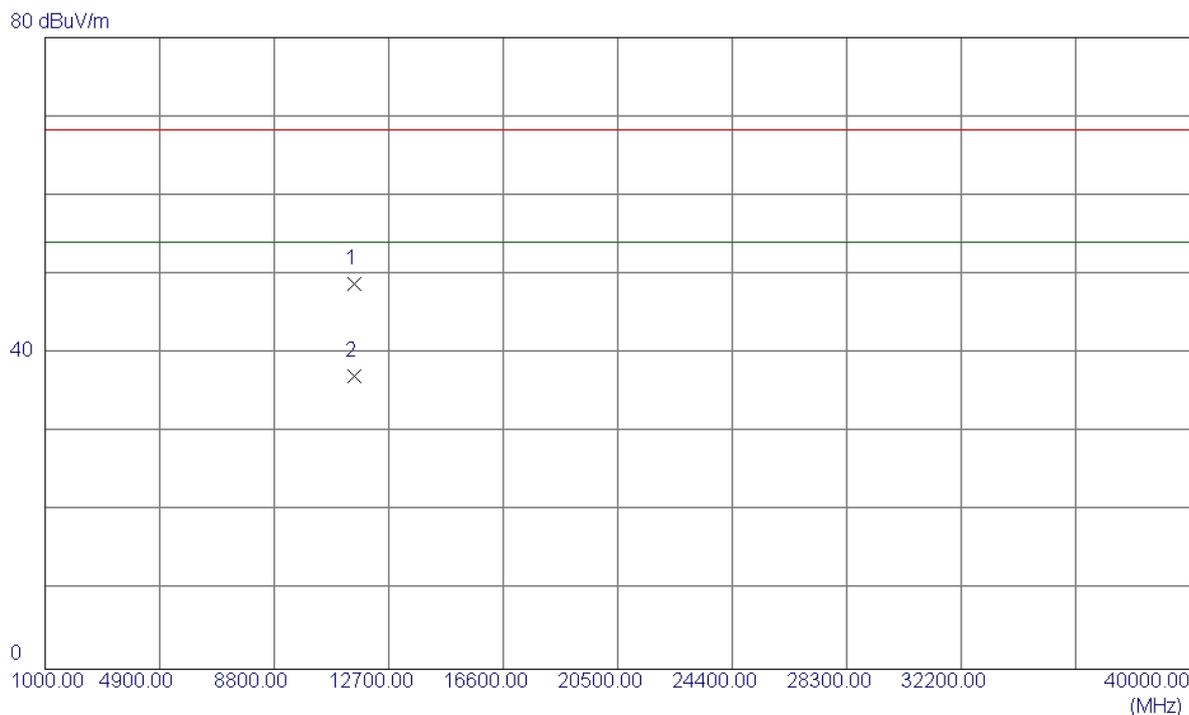

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.7859	31.78	17.02	48.80	68.30	-19.50	Peak	
2	11550.5540	20.07	17.02	37.09	54.00	-16.91	AVG	

TX A Mode_DUTY CYCLE

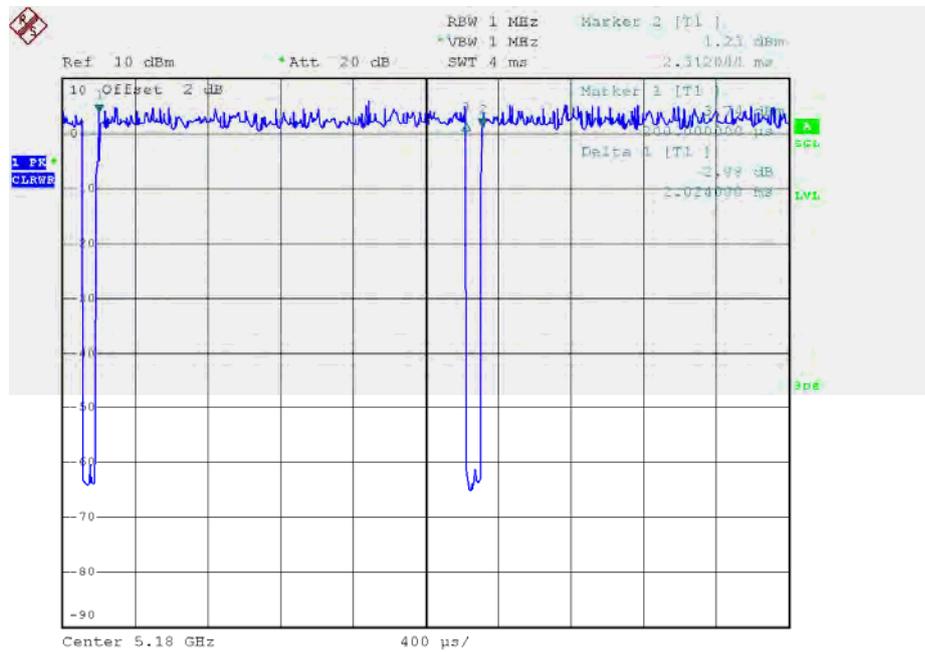

Date: 3.DEC.2015 14:18:35

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 2.02 msec

T_{Total} : 2.31 msec

Duty cycle: 87.45%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.58

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

$$\text{Output Power} = \text{Measured power} + \text{Ducy factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX N20 Mode_DUTY CYCLE

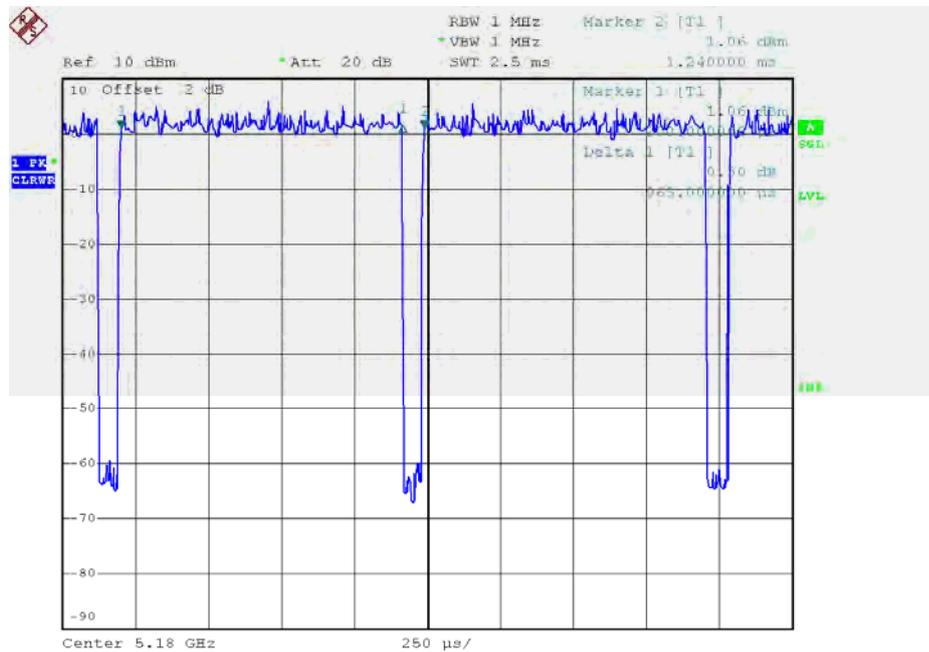

Date: 3.DEC.2015 14:14:39

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.97 msec

T_{Total} : 1.24 msec

Duty cycle: 78.23%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 1.07

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX N40 Mode_DUTY CYCLE

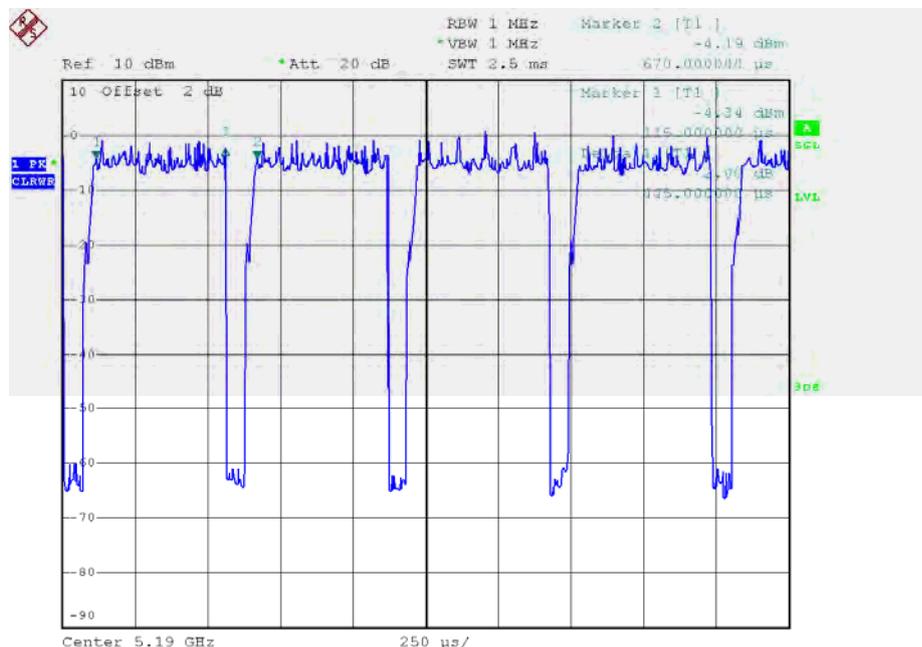

Date: 2.NOV.2015 16:44:27

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.44 msec

T_{Total} : 0.67 msec

Duty cycle: 65.67%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 1.83

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX AC20 Mode_DUTY CYCLE

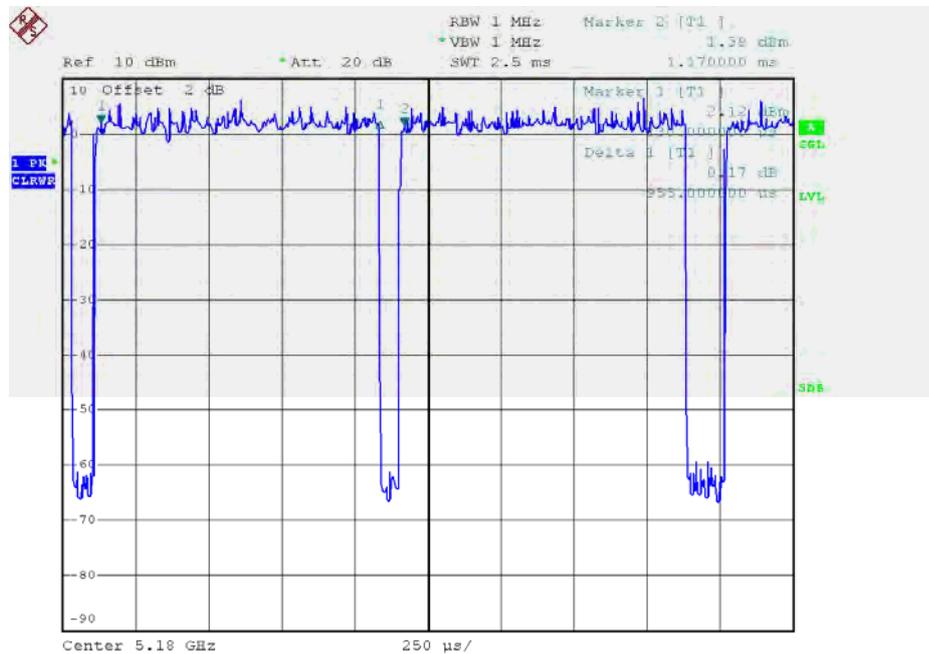

Date: 3.DEC.2015 14:07:15

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.96 msec

T_{Total} : 1.17 msec

Duty cycle: 82.05%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.86

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

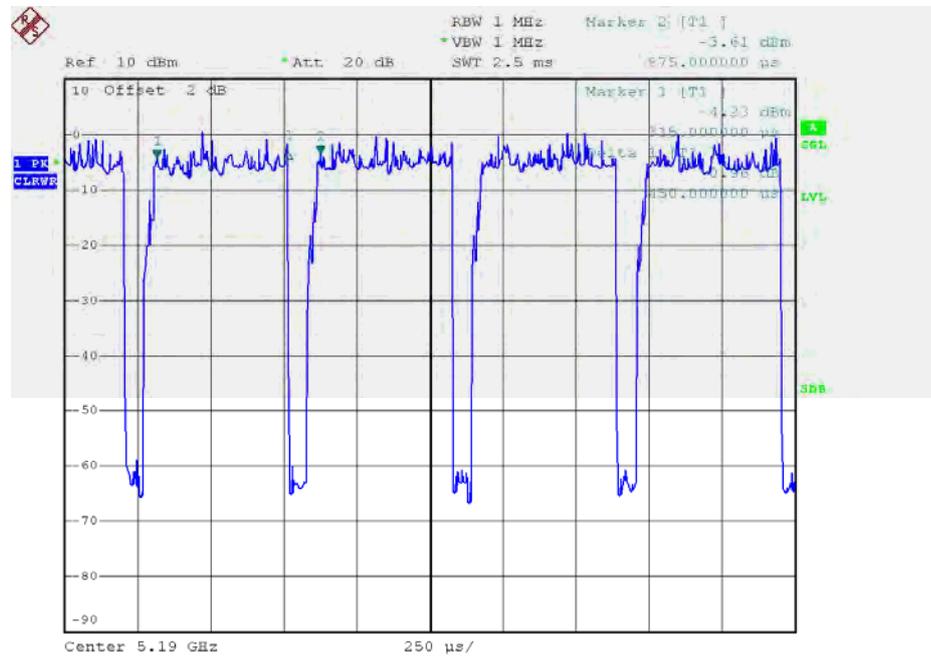

Date: 3.DEC.2015 14:12:33

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.45 msec

T_{Total} : 0.88 msec

Duty cycle: 51.14%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 2.91

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

Output Power = Measured power + Duty factor

Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

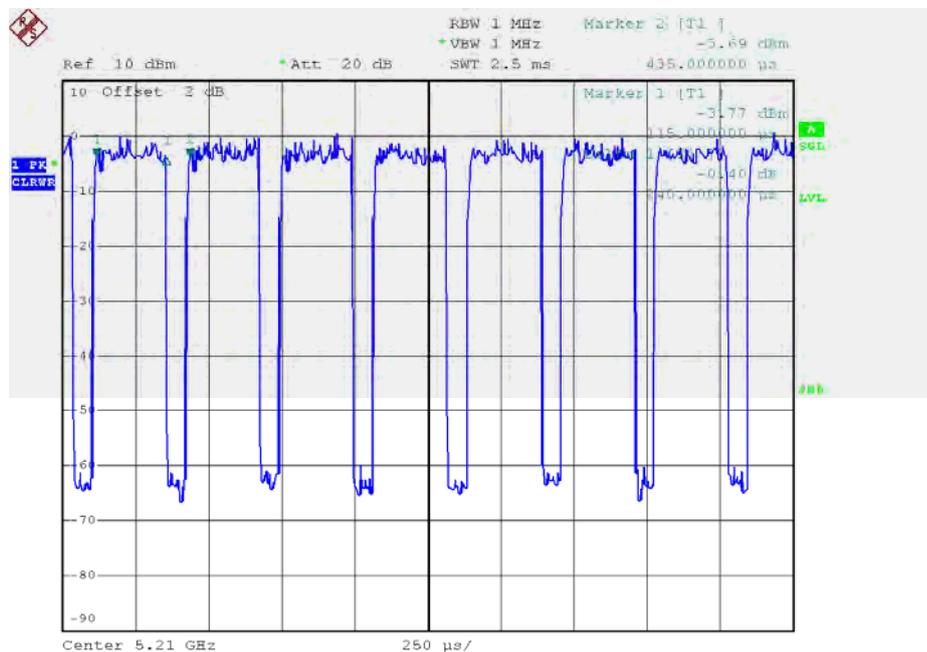

Date: 3.DEC.2015 14:07:57

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.24 msec

T_{Total} : 0.44 msec

Duty cycle: 54.55%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 2.63

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$


$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

ATTACHMENT E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.89	16.60
CH40	5200	34.00	18.00
CH48	5240	33.89	18.10

TX CH36

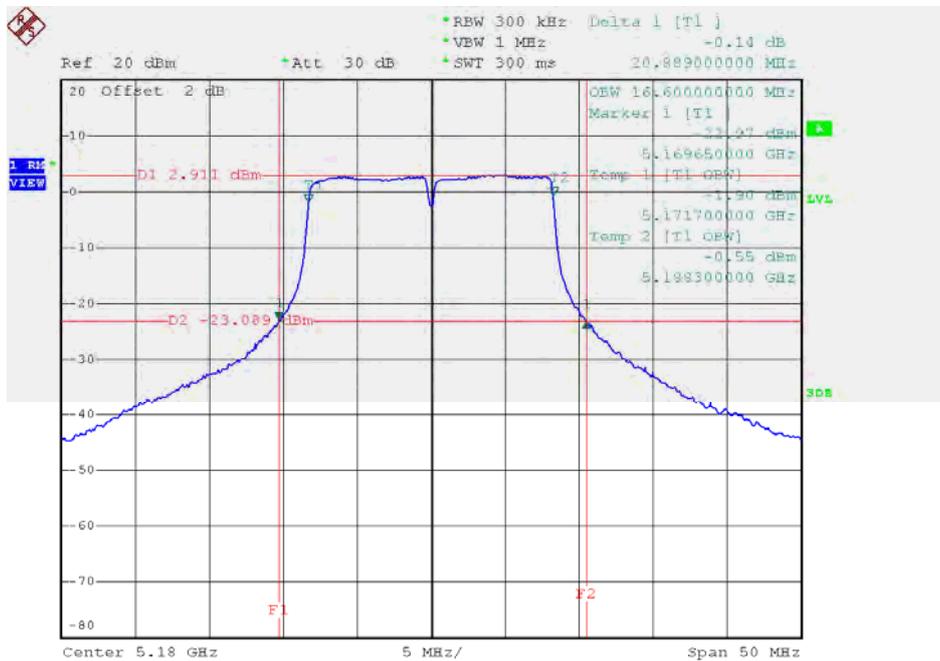


Date: 30.OCT.2015 00:18:00

TX CH40

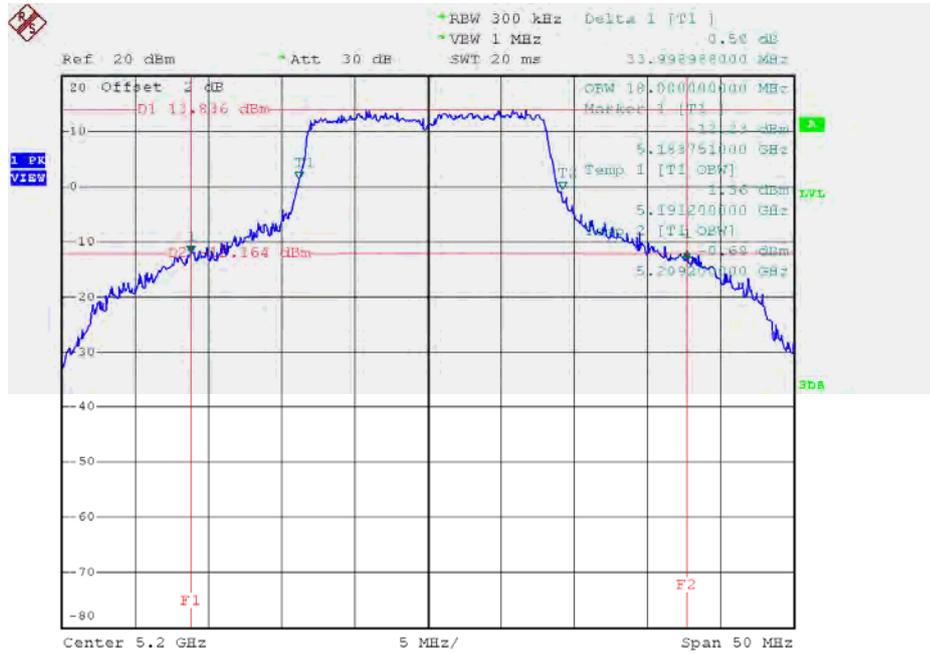

Date: 30.OCT.2015 00:52:23

TX CH48

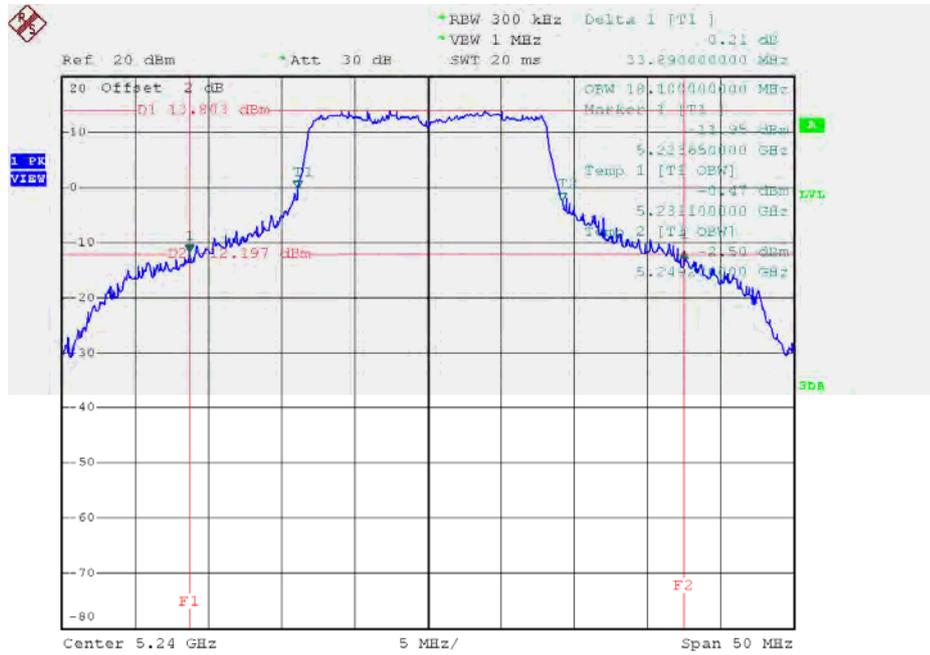


Date: 30.OCT.2015 00:53:23

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	37.00	19.10
CH40	5200	36.99	19.30
CH48	5240	36.29	19.20

TX CH36

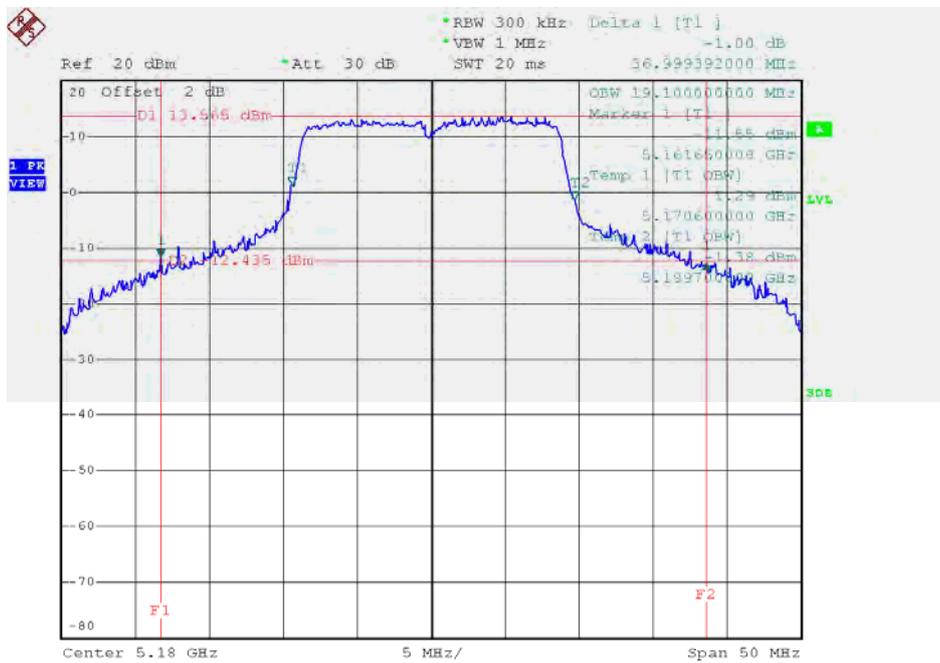


Date: 30.OCT.2015 01:41:50

TX CH40

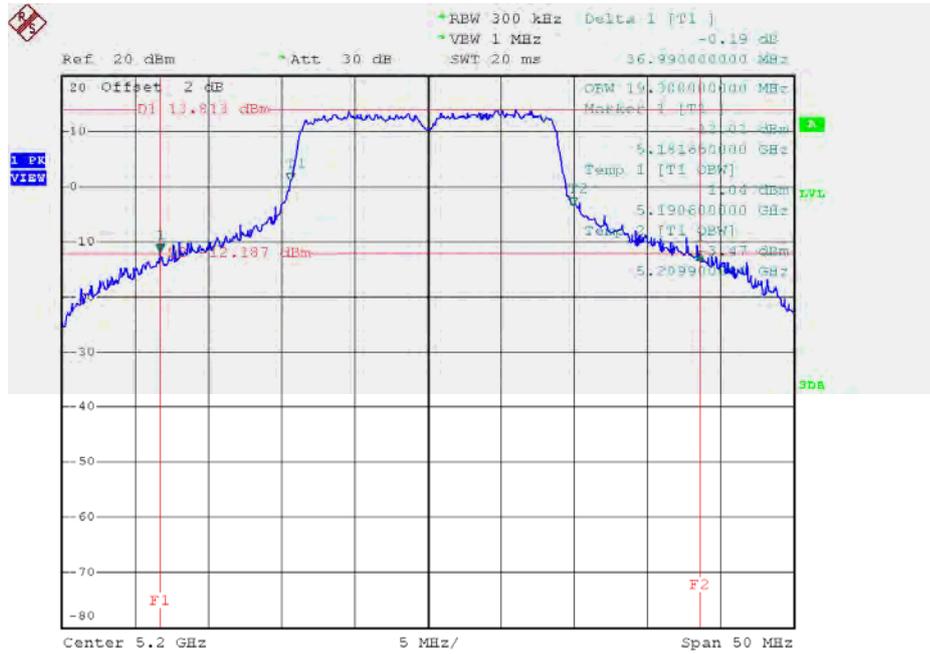

Date: 30.OCT.2015 01:45:32

TX CH48

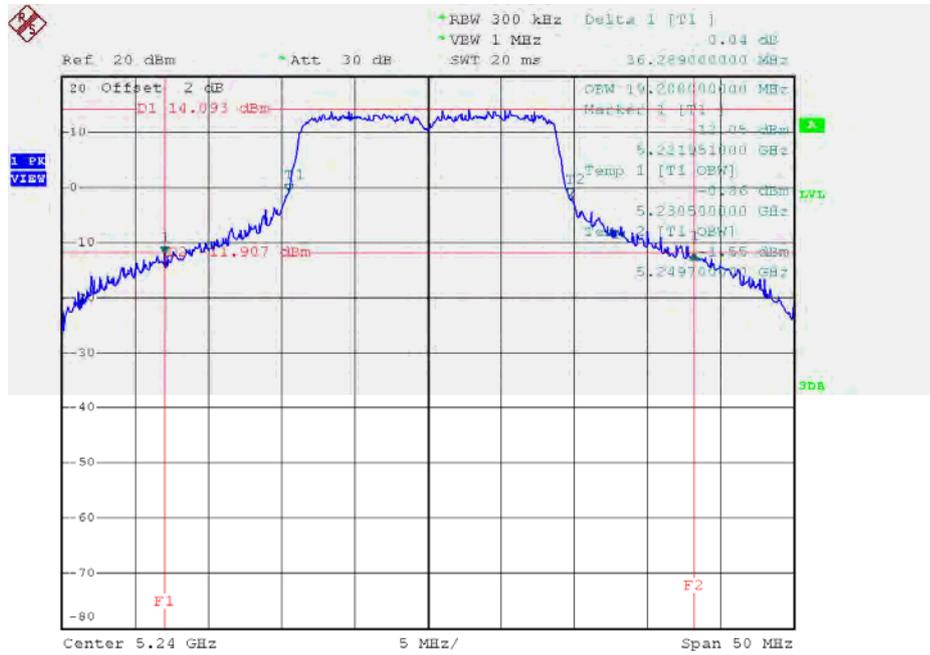


Date: 30.OCT.2015 01:46:21

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	64.30	37.00
CH46	5230	71.80	37.20

TX CH38

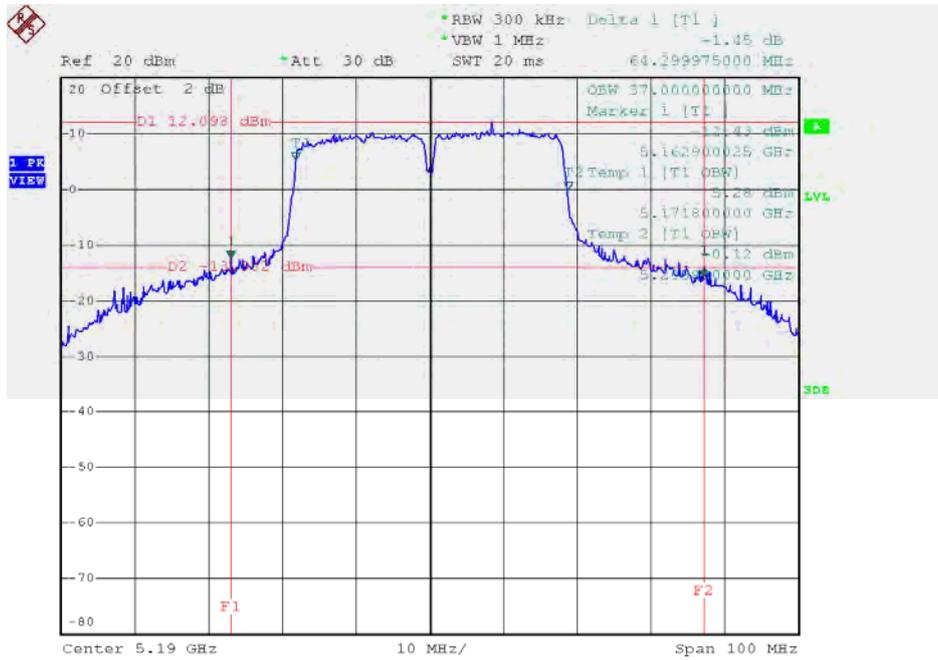

Date: 30.OCT.2015 02:32:14


TX CH46

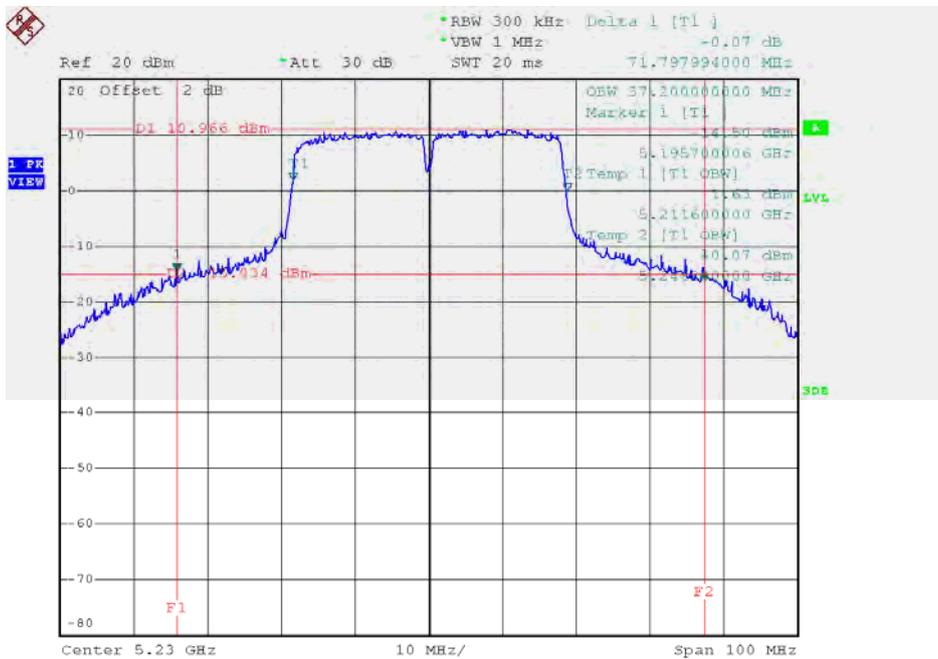

Date: 30.OCT.2015 02:35:09


Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	33.89	18.20
CH60	5300	28.25	17.30
CH64	5320	32.60	17.80

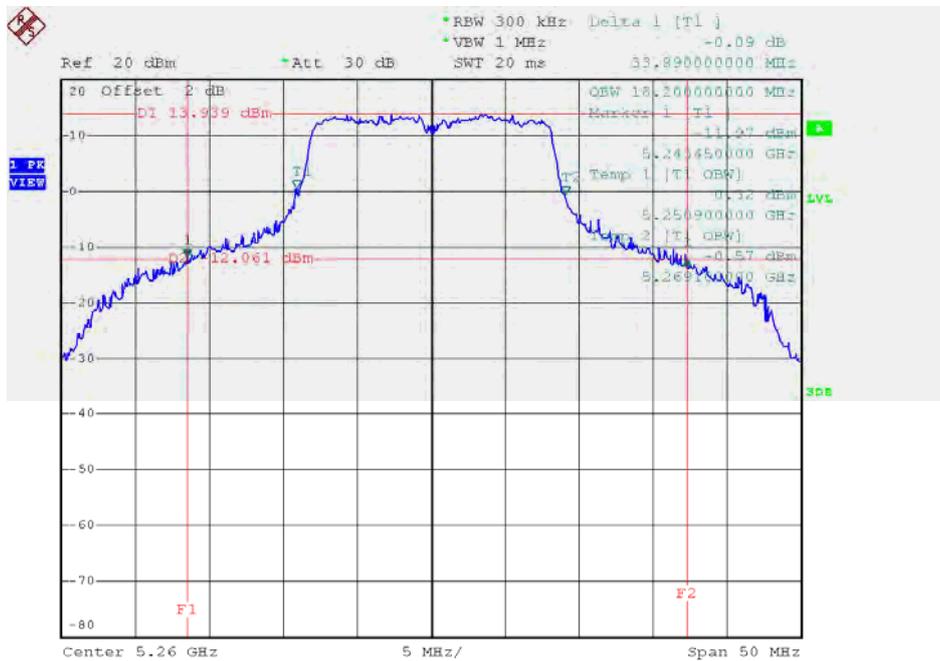TX CH52


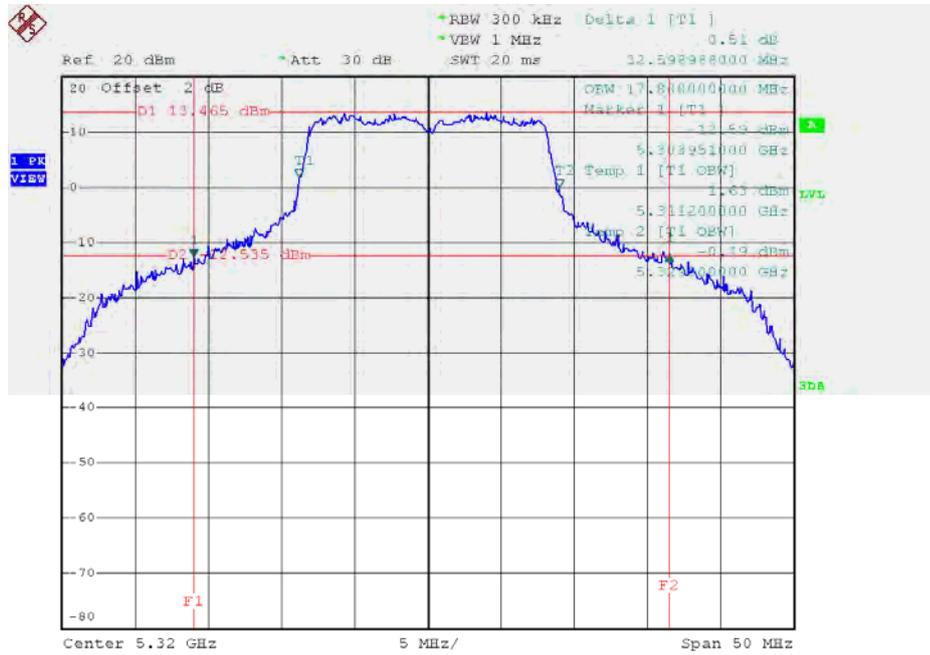
Date: 30.OCT.2015 00:54:31

TX CH60

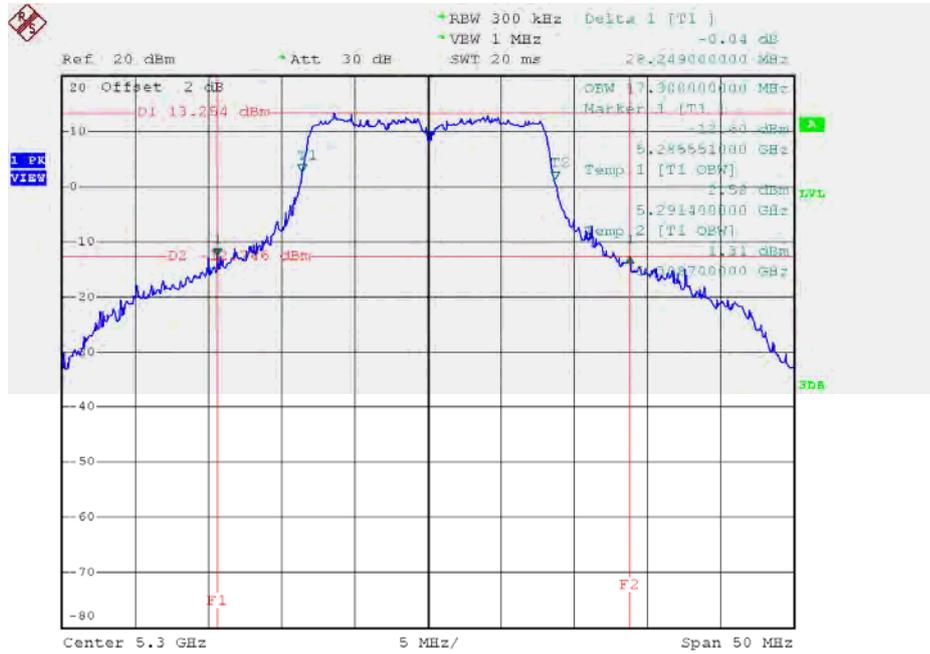

Date: 30.OCT.2015 00:58:16

TX CH64




Date: 30.OCT.2015 01:00:36

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	35.89	19.40
CH60	5300	40.19	20.40
CH64	5320	41.09	23.20

TX CH52

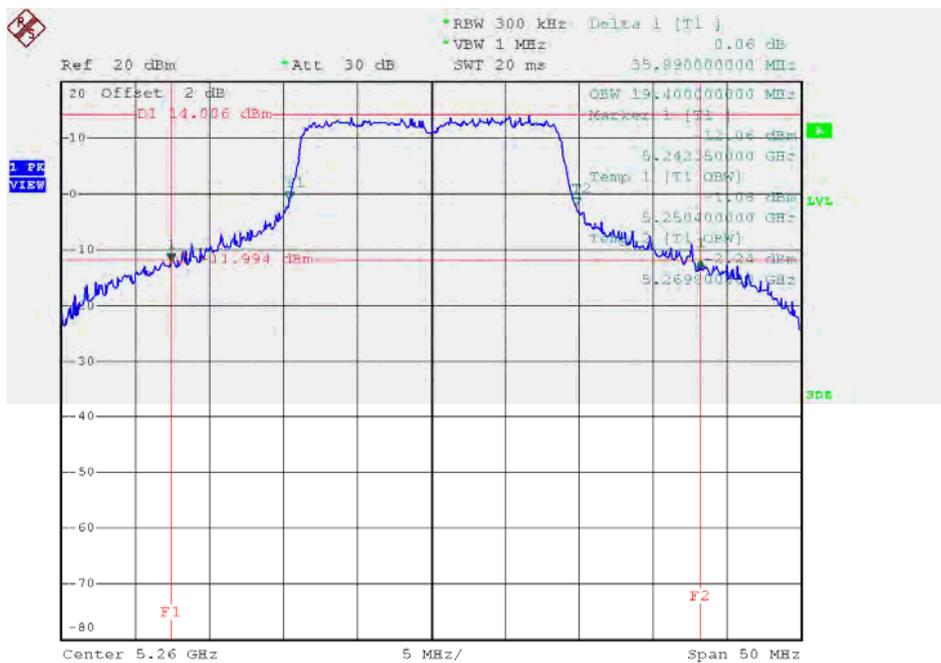


Date: 30.OCT.2015 01:47:37

TX CH60

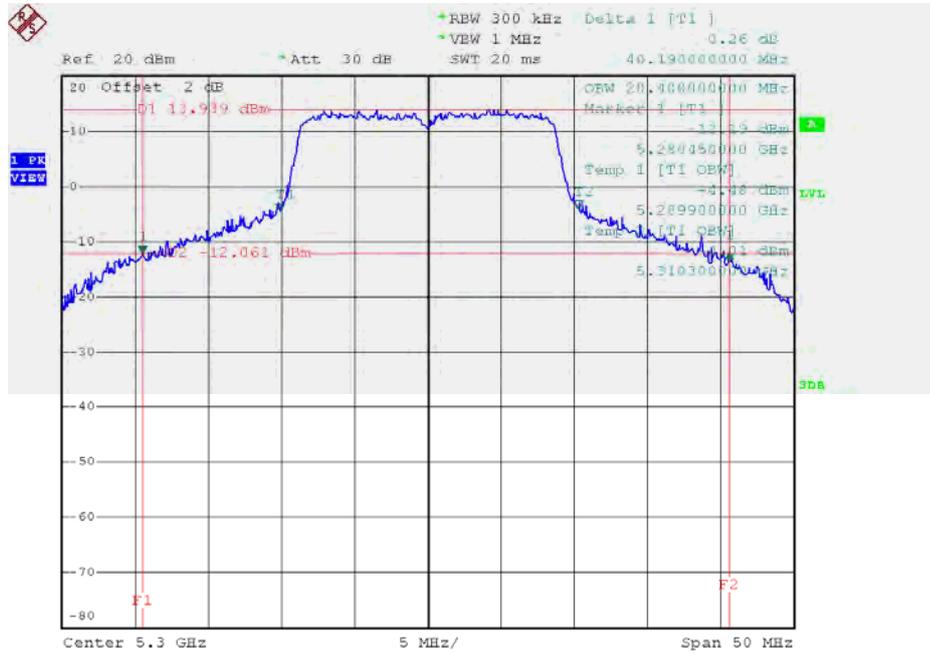

Date: 30.OCT.2015 01:50:35

TX CH64

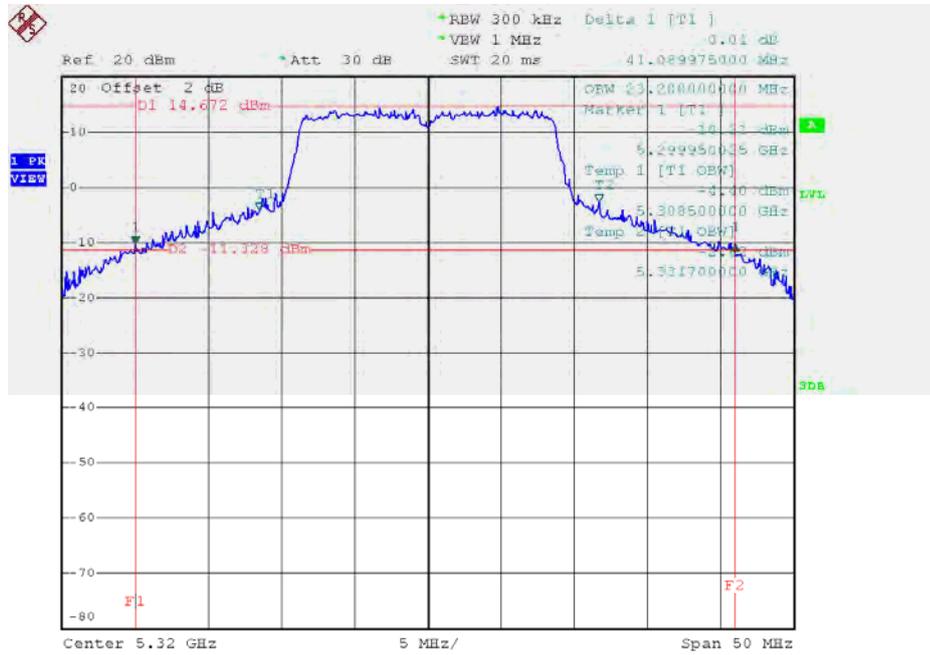


Date: 30.OCT.2015 01:53:51

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	85.20	41.80
CH62	5310	80.99	41.20

TX CH54

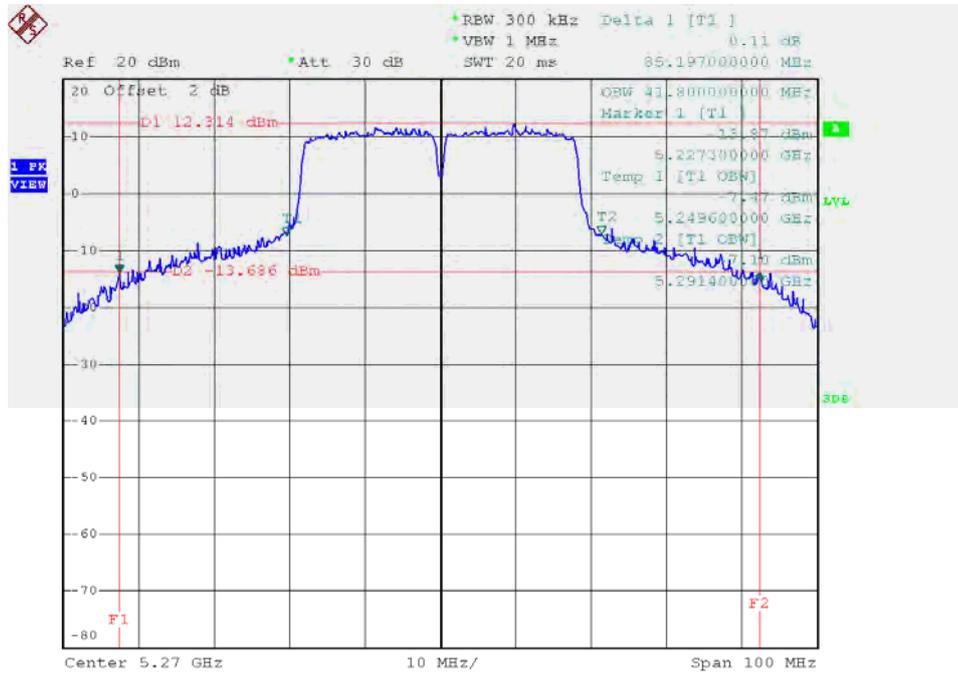

Date: 30.OCT.2015 02:36:08

TX CH62

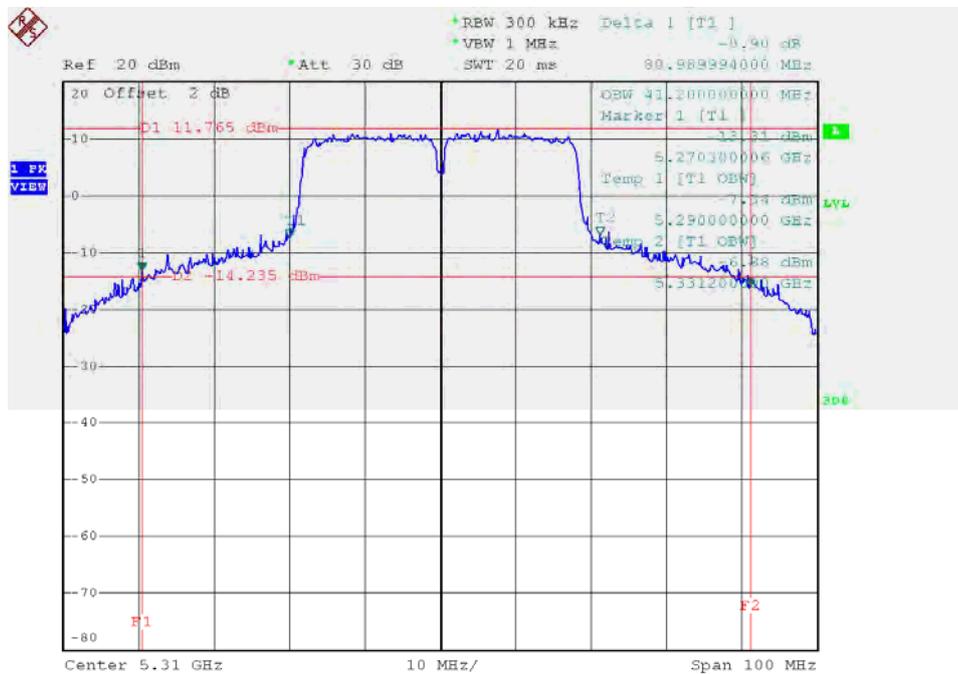


Date: 30.OCT.2015 02:37:26

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	37.30	19.40
CH116	5580	22.30	16.90
CH140	5700	24.15	17.00

TX CH100

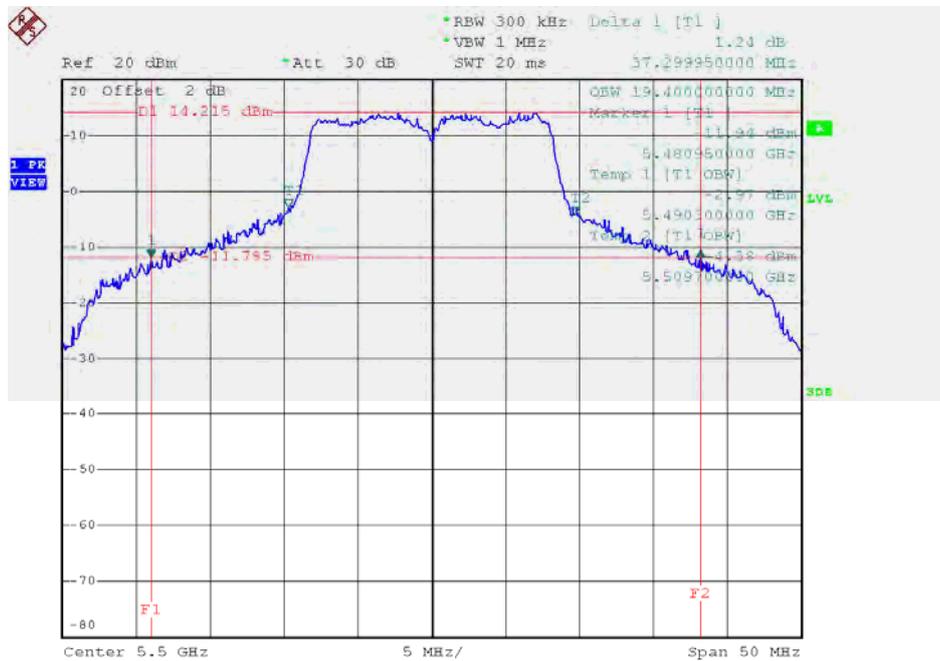


Date: 30.OCT.2015 01:07:59

TX CH116

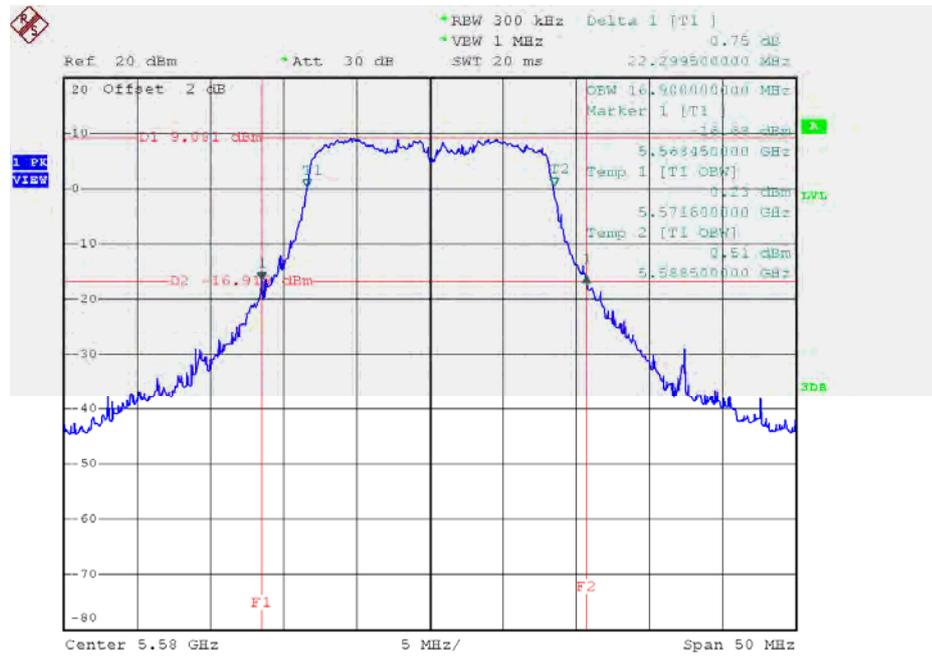

Date: 8.DEC.2015 10:47:51

TX CH140

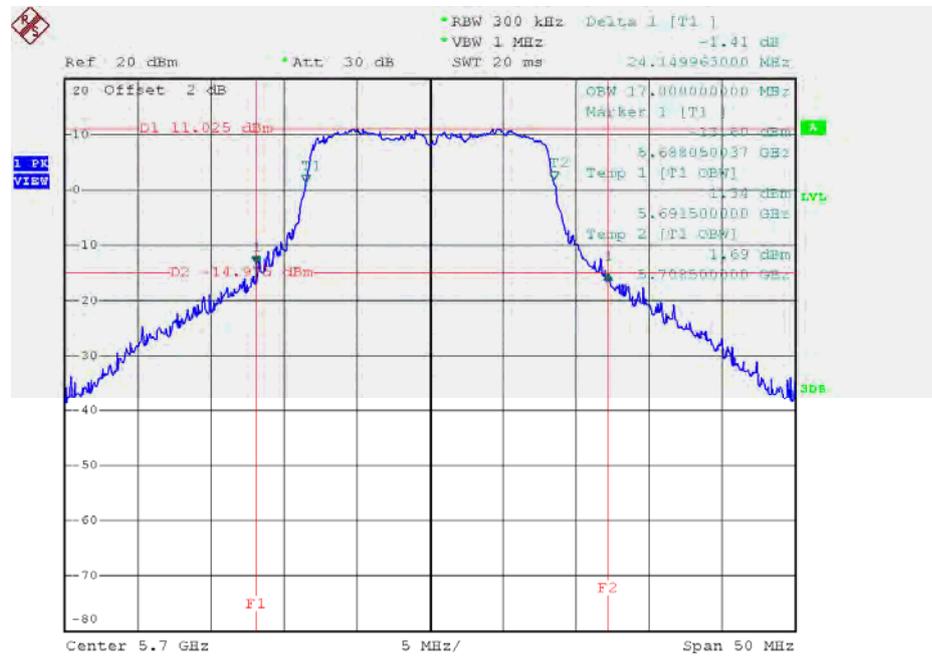


Date: 30.OCT.2015 01:17:22

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	40.05	21.00
CH116	5580	36.30	19.10
CH140	5700	43.95	23.80

TX CH100

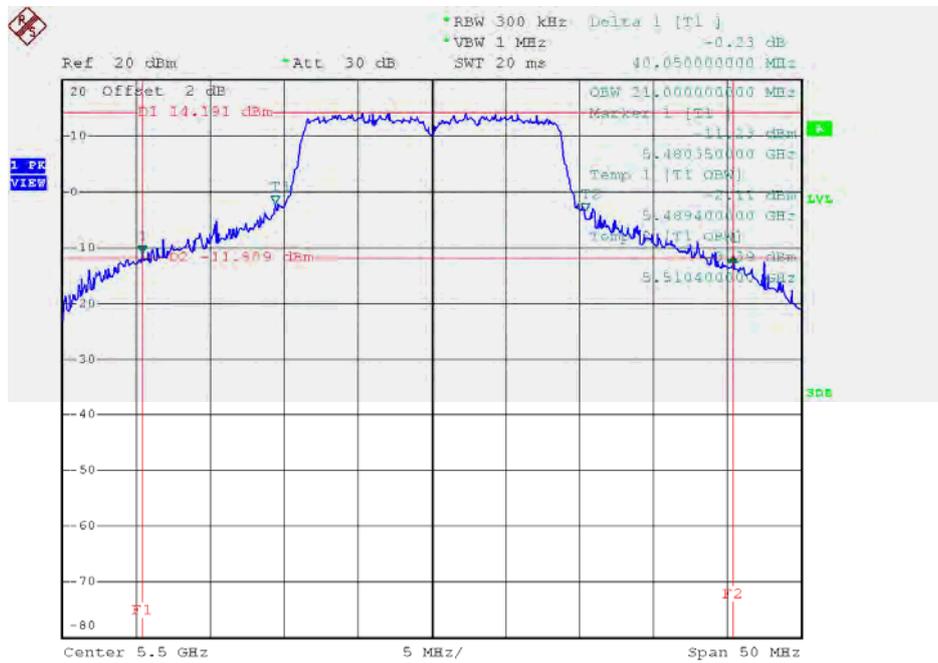


Date: 30.OCT.2015 02:01:46

TX CH116

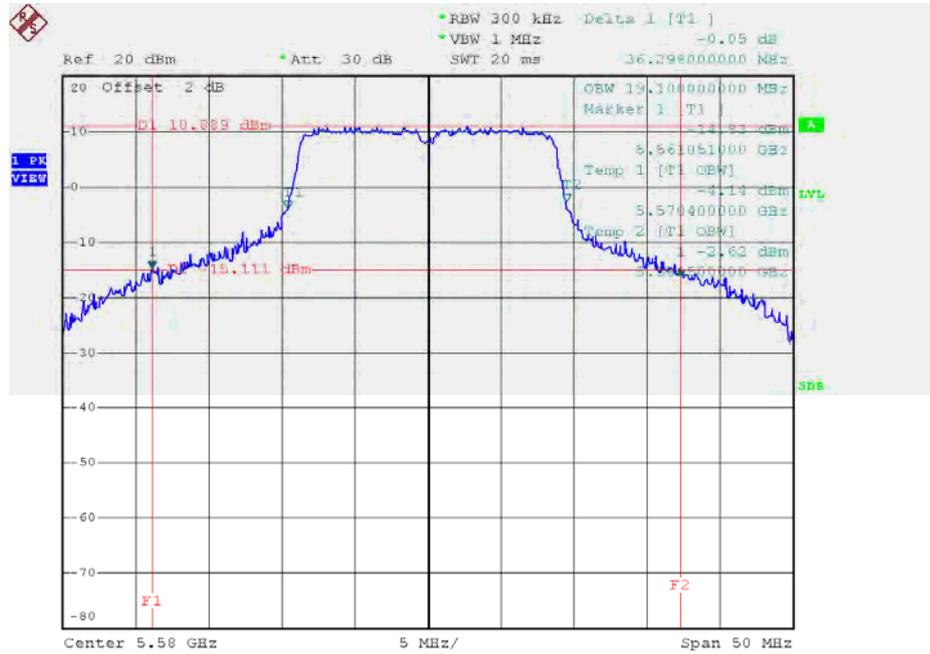

Date: 30.OCT.2015 02:06:20

TX CH140

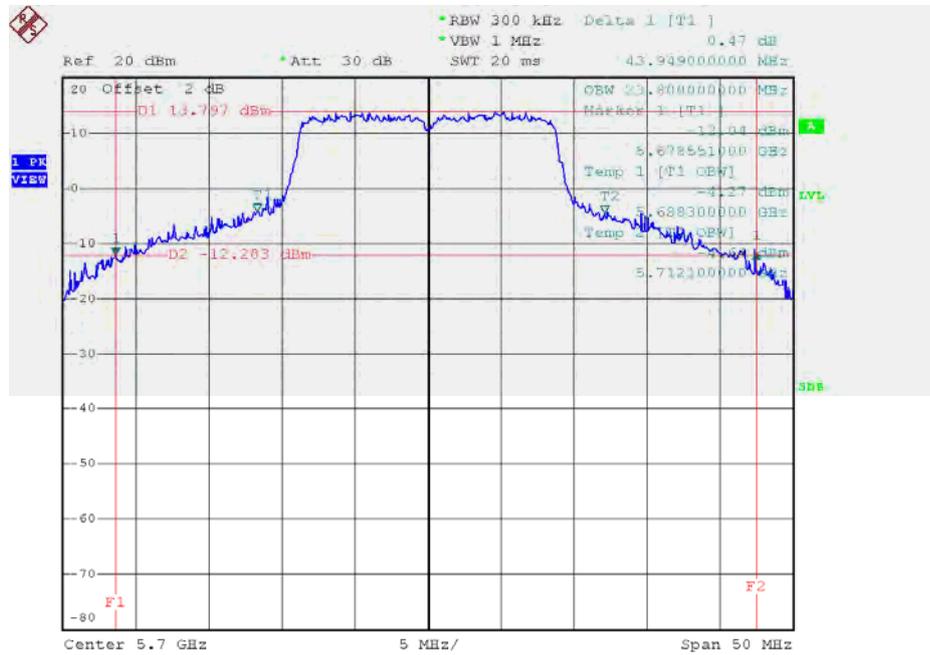


Date: 30.OCT.2015 02:07:21

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	48.60	36.40
CH110	5550	75.00	37.40
CH134	5670	87.59	45.60

TX CH102

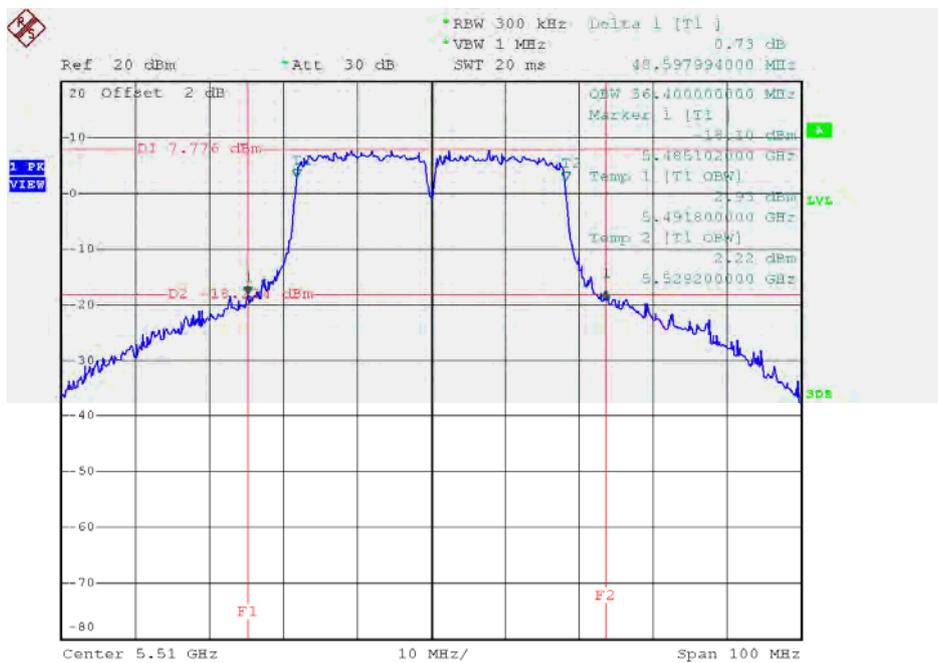


Date: 8.DEC.2015 11:00:08

TX CH110

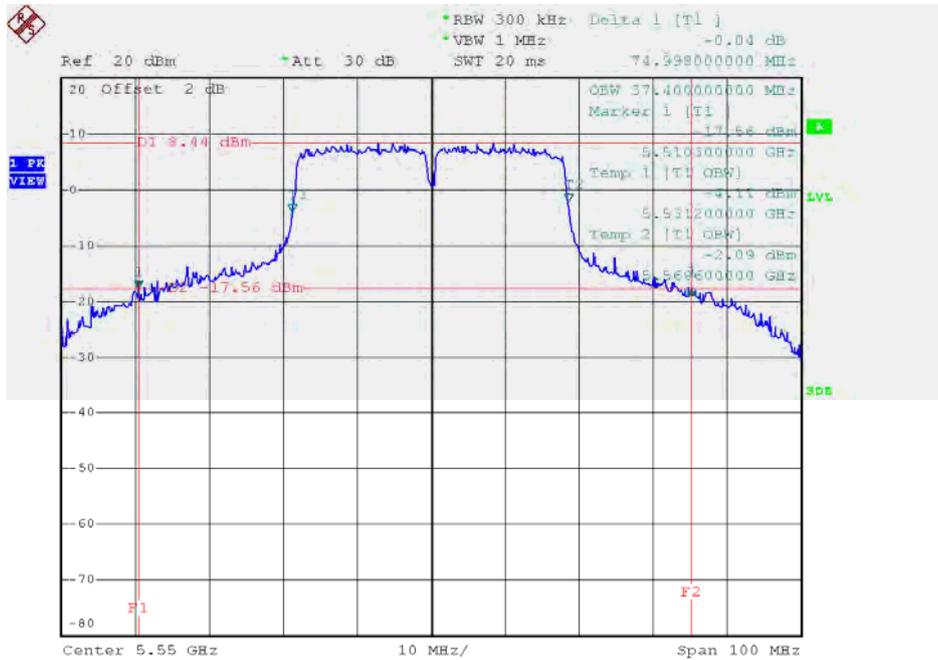

Date: 30.OCT.2015 02:47:24

TX CH134

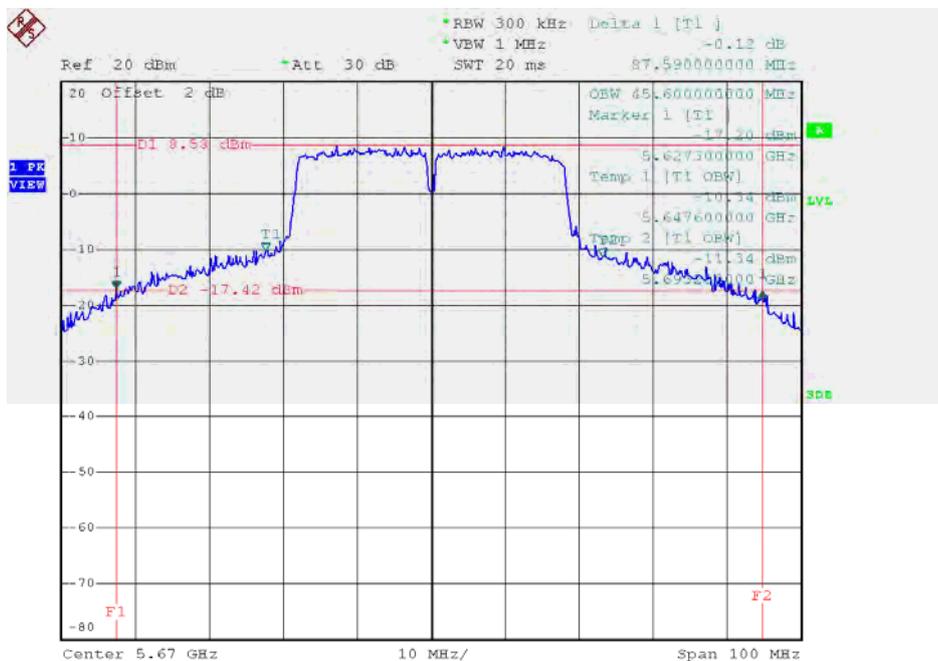


Date: 30.OCT.2015 02:48:42

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.50	20.90	>=500
CH157	5785	16.50	18.80	>=500
CH165	5825	16.50	17.60	>=500

TX CH 149

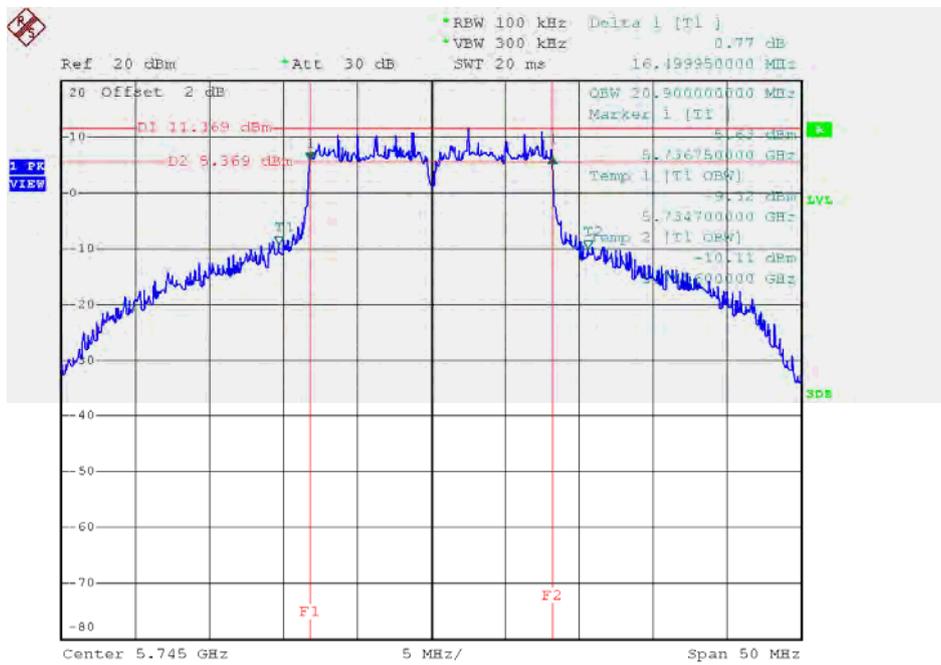


Date: 30.OCT.2015 01:23:26

TX CH 157

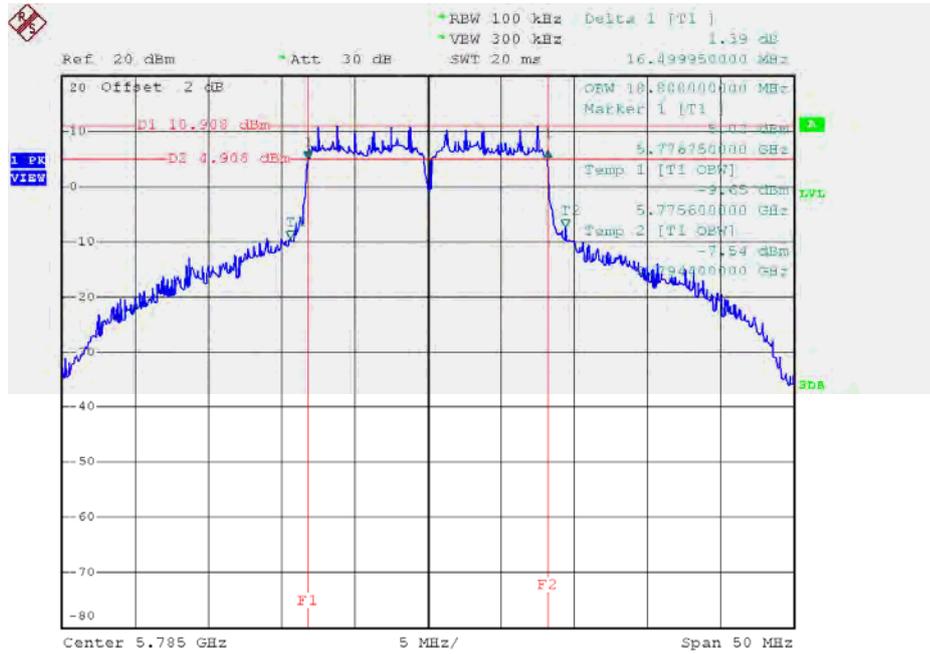

Date: 30.OCT.2015 01:24:29

TX CH 165

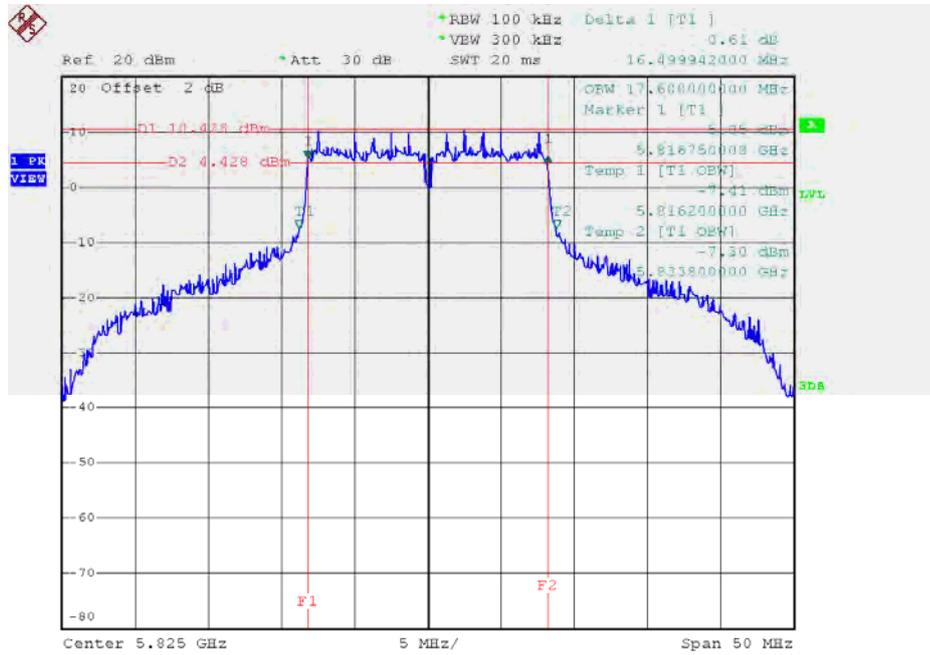


Date: 30.OCT.2015 01:25:45

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.61	22.20	>=500
CH157	5785	17.55	18.60	>=500
CH165	5825	17.65	18.20	>=500

TX CH 149

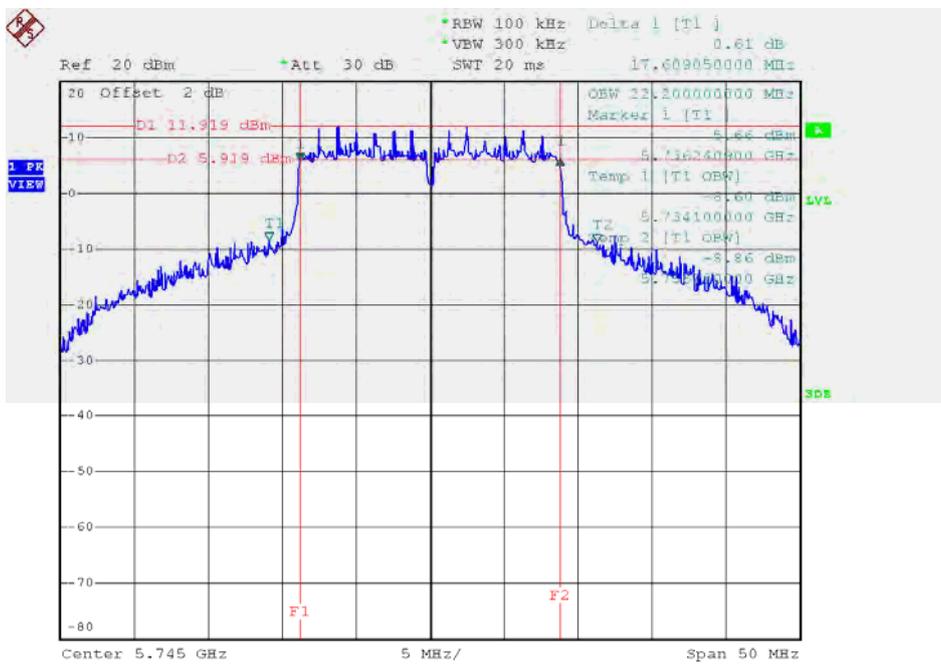


Date: 30.OCT.2015 02:11:20

TX CH 157

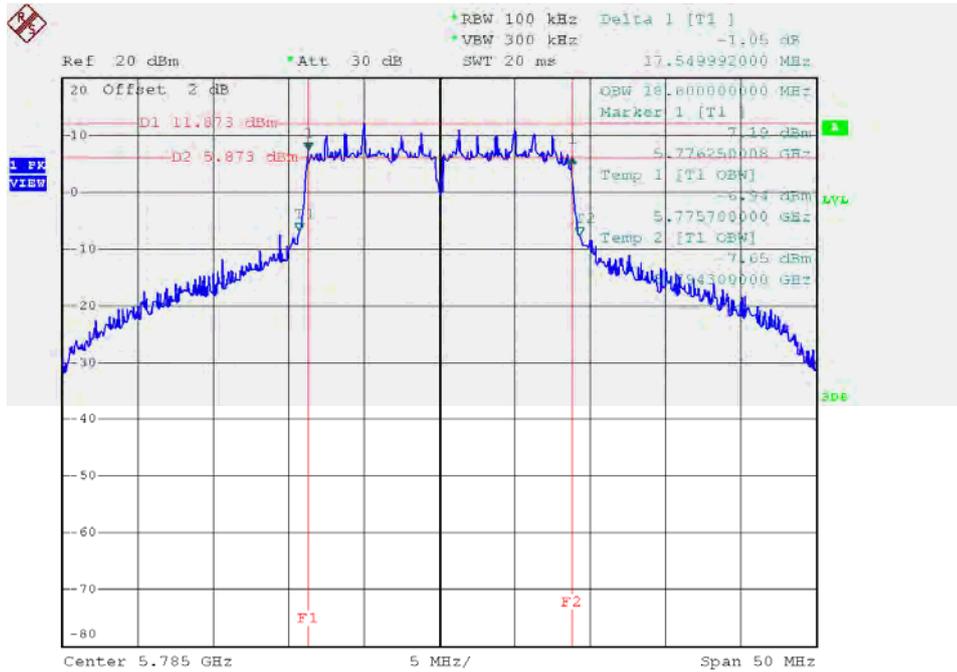

Date: 30.OCT.2015 02:26:01

TX CH 165

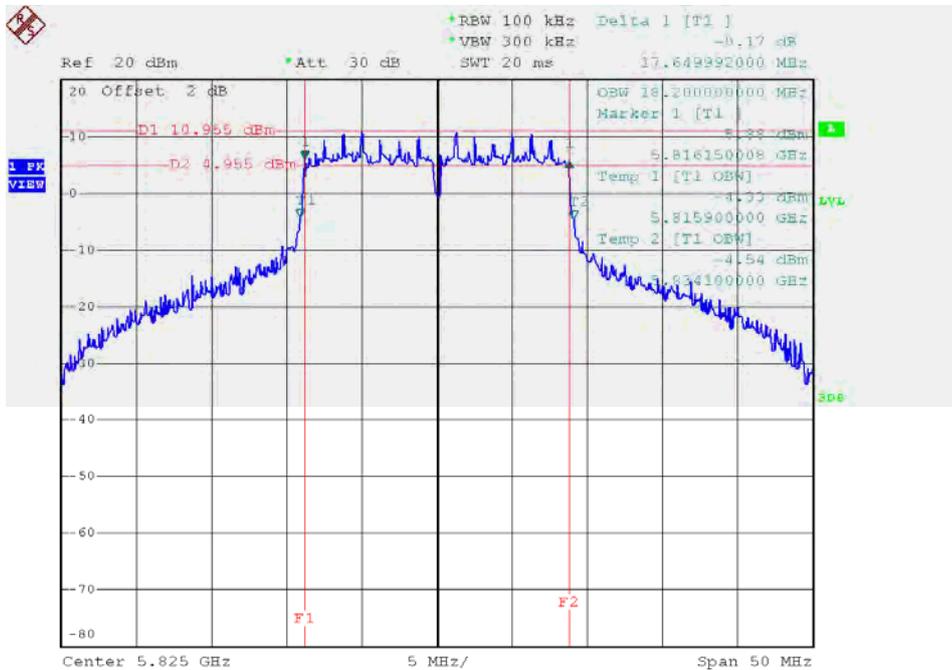


Date: 30.OCT.2015 02:27:10

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	49.40	>=500
CH159	5795	36.50	39.80	>=500

TX CH 151

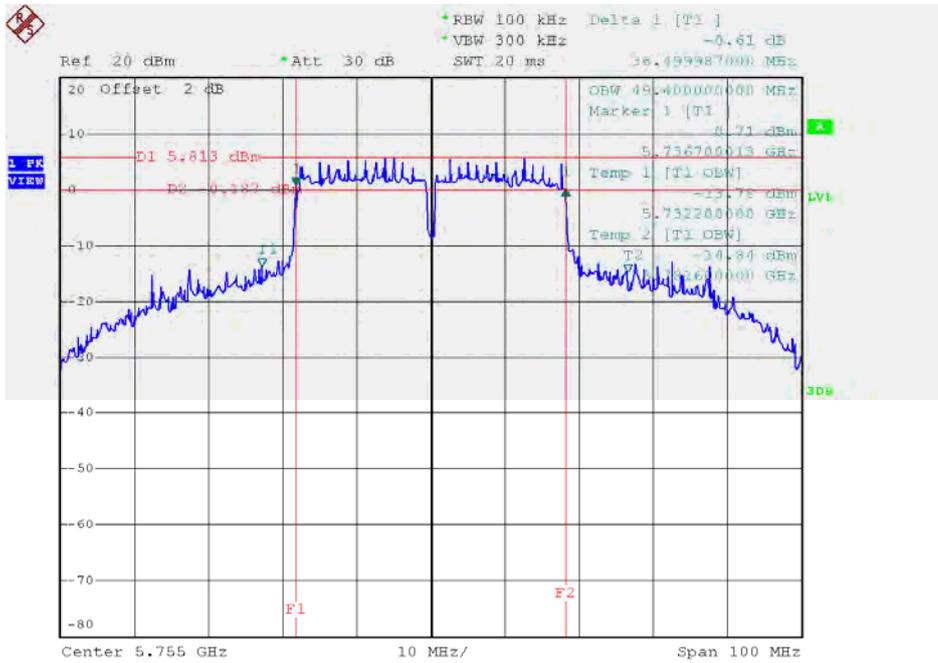

Date: 30.OCT.2015 02:50:56

TX CH 159

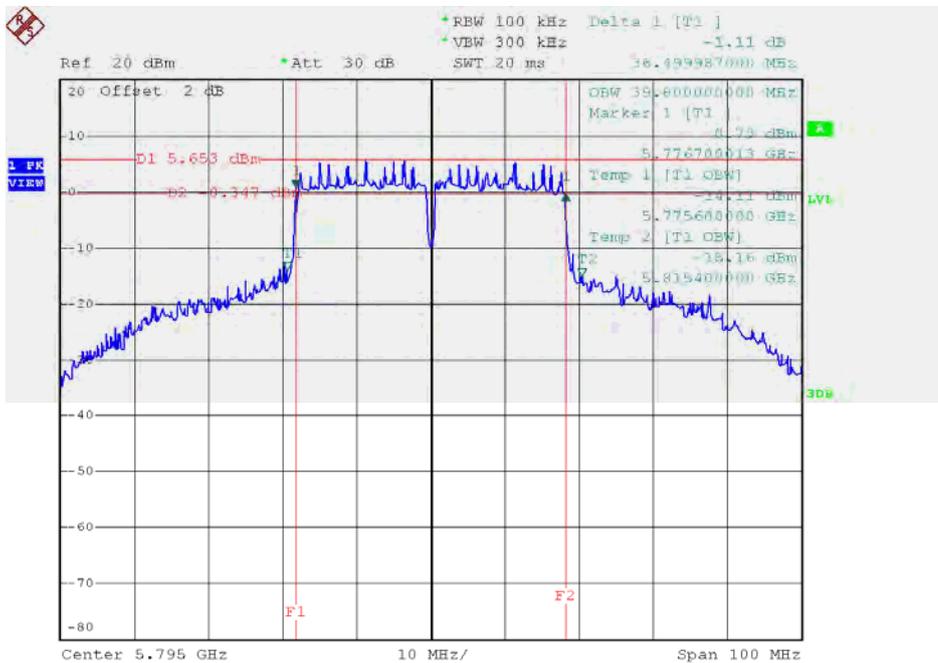


Date: 30.OCT.2015 02:53:22

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	38.39	18.80
CH40	5200	38.75	19.20
CH48	5240	35.89	19.00

TX CH36

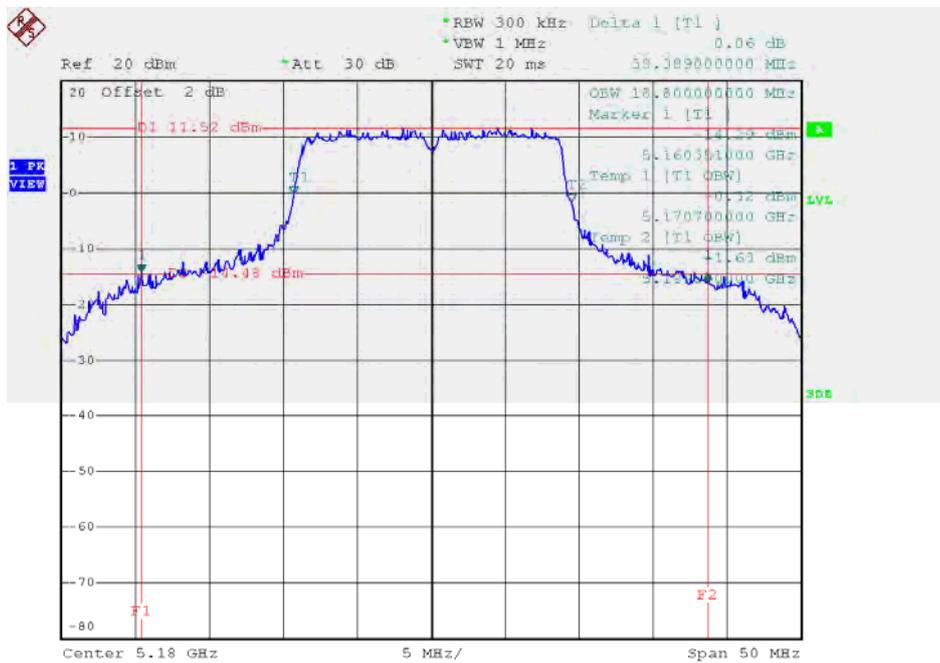


Date: 30.OCT.2015 02:59:08

TX CH40

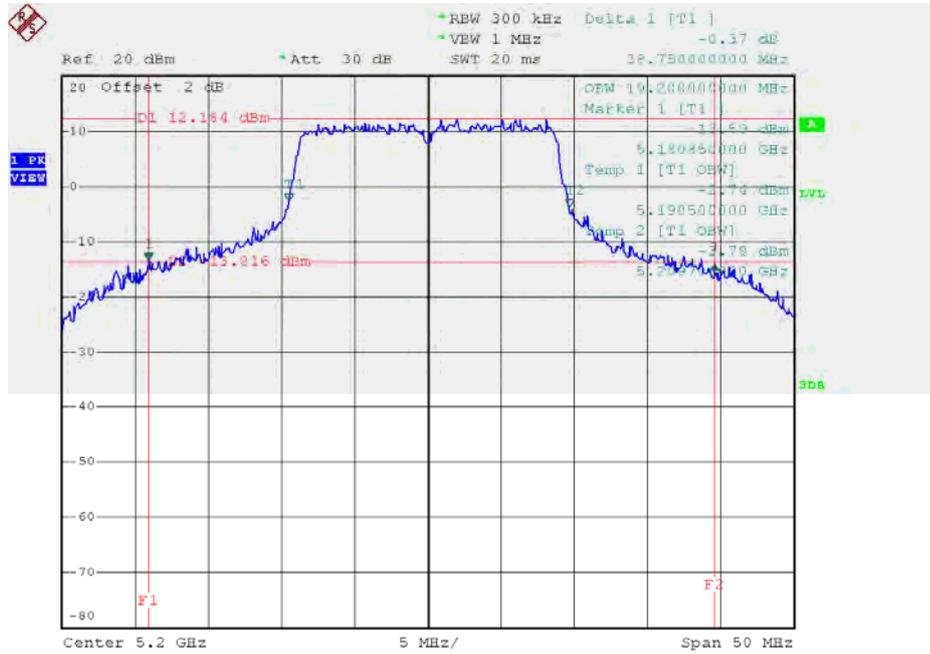

Date: 30.OCT.2015 03:02:21

TX CH48

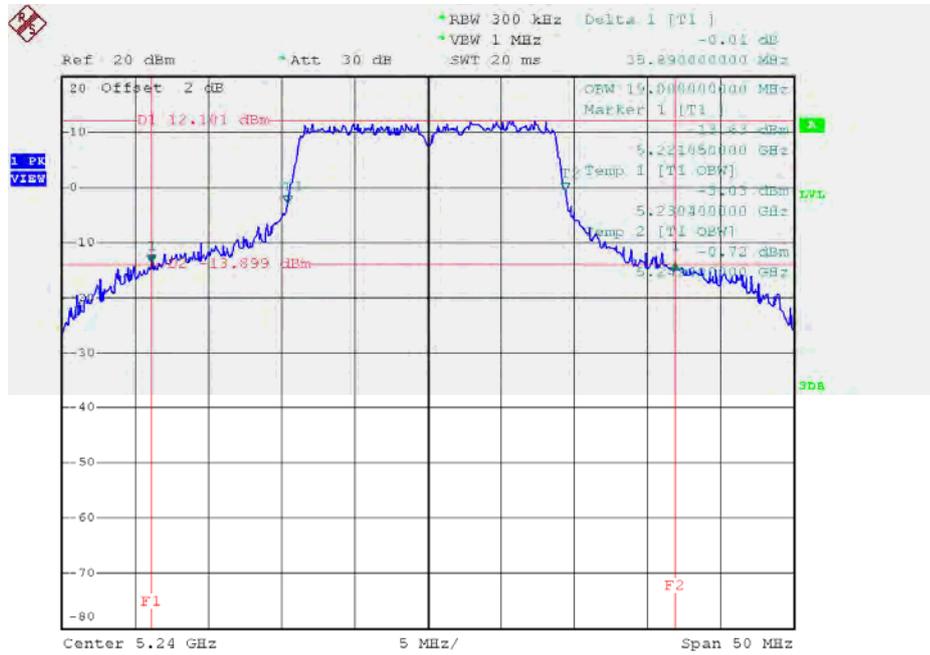


Date: 30.OCT.2015 03:03:16

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	75.90	38.20
CH46	5230	72.39	37.00

TX CH38

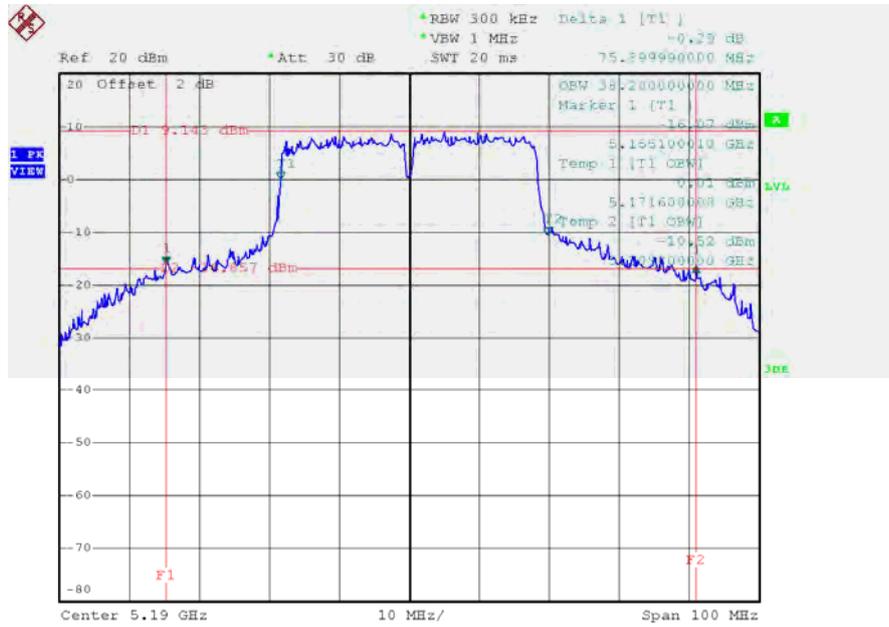

Date: 30.OCT.2015 03:52:00

TX CH46

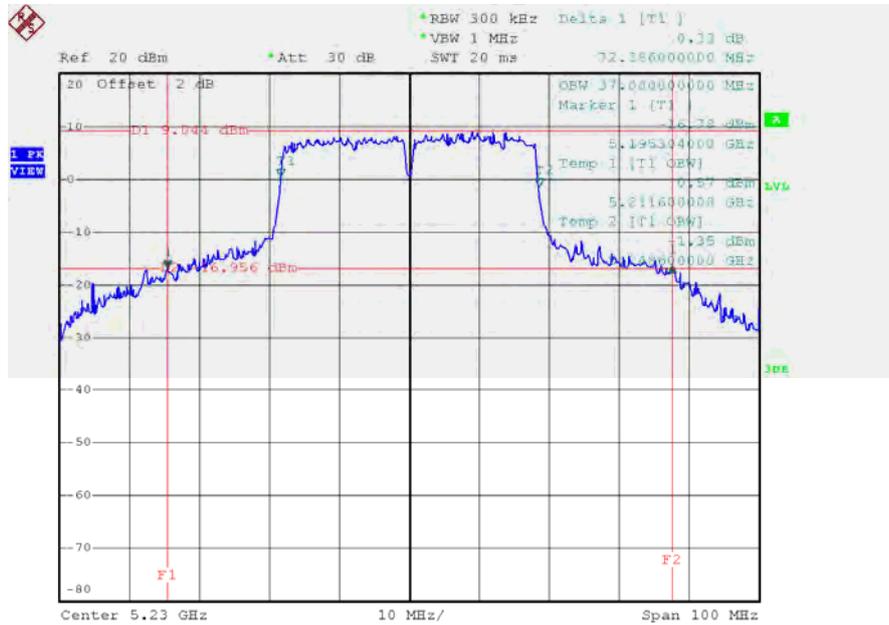


Date: 30.OCT.2015 03:55:08

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	130.39	76.80

TX CH42

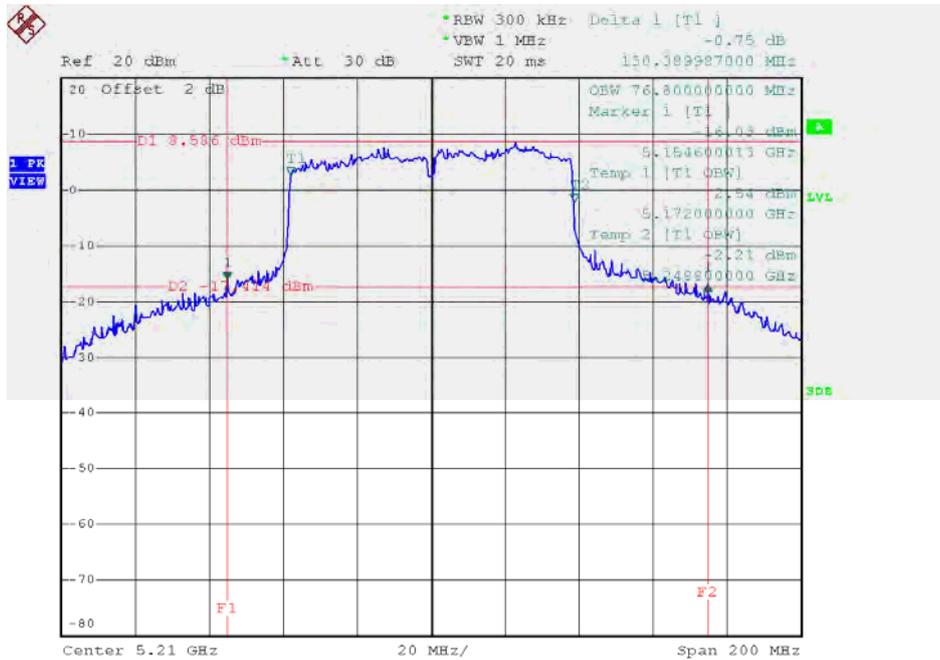


Date: 2.NOV.2015 09:32:57

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	39.25	20.20
CH60	5300	41.50	22.80
CH64	5320	41.29	22.80

TX CH52

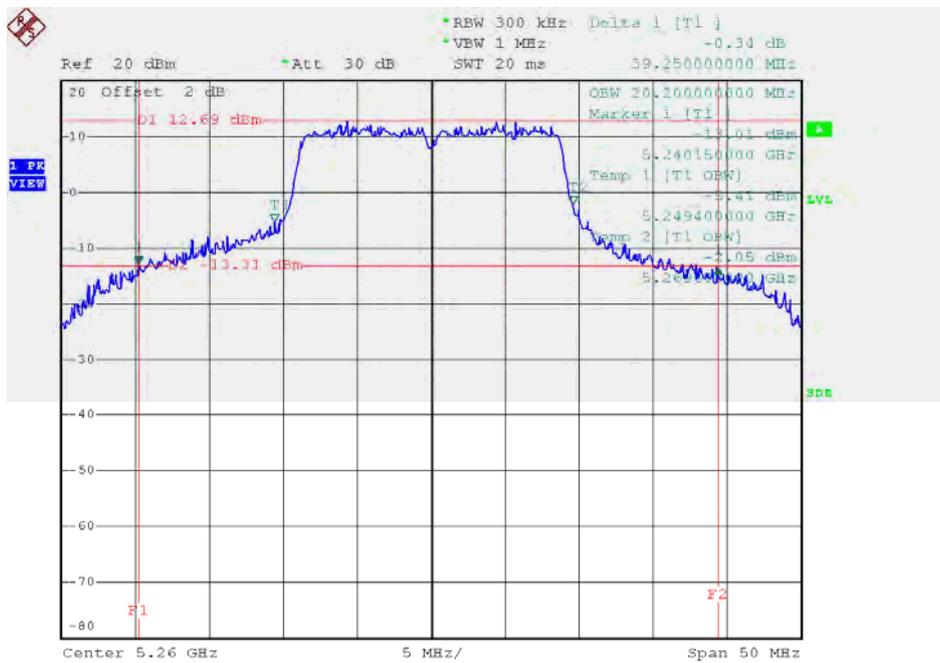


Date: 30.OCT.2015 03:04:09

TX CH60

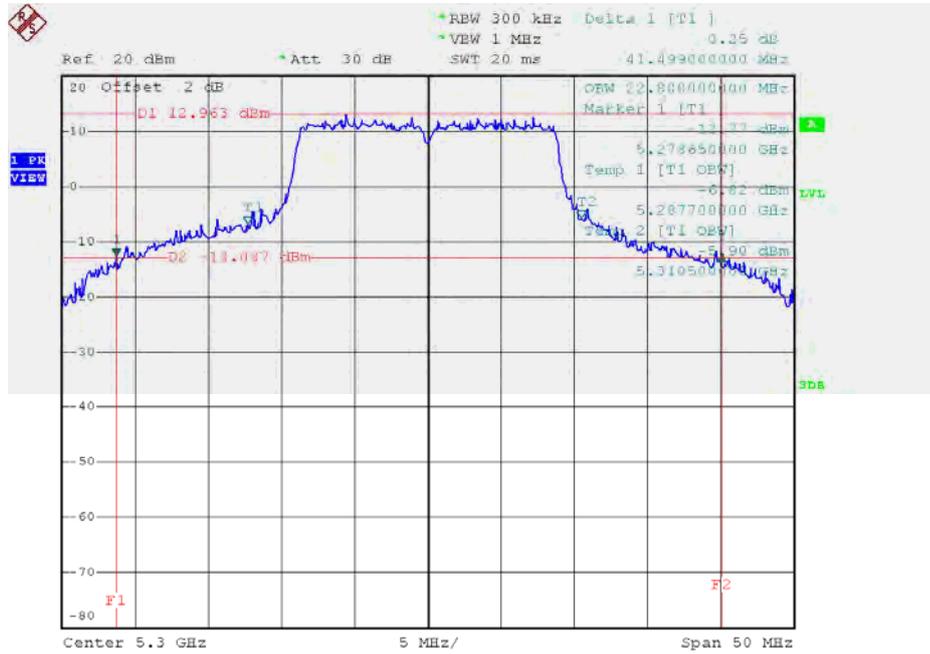

Date: 30.OCT.2015 03:06:11

TX CH64

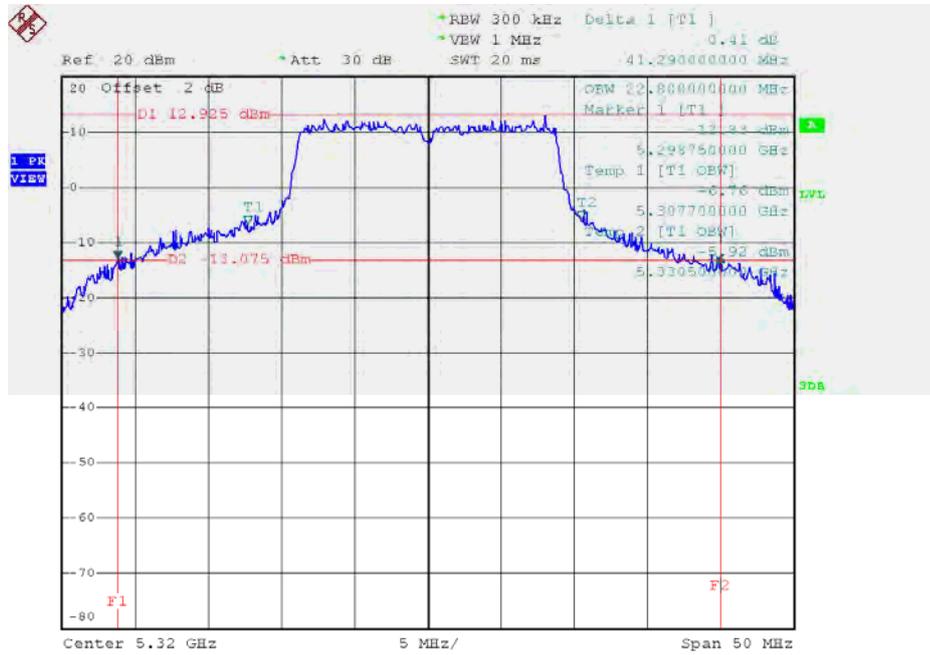


Date: 30.OCT.2015 03:07:04

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	79.98	40.20
CH62	5310	82.10	42.40

TX CH54

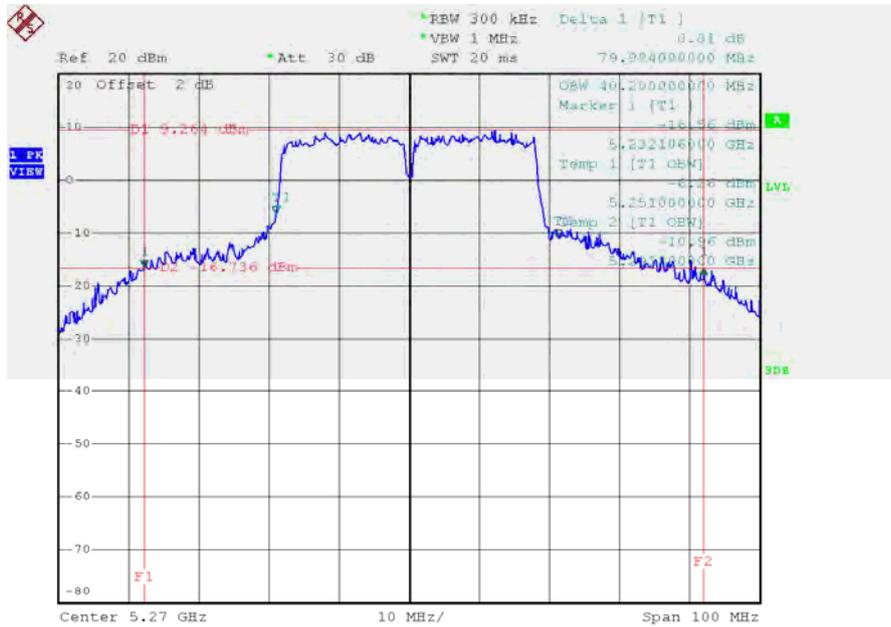

Date: 30.OCT.2015 03:56:17

TX CH62

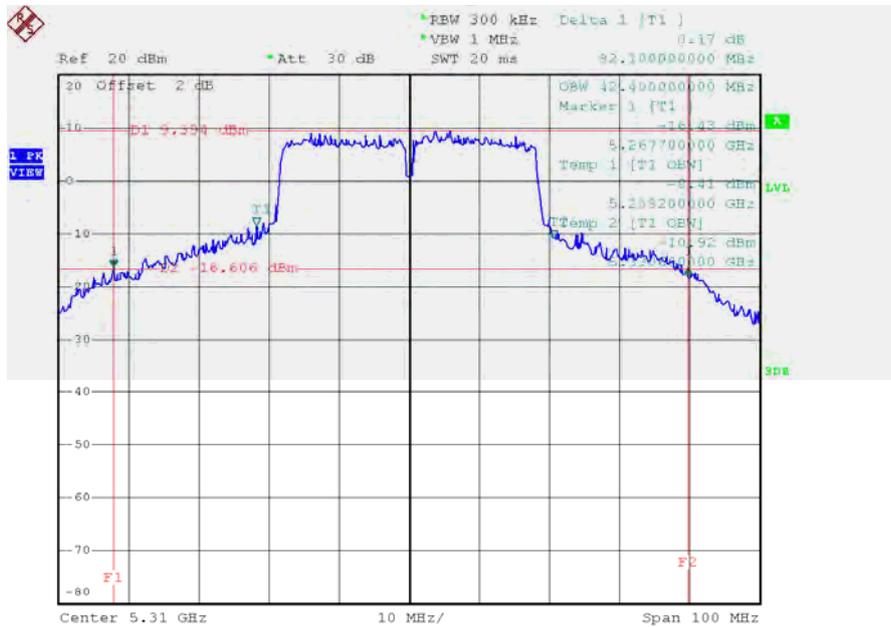


Date: 30.OCT.2015 03:57:13

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	162.00	82.80

TX CH58

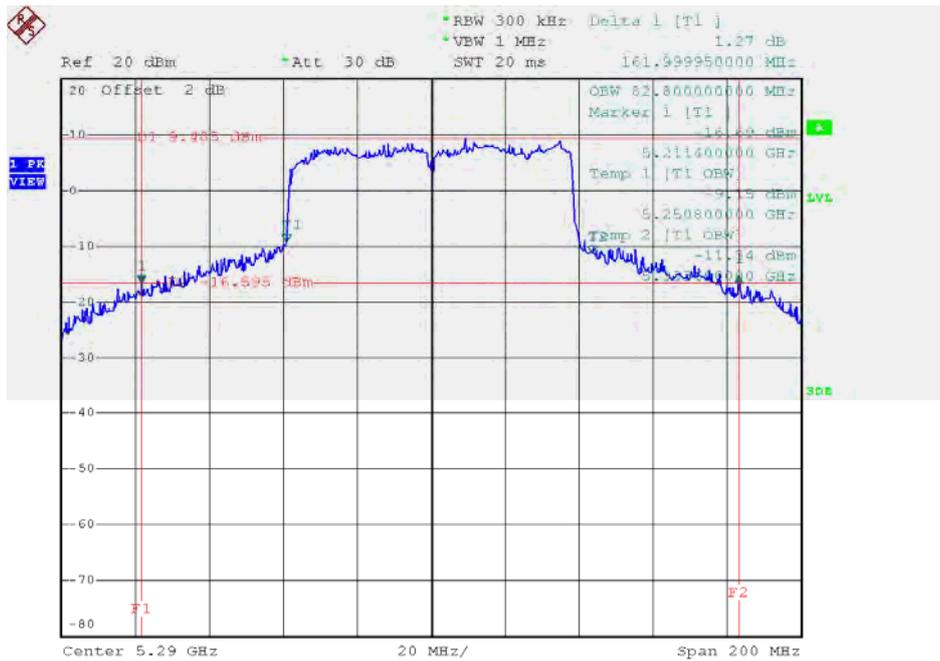


Date: 2.NOV.2015 09:40:03

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	36.39	19.10
CH116	5580	35.89	19.40
CH140	5700	43.39	22.10

TX CH100

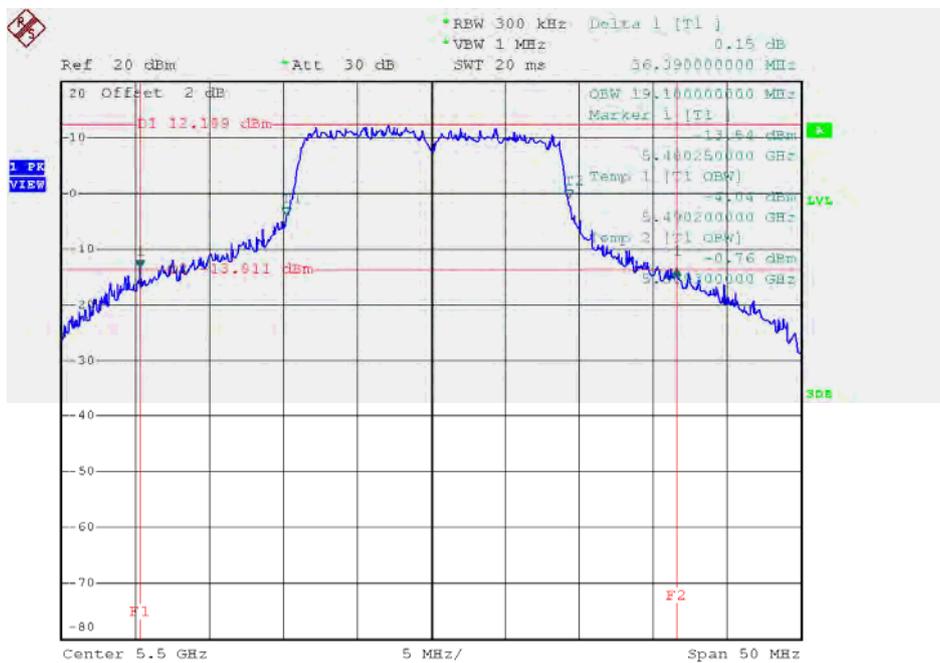


Date: 30.OCT.2015 03:09:41

TX CH116

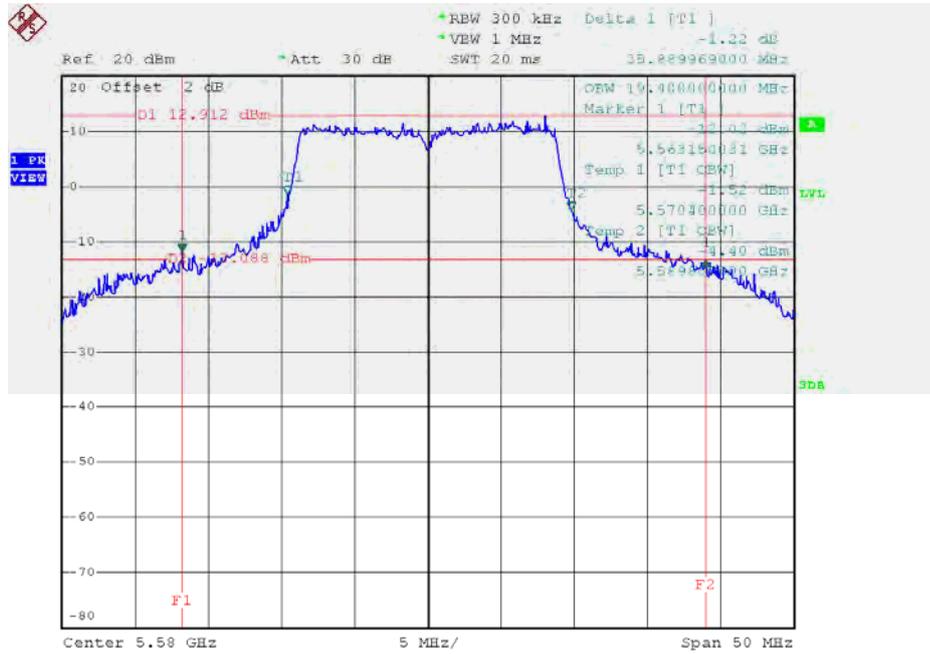

Date: 30.OCT.2015 03:34:43

TX CH140

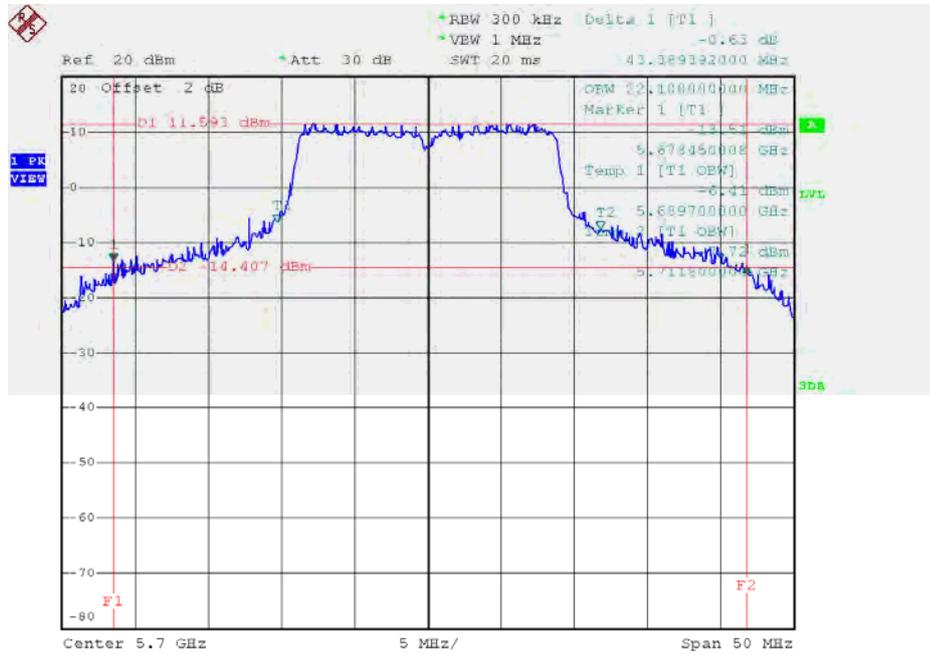


Date: 30.OCT.2015 03:35:32

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	75.60	37.80
CH110	5550	75.70	37.80
CH134	5670	86.80	46.60

TX CH102

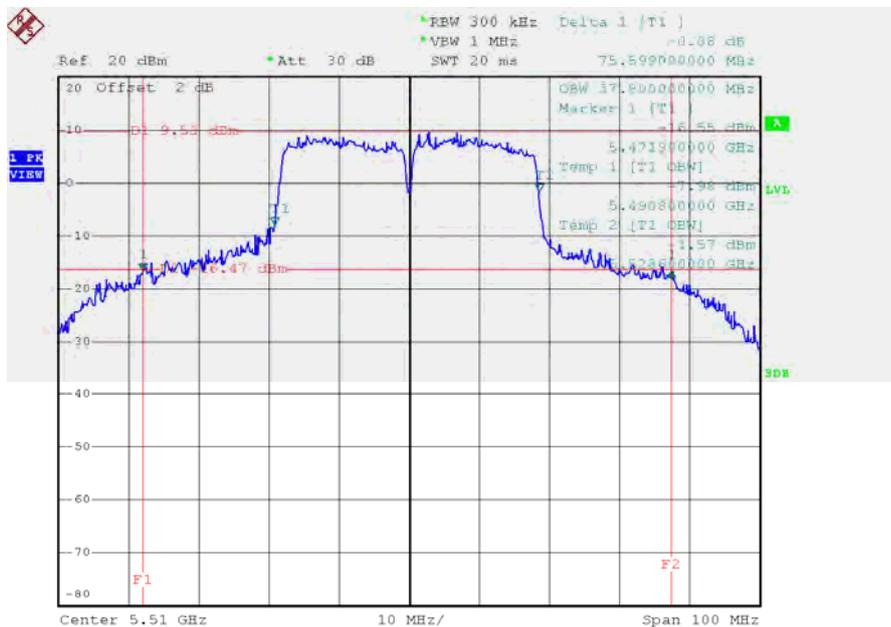


Date: 30.OCT.2015 04:03:09

TX CH110

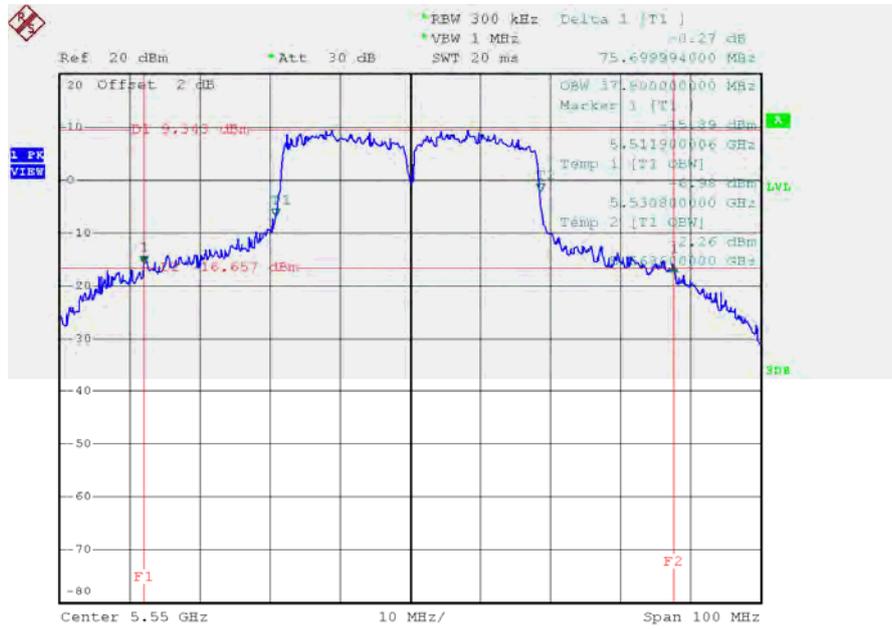

Date: 30.OCT.2015 04:07:02

TX CH134

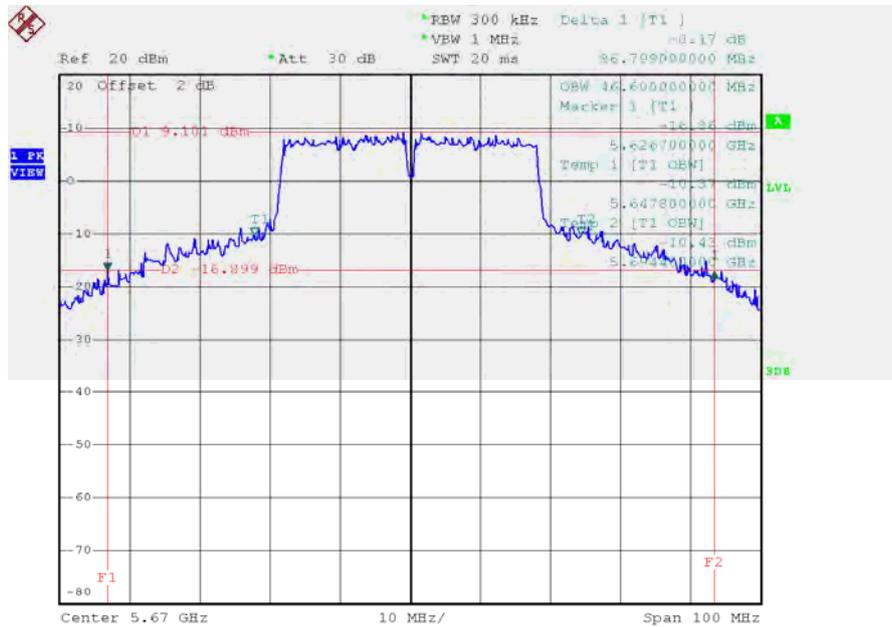


Date: 30.OCT.2015 04:08:09

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	84.40	76.00
CH122	5610	154.39	89.60

TX CH106

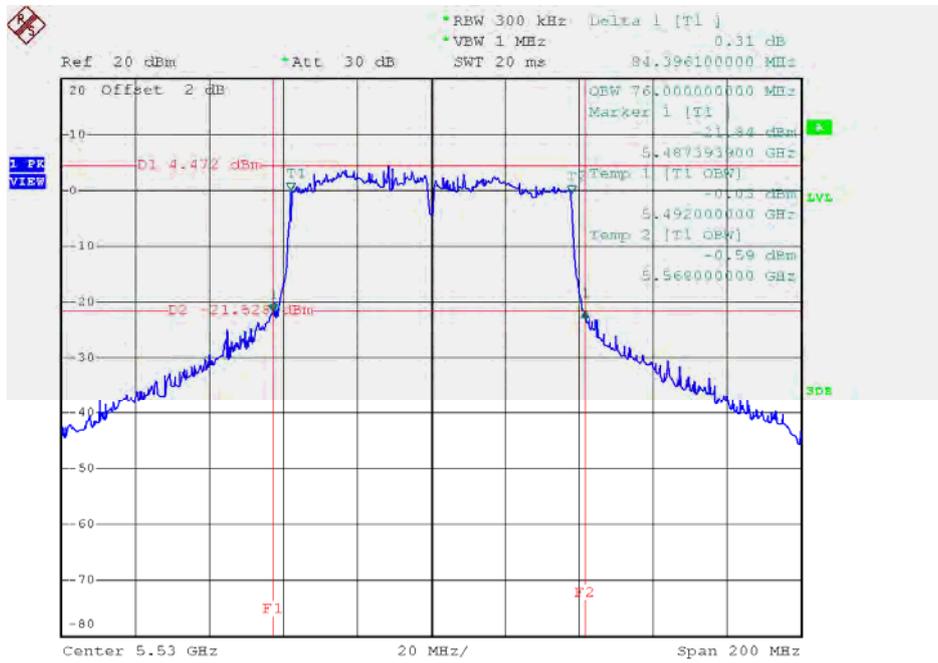

Date: 8.DEC.2015 11:03:04

TX CH122

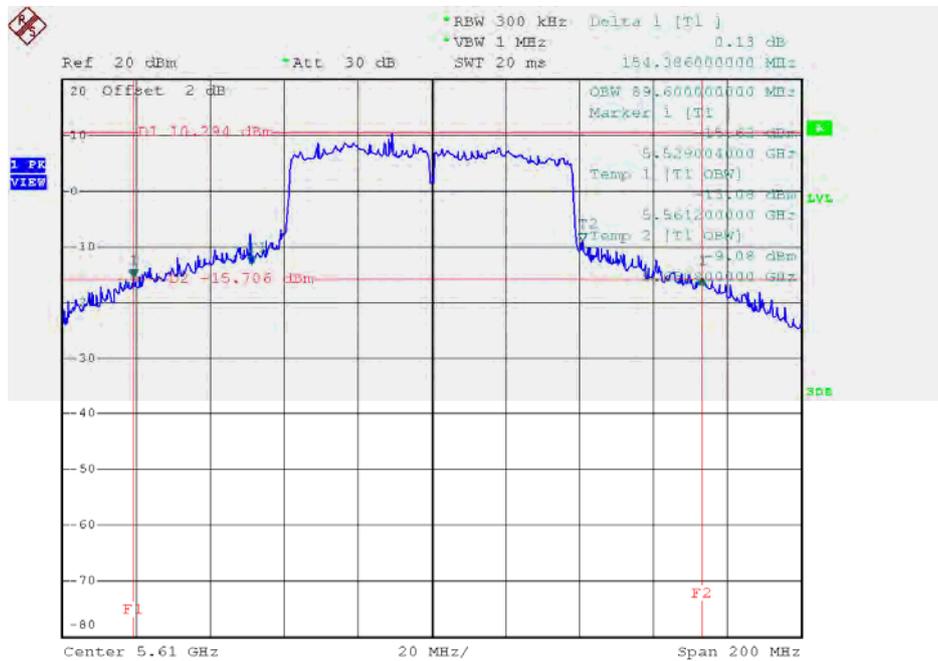


Date: 2.NOV.2015 09:58:40

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.70	19.30	>=500
CH157	5785	17.61	18.60	>=500
CH165	5825	17.85	18.50	>=500

TX CH 149

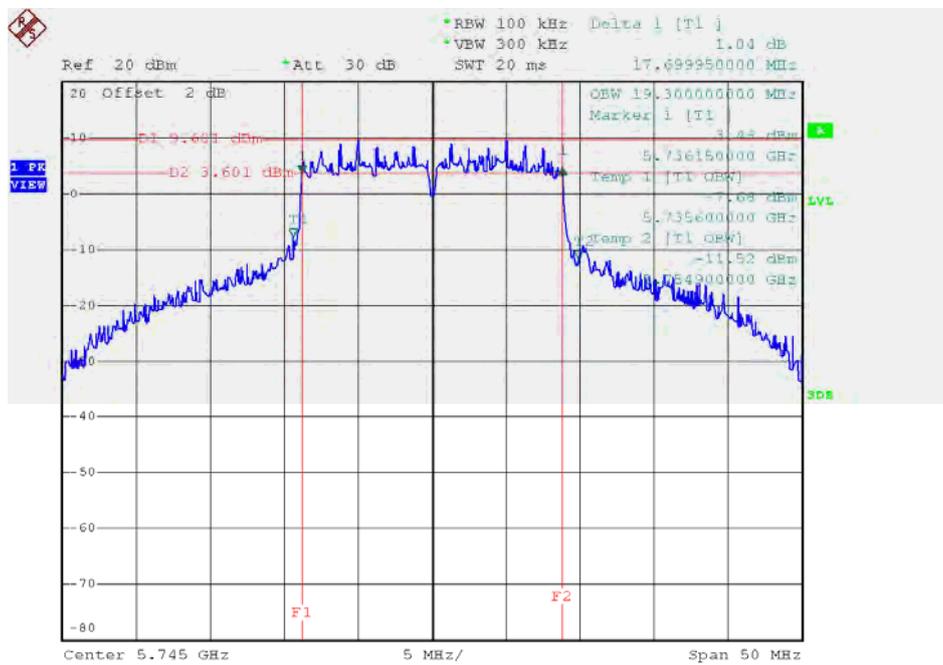


Date: 30.OCT.2015 03:38:30

TX CH 157

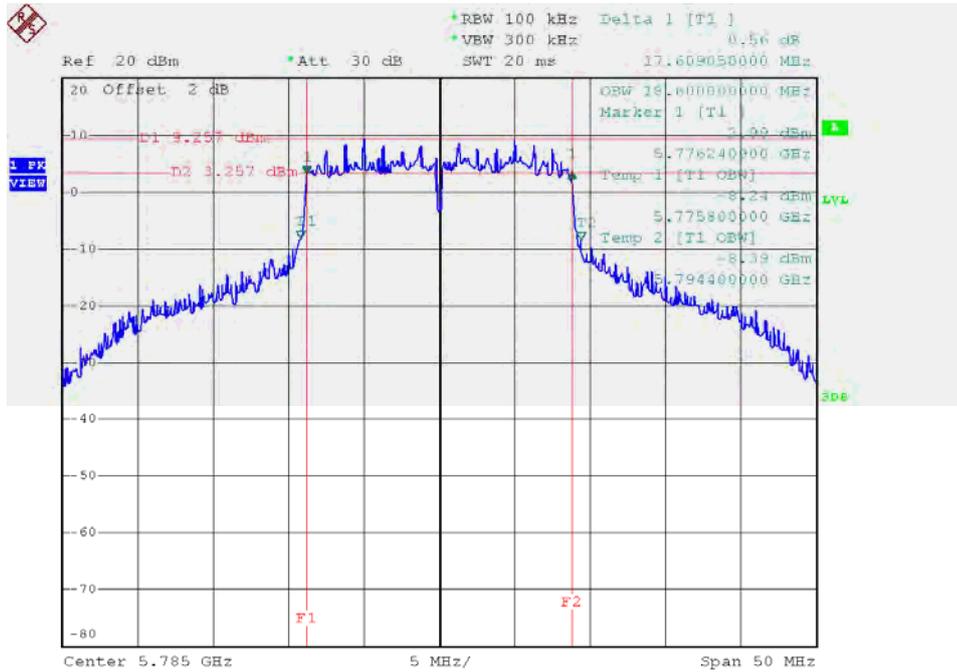

Date: 30.OCT.2015 03:44:54

TX CH 165

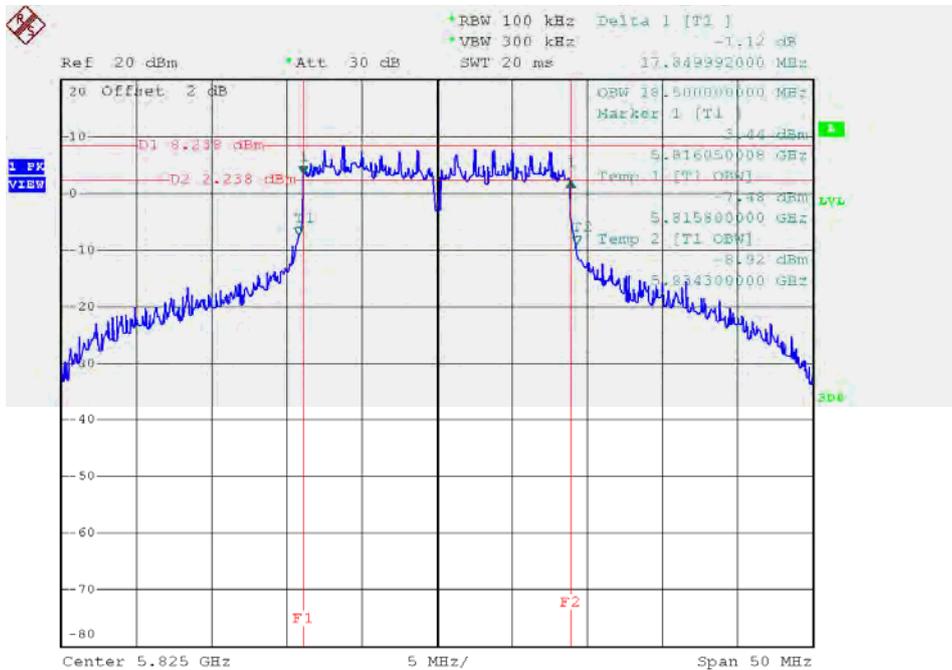


Date: 30.OCT.2015 03:46:02

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	41.20	>=500
CH159	5795	36.50	38.20	>=500

TX CH 151

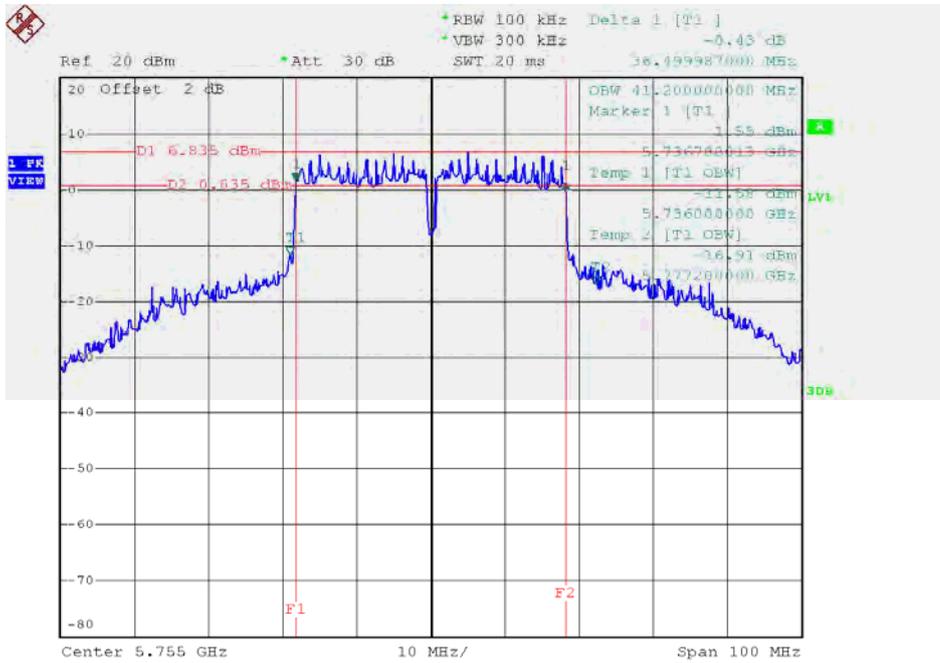

Date: 30.OCT.2015 04:10:23

TX CH 159

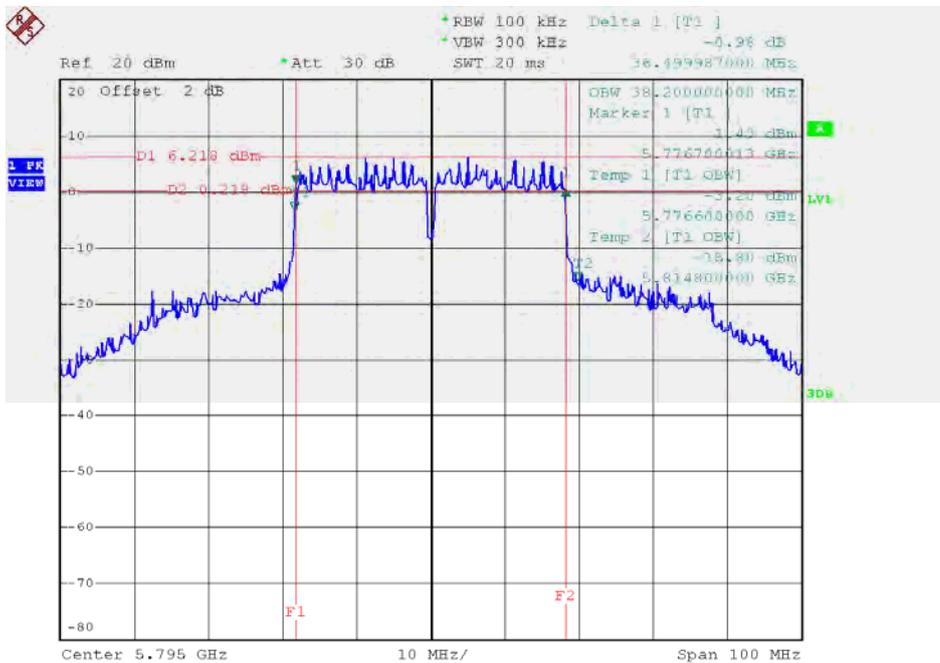


Date: 30.OCT.2015 04:14:16

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	74.80	86.00	>=500

TX CH 155

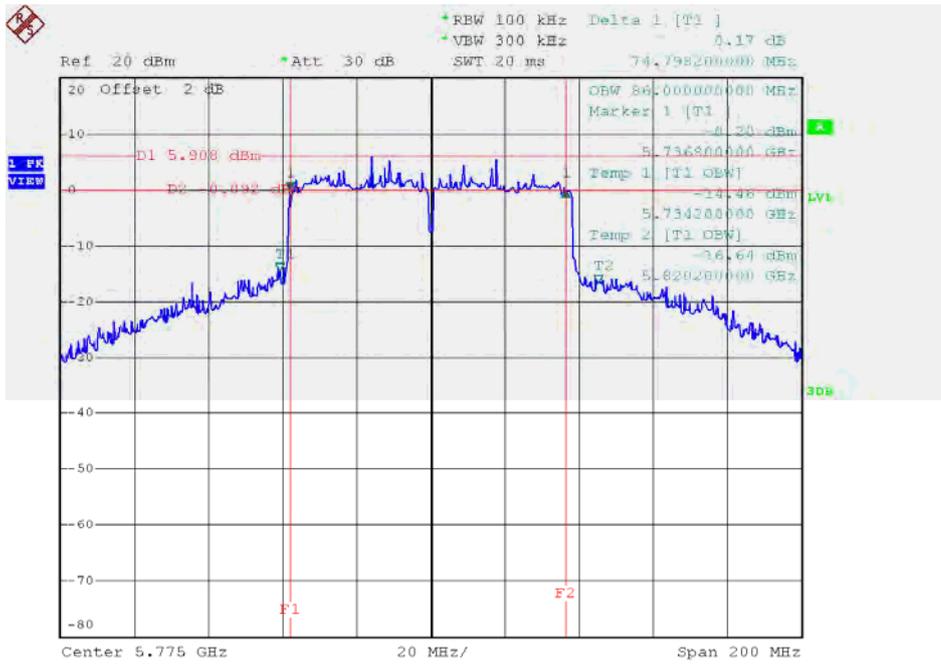

Date: 2.NOV.2015 10:01:22

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.93	0.58	17.51	30.00	1.00
CH40	5200	18.89	0.58	19.47	30.00	1.00
CH48	5240	18.36	0.58	18.94	30.00	1.00

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.81	0.58	18.39	30.00	1.00
CH40	5200	19.65	0.58	20.23	30.00	1.00
CH48	5240	19.47	0.58	20.05	30.00	1.00

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	20.98	30.00	1.00
CH40	5200	22.88	30.00	1.00
CH48	5240	22.54	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.86	1.07	16.93	30.00	1.00
CH40	5200	20.06	1.07	21.13	30.00	1.00
CH48	5240	18.47	1.07	19.54	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.55	1.07	17.62	30.00	1.00
CH40	5200	20.71	1.07	21.78	30.00	1.00
CH48	5240	19.51	1.07	20.58	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	20.30	30.00	1.00
CH40	5200	24.48	30.00	1.00
CH48	5240	23.10	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.32	1.83	16.15	30.00	1.00
CH46	5230	18.33	1.83	20.16	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.66	1.83	15.49	30.00	1.00
CH46	5230	19.14	1.83	20.97	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	18.84	30.00	1.00
CH46	5230	23.59	30.00	1.00

Test Mode: UNII-2A/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.81	0.58	16.39	24.00	0.25
CH60	5300	15.59	0.58	16.17	24.00	0.25
CH64	5320	15.21	0.58	15.79	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	16.39	0.58	16.97	24.00	0.25
CH60	5300	16.50	0.58	17.08	24.00	0.25
CH64	5320	16.24	0.58	16.82	24.00	0.25

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.70	24.00	0.25
CH60	5300	19.66	24.00	0.25
CH64	5320	19.35	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.60	1.07	16.67	24.00	0.25
CH60	5300	15.41	1.07	16.48	24.00	0.25
CH64	5320	14.15	1.07	15.22	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	16.14	1.07	17.21	24.00	0.25
CH60	5300	16.13	1.07	17.20	24.00	0.25
CH64	5320	14.56	1.07	15.63	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.96	24.00	0.25
CH60	5300	19.87	24.00	0.25
CH64	5320	18.44	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	16.74	1.83	18.57	24.00	0.25
CH62	5310	14.11	1.83	15.94	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	17.33	1.83	19.16	24.00	0.25
CH62	5310	14.84	1.83	16.67	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	21.89	24.00	0.25
CH62	5310	19.33	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	16.12	0.58	16.70	24.00	0.25
CH116	5580	15.82	0.58	16.40	24.00	0.25
CH140	5700	13.88	0.58	14.46	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.41	0.58	15.99	24.00	0.25
CH116	5580	16.15	0.58	16.73	24.00	0.25
CH140	5700	14.52	0.58	15.10	24.00	0.25

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.37	24.00	0.25
CH116	5580	19.58	24.00	0.25
CH140	5700	17.80	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.99	1.07	17.06	24.00	0.25
CH116	5580	15.68	1.07	16.75	24.00	0.25
CH140	5700	12.33	1.07	13.40	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.21	1.07	16.28	24.00	0.25
CH116	5580	15.93	1.07	17.00	24.00	0.25
CH140	5700	12.31	1.07	13.38	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.70	24.00	0.25
CH116	5580	19.89	24.00	0.25
CH140	5700	16.40	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.81	1.83	18.64	24.00	0.25
CH110	5550	16.68	1.83	18.51	24.00	0.25
CH134	5670	16.68	1.83	18.51	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.44	1.83	17.27	24.00	0.25
CH110	5550	17.09	1.83	18.92	24.00	0.25
CH134	5670	16.38	1.83	18.21	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	21.02	24.00	0.25
CH110	5550	21.73	24.00	0.25
CH134	5670	21.37	24.00	0.25

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.95	0.58	16.53	30.00	1.00
CH157	5785	19.33	0.58	19.91	30.00	1.00
CH165	5825	18.71	0.58	19.29	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.16	0.58	16.74	30.00	1.00
CH157	5785	19.52	0.58	20.10	30.00	1.00
CH165	5825	19.58	0.58	20.16	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.65	30.00	1.00
CH157	5785	23.02	30.00	1.00
CH165	5825	22.76	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.12	1.07	17.19	30.00	1.00
CH157	5785	19.25	1.07	20.32	30.00	1.00
CH165	5825	17.56	1.07	18.63	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.52	1.07	17.59	30.00	1.00
CH157	5785	19.38	1.07	20.45	30.00	1.00
CH165	5825	17.73	1.07	18.80	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.40	30.00	1.00
CH157	5785	23.40	30.00	1.00
CH165	5825	21.73	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	16.38	1.83	18.21	30.00	1.00
CH159	5795	19.14	1.83	20.97	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	17.84	1.83	19.67	30.00	1.00
CH159	5795	19.45	1.83	21.28	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	22.01	30.00	1.00
CH159	5795	24.14	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.68	0.86	13.54	30.00	1.00
CH40	5200	18.88	0.86	19.74	30.00	1.00
CH48	5240	18.44	0.86	19.30	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.77	0.86	16.63	30.00	1.00
CH40	5200	19.57	0.86	20.43	30.00	1.00
CH48	5240	19.47	0.86	20.33	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.36	30.00	1.00
CH40	5200	23.11	30.00	1.00
CH48	5240	22.86	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.52	2.91	17.43	30.00	1.00
CH46	5230	18.34	2.91	21.25	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.77	2.91	16.68	30.00	1.00
CH46	5230	19.46	2.91	22.37	30.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	20.08	30.00	1.00
CH46	5230	24.86	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.68	2.63	17.31	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	14.15	2.63	16.78	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	20.06	30.00	1.00

Test Mode: UNII-2A/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.20	0.86	16.06	24.00	0.25
CH60	5300	15.11	0.86	15.97	24.00	0.25
CH64	5320	14.80	0.86	15.66	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.94	0.86	16.80	24.00	0.25
CH60	5300	15.82	0.86	16.68	24.00	0.25
CH64	5320	15.62	0.86	16.48	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.46	24.00	0.25
CH60	5300	19.35	24.00	0.25
CH64	5320	19.10	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.61	2.91	18.52	24.00	0.25
CH62	5310	15.32	2.91	18.23	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	16.11	2.91	19.02	24.00	0.25
CH62	5310	16.01	2.91	18.92	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	21.79	24.00	0.25
CH62	5310	21.60	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	15.25	2.63	17.88	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	15.33	2.63	17.96	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	20.93	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.27	0.86	16.13	24.00	0.25
CH116	5580	15.64	0.86	16.50	24.00	0.25
CH140	5700	12.56	0.86	13.42	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.48	0.86	15.34	24.00	0.25
CH116	5580	15.84	0.86	16.70	24.00	0.25
CH140	5700	12.86	0.86	13.72	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.76	24.00	0.25
CH116	5580	19.61	24.00	0.25
CH140	5700	16.58	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.44	2.91	19.35	24.00	0.25
CH110	5550	16.54	2.91	19.45	24.00	0.25
CH134	5670	16.48	2.91	19.39	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.11	2.91	19.02	24.00	0.25
CH110	5550	16.81	2.91	19.72	24.00	0.25
CH134	5670	16.41	2.91	19.32	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	22.20	24.00	0.25
CH110	5550	22.60	24.00	0.25
CH134	5670	22.37	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	15.09	2.63	17.72	24.00	0.25
CH122	5610	18.01	2.63	20.64	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	13.89	2.63	16.52	24.00	0.25
CH122	5610	17.81	2.63	20.44	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	20.17	24.00	0.25
CH122	5610	23.55	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	13.09	0.86	13.95	30.00	1.00
CH157	5785	19.14	0.86	20.00	30.00	1.00
CH165	5825	17.54	0.86	18.40	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.37	0.86	17.23	30.00	1.00
CH157	5785	19.35	0.86	20.21	30.00	1.00
CH165	5825	17.61	0.86	18.47	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.90	30.00	1.00
CH157	5785	23.12	30.00	1.00
CH165	5825	21.45	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.58	2.91	17.49	30.00	1.00
CH159	5795	18.18	2.91	21.09	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.86	2.91	17.77	30.00	1.00
CH159	5795	18.24	2.91	21.15	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	20.64	30.00	1.00
CH159	5795	24.13	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	14.43	2.63	17.06	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	14.52	2.63	17.15	30.00	1.00


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	20.12	30.00	1.00

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode: UNII-1/TX A Mode_ANT 1

TX mode CH36

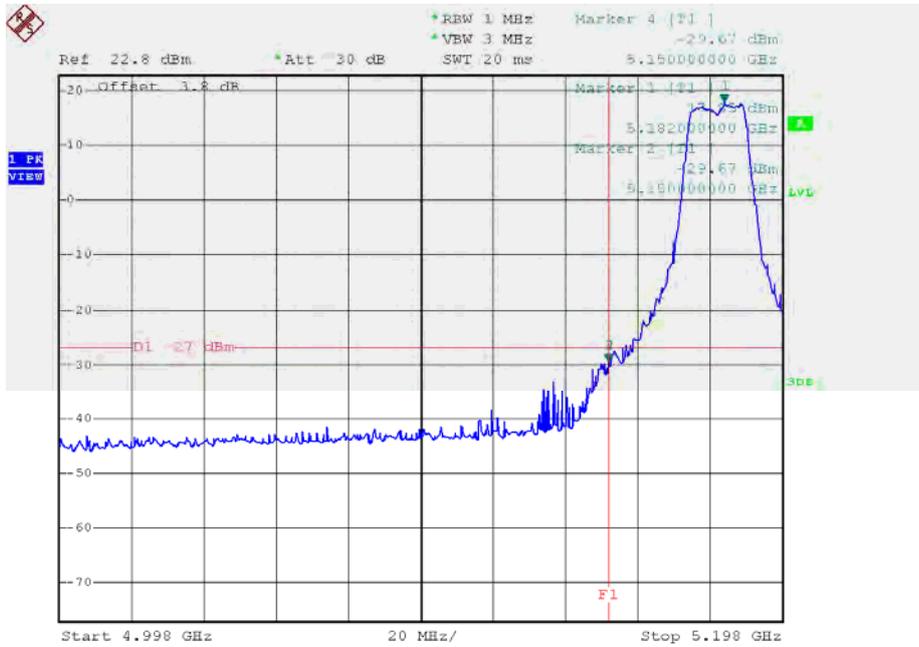

Date: 30.OCT.2015 00:25:05


TX mode CH48

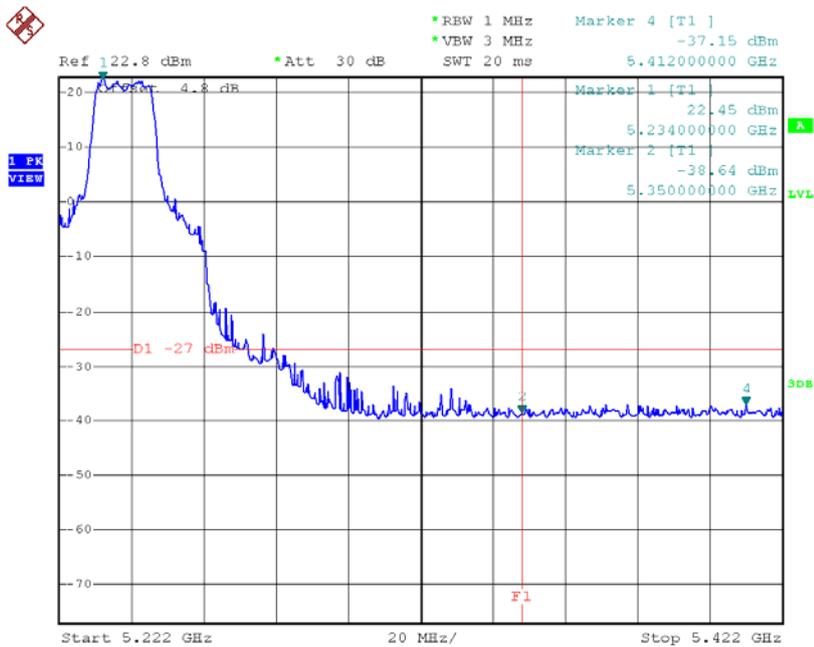

Date: 30.OCT.2015 00:53:40


Test Mode: UNII-1/TX A Mode_ANT 2

TX mode CH36

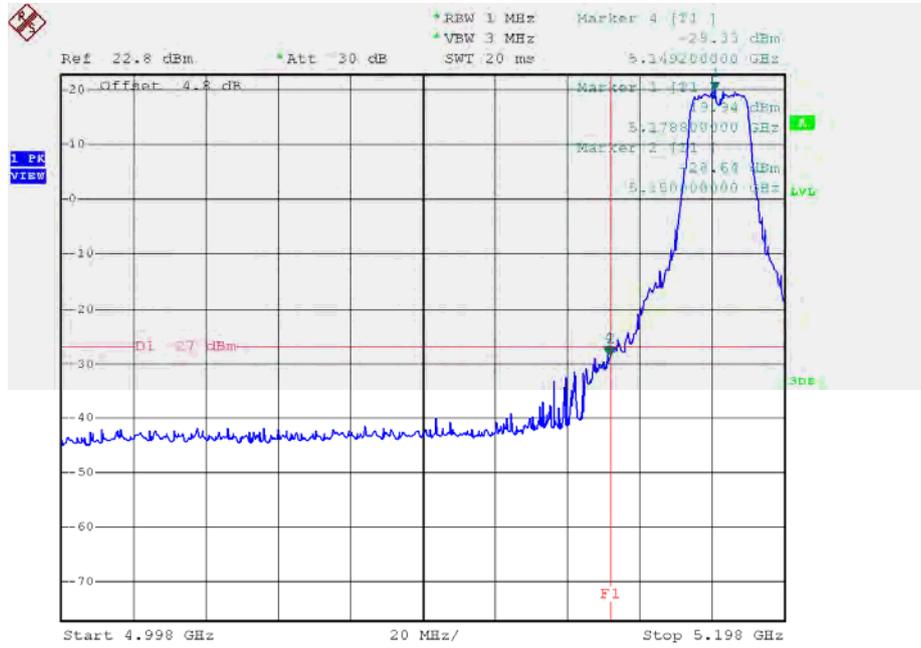

Date: 30.OCT.2015 04:44:11


TX mode CH48

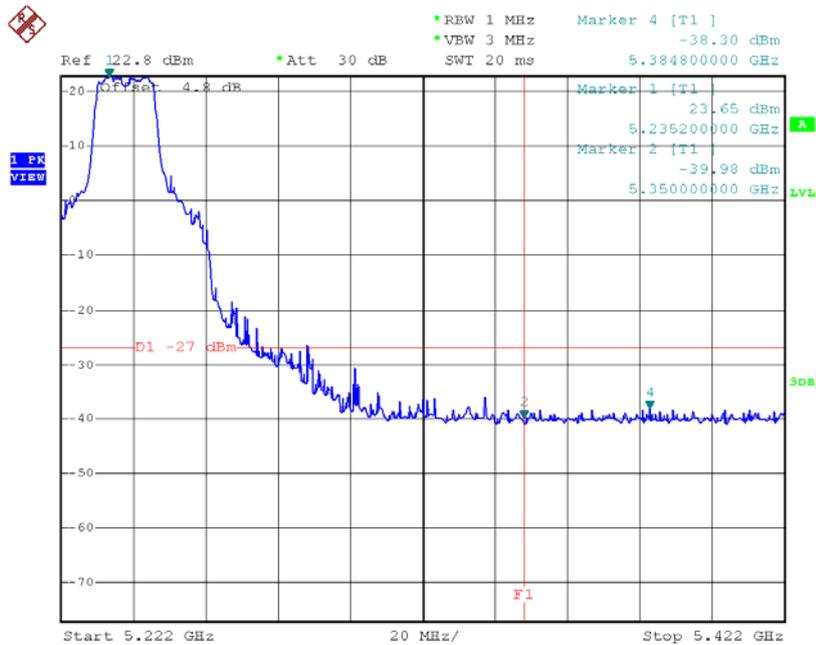

Date: 30.OCT.2015 04:46:39


Test Mode: UNII-1/TX N20 Mode_ANT 1

TX mode CH36

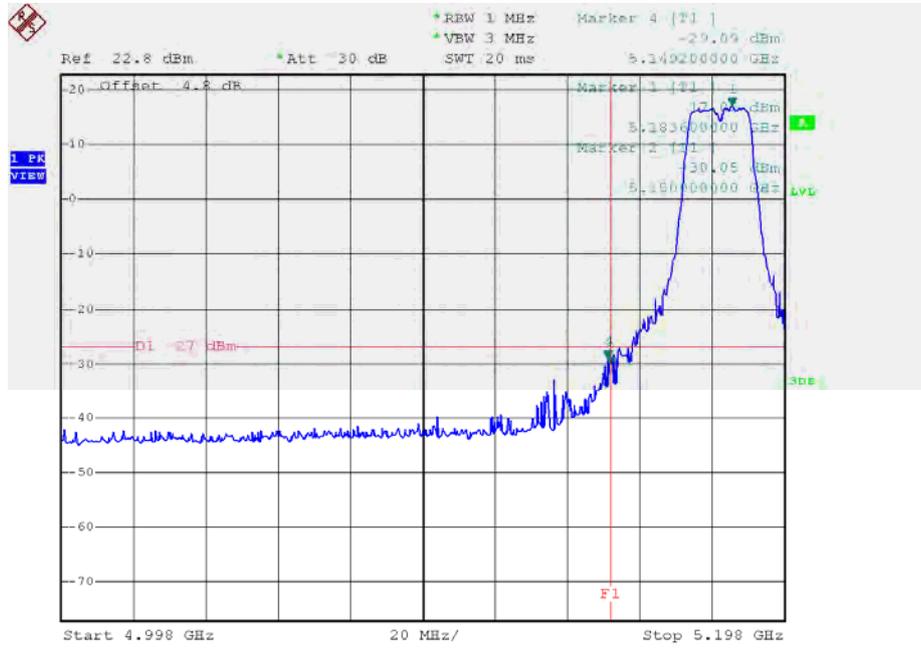

Date: 30.OCT.2015 01:44:35


TX mode CH48

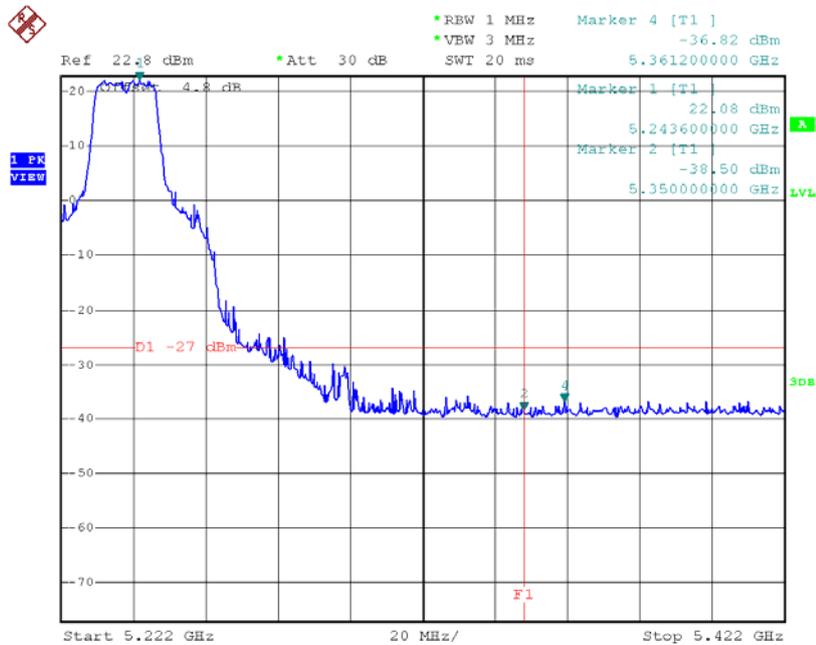

Date: 30.OCT.2015 01:46:38


Test Mode: UNII-1/TX N20 Mode_ANT 2

TX mode CH36

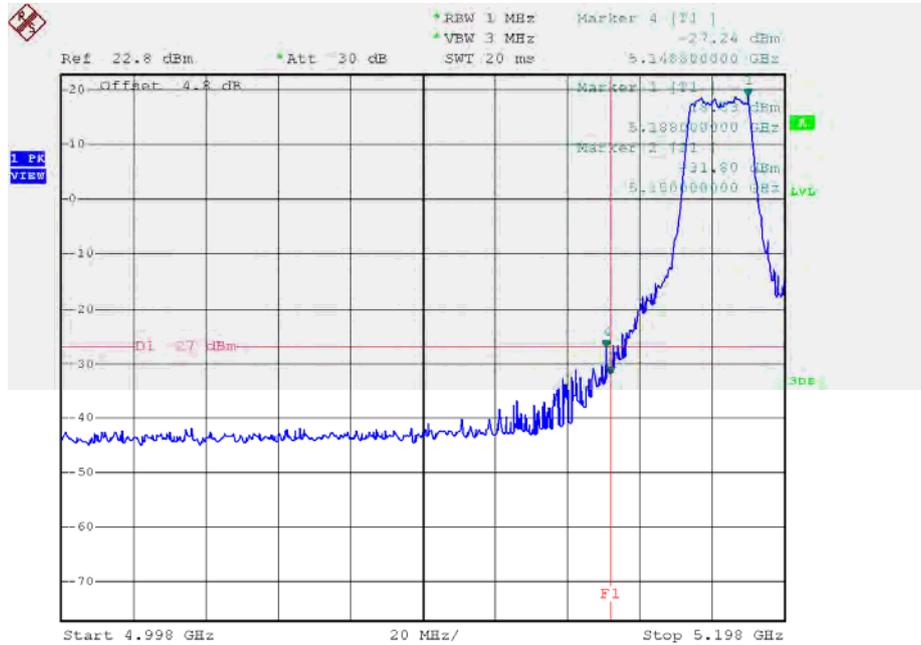

Date: 30.OCT.2015 05:22:57


TX mode CH48

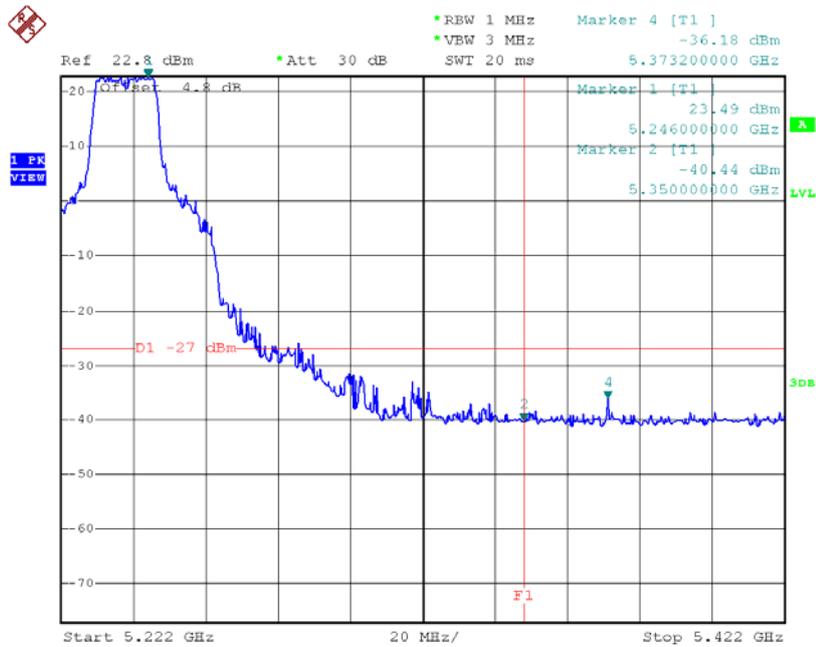

Date: 30.OCT.2015 05:24:53


Test Mode: UNII-1/TX N40 Mode_ANT 1

TX mode CH38

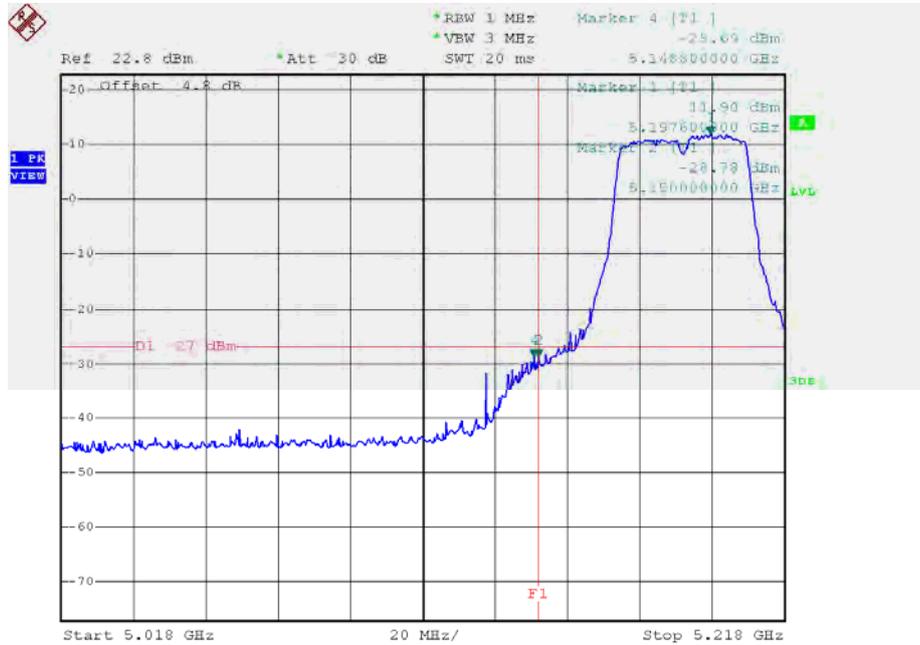

Date: 27.NOV.2015 17:00:25


TX mode CH46

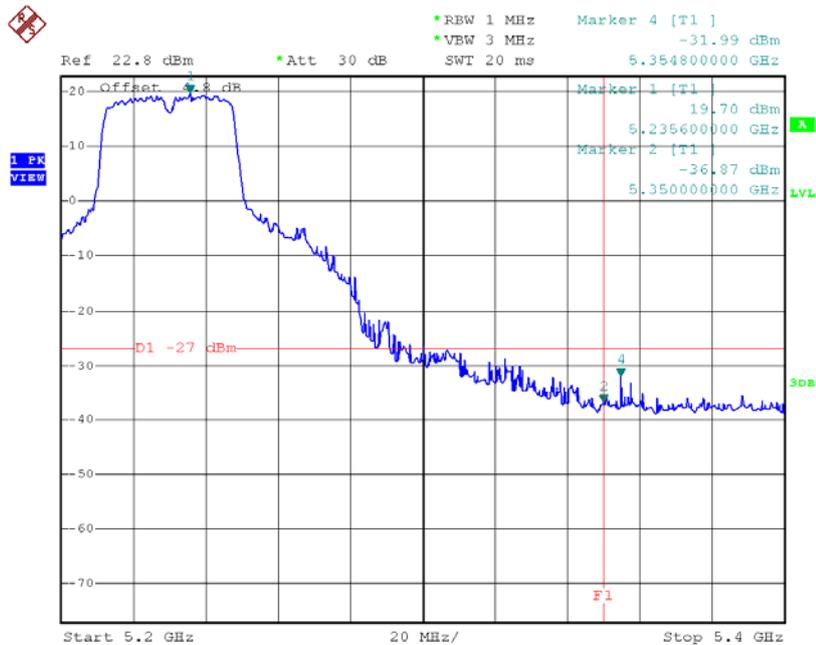

Date: 30.OCT.2015 02:35:26


Test Mode: UNII-1/TX N40 Mode_ANT 2

TX mode CH38

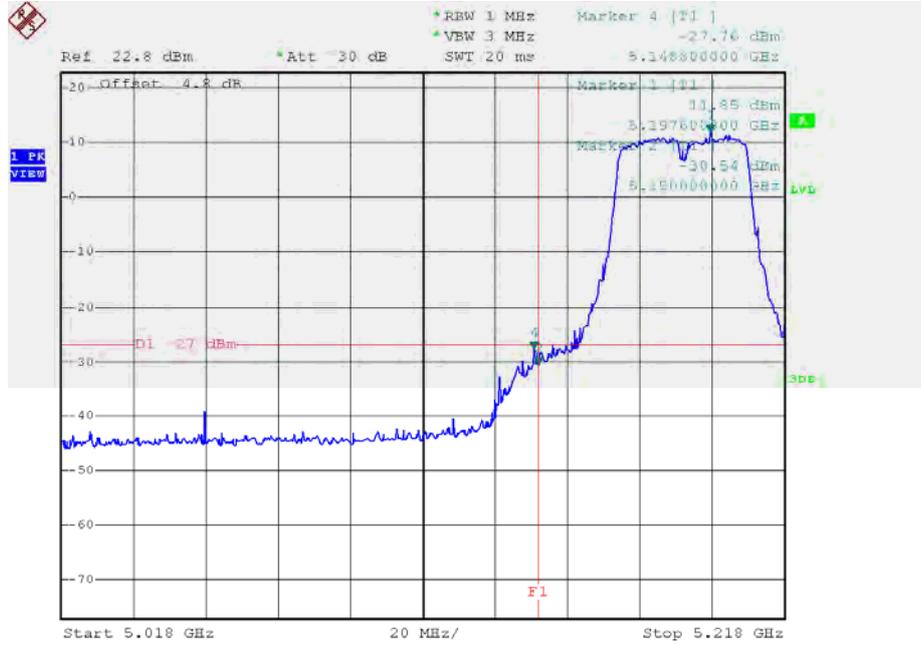

Date: 27.NOV.2015 16:51:16


TX mode CH46

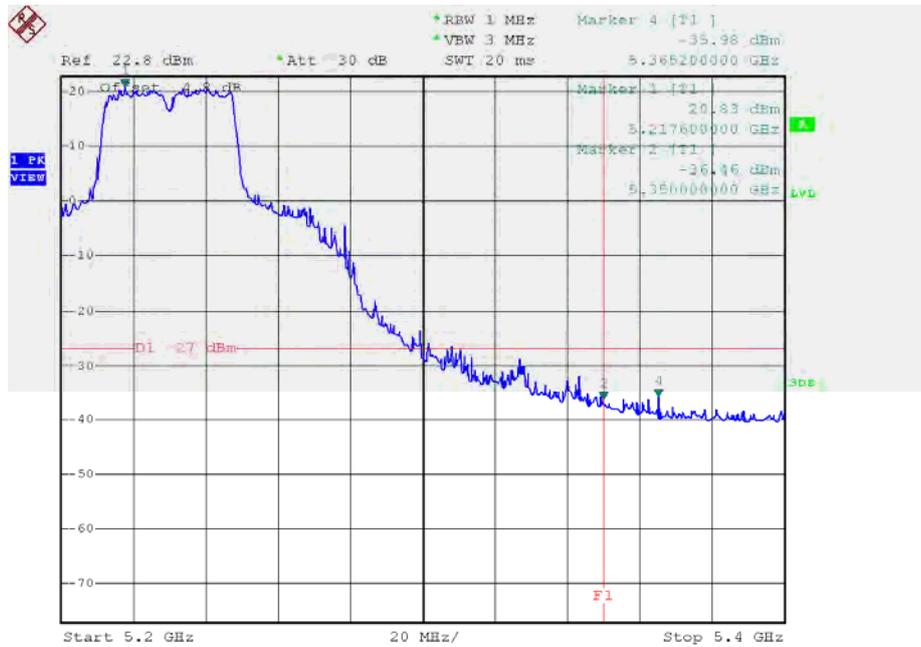

Date: 30.OCT.2015 05:47:44


Test Mode: UNII-2A/TX A Mode_ANT 2

TX mode CH52

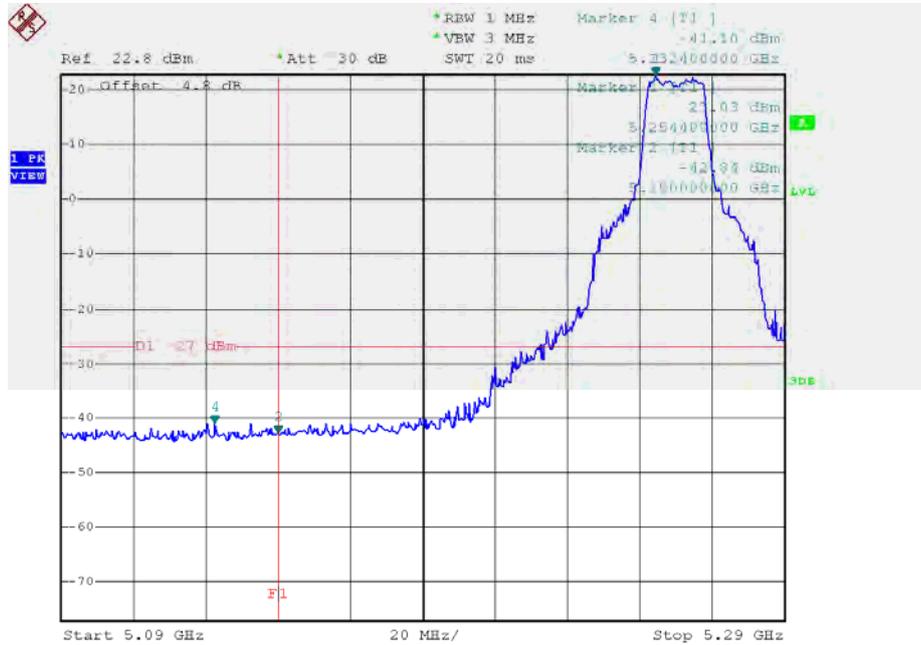

Date: 30.OCT.2015 04:47:53


TX mode CH64

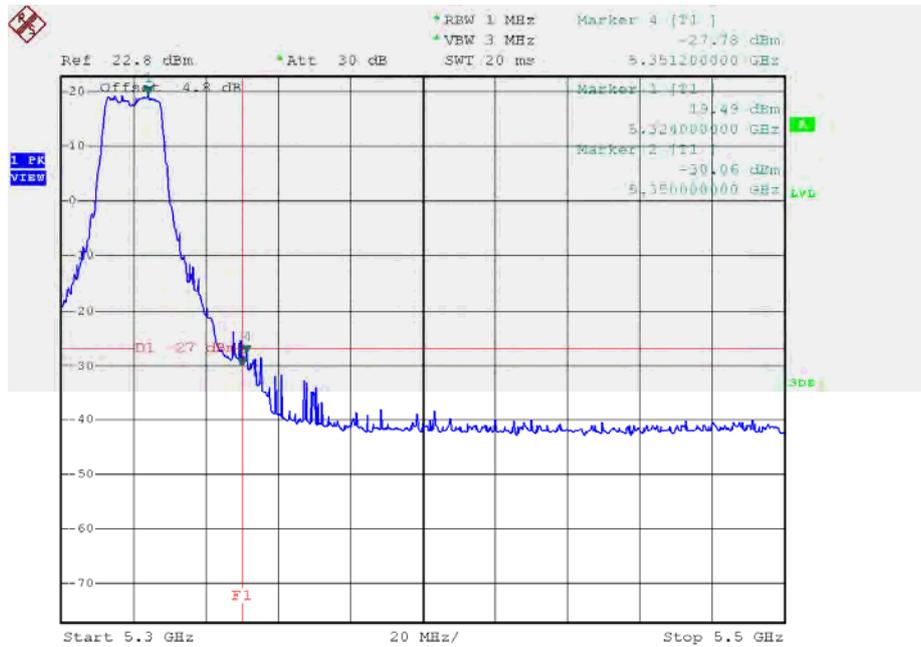

Date: 30.OCT.2015 04:53:23


Test Mode: UNII-2A/TX N20 Mode_ANT 1

TX mode CH52

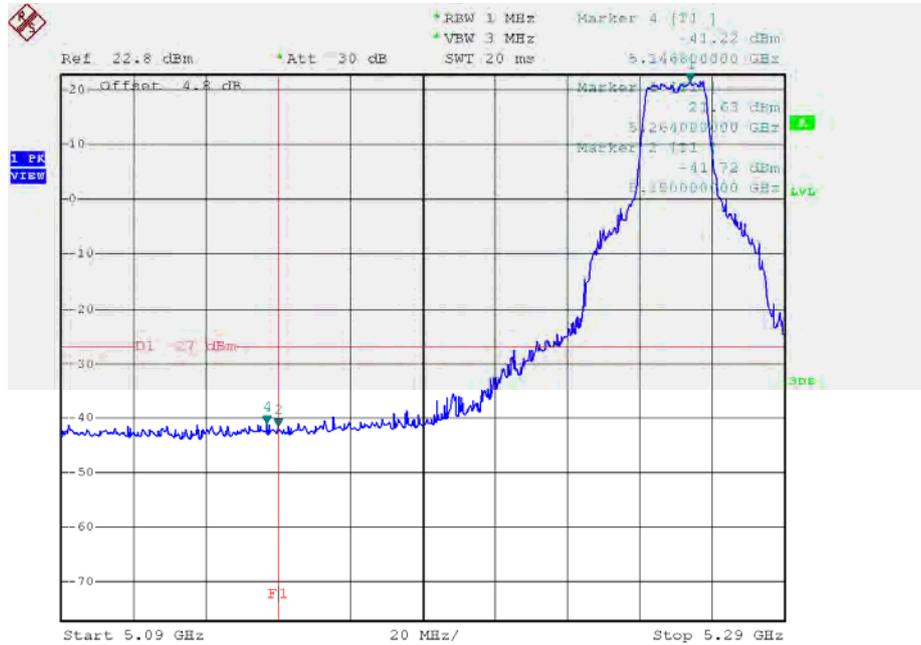

Date: 30.OCT.2015 01:48:58


TX mode CH64

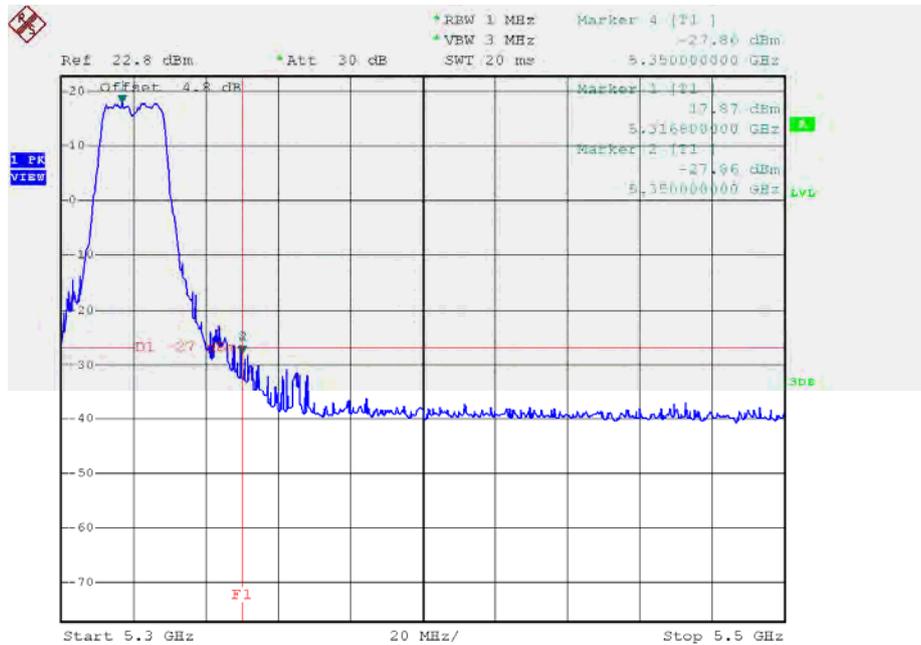

Date: 30.OCT.2015 02:00:39


Test Mode: UNII-2A/TX N20 Mode_ANT 2

TX mode CH52

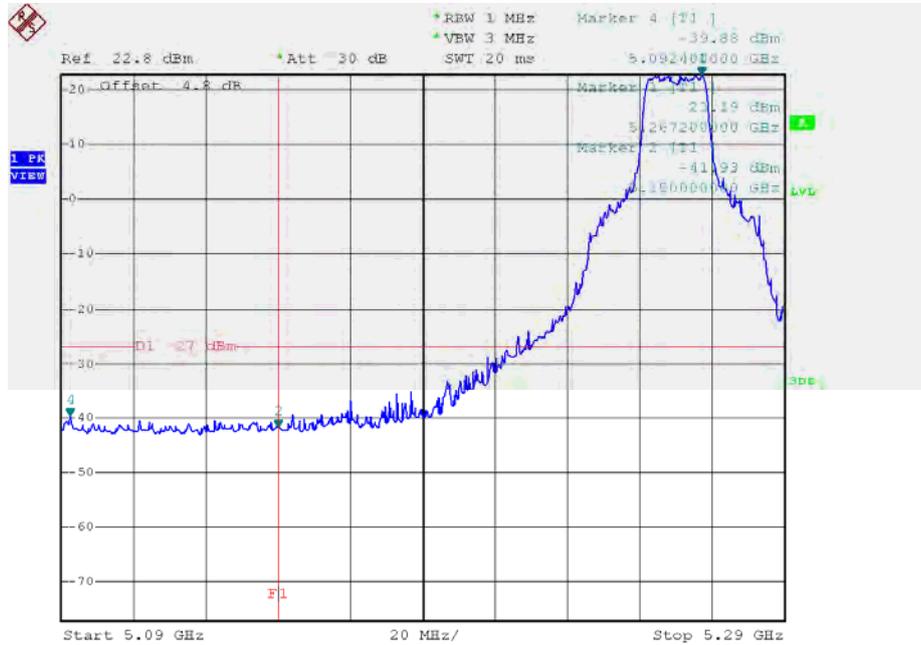

Date: 30.OCT.2015 05:25:45


TX mode CH64

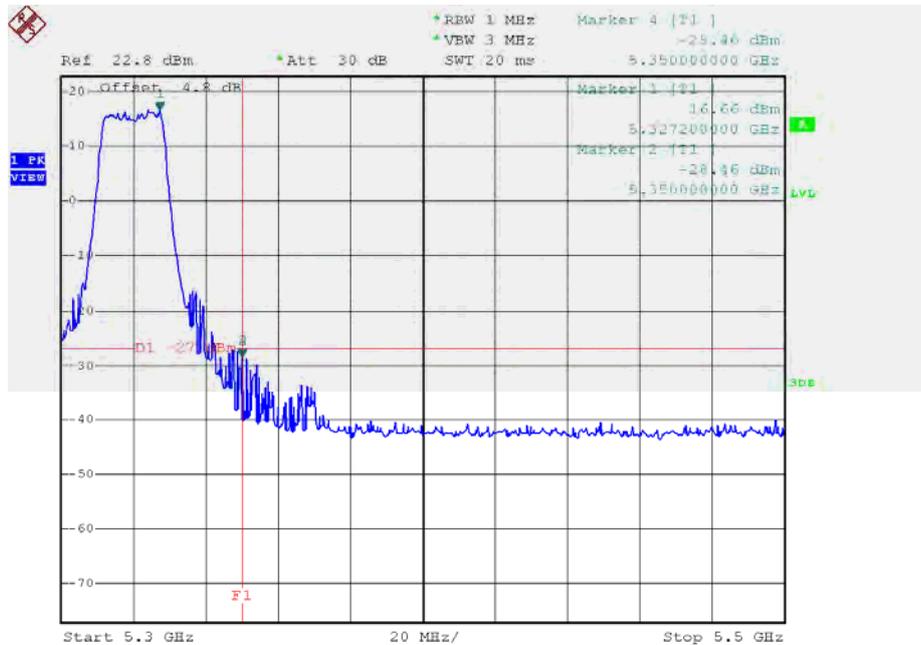

Date: 30.OCT.2015 05:29:26


Test Mode: UNII-2A/TX N40 Mode_ANT 1

TX mode CH54

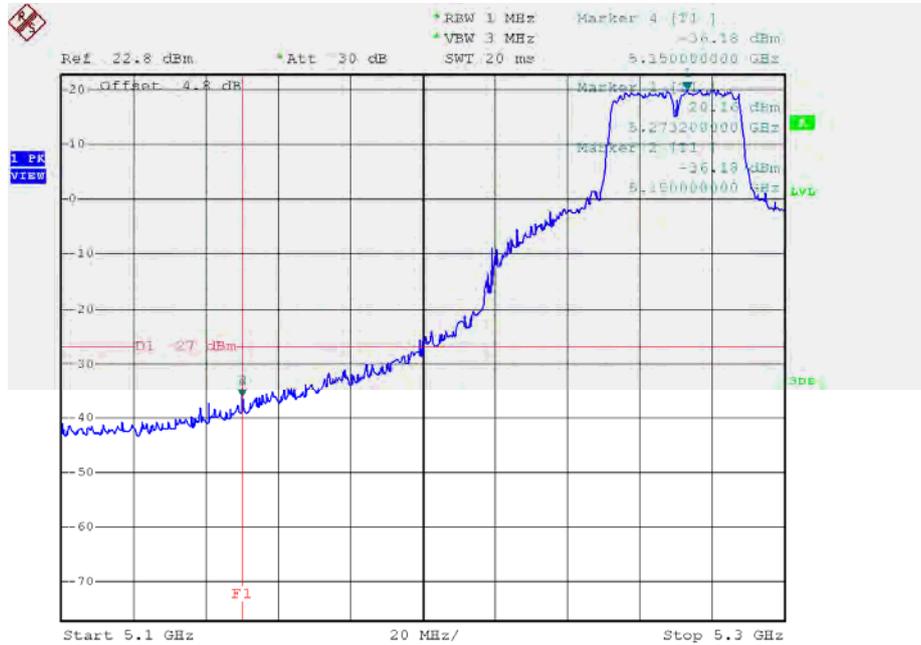

Date: 30.OCT.2015 02:36:25


TX mode CH62

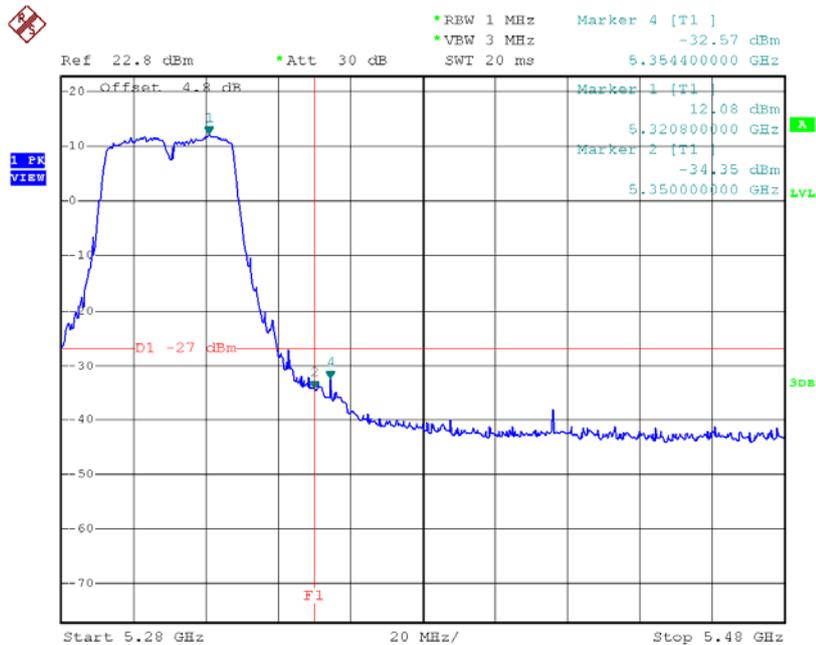

Date: 27.NOV.2015 17:01:27


Test Mode: UNII-2A/TX N40 Mode_ANT 2

TX mode CH54

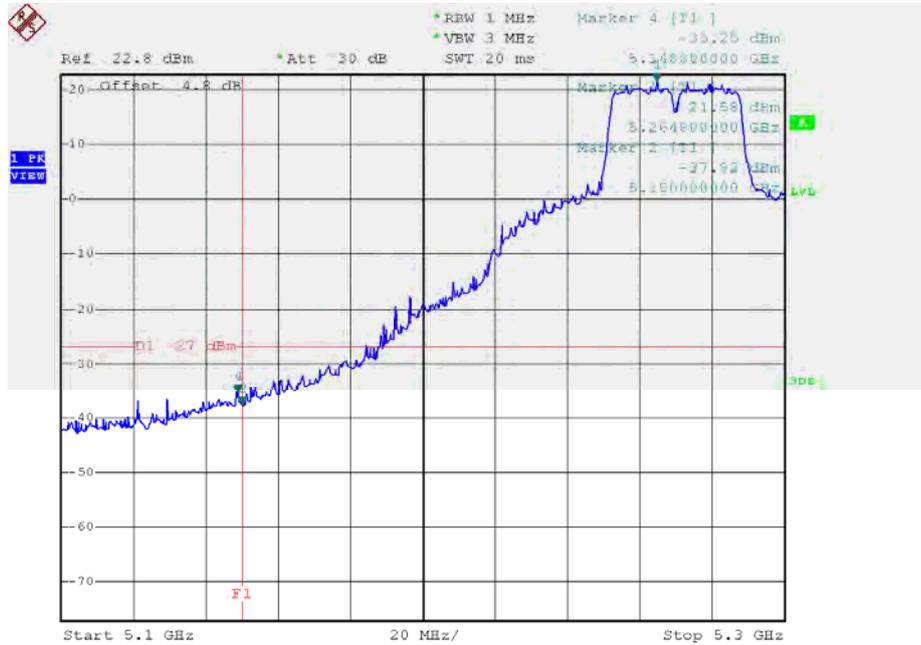

Date: 30.OCT.2015 05:48:38


TX mode CH62

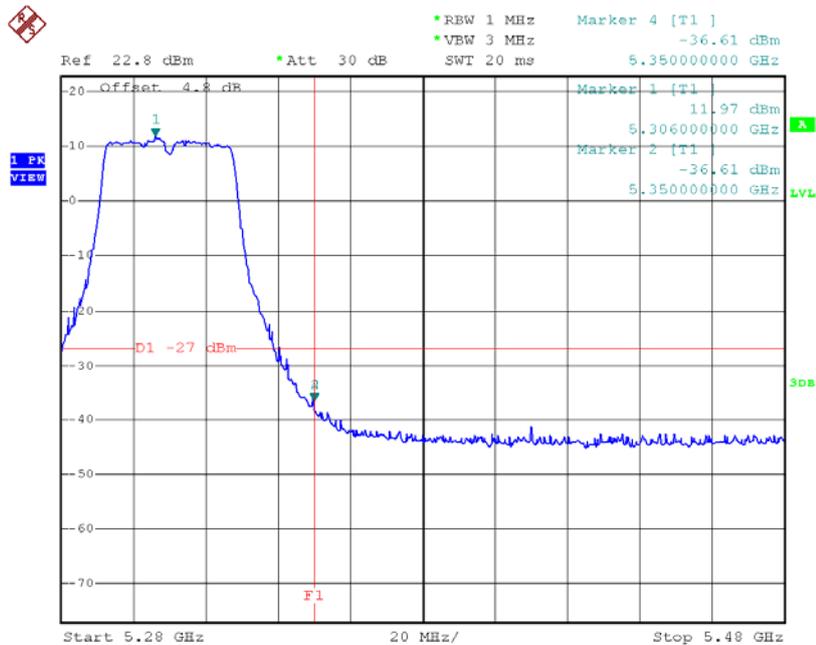

Date: 27.NOV.2015 16:55:16


Test Mode: UNII-2C/TX A Mode_ANT 1

TX mode CH100

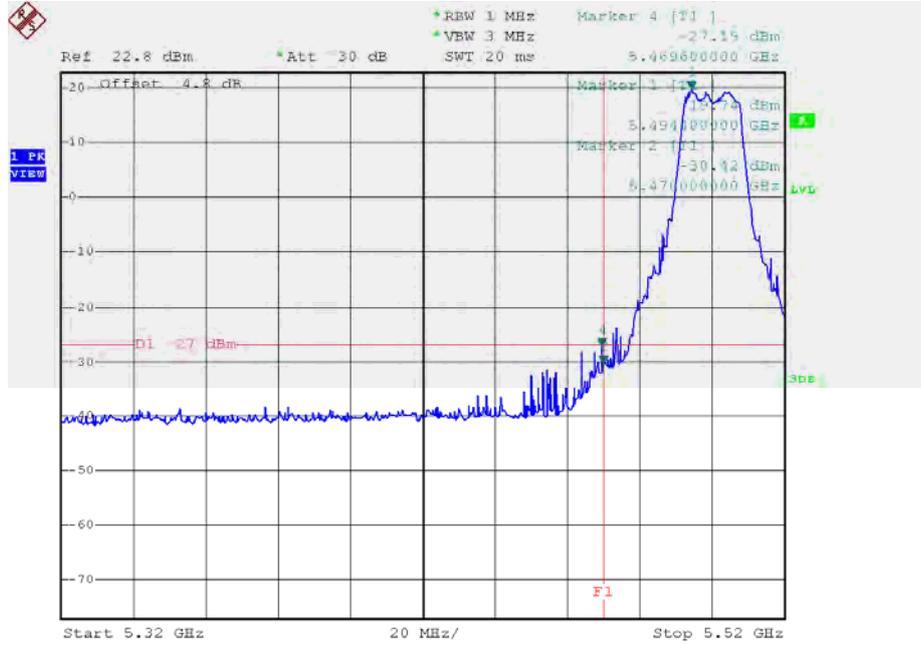

Date: 30.OCT.2015 01:12:14


TX mode CH140

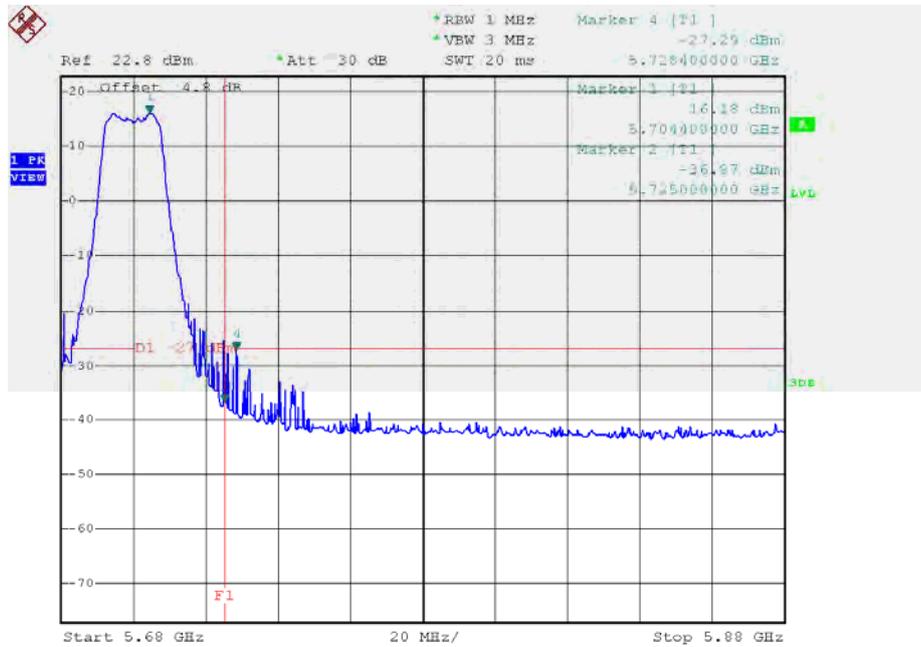

Date: 30.OCT.2015 01:21:03


Test Mode: UNII-2C/TX A Mode_ANT 2

TX mode CH100

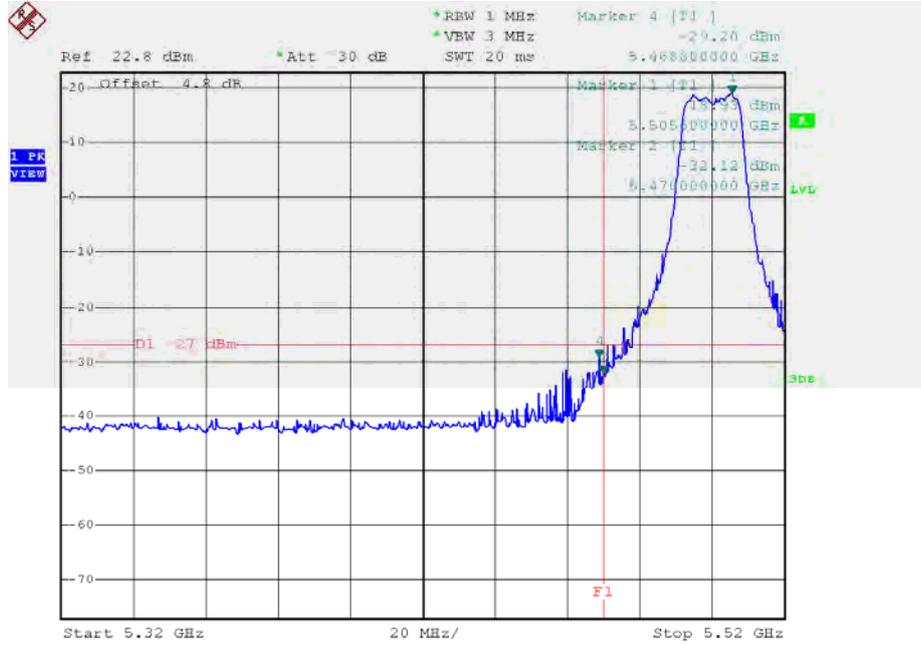

Date: 30.OCT.2015 04:54:38


TX mode CH140

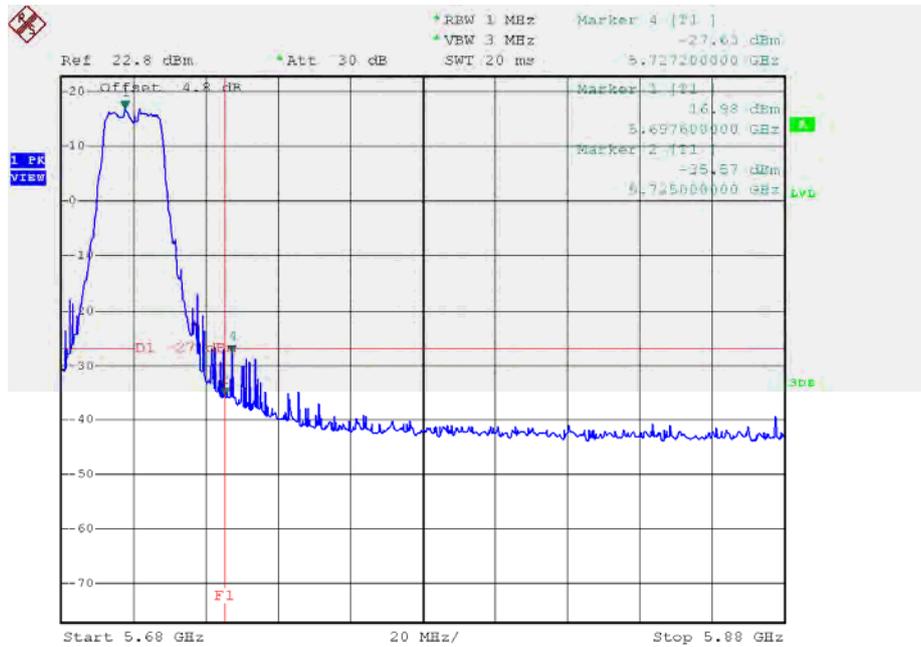

Date: 30.OCT.2015 04:57:06


Test Mode: UNII-2C/TX N20 Mode_ANT 1

TX mode CH100

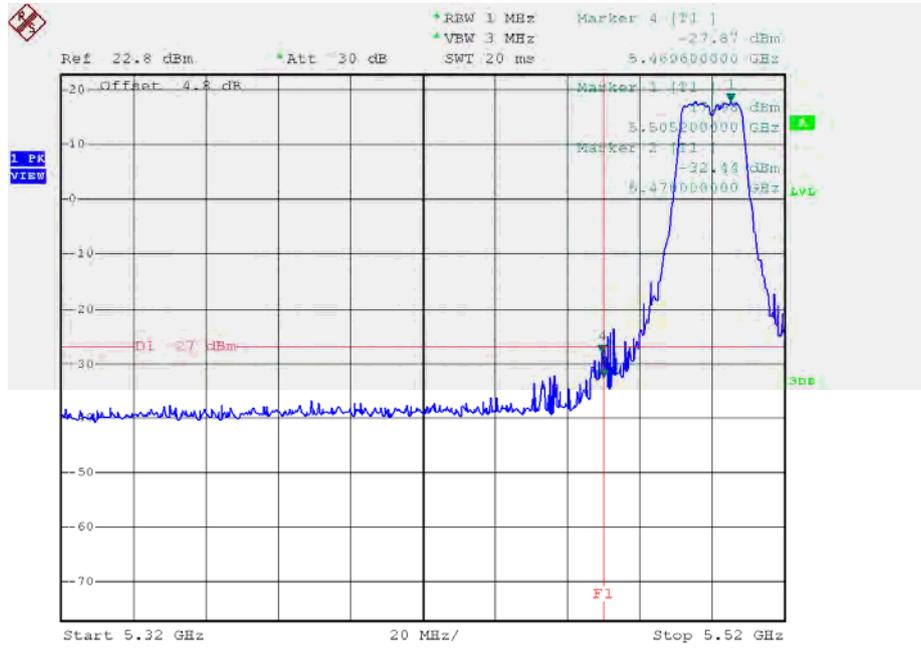

Date: 30.OCT.2015 02:04:56


TX mode CH140

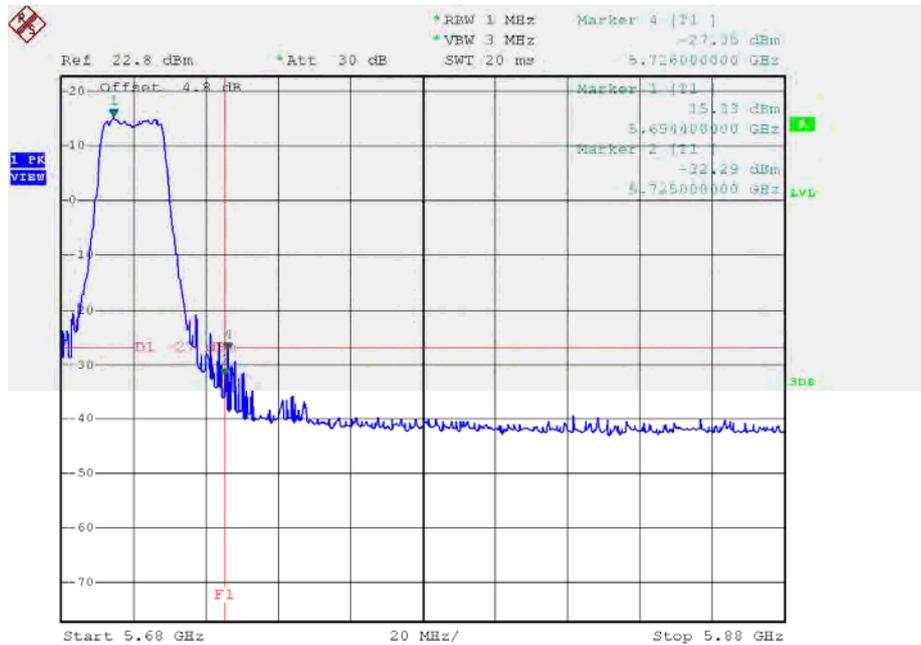

Date: 30.OCT.2015 02:10:09


Test Mode: UNII-2C/TX N20 Mode_ANT 2

TX mode CH100

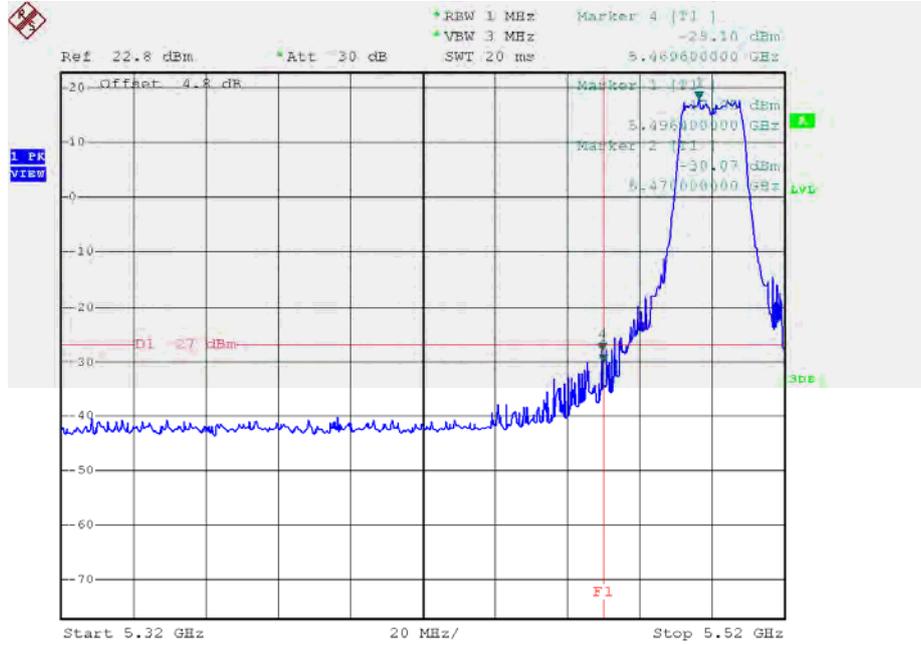

Date: 30.OCT.2015 05:30:49


TX mode CH140

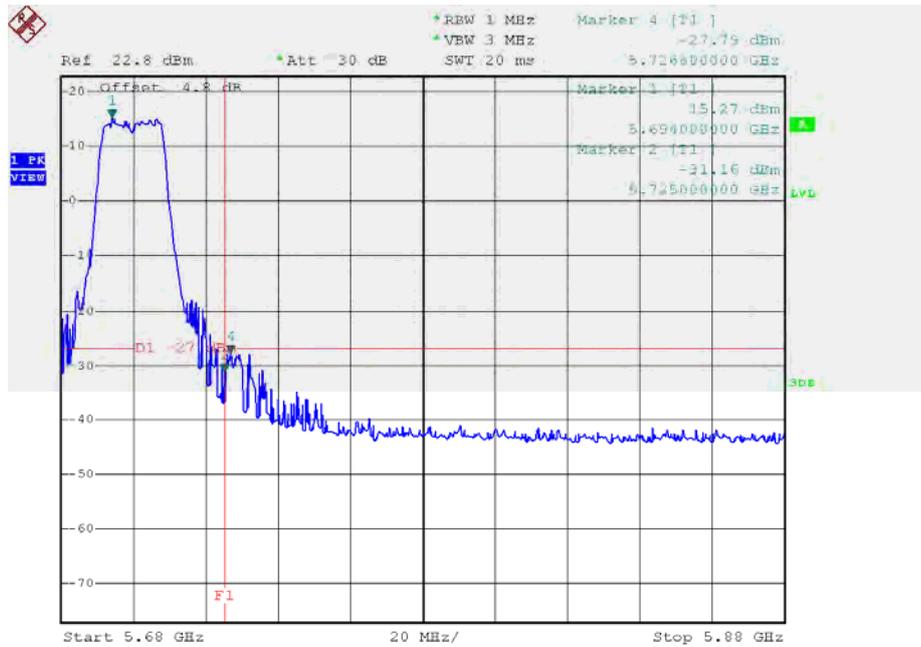

Date: 30.OCT.2015 05:35:02


Test Mode: UNII-2C/TX N40 Mode_ANT 1

TX mode CH102

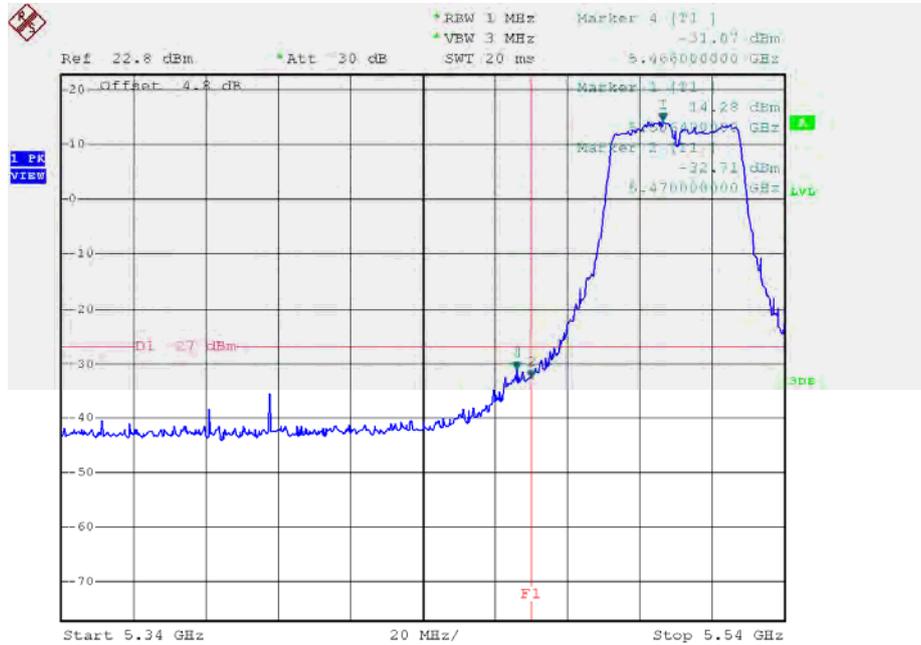

Date: 27.NOV.2015 17:02:06


TX mode CH134

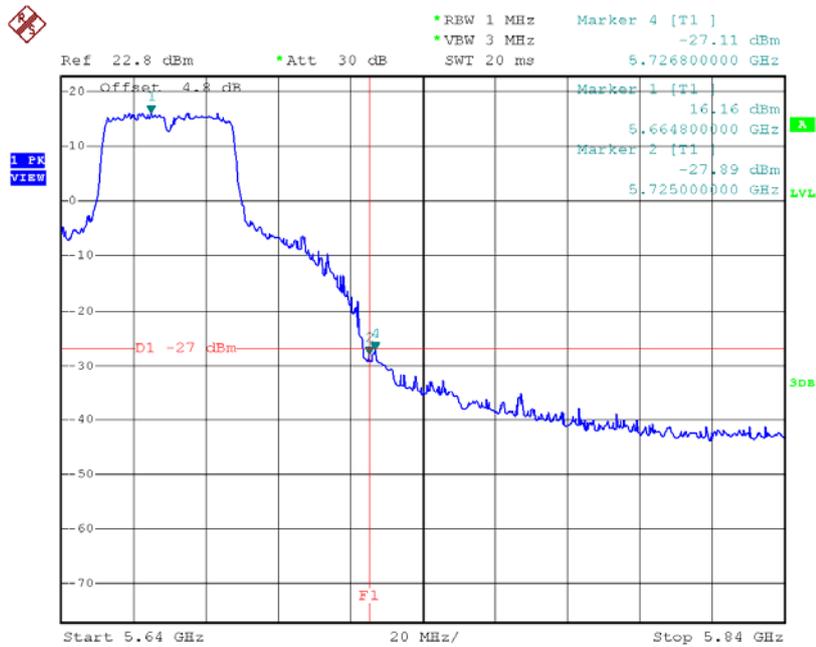

Date: 30.OCT.2015 02:49:31


Test Mode: UNII-2C/TX N40 Mode_ANT 2

TX mode CH102

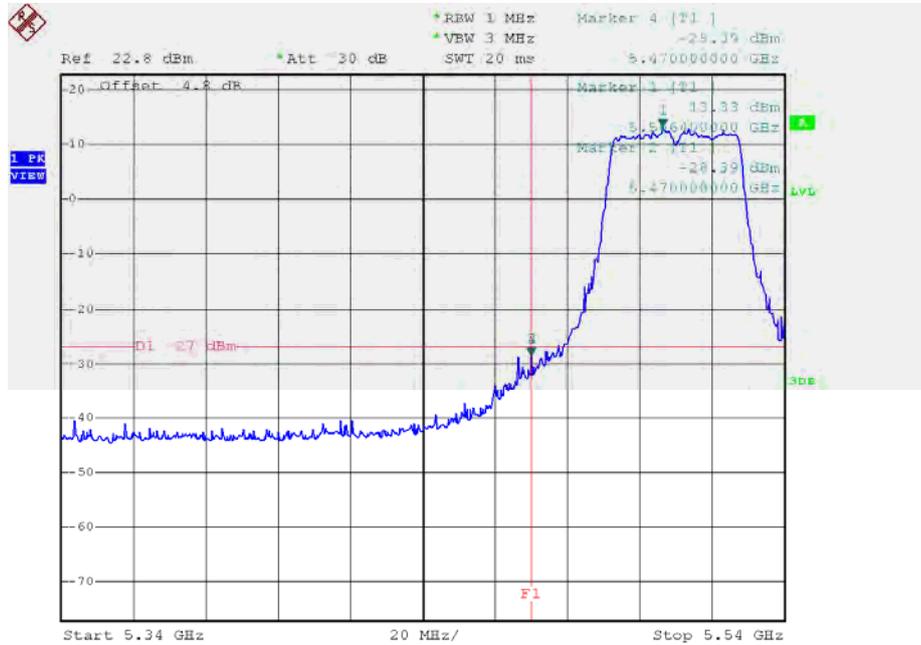

Date: 27.NOV.2015 16:56:45


TX mode CH134

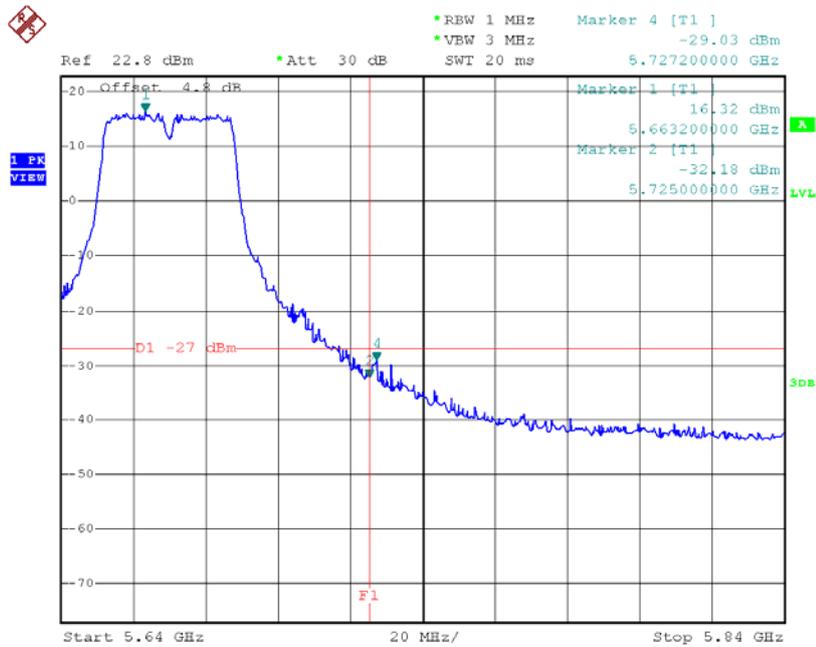

Date: 30.OCT.2015 06:04:47


Test Mode: UNII-3/TX A Mode_ANT 1

TX A Mode CH149

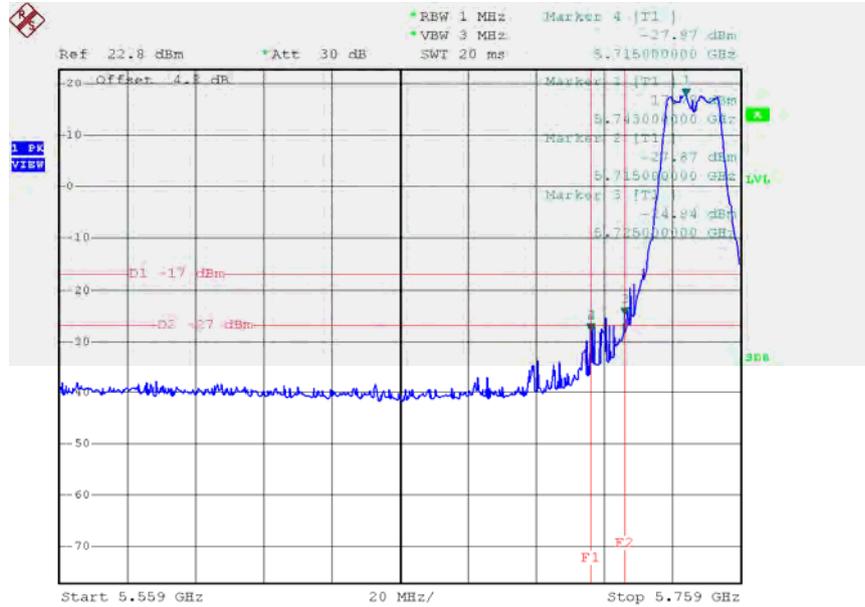

Date: 30.OCT.2015 05:05:28


TX A Mode CH165

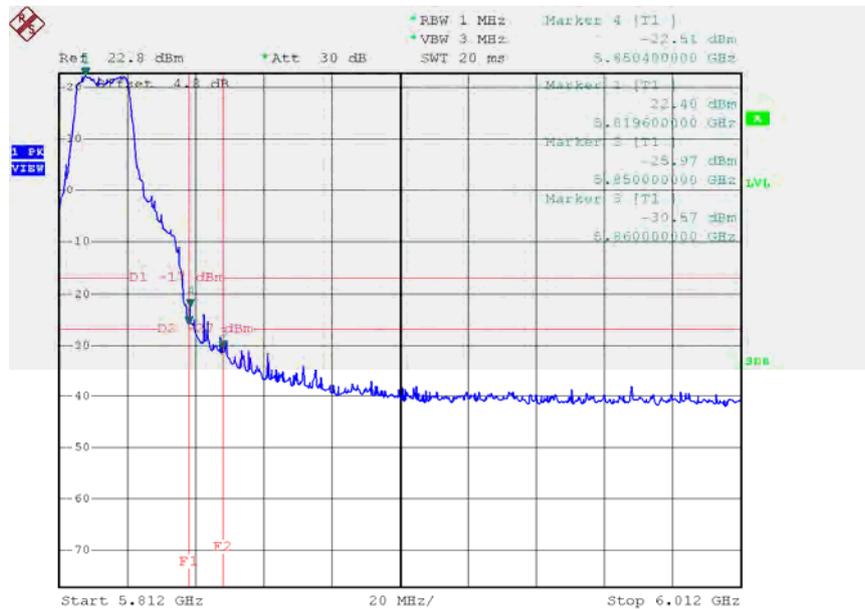

Date: 2.NOV.2015 13:30:40


Test Mode: UNII-3/TX A Mode_ANT 2

TX A Mode CH149

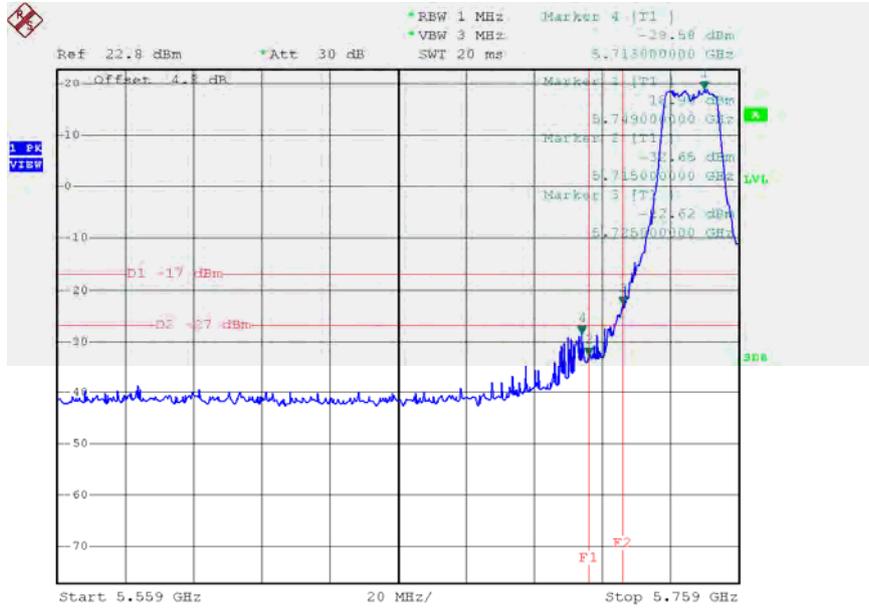

Date: 30.OCT.2015 05:00:56


TX A Mode CH165

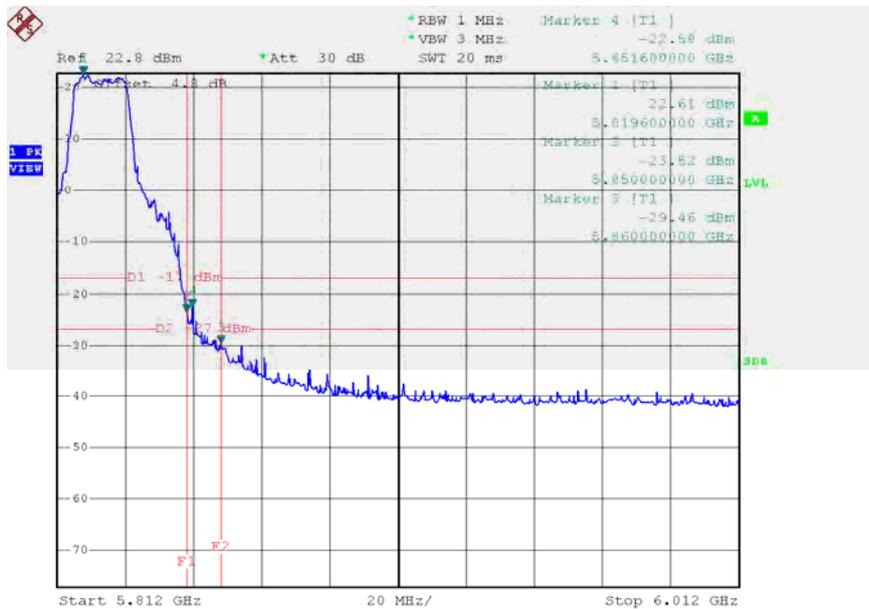

Date: 2.NOV.2015 13:32:29


Test Mode: UNII-3/TX N20 Mode_ANT 1

TX HT20 mode CH149

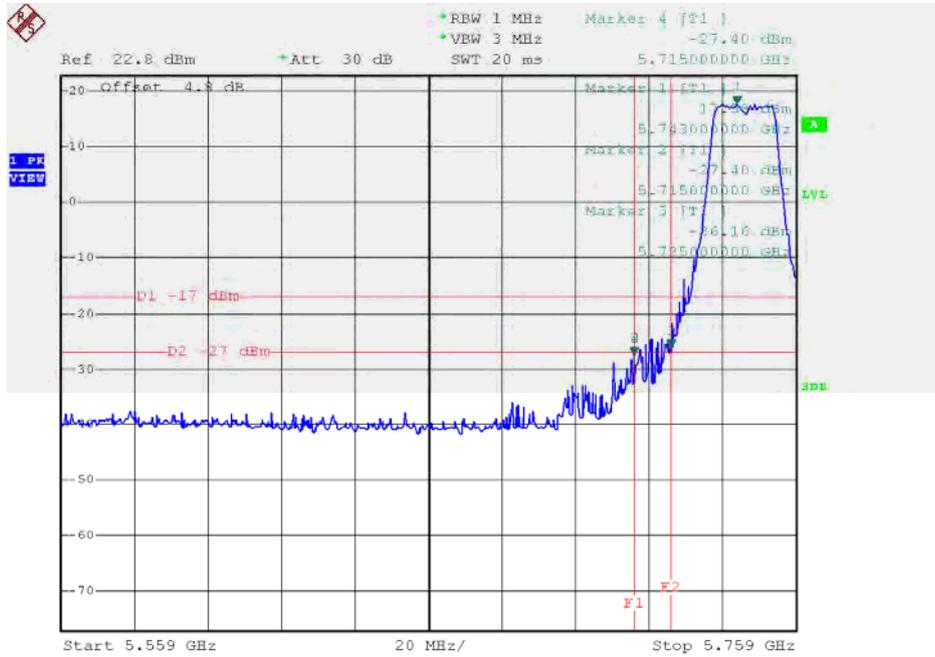

Date: 30.OCT.2015 02:23:44


TX HT20 mode CH165

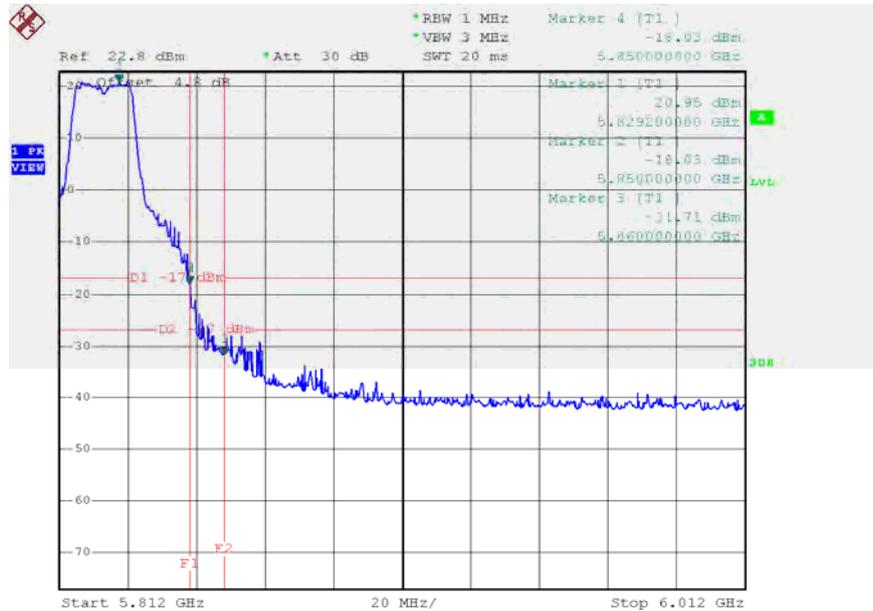

Date: 30.OCT.2015 02:28:42


Test Mode: UNII-3/TX N20 Mode_ANT 2

TX HT20 mode CH149

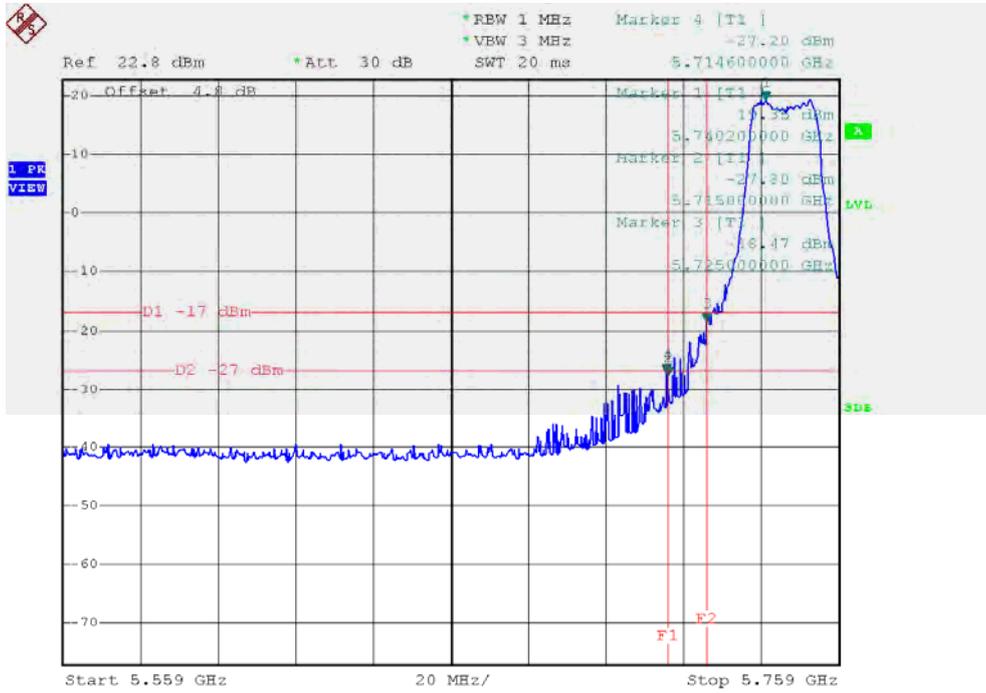

Date: 30.OCT.2015 05:36:53


X HT20 mode CH165

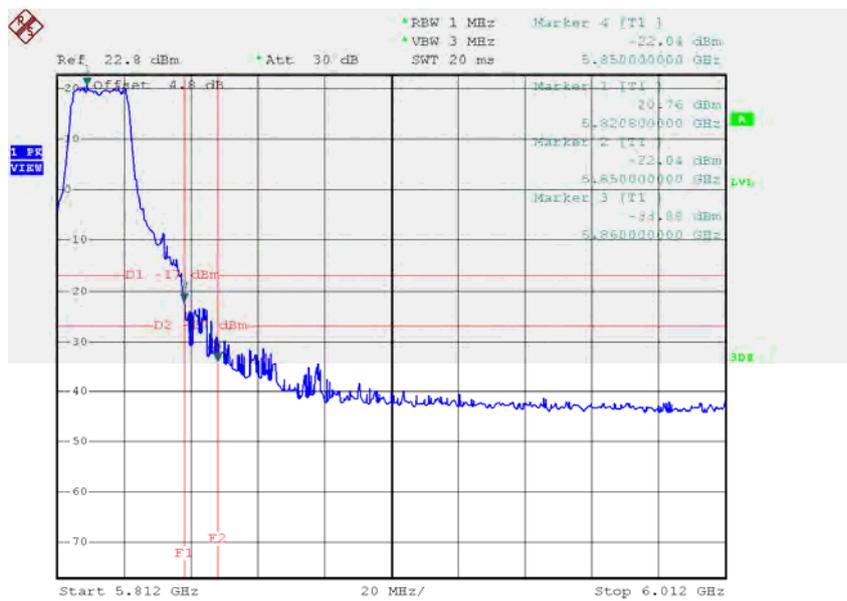

Date: 2.NOV.2015 14:23:10


Test Mode: UNII-3/TX N40 Mode_ANT 1

UNII-3/TX HT40 mode CH151

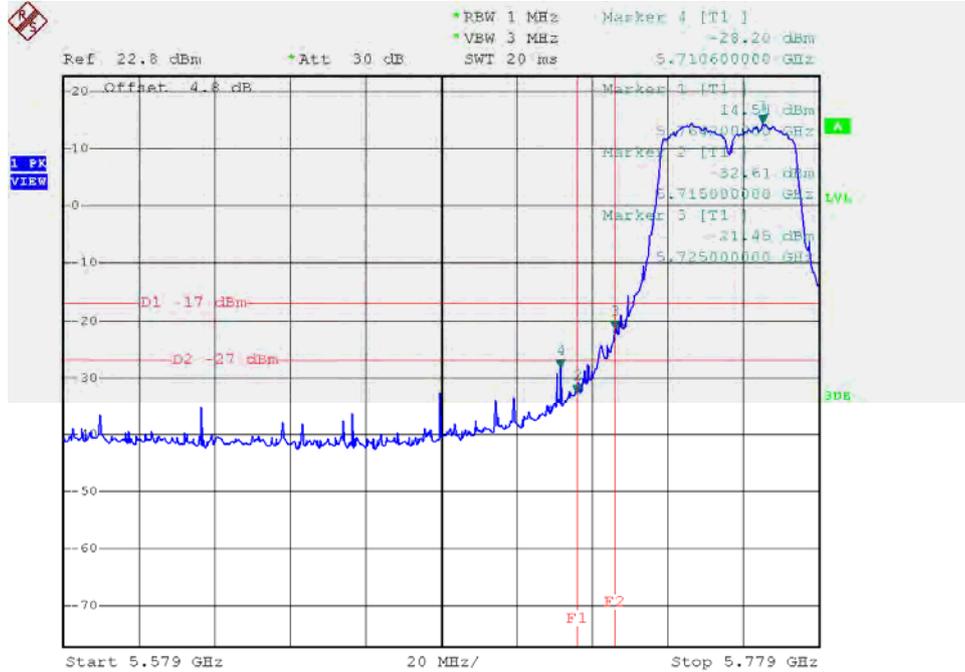

Date: 27.NOV.2015 17:03:03


UNII-3/TX HT40 mode CH159

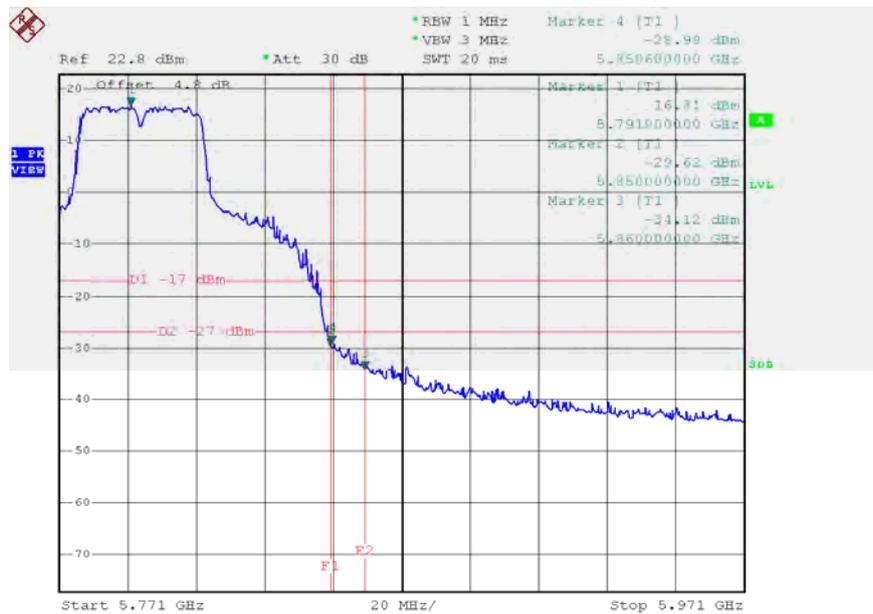

Date: 30.OCT.2015 02:53:39


Test Mode: UNII-3/TX N40 Mode_ANT 2

TX HT40 mode CH151

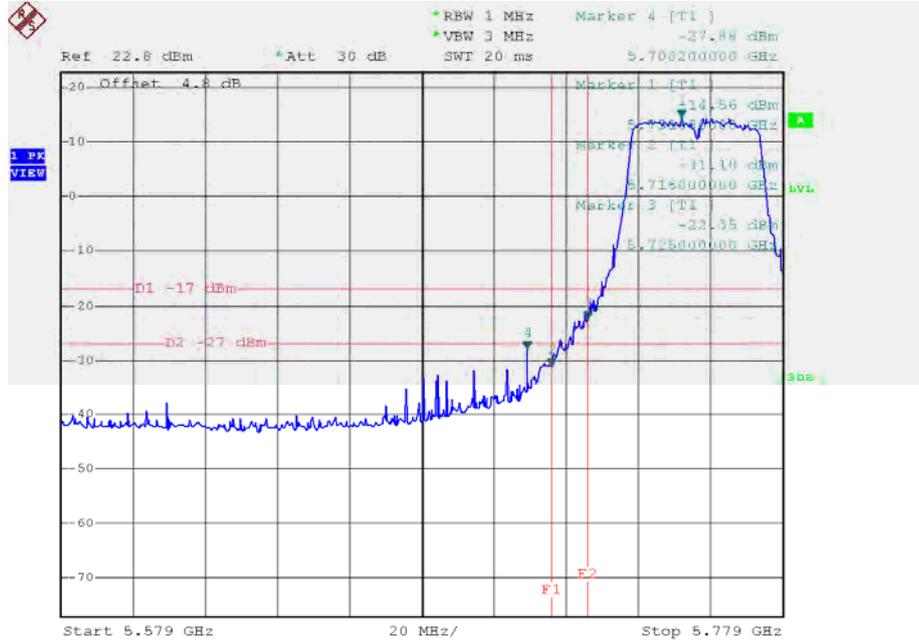

Date: 27.NOV.2015 16:57:24


HT40 mode CH159

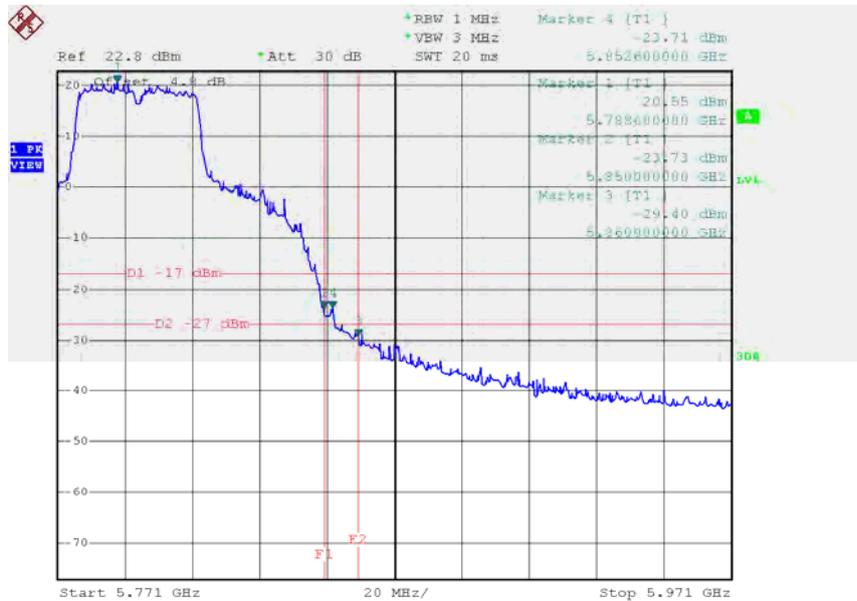

Date: 30.OCT.2015 06:19:29


Test Mode: UNII-1/TX AC20 Mode_ANT 1

TX mode CH36

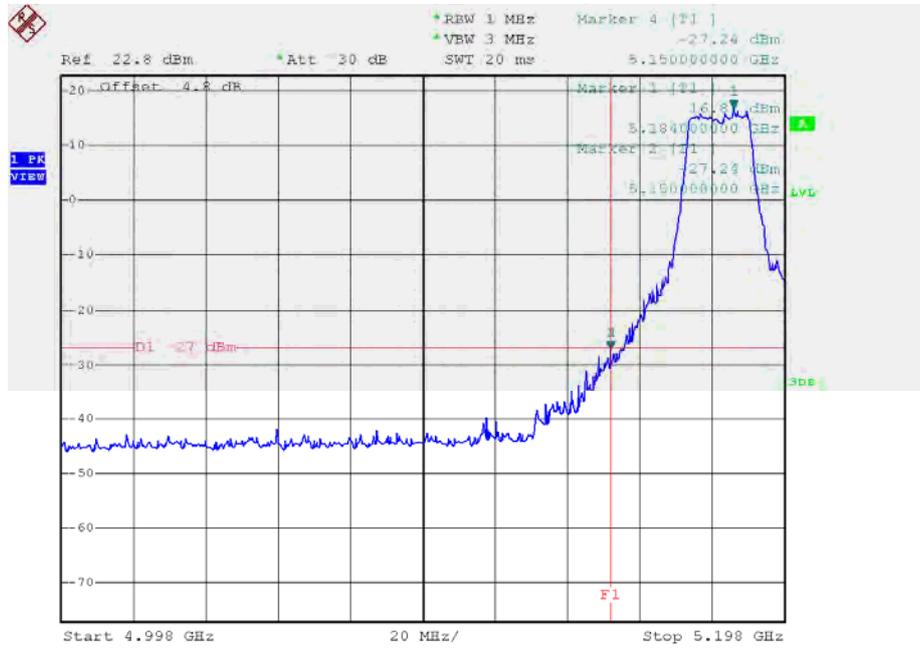

Date: 30.OCT.2015 03:00:11


TX mode CH48

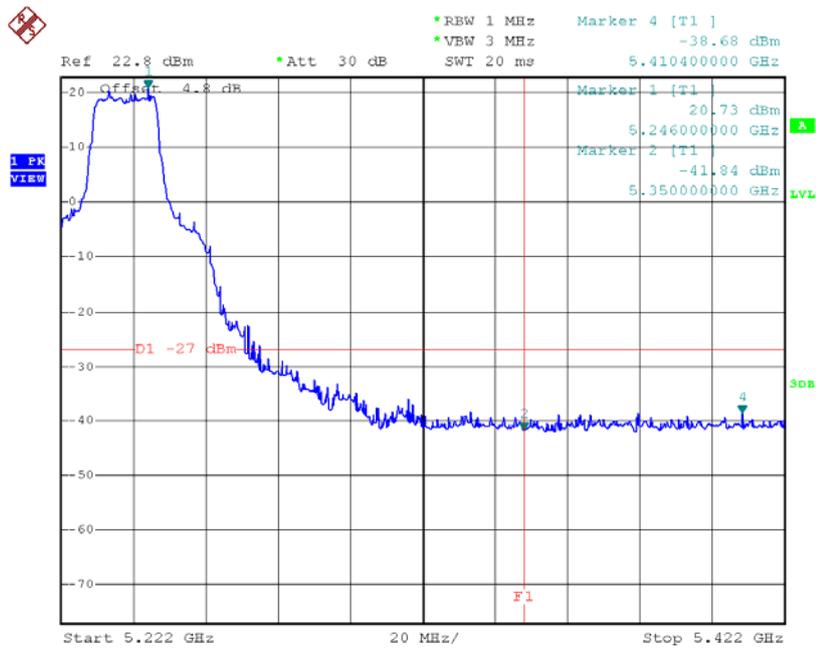

Date: 30.OCT.2015 03:03:33


Test Mode: UNII-1/TX AC20 Mode_ANT 2

TX mode CH36

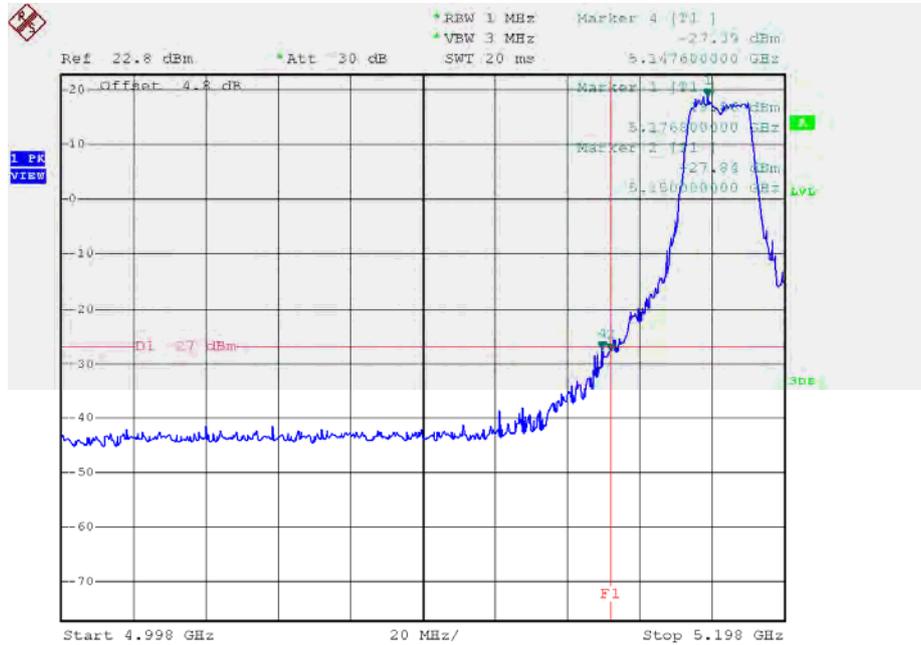

Date: 30.OCT.2015 06:25:36


TX mode CH48

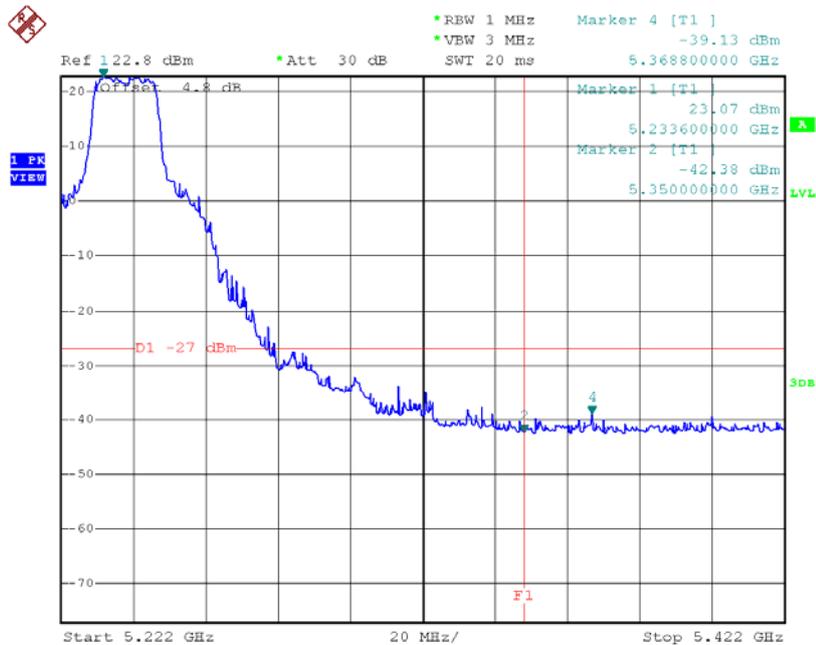

Date: 30.OCT.2015 06:27:18


Test Mode: UNII-1/TX AC40 Mode_ANT 1

TX mode CH38

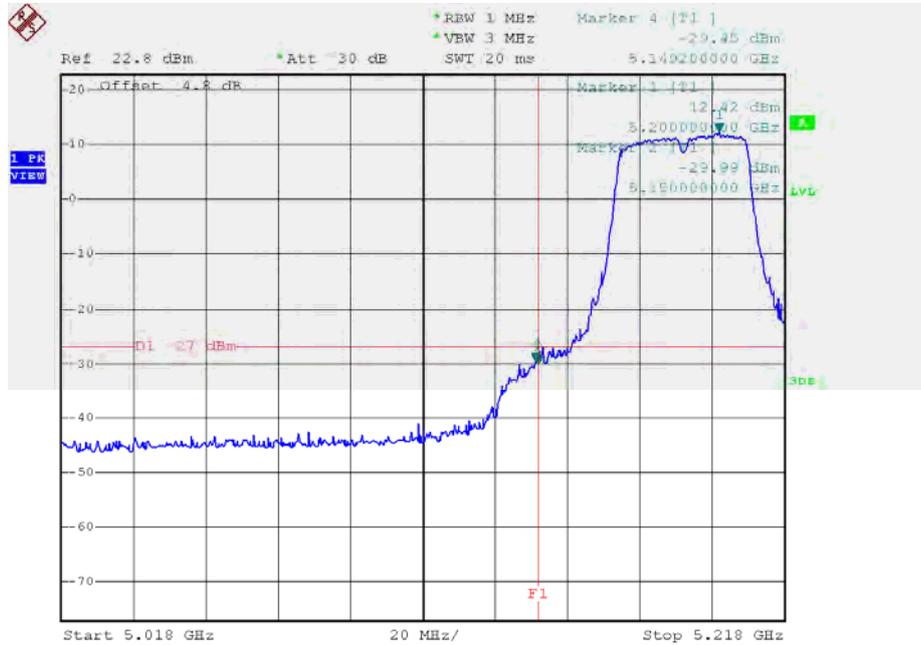

Date: 27.NOV.2015 17:15:54


TX mode CH46

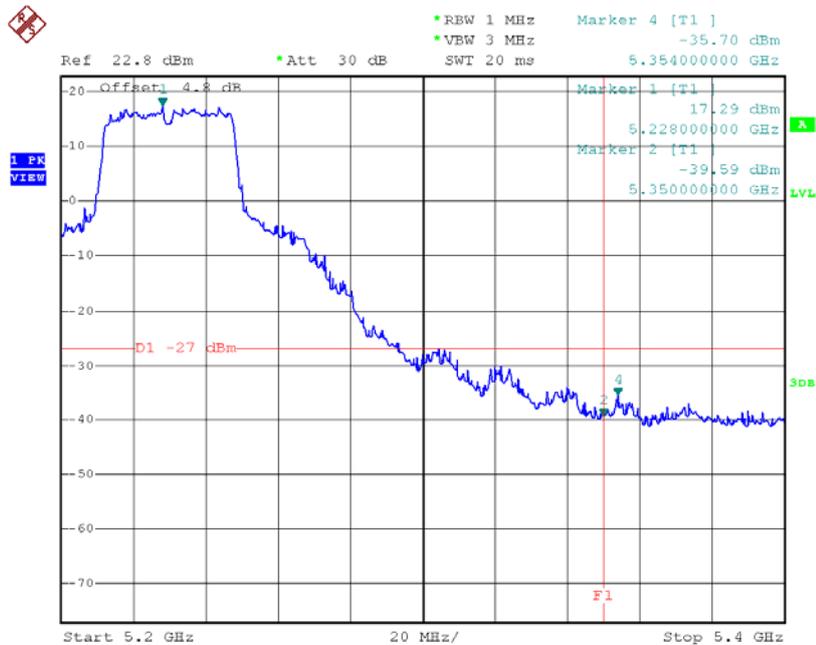

Date: 30.OCT.2015 03:55:26


Test Mode: UNII-1/TX AC40 Mode_ANT 2

TX mode CH38

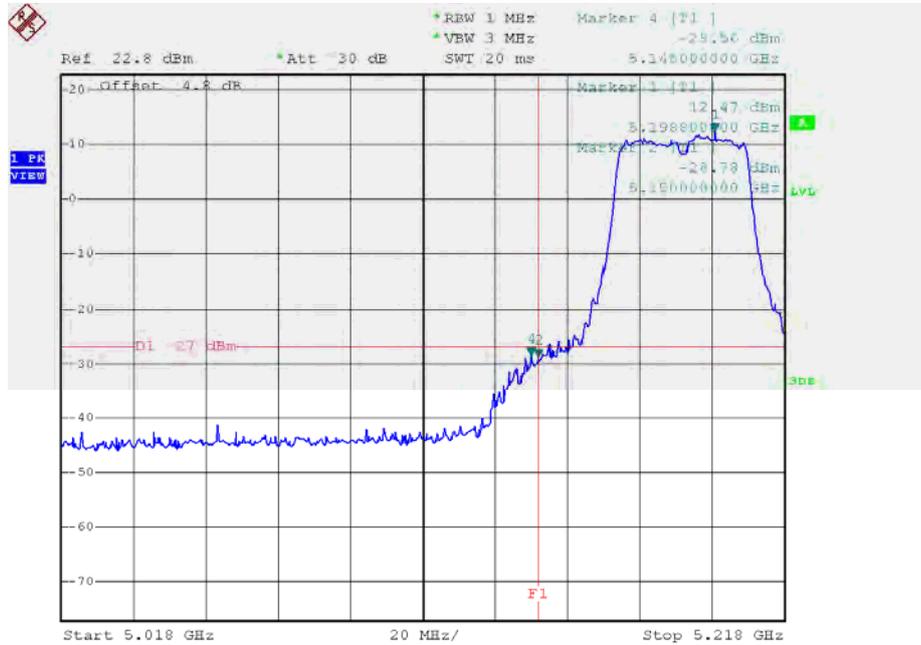

Date: 27.NOV.2015 17:11:01


TX mode CH46

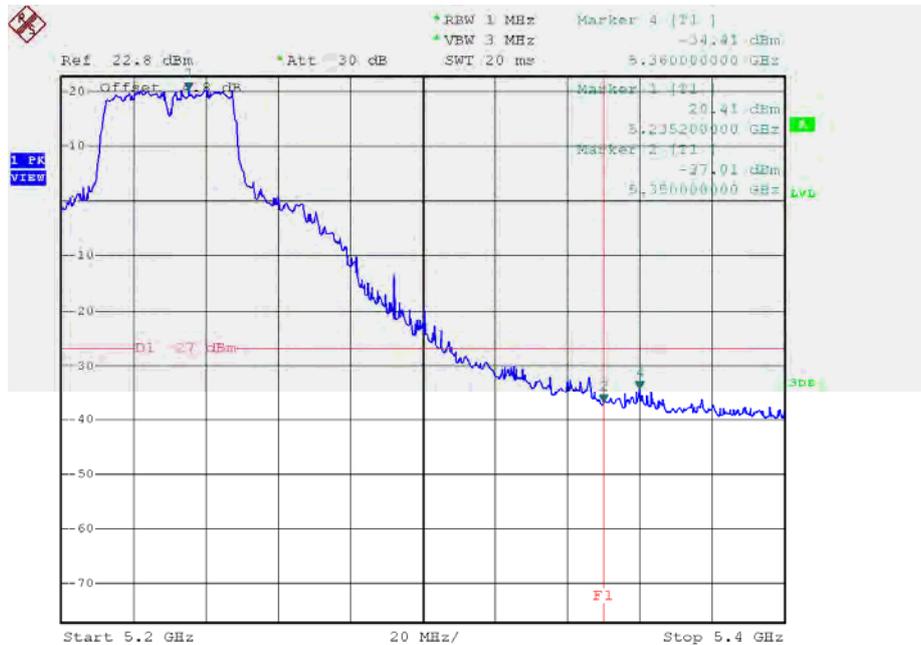


Date: 30.OCT.2015 06:56:37

Test Mode: UNII-1/TX AC80 Mode_ANT 1

TX mode CH42

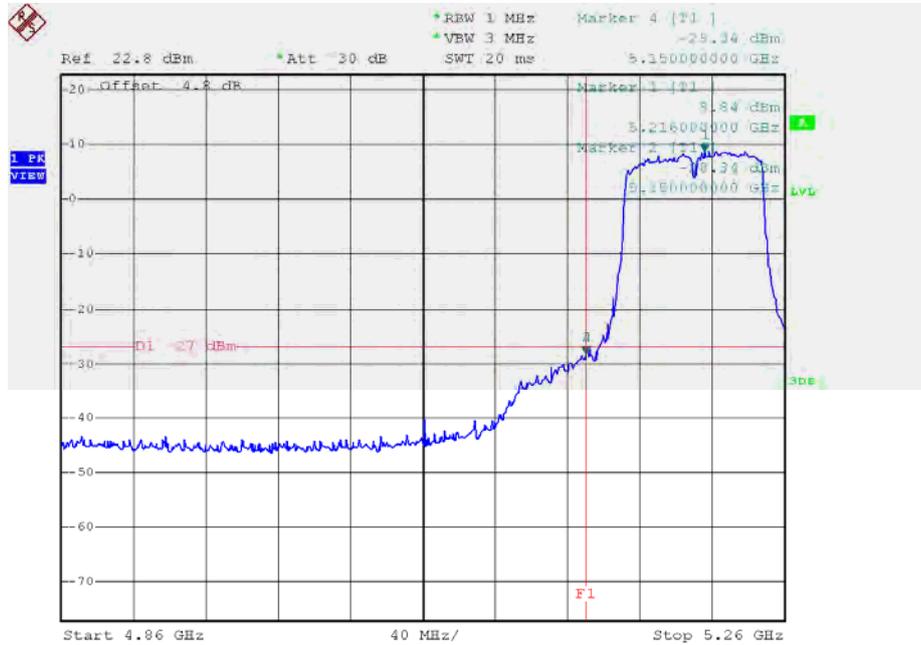


Date: 27.NOV.2015 15:52:15

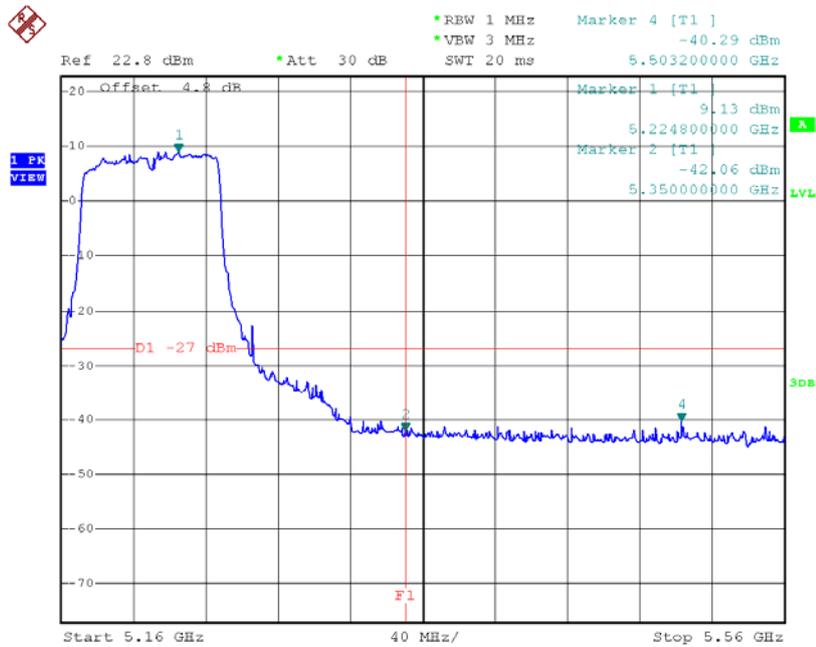


Date: 27.NOV.2015 15:52:23

Test Mode: UNII-1/TX AC80 Mode_ANT 2

TX mode CH42

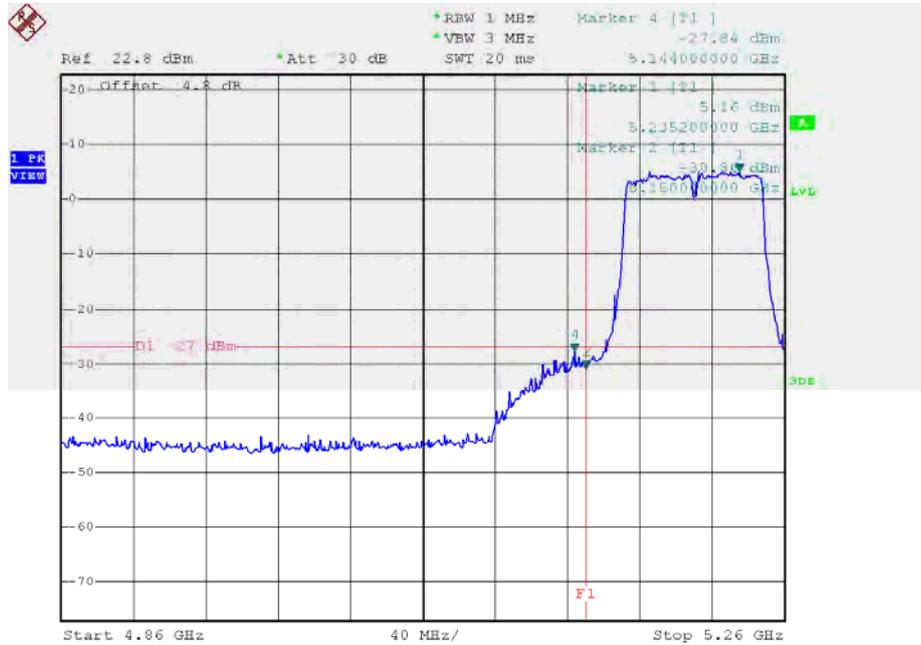


Date: 27.NOV.2015 15:33:16

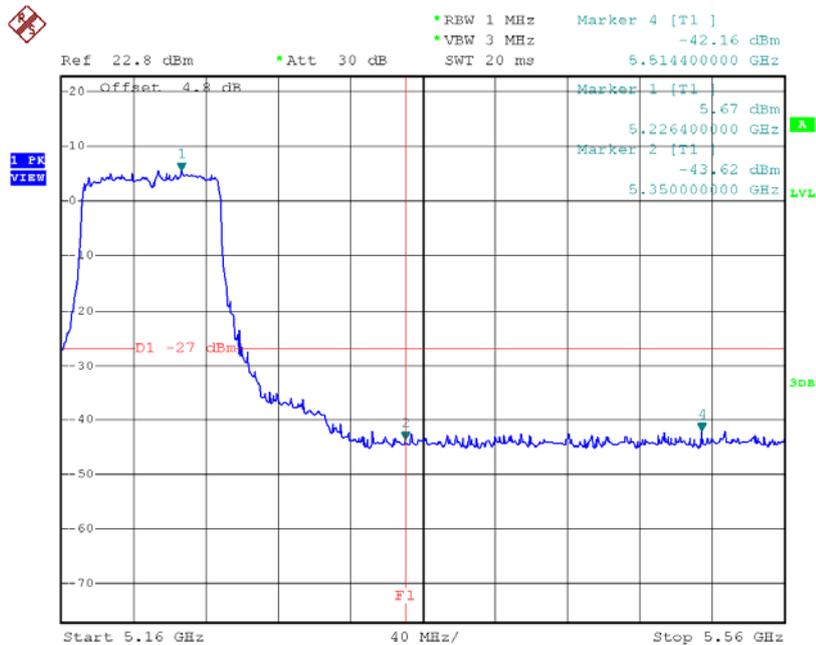

Date: 27.NOV.2015 15:33:24


Test Mode: UNII-2A/TX AC20 Mode_ANT 1

TX mode CH52

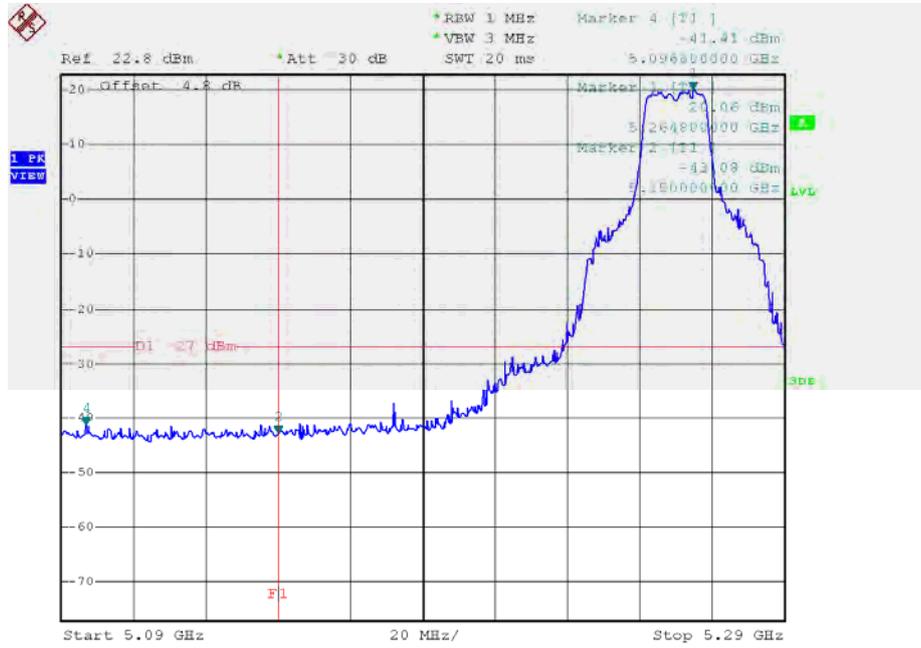

Date: 30.OCT.2015 03:05:23


TX mode CH64

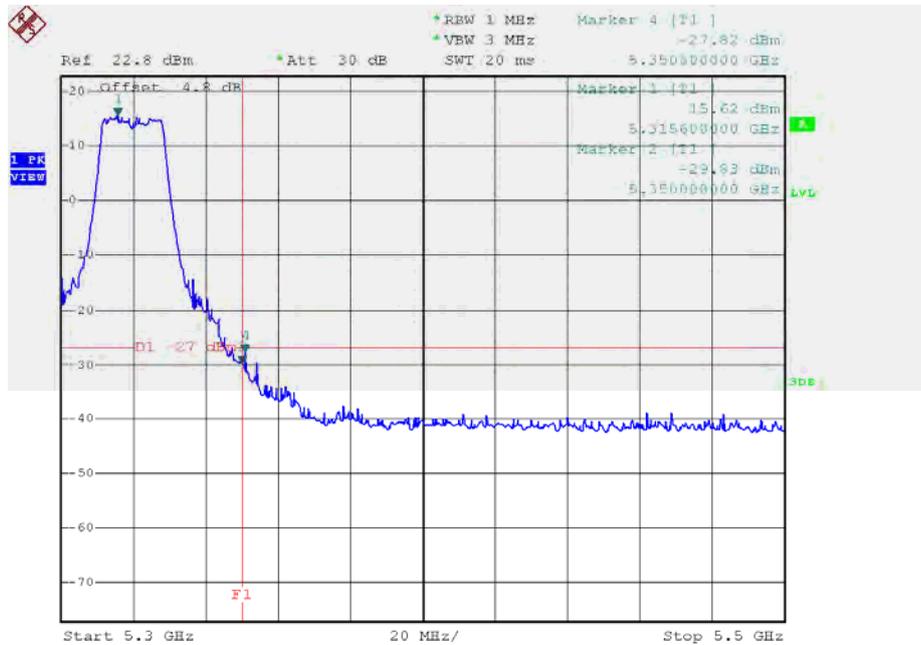

Date: 30.OCT.2015 03:08:37


Test Mode: UNII-2A/TX AC20 Mode_ANT 2

TX mode CH52

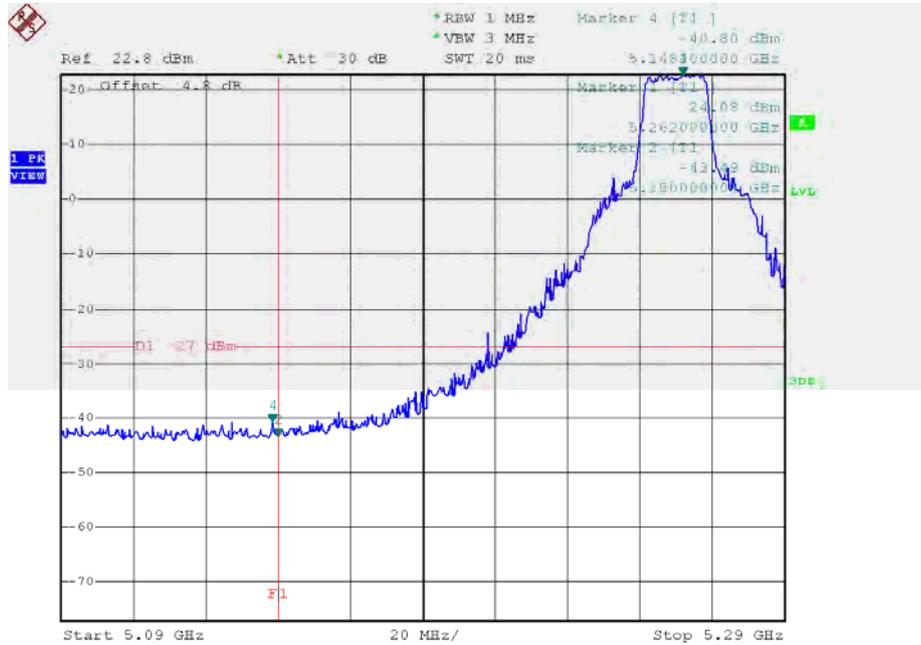

Date: 30.OCT.2015 06:28:10


TX mode CH64

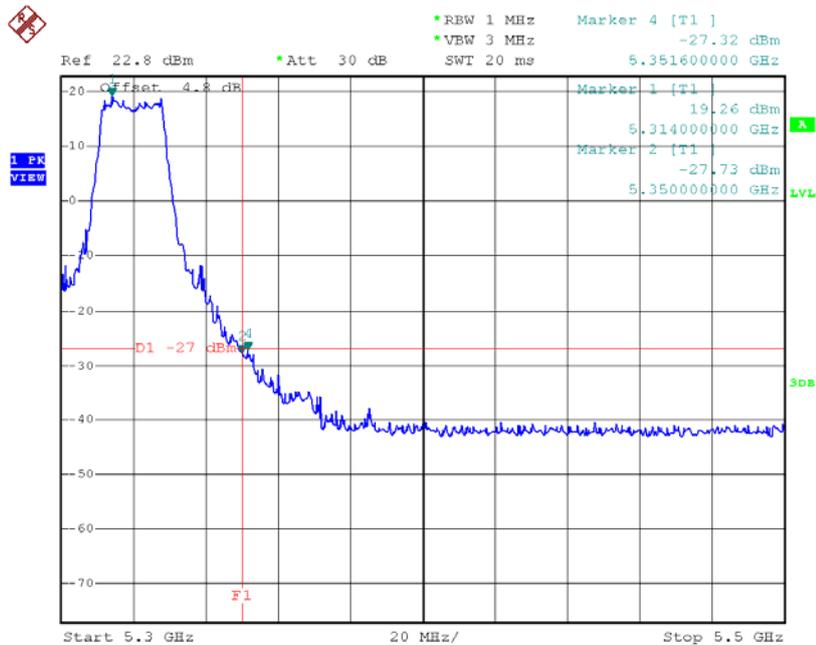

Date: 30.OCT.2015 06:38:25


Test Mode: UNII-2A/TX AC40 Mode_ANT 1

TX mode CH54

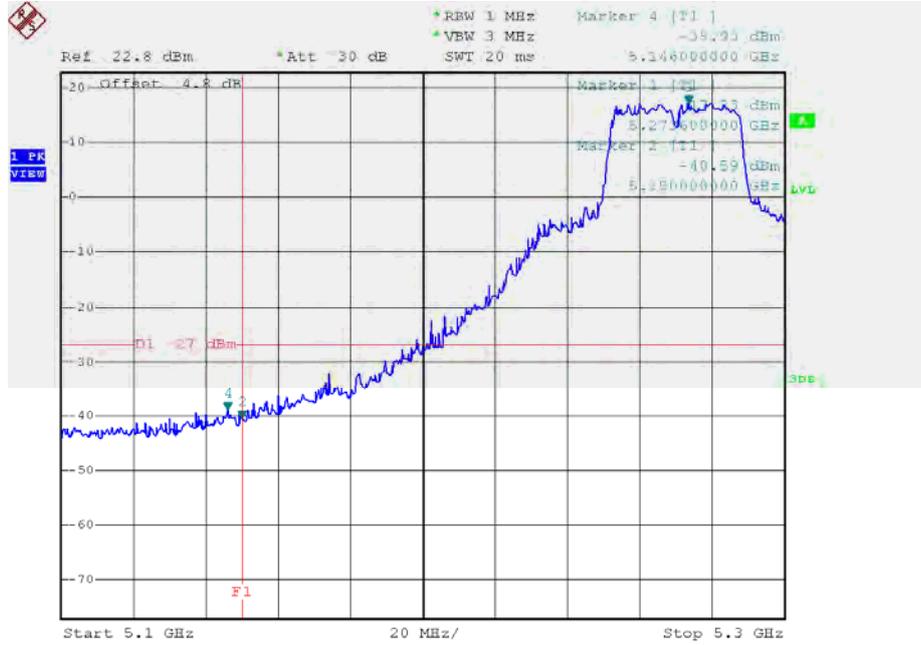

Date: 30.OCT.2015 03:56:35


TX mode CH62

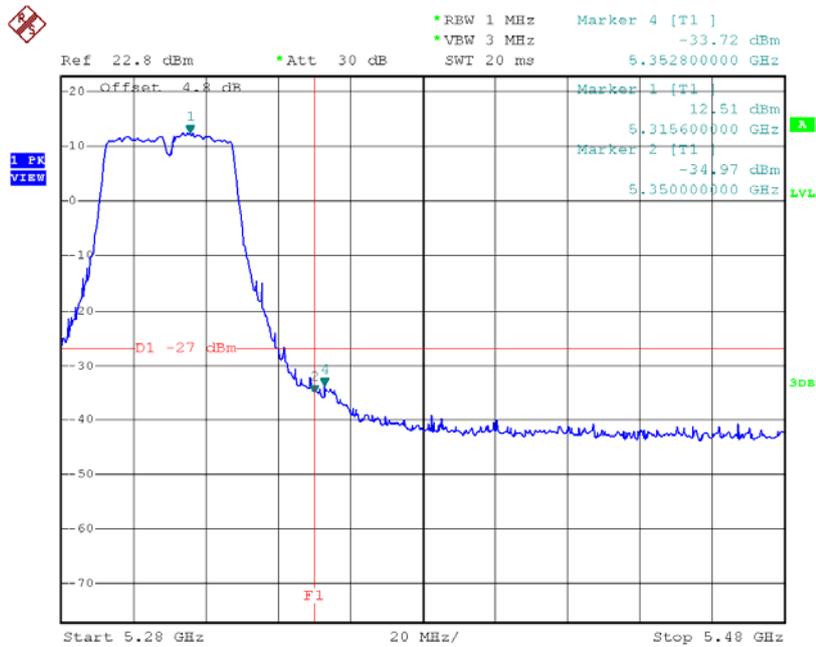

Date: 27.NOV.2015 17:16:55


Test Mode: UNII-2A/TX AC40 Mode_ANT 2

TX mode CH54

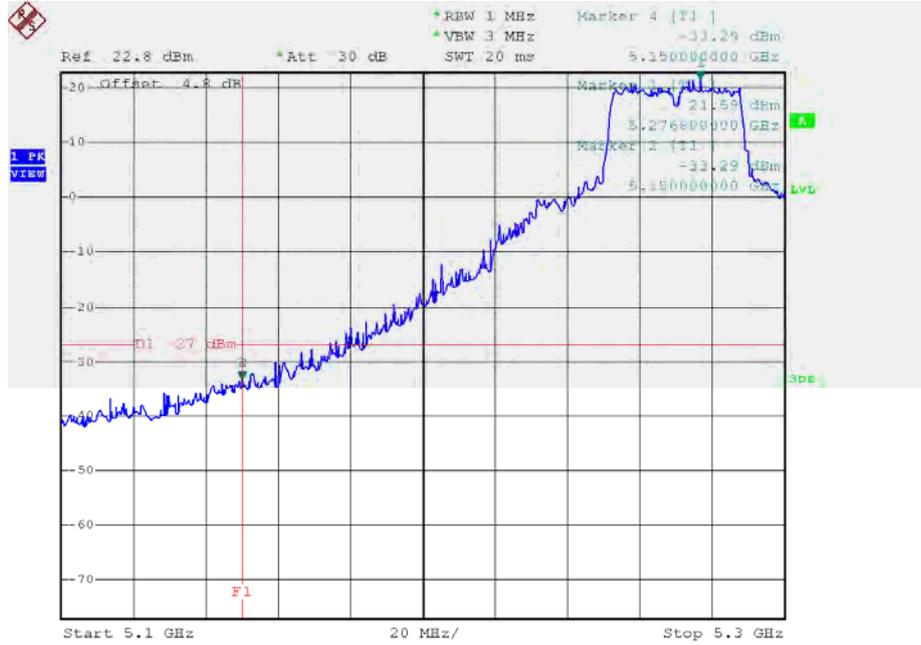

Date: 30.OCT.2015 06:57:52


TX mode CH62

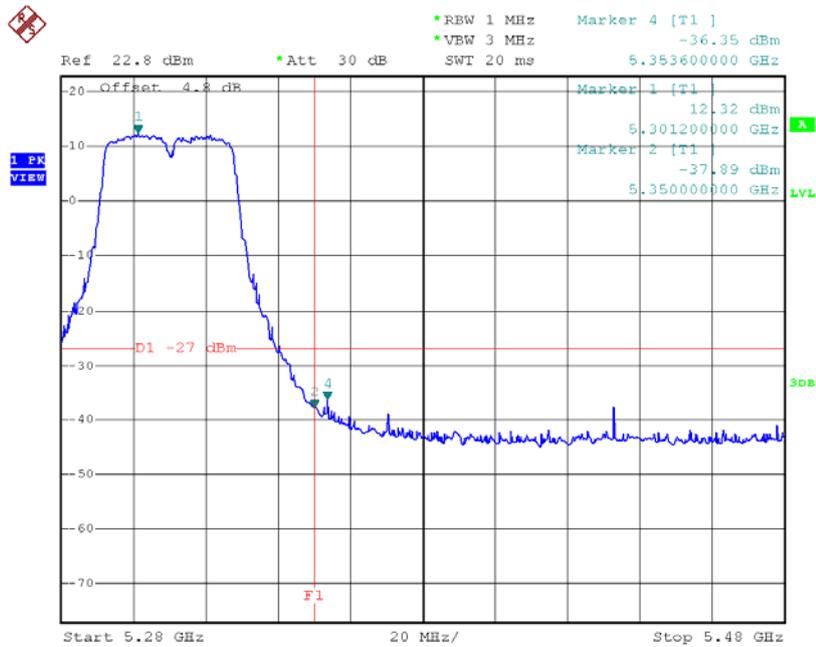


Date: 27.NOV.2015 17:12:49

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

TX mode CH58

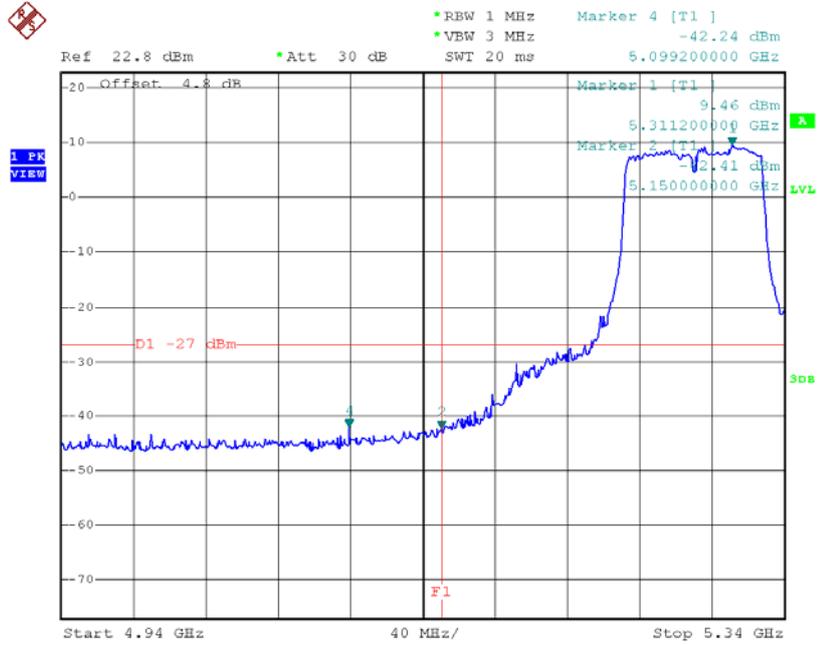


Date: 27.NOV.2015 15:52:53

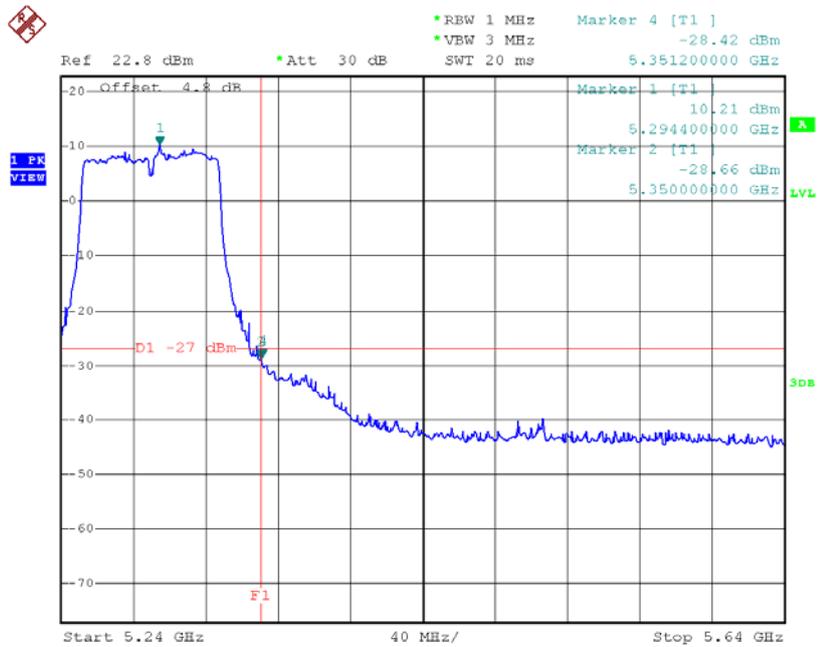


Date: 27.NOV.2015 15:53:01

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

TX mode CH58

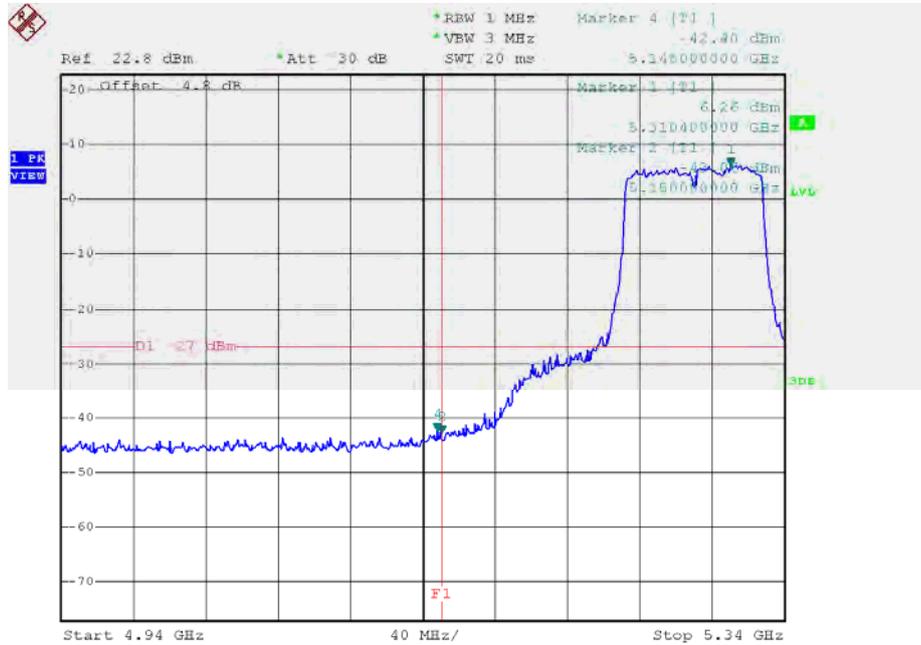


Date: 27.NOV.2015 15:39:19

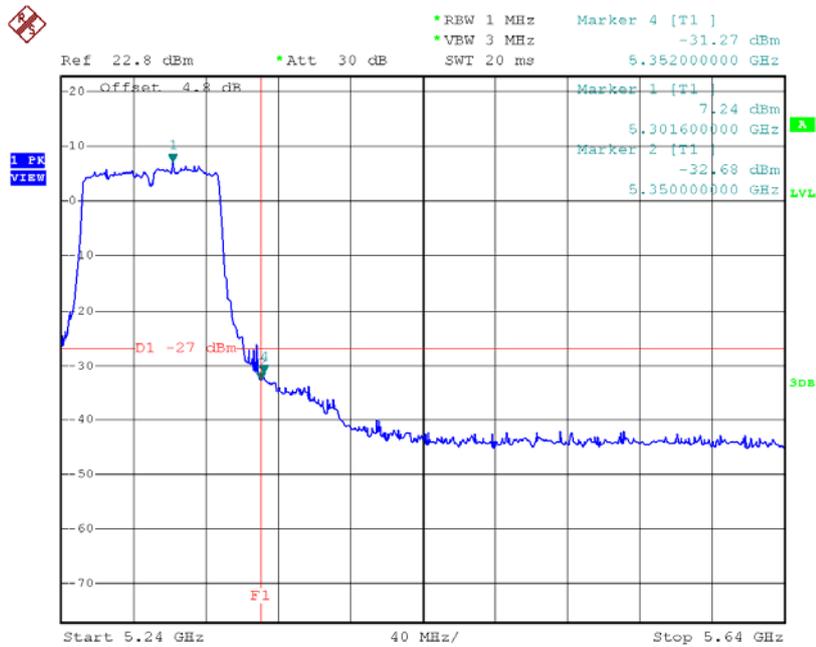

Date: 27.NOV.2015 15:39:27


Test Mode: UNII-2C/TX AC20 Mode_ANT 1

TX mode CH100

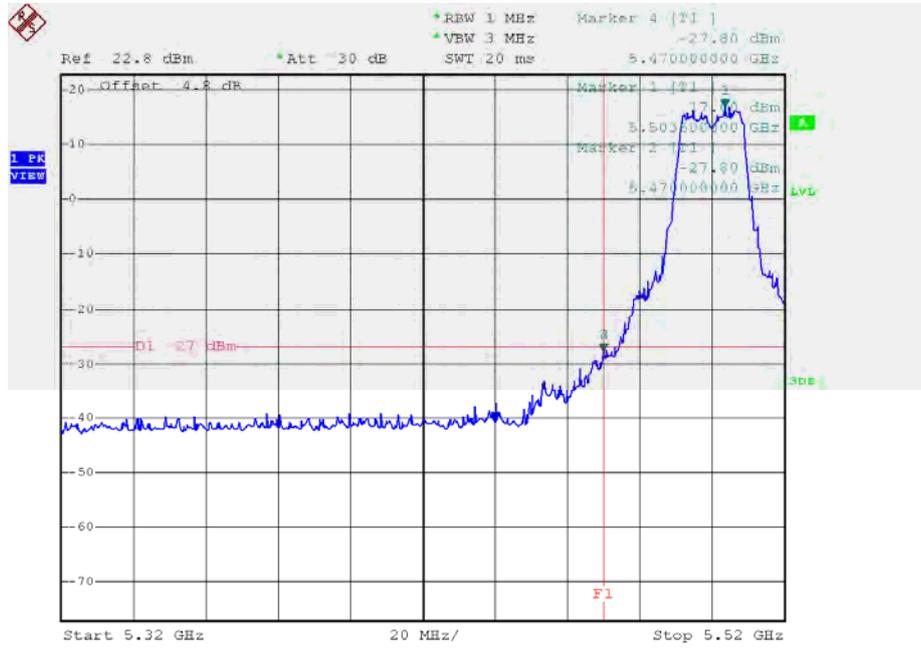

Date: 30.OCT.2015 03:33:29


TX mode CH140

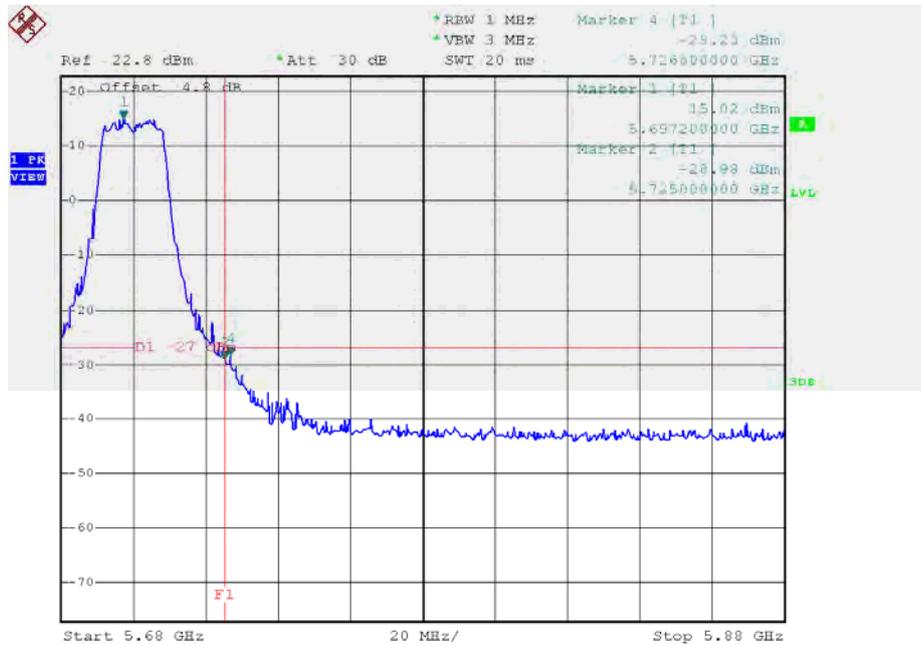

Date: 30.OCT.2015 03:37:07


Test Mode: UNII-2C/TX AC20 Mode_ANT 2

TX mode CH100

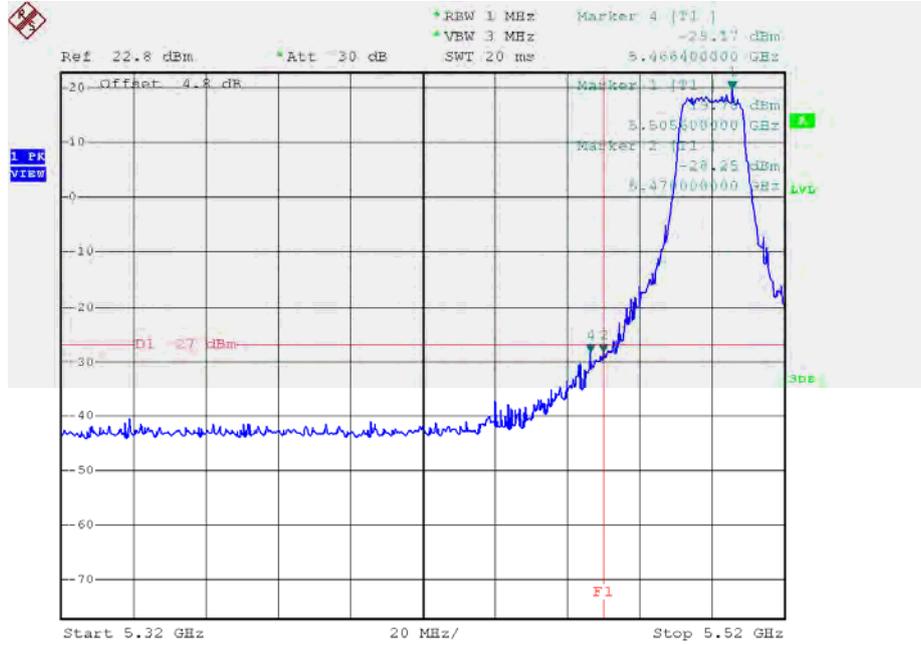

Date: 30.OCT.2015 06:39:40


TX mode CH140

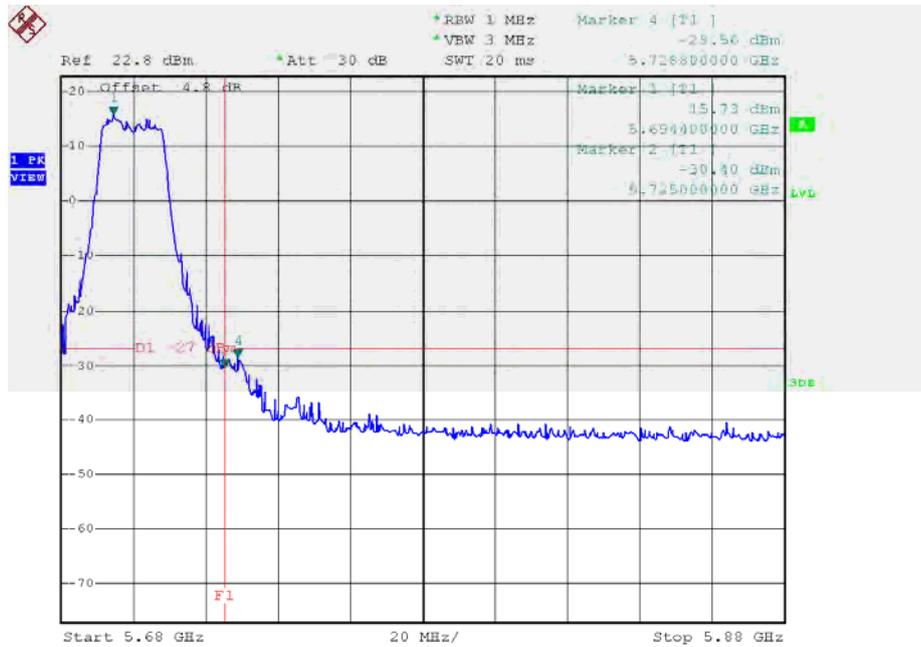

Date: 30.OCT.2015 06:44:00


Test Mode: UNII-2C/TX AC40 Mode_ANT 1

TX mode CH102

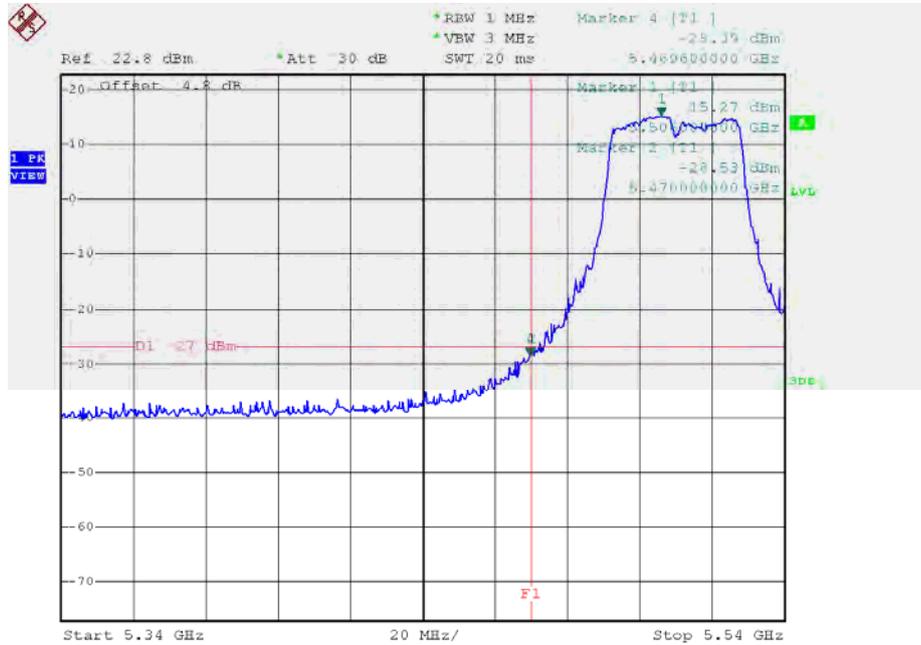

Date: 27.NOV.2015 17:17:57


TX mode CH134

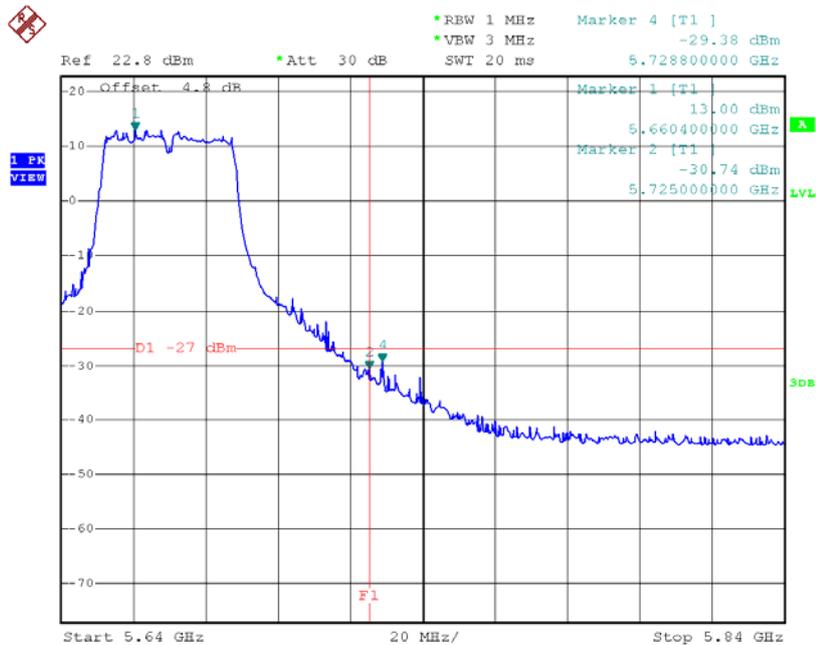

Date: 30.OCT.2015 04:09:00


Test Mode: UNII-2C/TX AC40 Mode_ANT 2

TX mode CH102

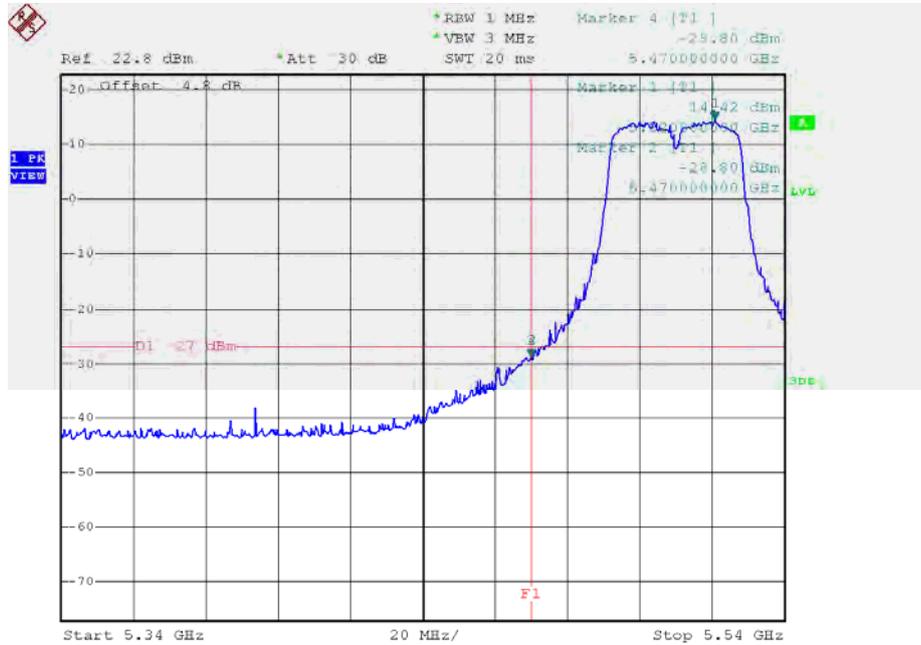

Date: 27.NOV.2015 17:13:37


TX mode CH134

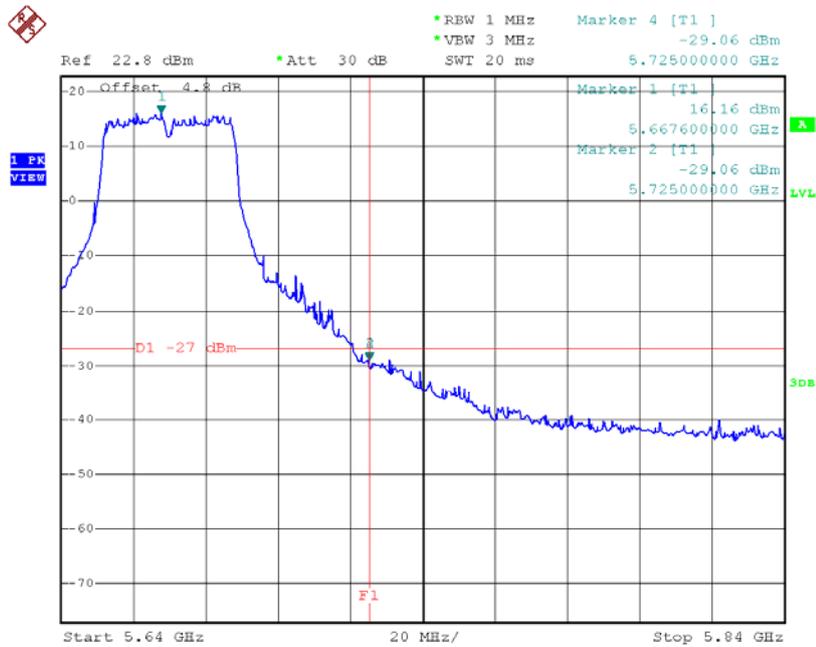

Date: 30.OCT.2015 07:06:04


Test Mode: UNII-2C/TX AC80 Mode_ANT 1

TX mode CH106

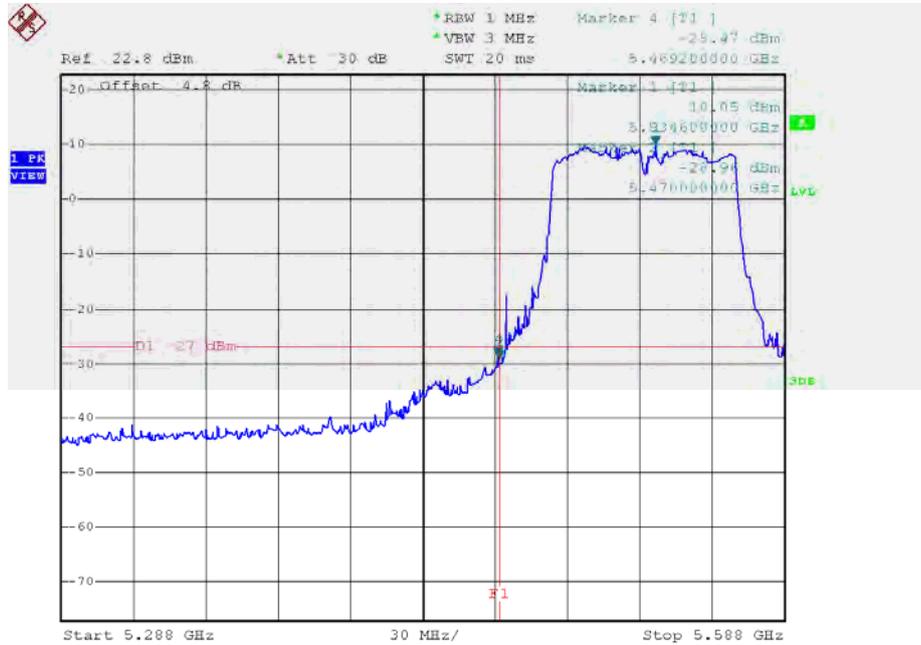

Date: 27.NOV.2015 15:53:47


TX mode CH122

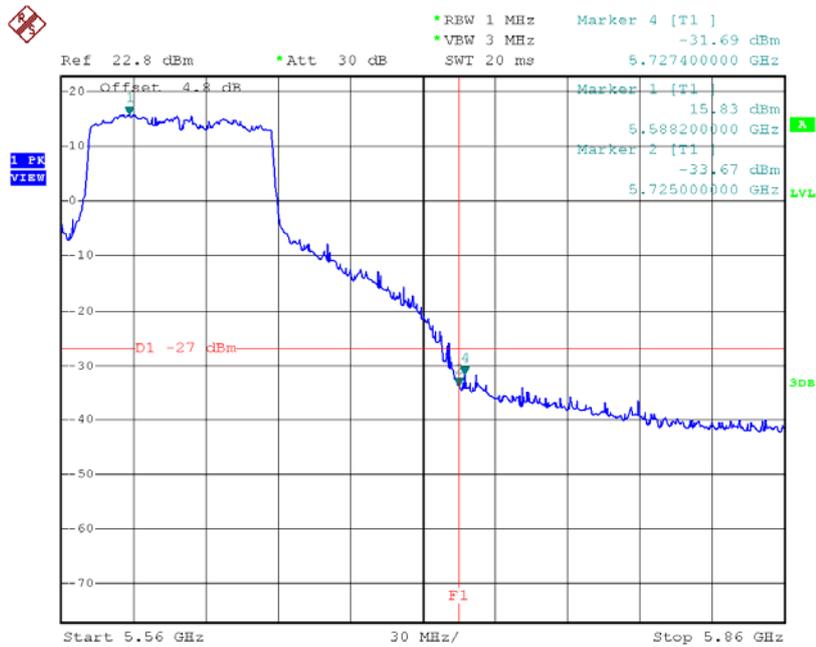

Date: 2.NOV.2015 10:00:07


Test Mode: UNII-2C/TX AC80 Mode_ANT 2

TX mode CH106

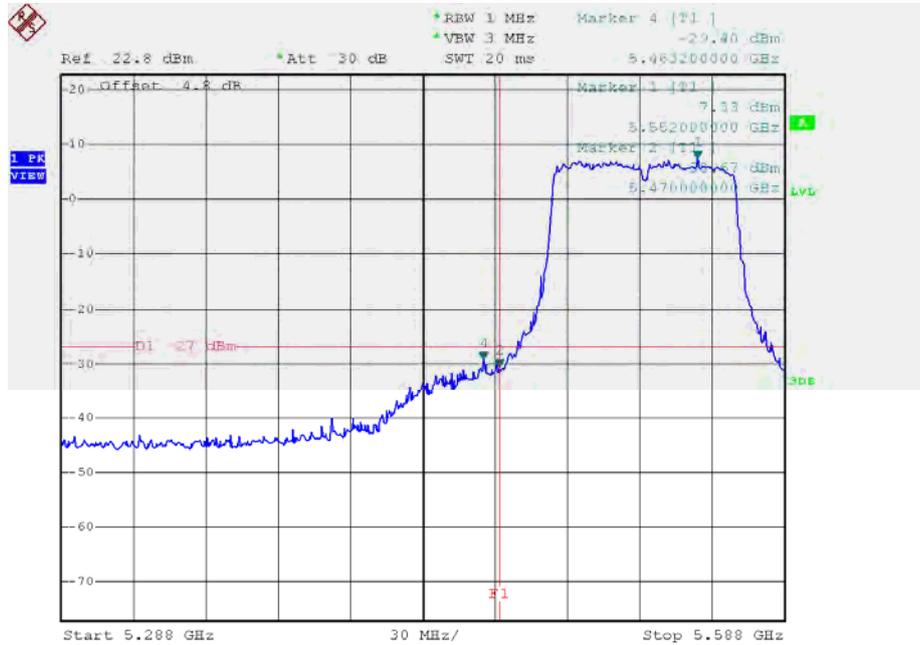

Date: 27.NOV.2015 15:40:59


TX mode CH122

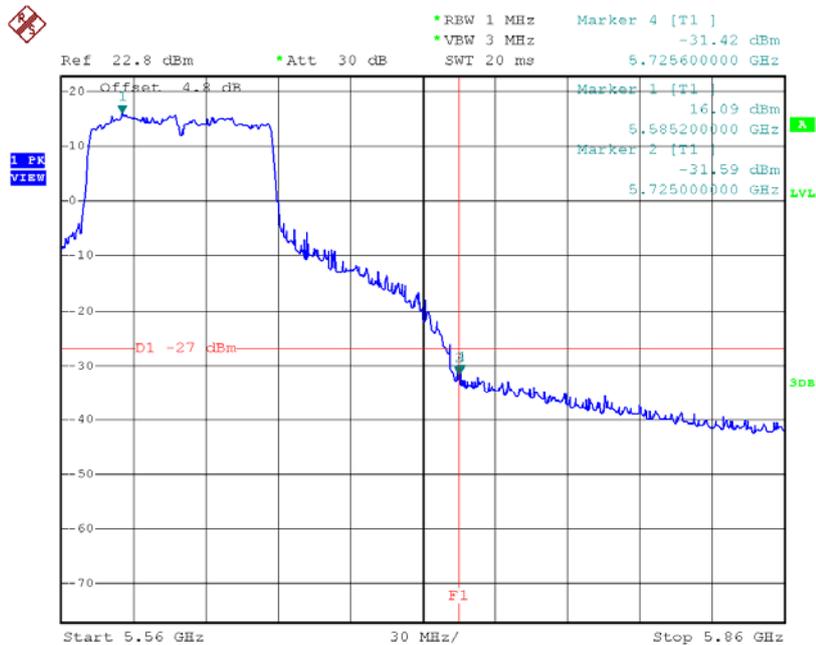

Date: 2.NOV.2015 10:16:48


Test Mode: UNII-3/TX AC20 Mode_ANT 1

TX AC HT20 mode CH149

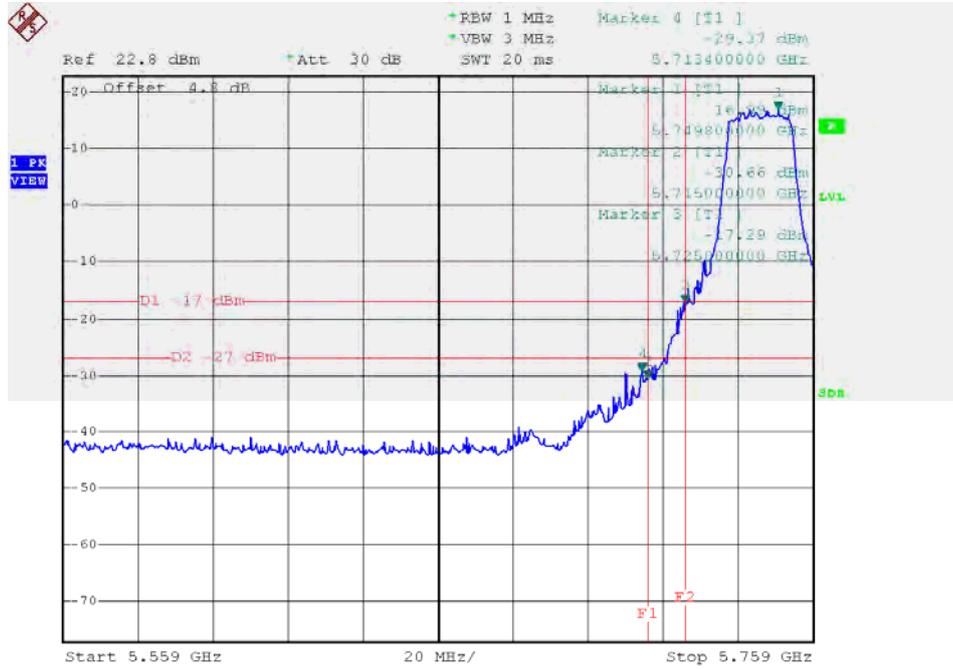

Date: 30.OCT.2015 03:43:25


TX AC HT20 mode CH165

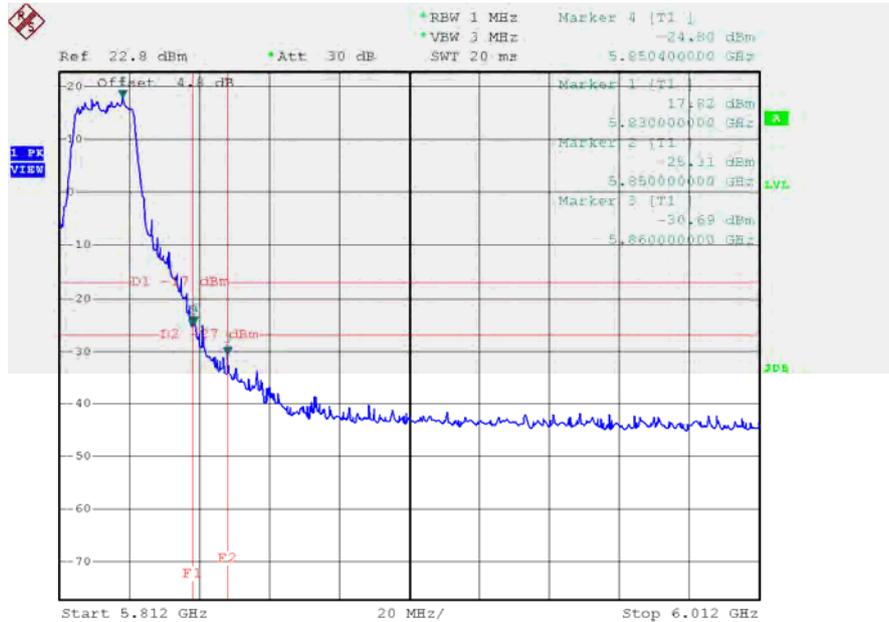

Date: 2.NOV.2015 14:11:55


Test Mode: UNII-3/TX AC20 Mode_ANT 2

TX AC HT20 mode CH149

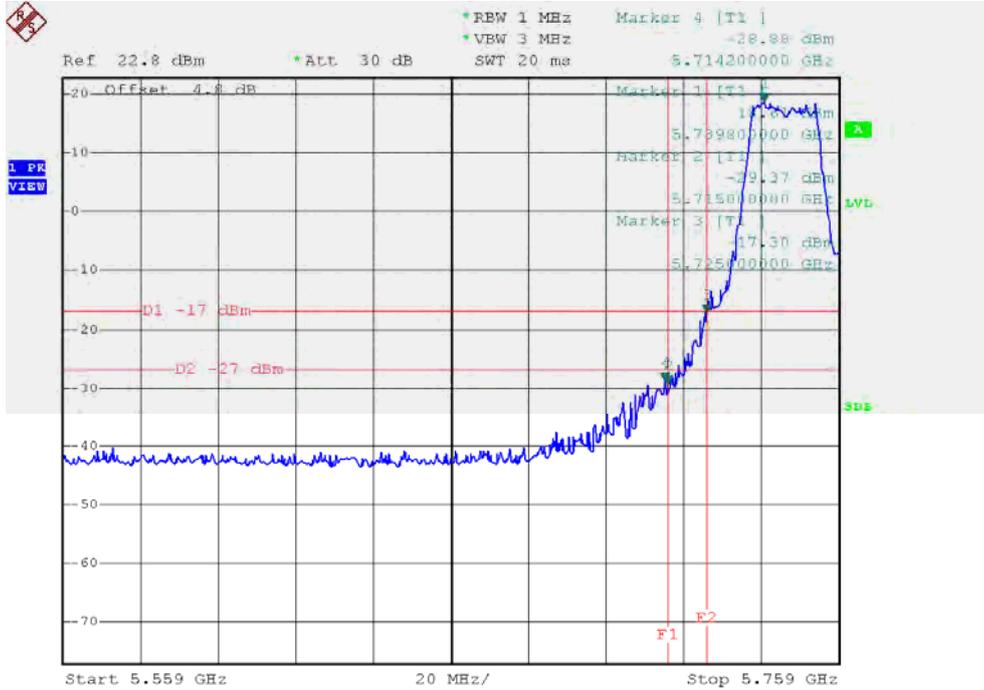

Date: 30.OCT.2015 06:46:36


TX AC HT20 mode CH165

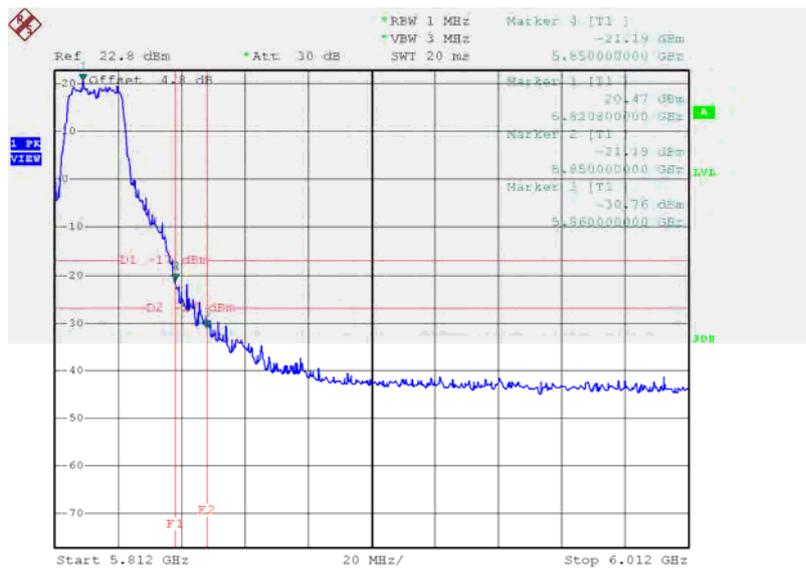

Date: 30.OCT.2015 06:51:02


Test Mode: UNII-3/TX AC40 Mode_ANT 1

TX AC HT40 mode CH151

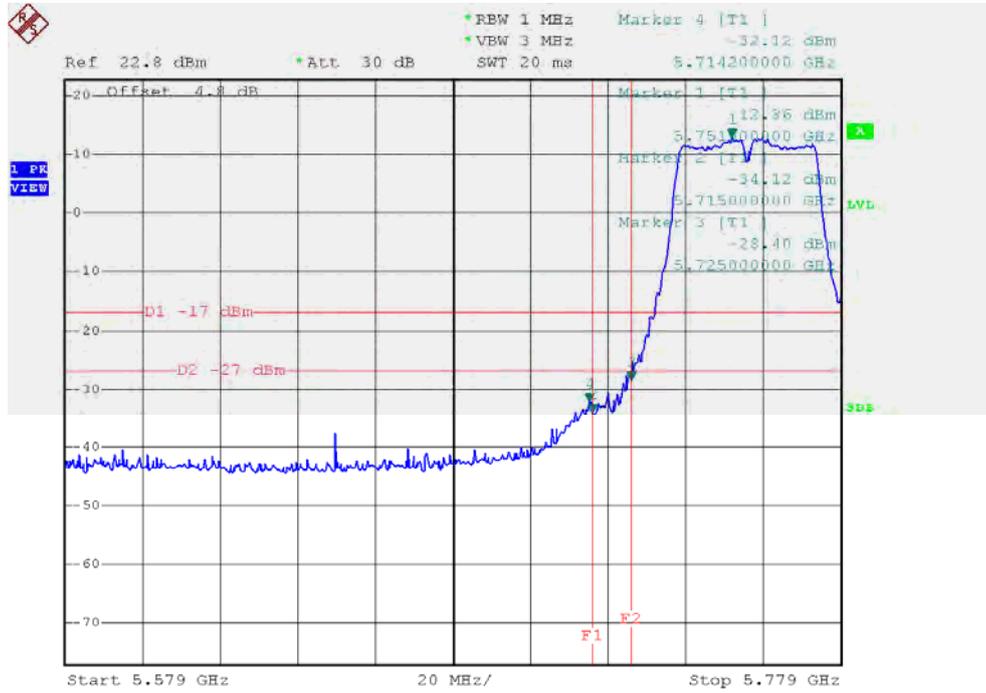

Date: 27.NOV.2015 17:19:11


TX AC HT40 mode CH159

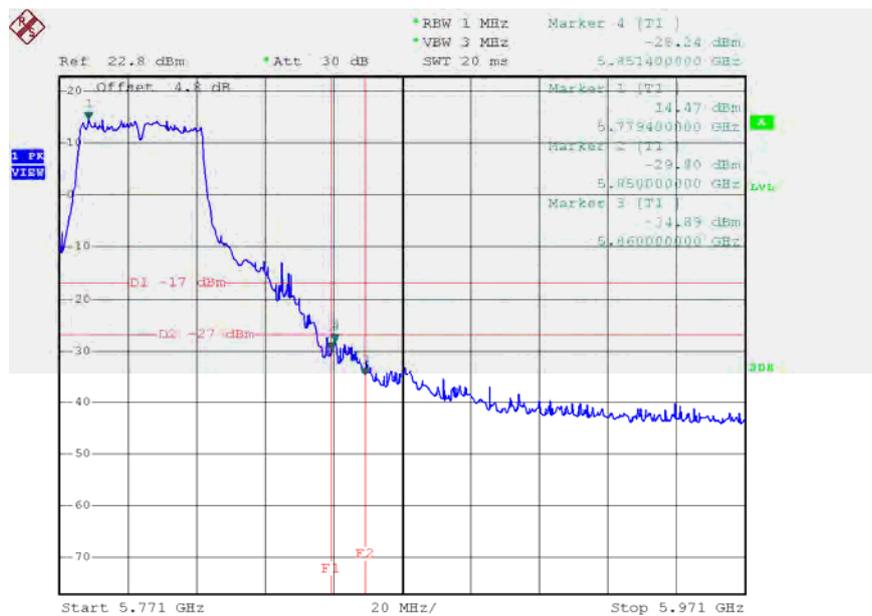

Date: 30.OCT.2015 04:16:44


Test Mode: UNII-3/TX AC40 Mode_ANT 2

TX AC HT40 mode CH151

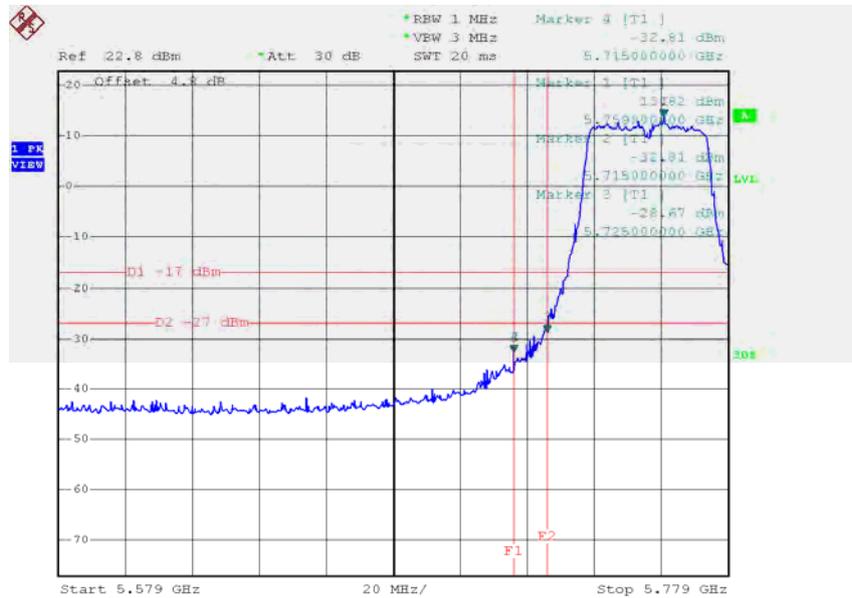

Date: 27.NOV.2015 17:14:42


TX AC HT40 mode CH159

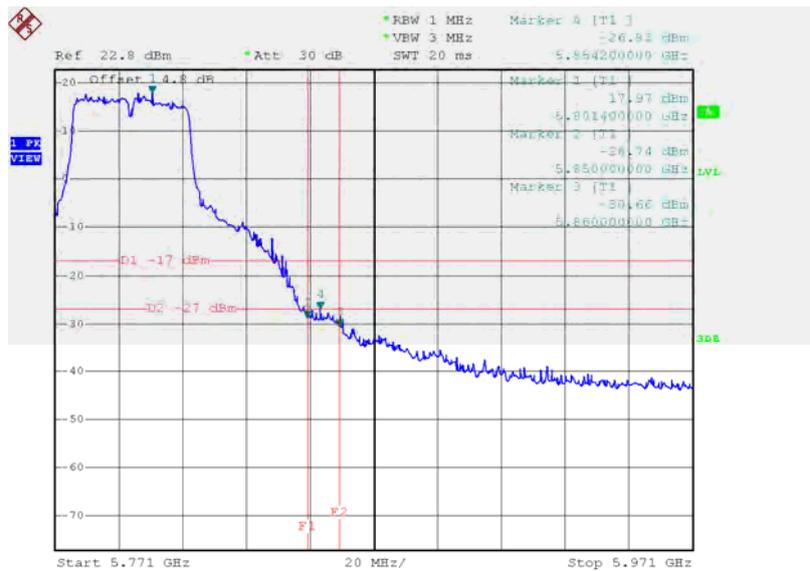


Date: 30.OCT.2015 07:12:59

Test Mode: UNII-3/TX AC80 Mode_ANT 1

TX AC HT80 mode CH155

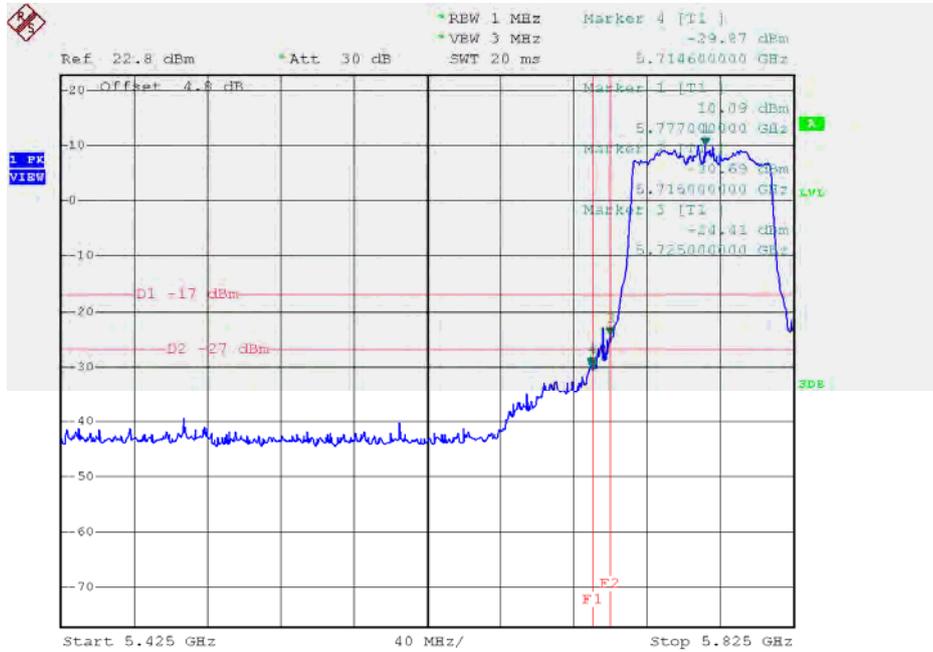


Date: 27.NOV.2015 15:47:36

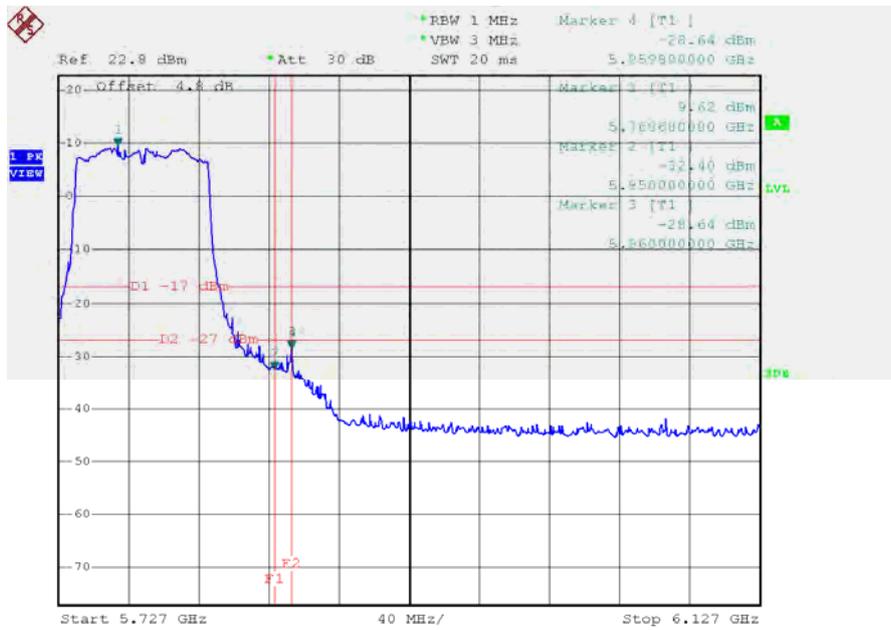


Date: 27.NOV.2015 15:47:44

Test Mode: UNII-3/TX AC80 Mode_ANT 2

TX AC HT80 mode CH155

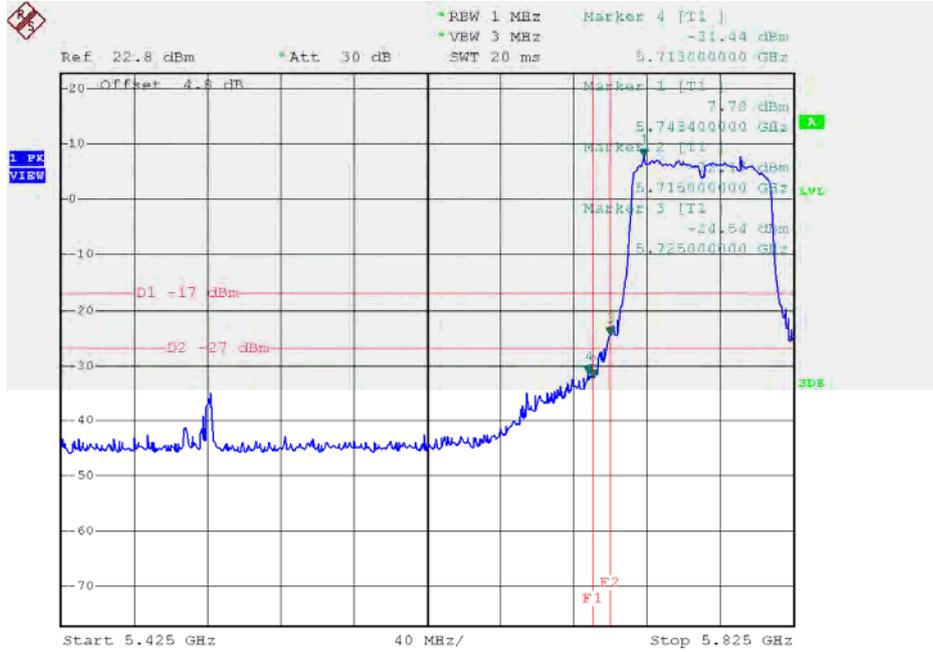

Date: 27.NOV.2015 15:45:31

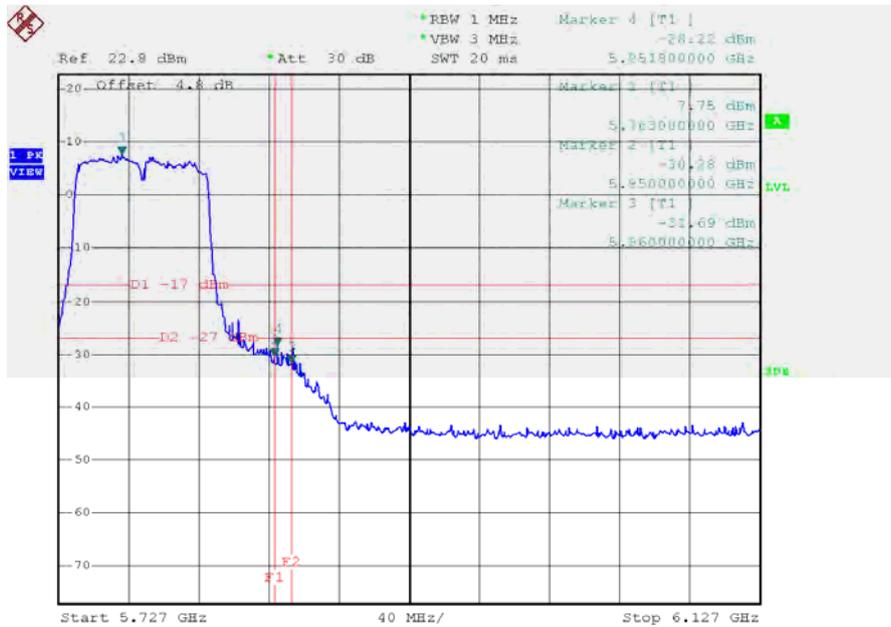


Date: 27.NOV.2015 15:45:39

ATTACHMENT H - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	5.65	0.58	6.23	17.00
CH40	5200	9.14	0.58	9.72	17.00
CH48	5240	9.26	0.58	9.84	17.00

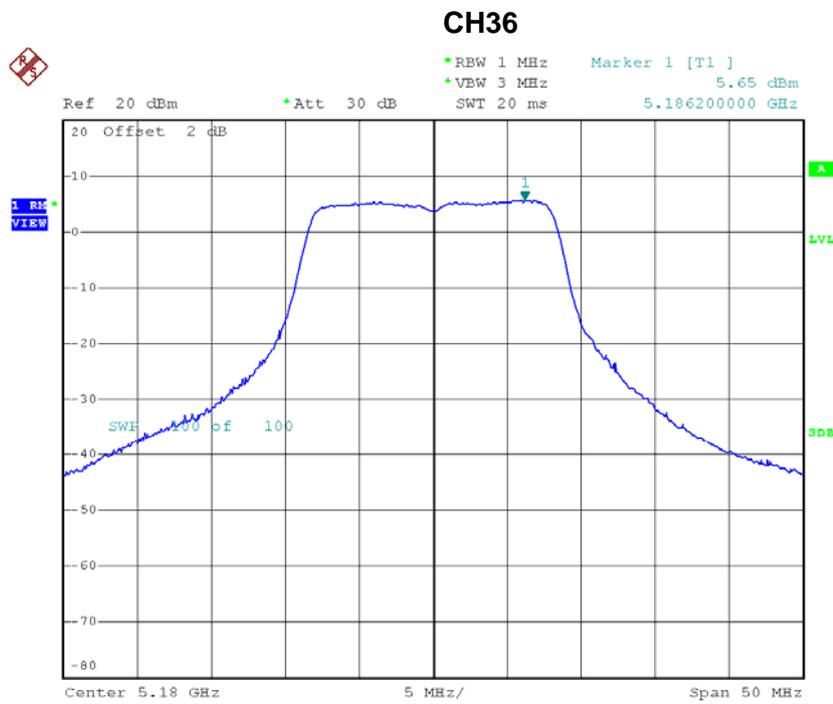


Date: 2.NOV.2015 19:06:46

CH40

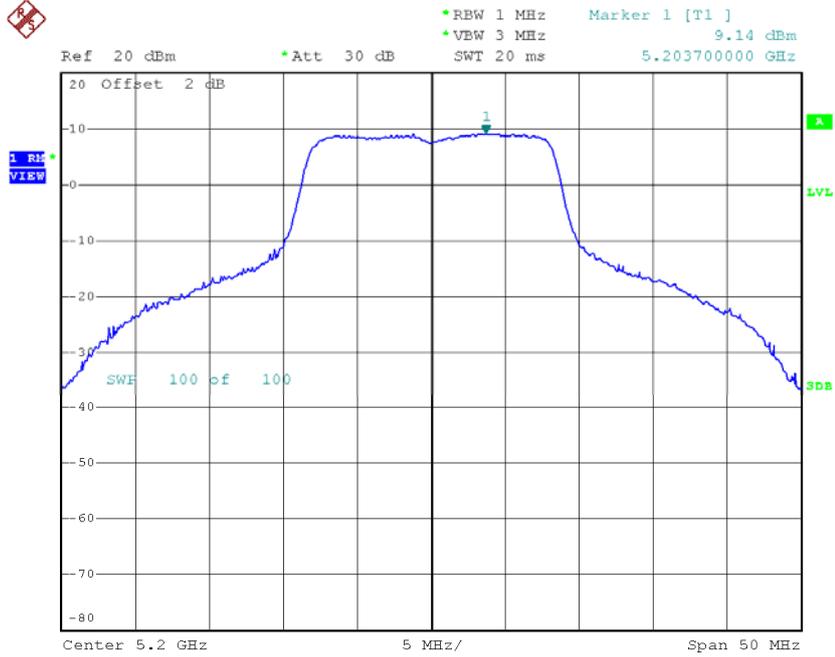

Date: 2.NOV.2015 19:07:13


CH48

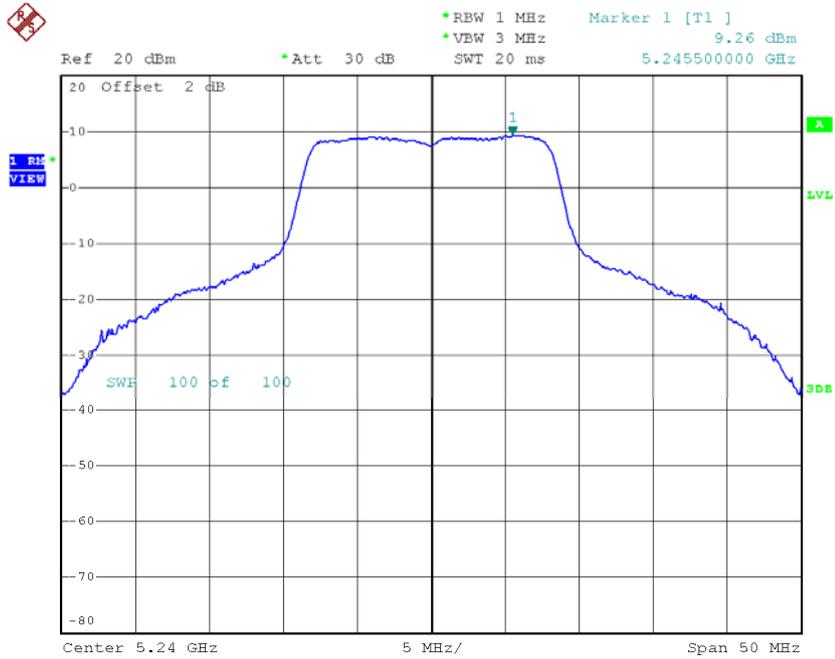

Date: 2.NOV.2015 19:07:32


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	8.79	0.58	9.37	17.00
CH40	5200	12.17	0.58	12.75	17.00
CH48	5240	12.38	0.58	12.96	17.00

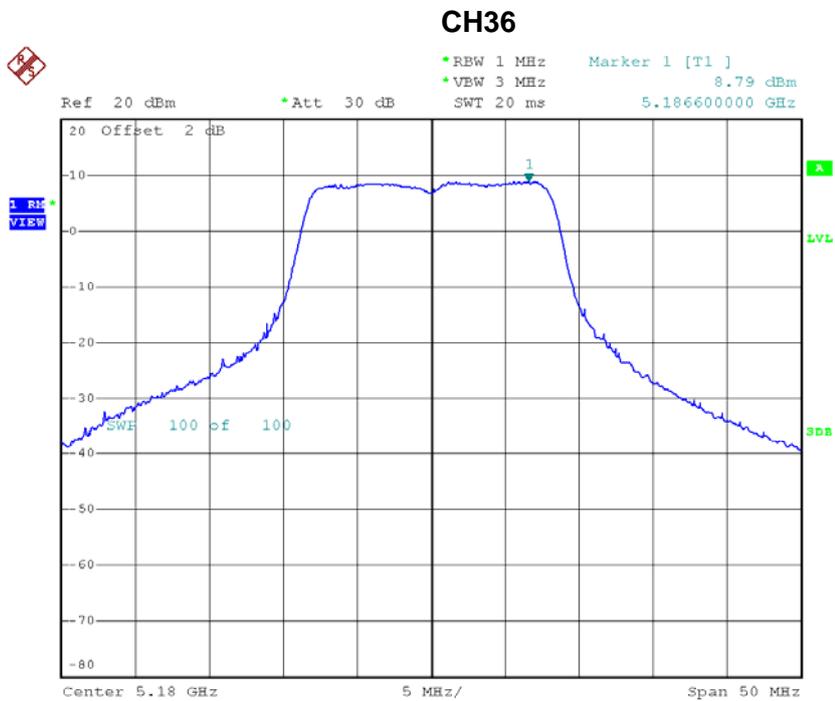


Date: 2.NOV.2015 19:12:12

CH40

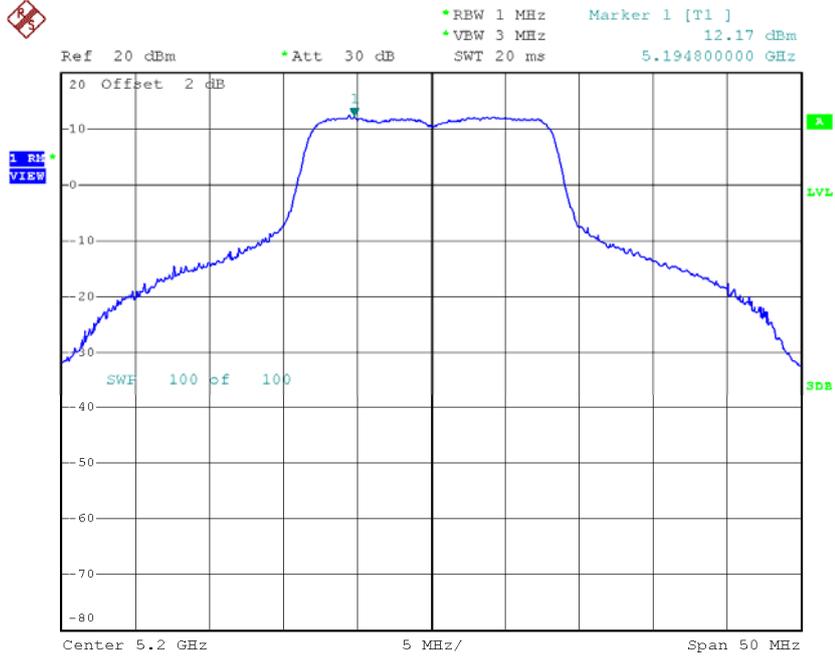

Date: 2.NOV.2015 19:12:50

CH48

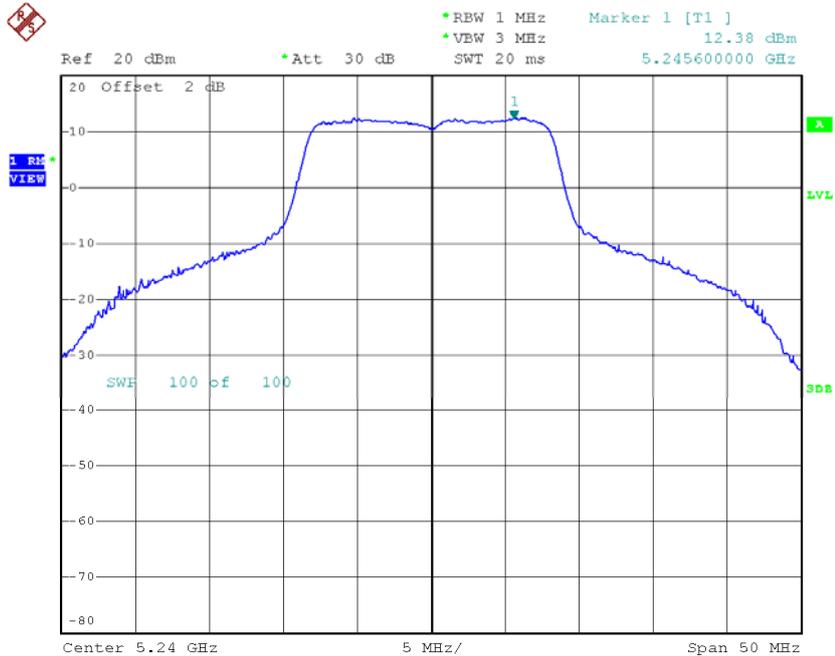


Date: 2.NOV.2015 19:13:11

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	11.09	17.00
CH40	5200	14.50	17.00
CH48	5240	14.68	17.00


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	4.01	1.07	5.08	17.00
CH40	5200	8.70	1.07	9.77	17.00
CH48	5240	9.32	1.07	10.39	17.00

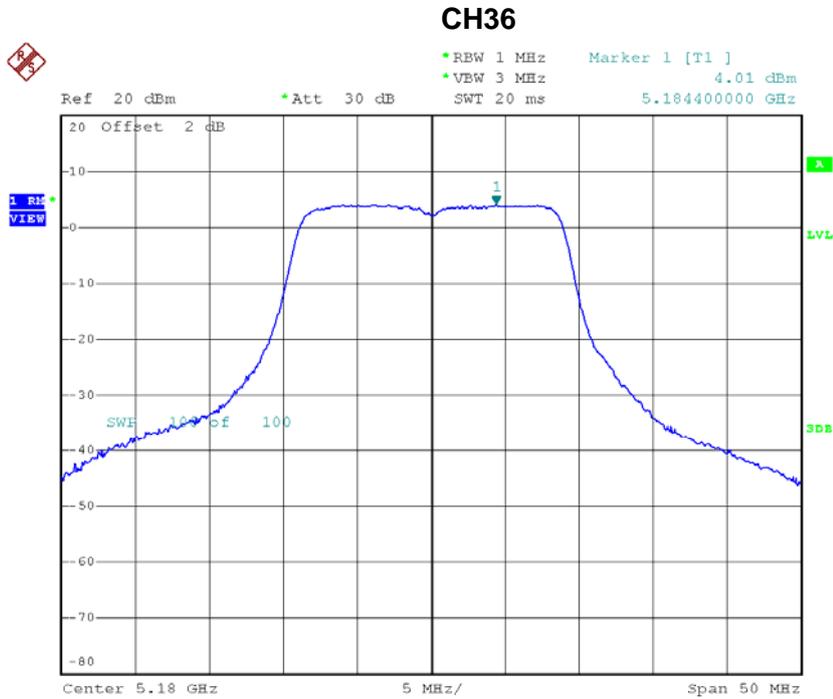


Date: 2.NOV.2015 18:58:51

CH40

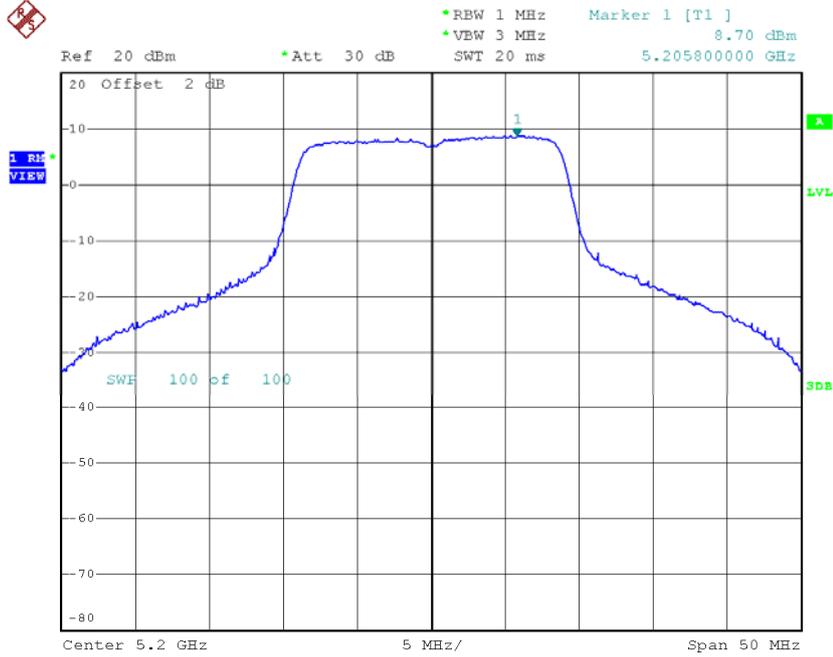

Date: 2.NOV.2015 18:59:16


CH48

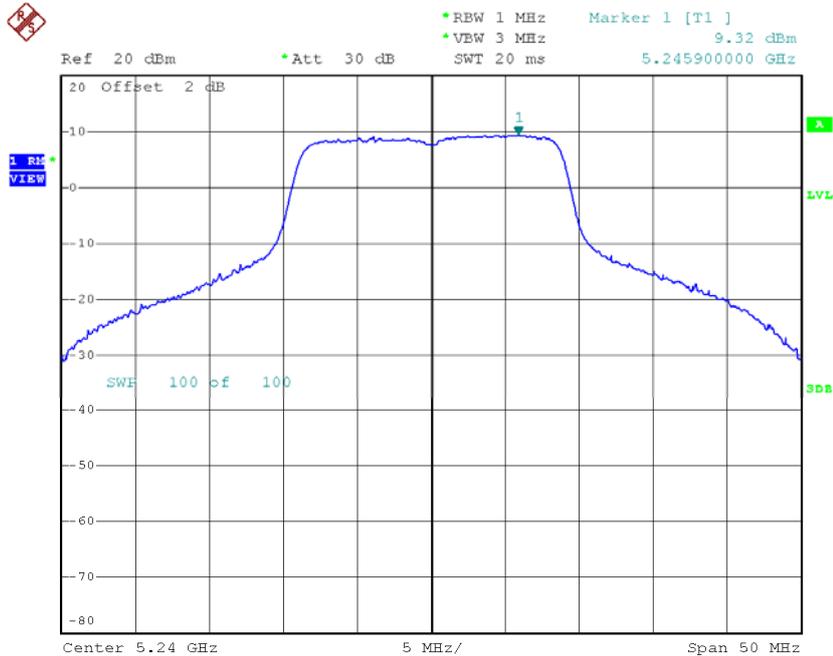


Date: 2.NOV.2015 18:59:37

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	7.72	1.07	8.79	17.00
CH40	5200	11.86	1.07	12.93	17.00
CH48	5240	12.27	1.07	13.34	17.00

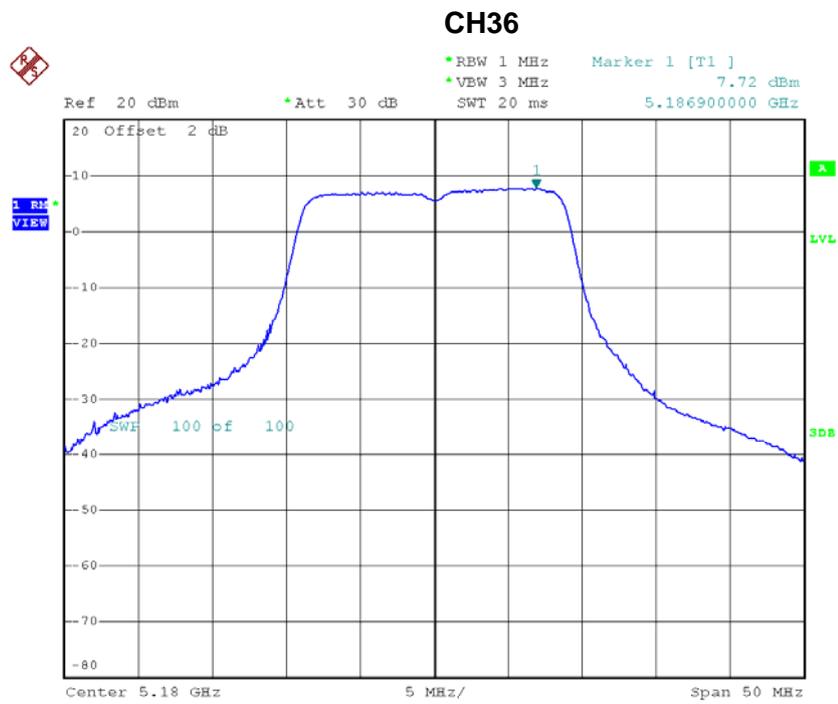

Date: 2.NOV.2015 18:52:15

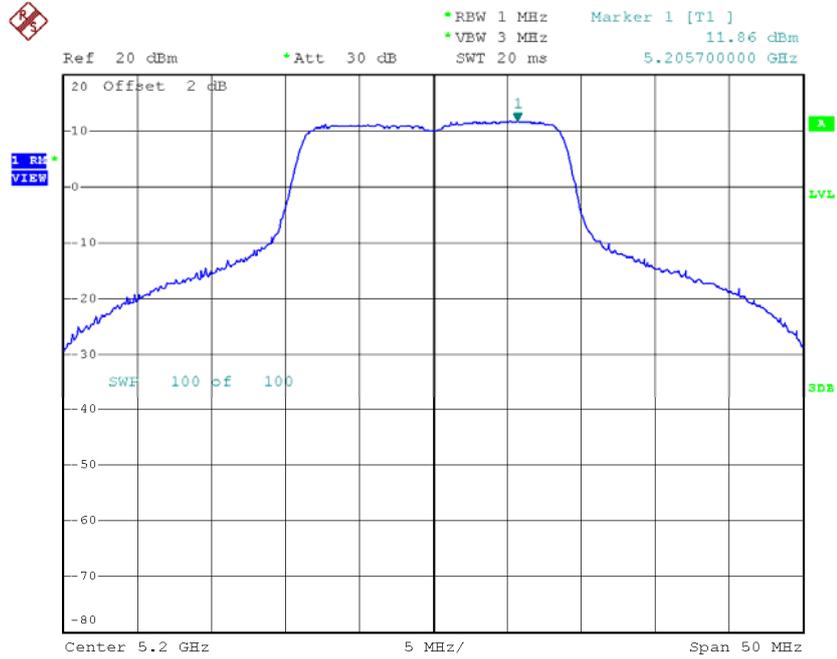CH40

Date: 2.NOV.2015 18:52:45

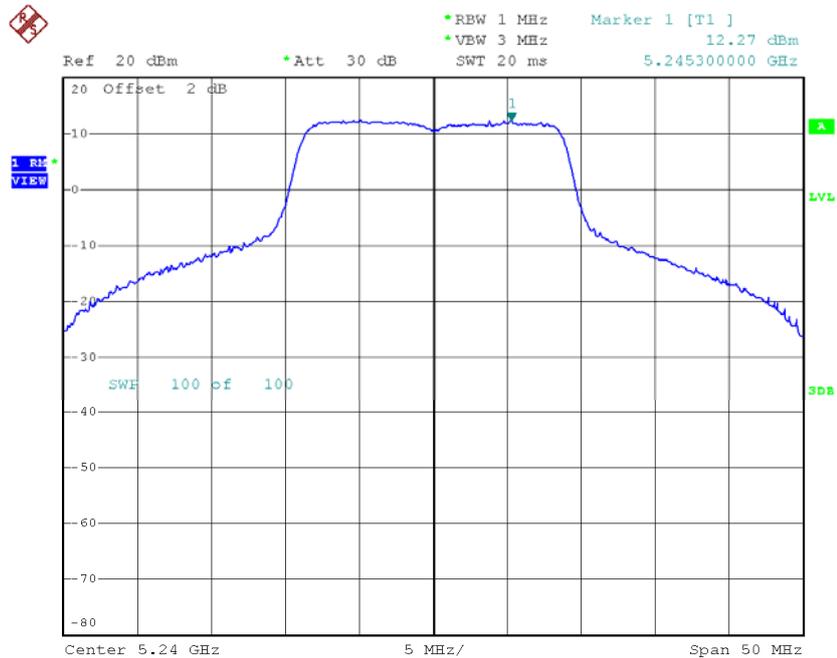CH48

Date: 2.NOV.2015 18:53:10


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	10.33	17.00
CH40	5200	14.64	17.00
CH48	5240	15.12	17.00

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	1.34	1.83	3.17	17.00
CH46	5230	9.09	1.83	10.92	17.00

CH38

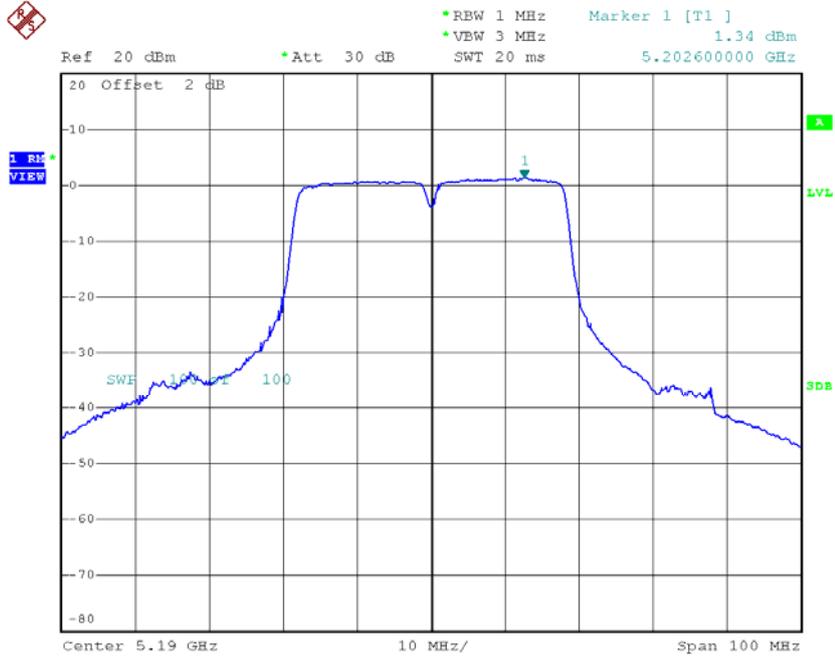

Date: 4.DEC.2015 08:23:51

CH46

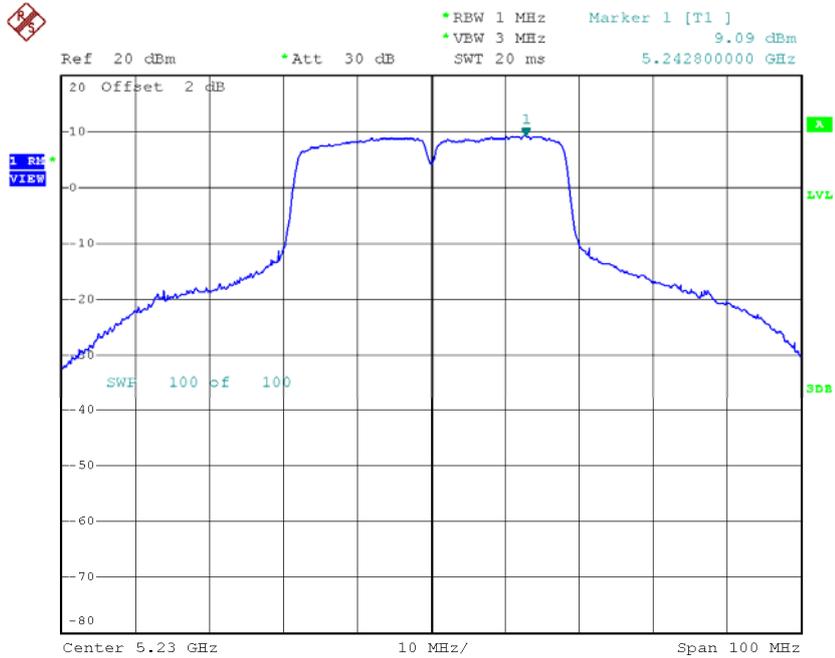


Date: 2.NOV.2015 18:39:47

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	3.03	1.83	4.86	17.00
CH46	5230	9.47	1.83	11.30	17.00

CH38

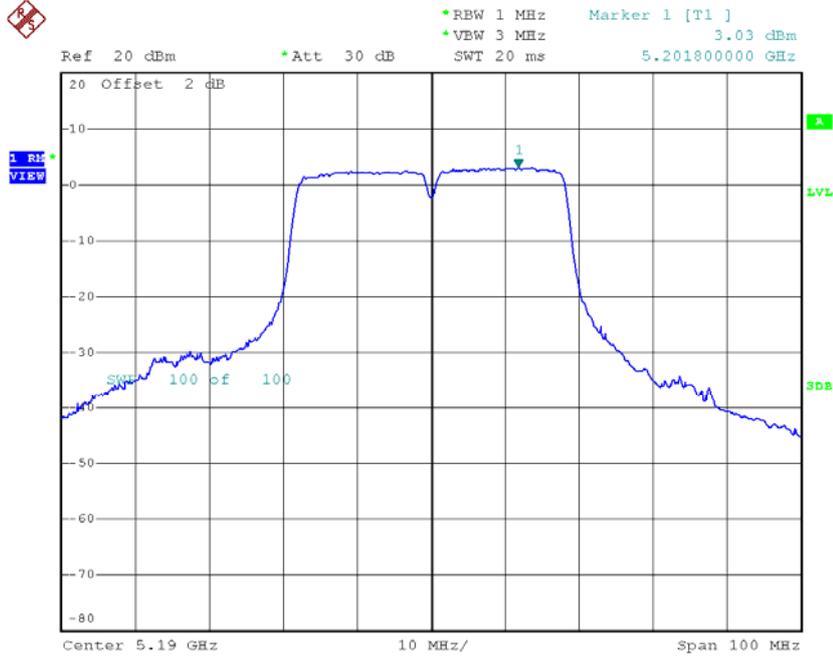

Date: 4.DEC.2015 08:22:47

CH46

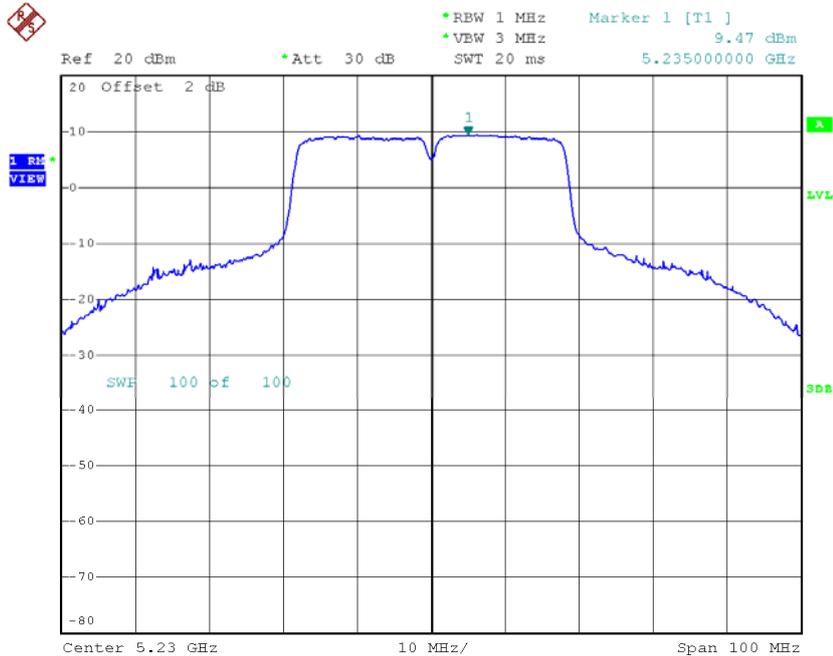


Date: 2.NOV.2015 18:46:38

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	7.11	17.00
CH46	5230	14.12	17.00


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	6.51	0.58	7.09	11.00
CH60	5300	6.29	0.58	6.87	11.00
CH64	5320	5.69	0.58	6.27	11.00

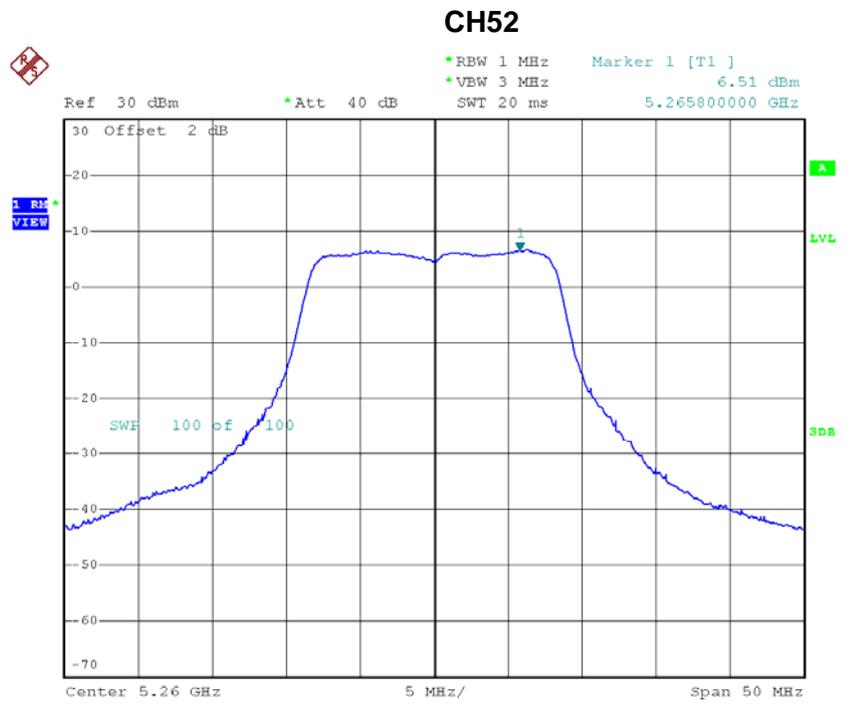


Date: 3.DEC.2015 14:29:05

CH60

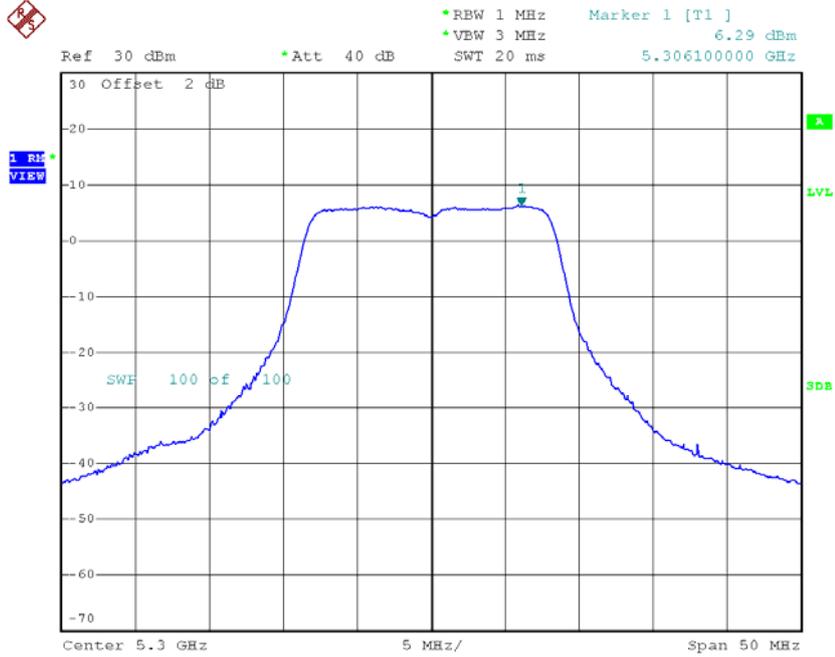

Date: 3.DEC.2015 14:31:53


CH64

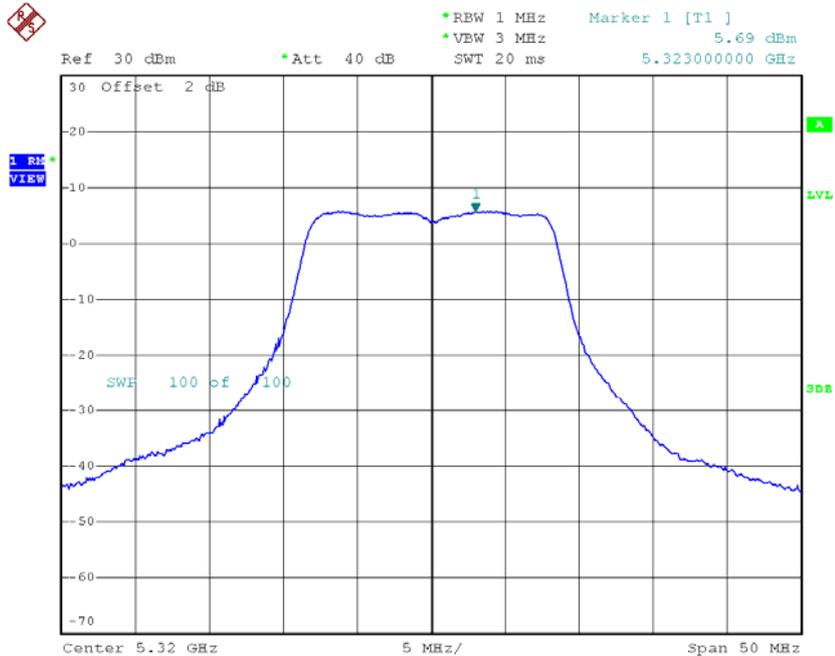

Date: 3.DEC.2015 14:33:35


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	7.11	0.58	7.69	11.00
CH60	5300	7.00	0.58	7.58	11.00
CH64	5320	6.94	0.58	7.52	11.00

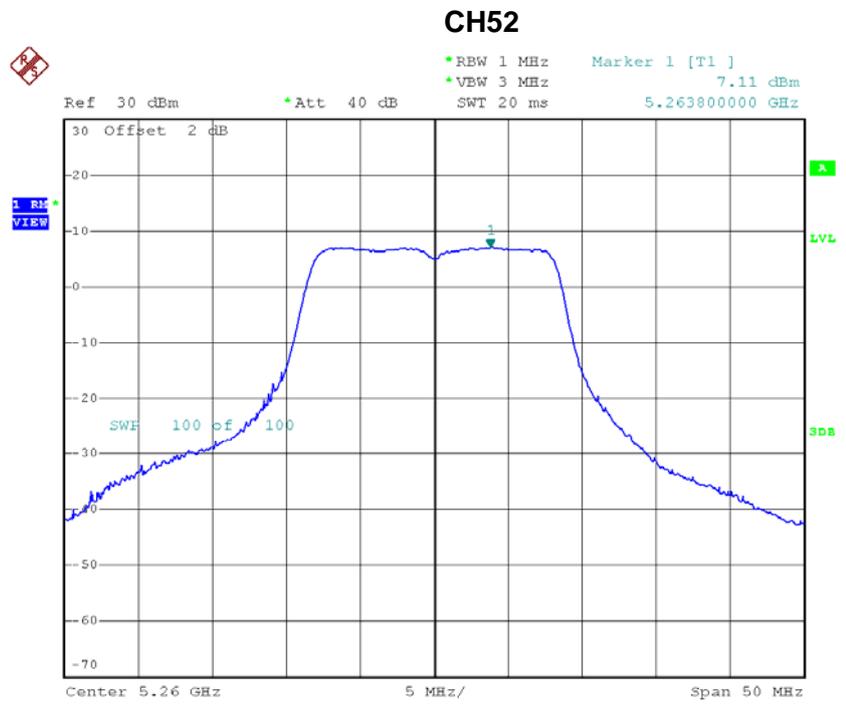


Date: 3.DEC.2015 14:27:43

CH60

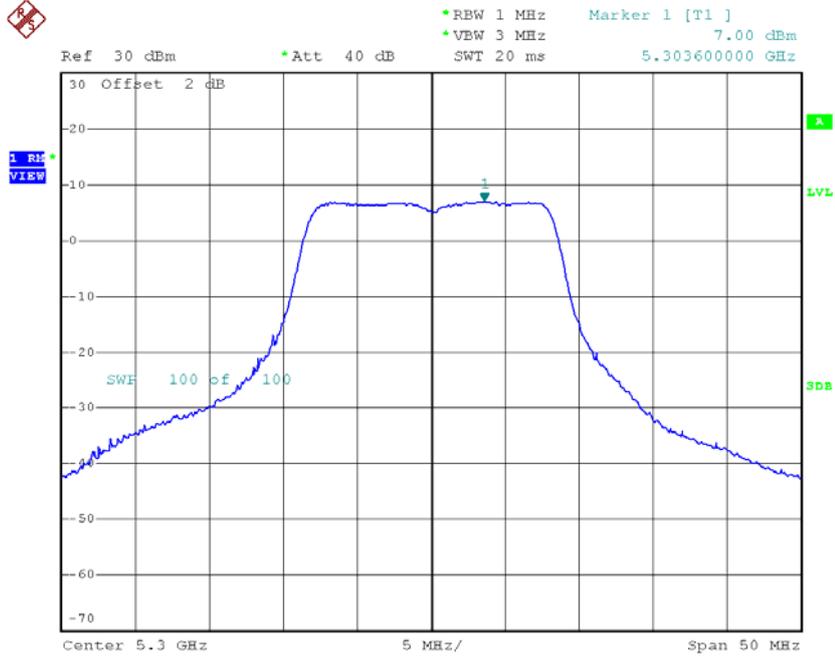

Date: 3.DEC.2015 14:31:30

CH64

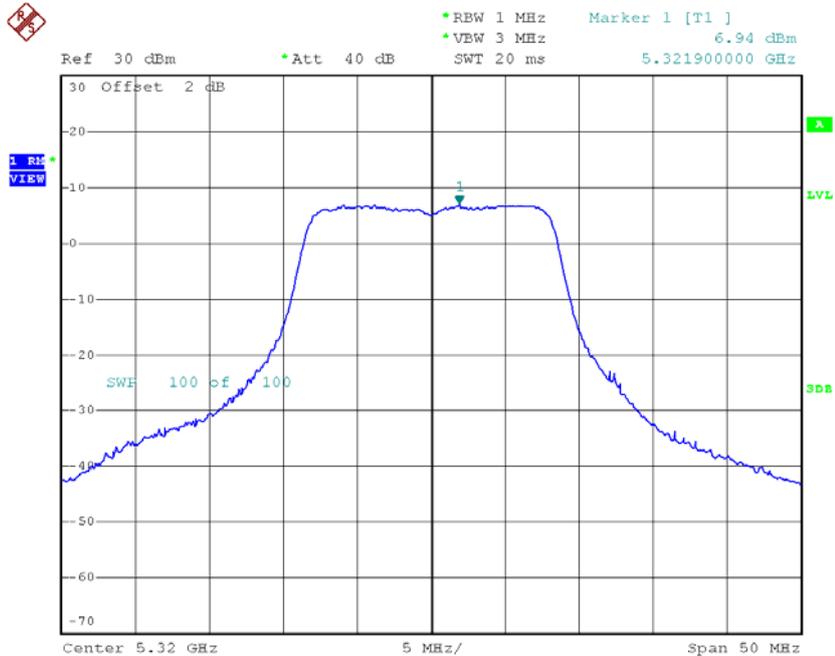


Date: 3.DEC.2015 14:33:09

Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	10.41	11.00
CH60	5300	10.25	11.00
CH64	5320	9.95	11.00


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.92	1.07	6.99	11.00
CH60	5300	6.07	1.07	7.14	11.00
CH64	5320	1.90	1.07	2.97	11.00

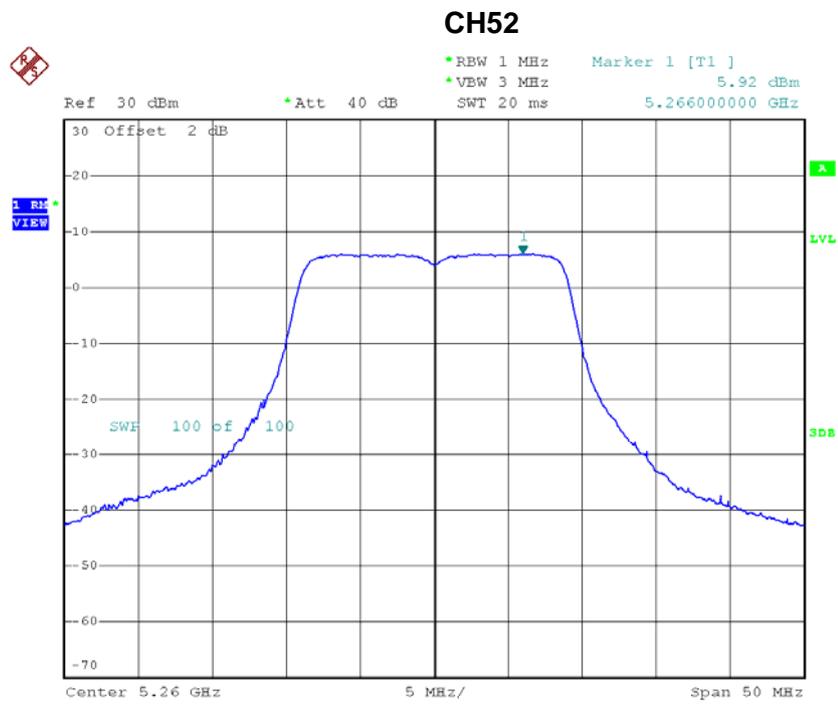


Date: 3.DEC.2015 14:45:42

CH60

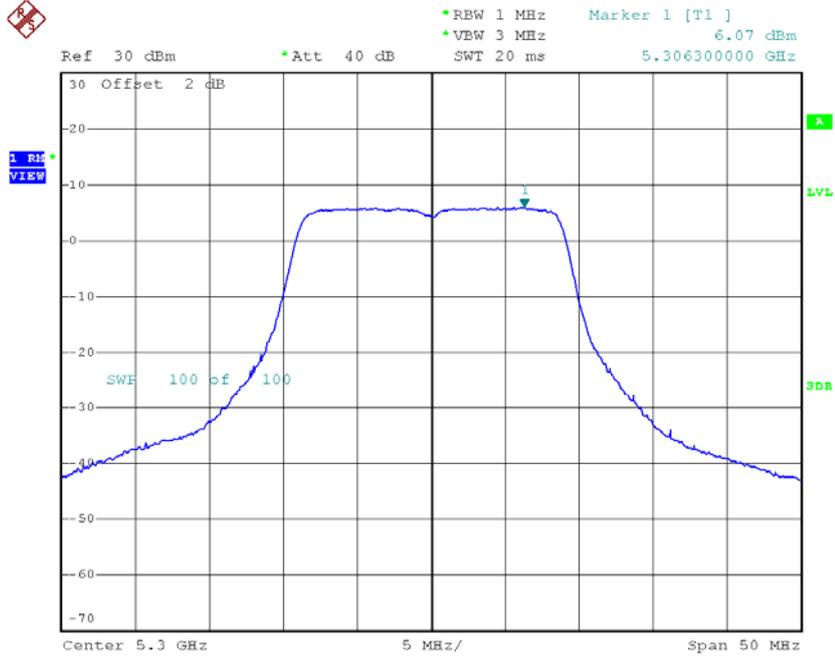

Date: 3.DEC.2015 14:47:16


CH64

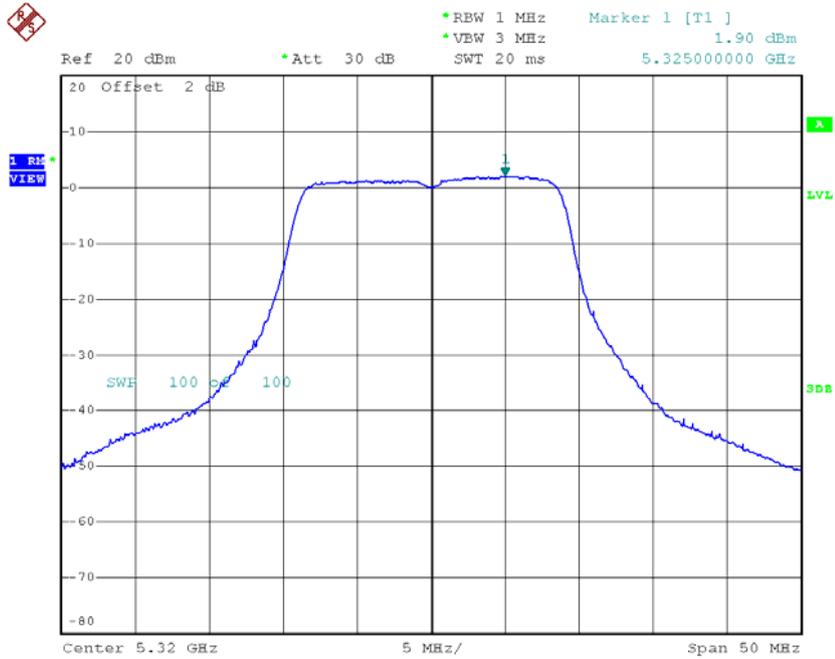

Date: 2.NOV.2015 19:00:58


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	6.93	1.07	8.00	11.00
CH60	5300	6.96	1.07	8.03	11.00
CH64	5320	5.41	1.07	6.48	11.00

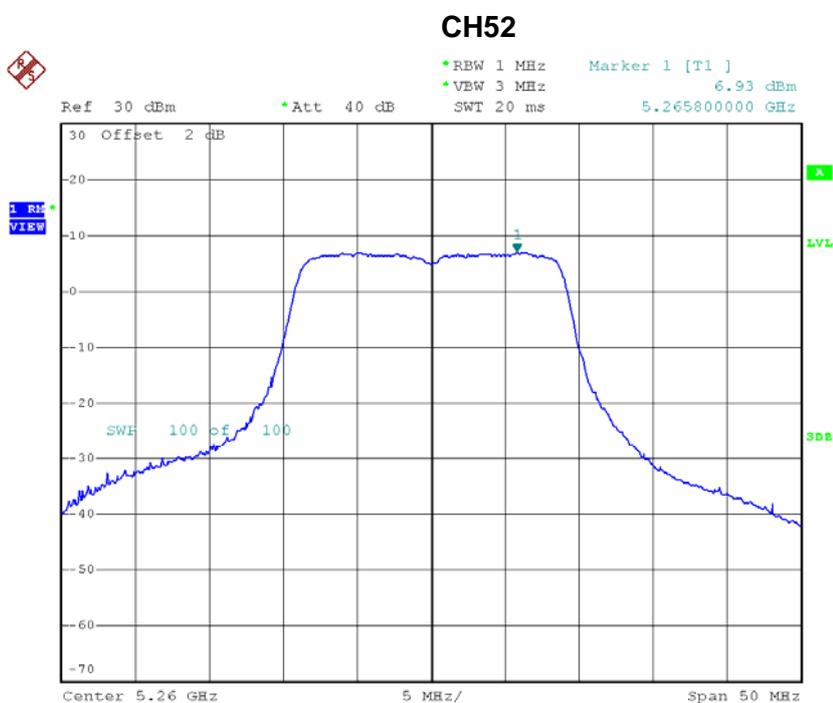


Date: 3.DEC.2015 14:45:15

CH60

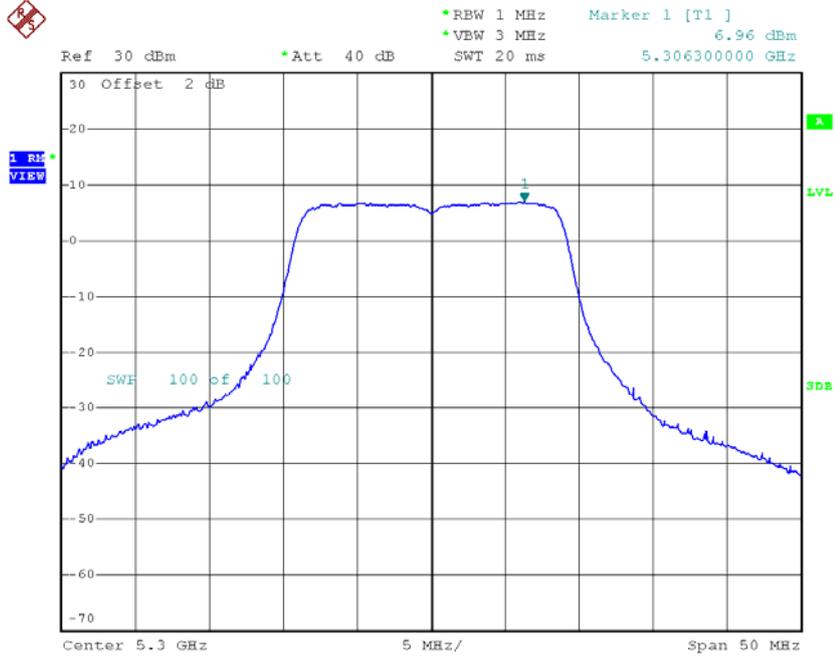

Date: 3.DEC.2015 14:46:55

CH64

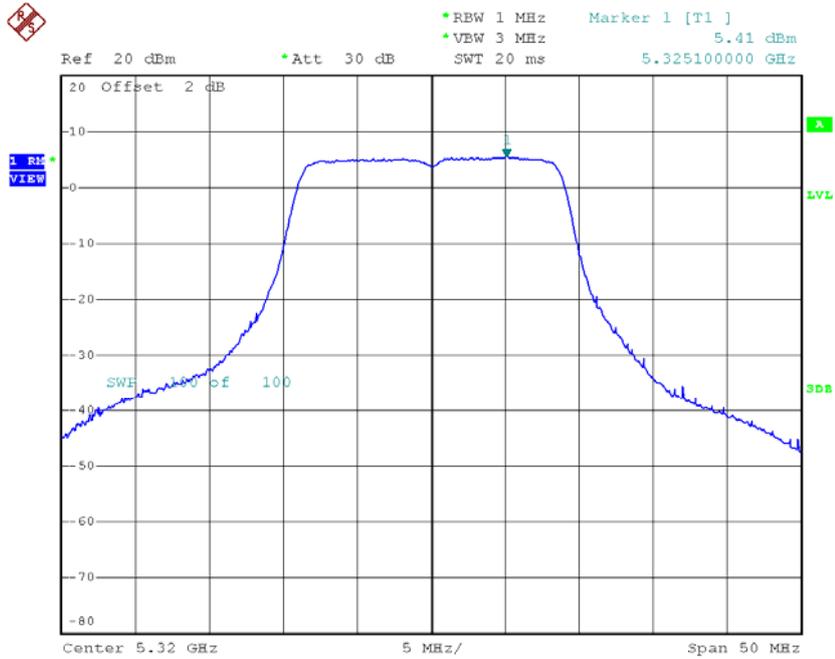

Date: 2.NOV.2015 18:55:18


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	10.53	11.00
CH60	5300	10.62	11.00
CH64	5320	8.08	11.00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	4.74	1.83	6.57	11.00
CH62	5310	4.28	1.83	6.11	11.00

CH54

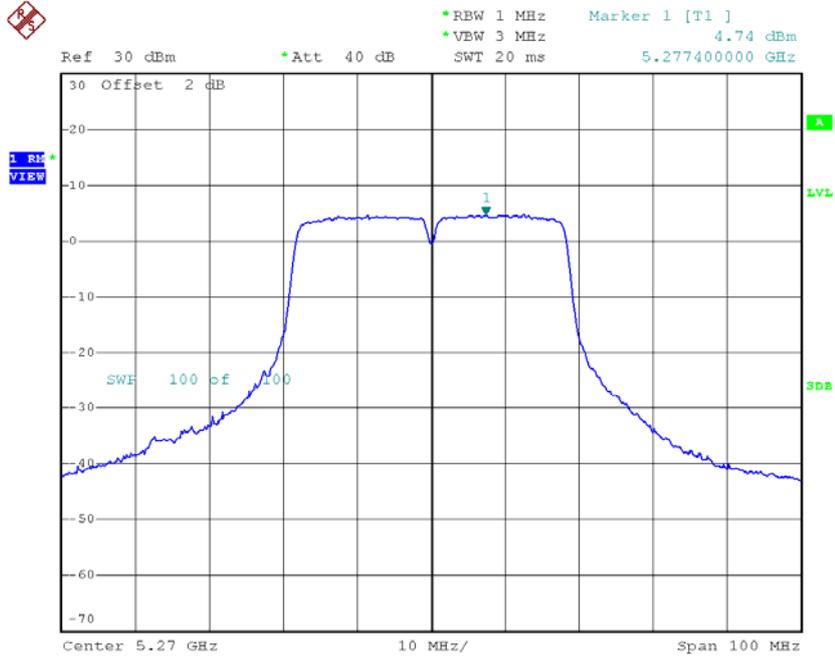

Date: 3.DEC.2015 14:57:49

CH62

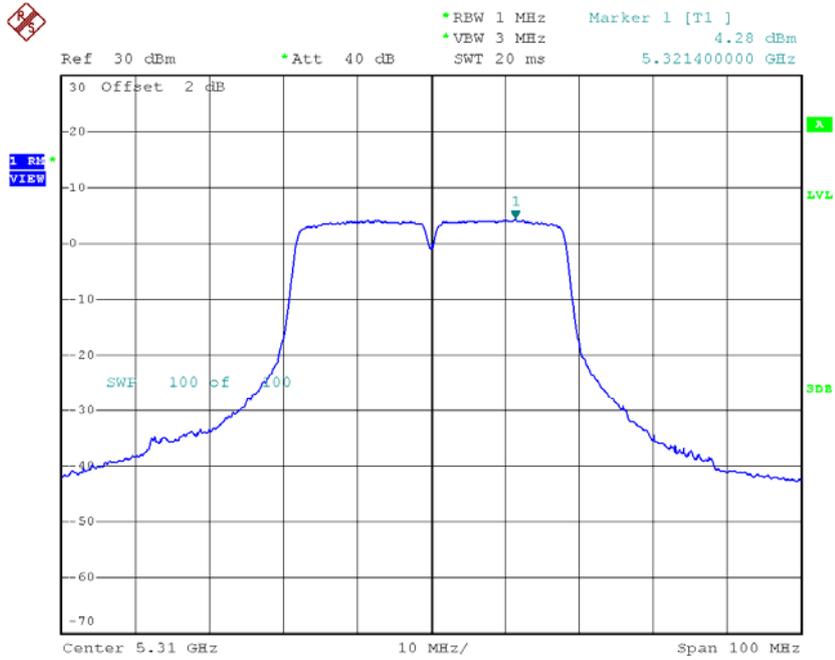


Date: 3.DEC.2015 14:59:46

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	5.66	1.83	7.49	11.00
CH62	5310	5.15	1.83	6.98	11.00

CH54

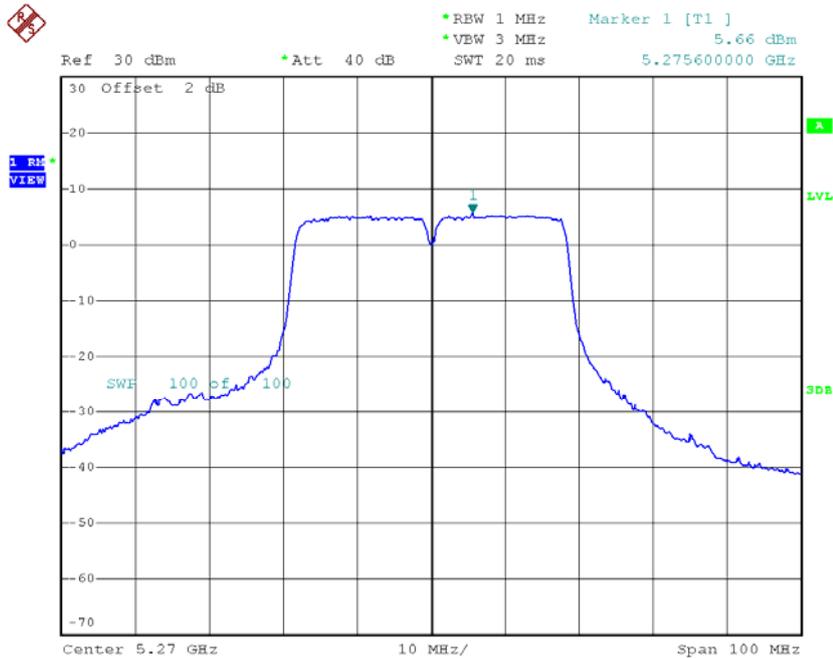

Date: 3.DEC.2015 14:57:29

CH62

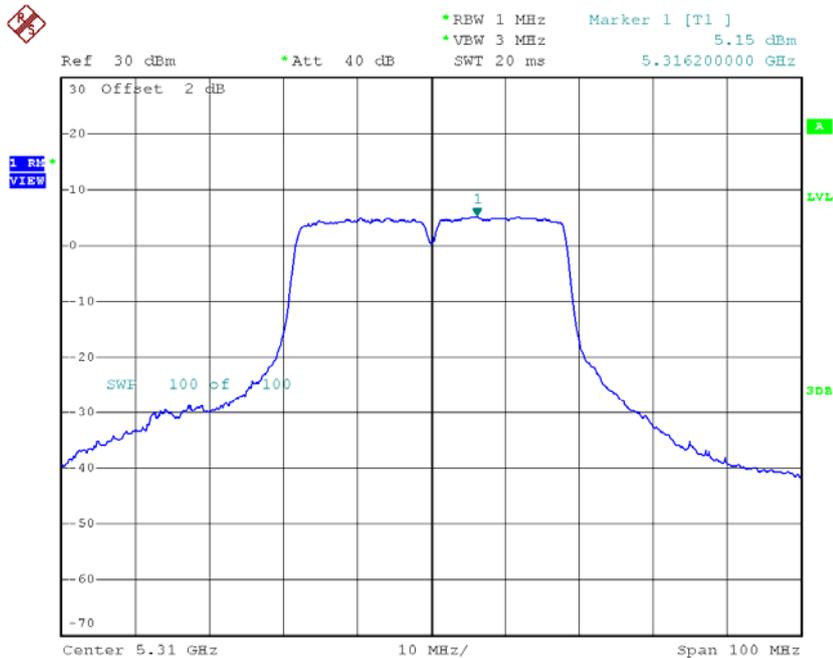


Date: 3.DEC.2015 14:59:24

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	10.06	11.00
CH62	5310	9.58	11.00


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	7.24	0.58	7.82	11.00
CH116	5580	6.95	0.58	7.53	11.00
CH140	5700	6.98	0.58	7.56	11.00

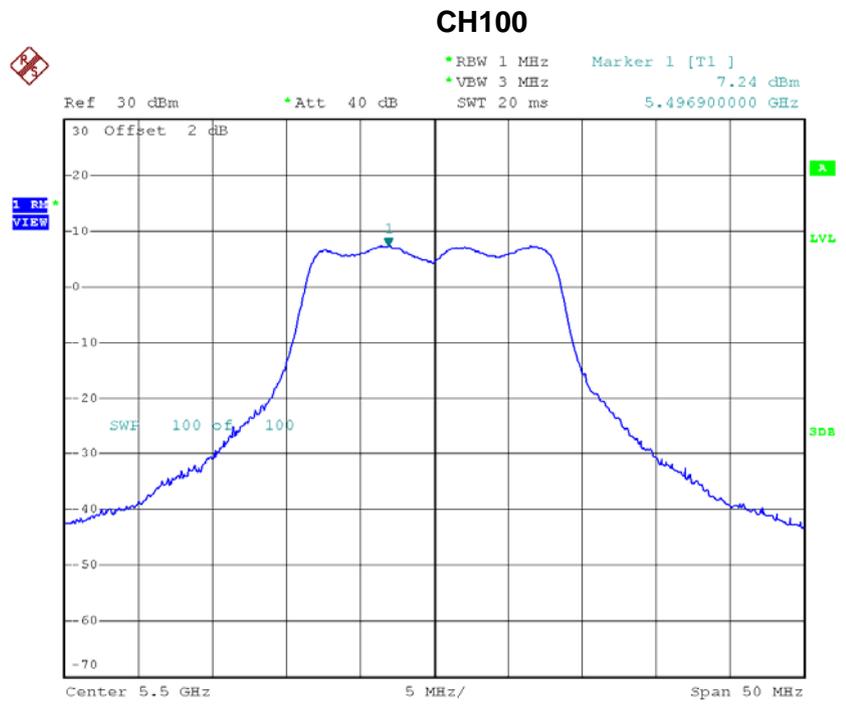


Date: 3.DEC.2015 14:36:33

CH116

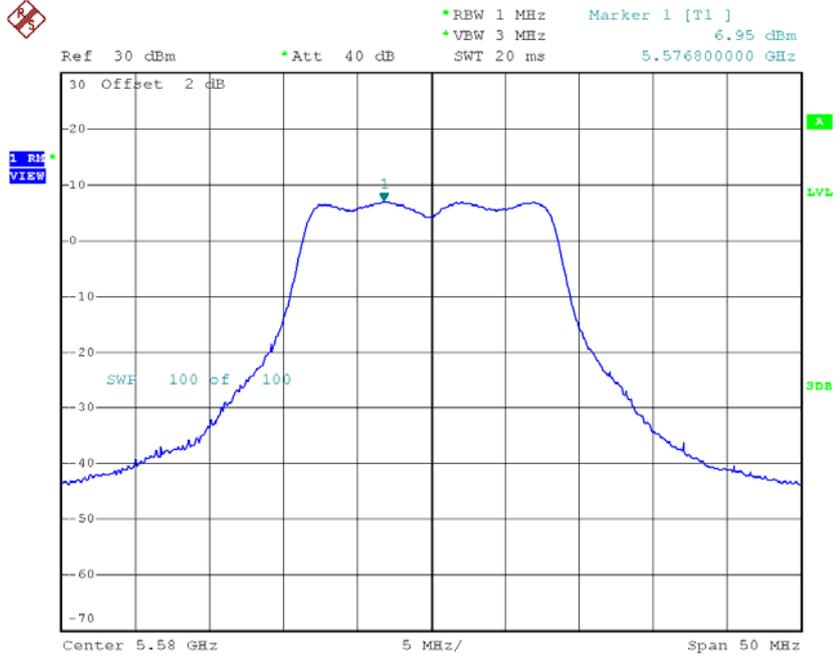

Date: 3.DEC.2015 14:38:49


CH140

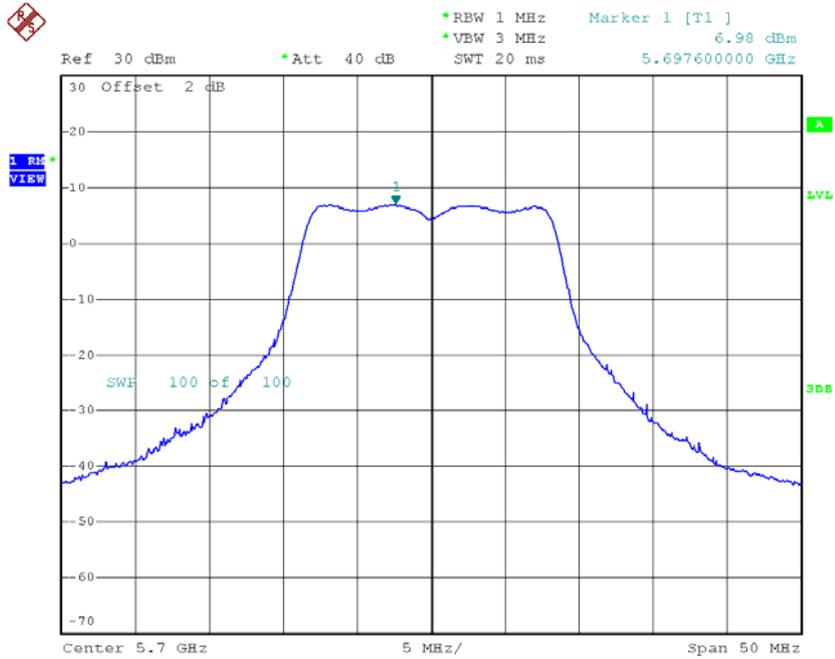

Date: 3.DEC.2015 14:40:24


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	6.58	0.58	7.16	11.00
CH116	5580	7.08	0.58	7.66	11.00
CH140	5700	7.13	0.58	7.71	11.00

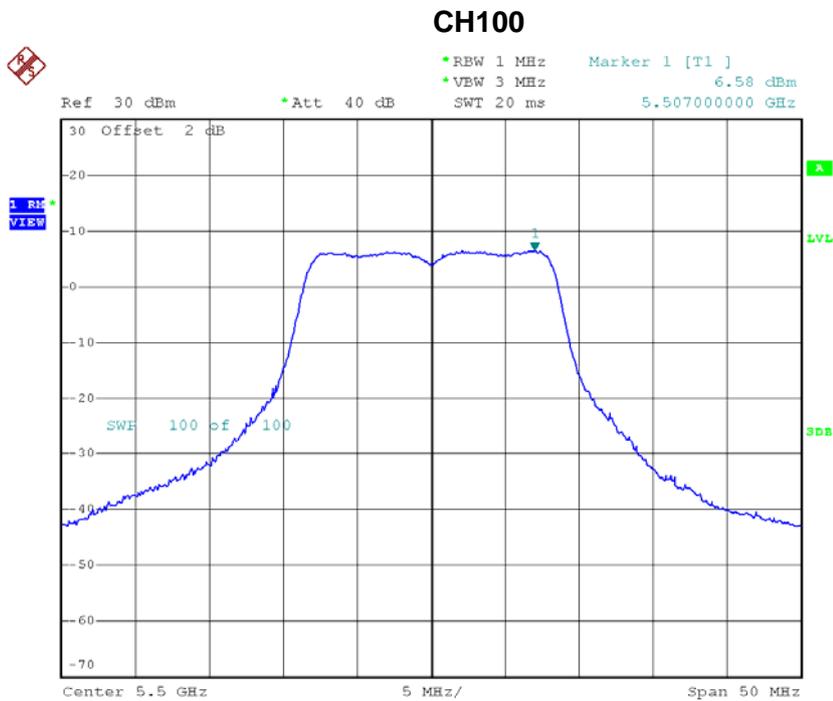


Date: 3.DEC.2015 14:36:58

CH116

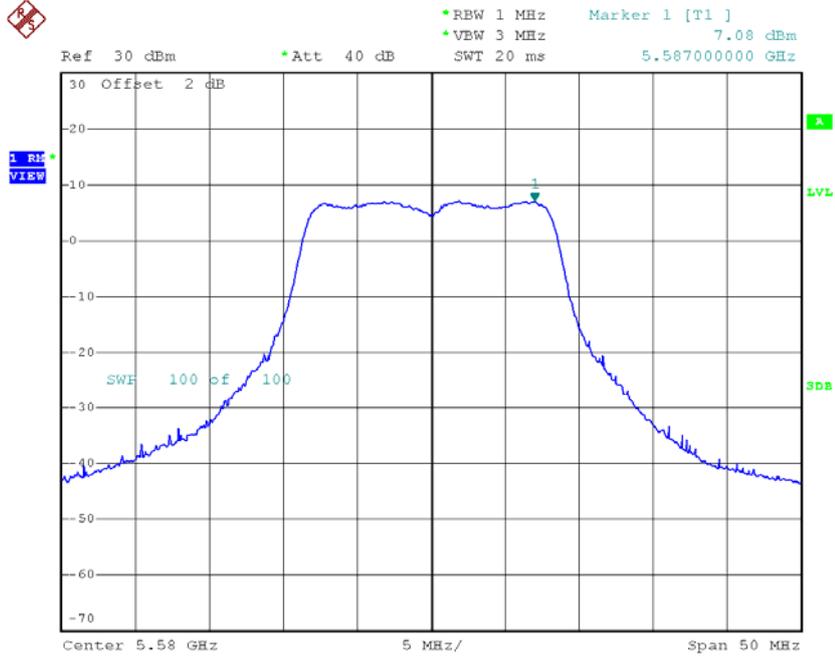

Date: 3.DEC.2015 14:38:23

CH140

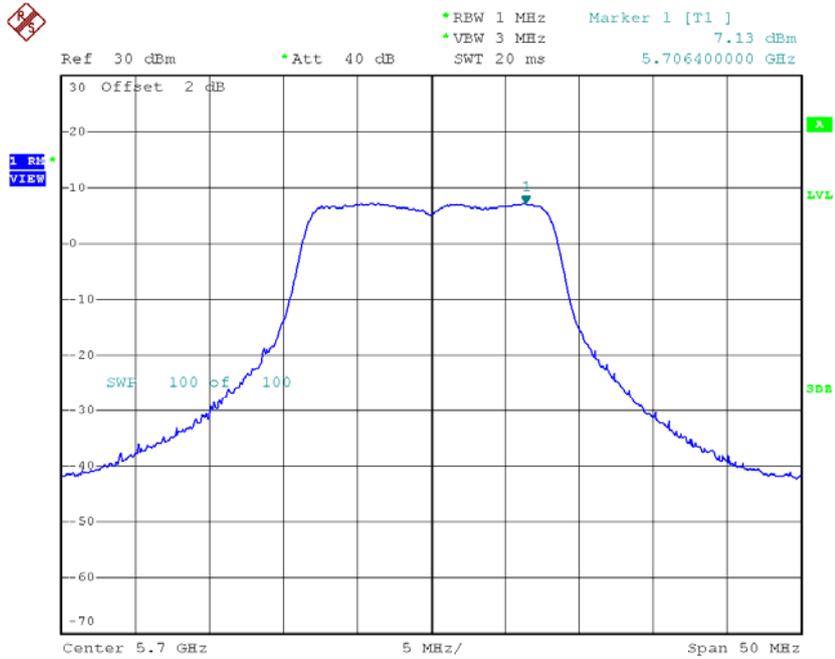

Date: 3.DEC.2015 14:40:50


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	10.51	11.00
CH116	5580	10.61	11.00
CH140	5700	10.65	11.00

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	7.02	1.07	8.09	11.00
CH116	5580	6.57	1.07	7.64	11.00
CH140	5700	5.56	1.07	6.63	11.00

CH100

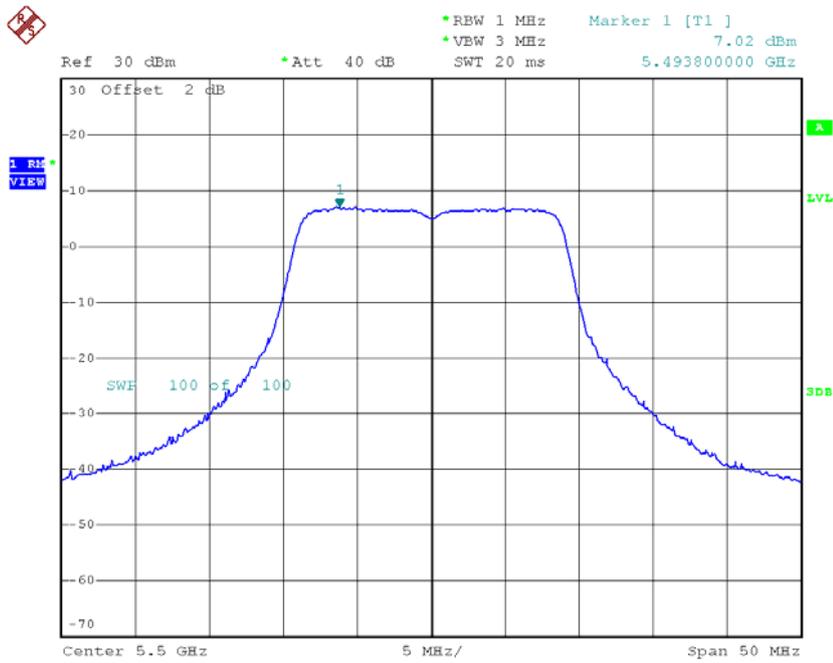


Date: 3.DEC.2015 14:49:10

CH116

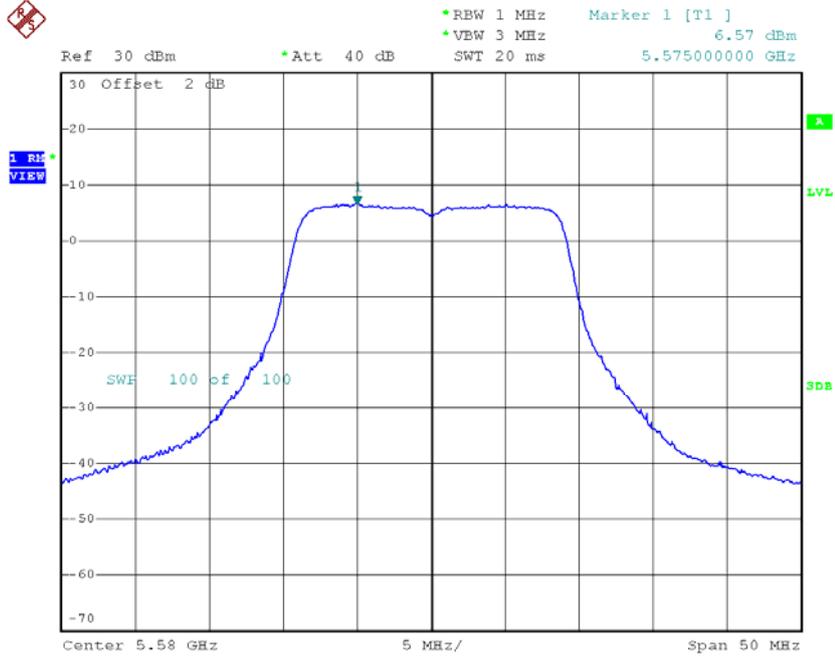

Date: 3.DEC.2015 14:51:00


CH140

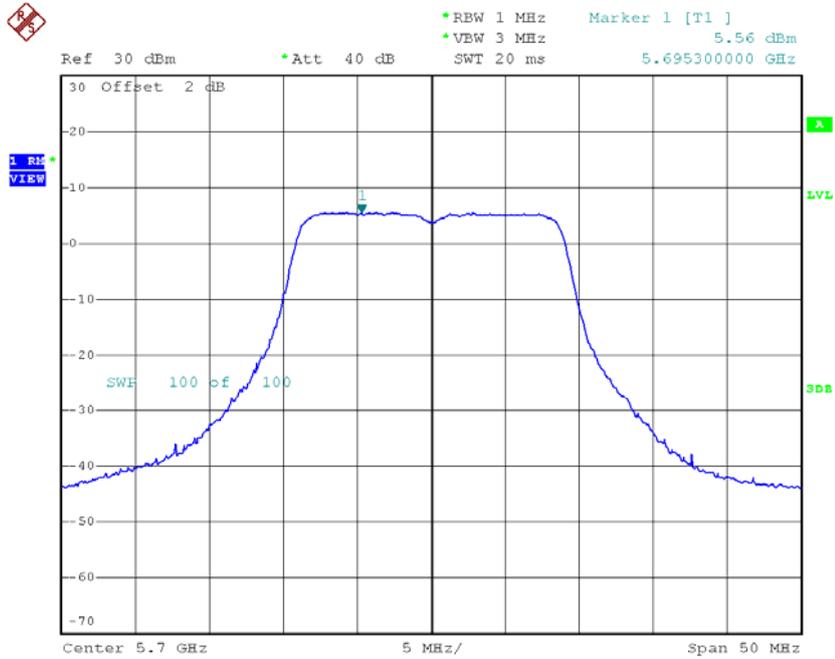

Date: 3.DEC.2015 14:52:43


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	6.36	1.07	7.43	11.00
CH116	5580	6.93	1.07	8.00	11.00
CH140	5700	6.14	1.07	7.21	11.00

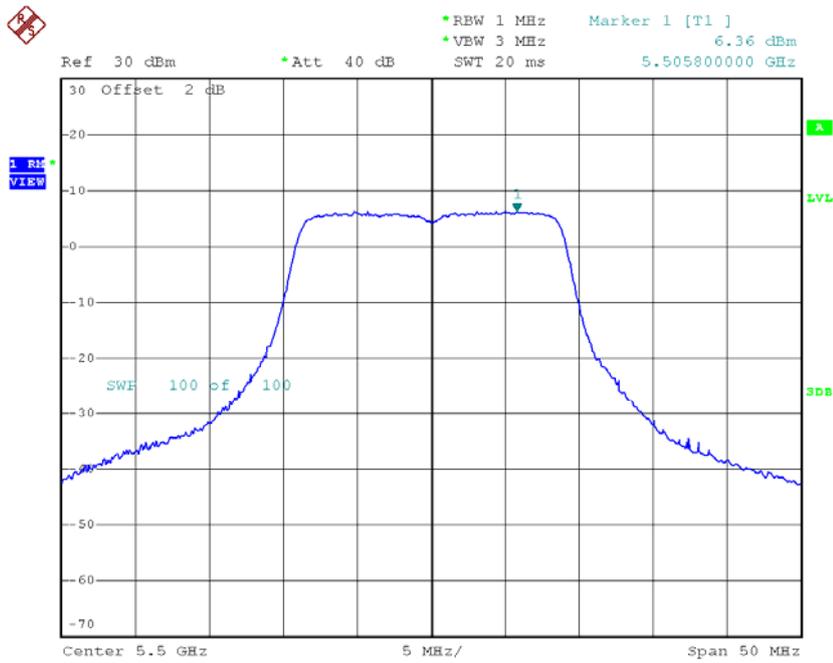CH100


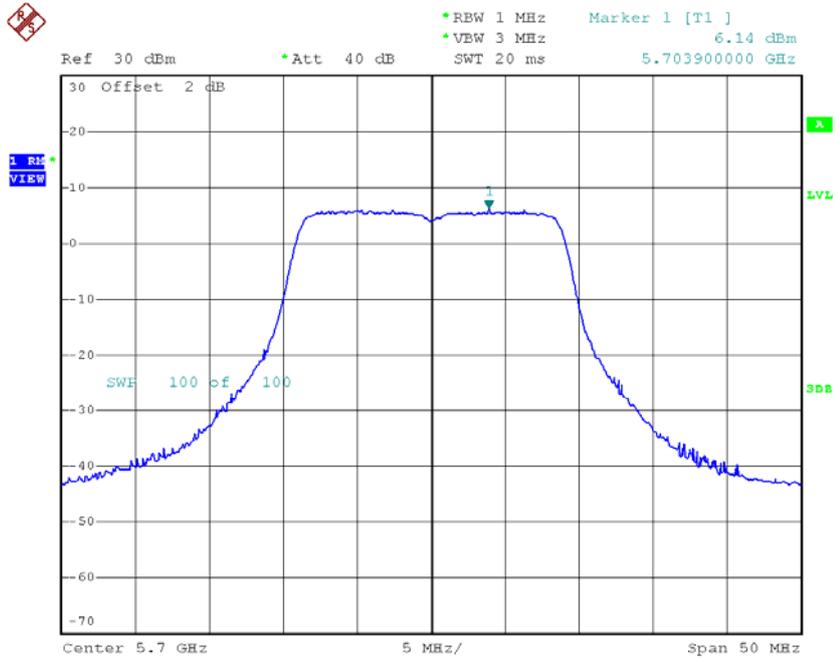
Date: 3.DEC.2015 14:49:01

CH116

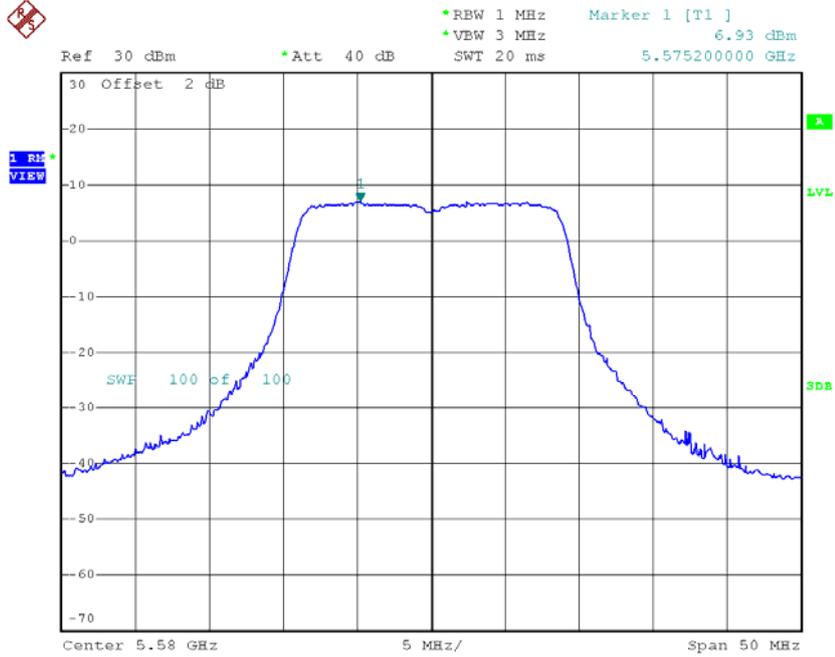

Date: 3.DEC.2015 14:51:21

CH140




Date: 3.DEC.2015 14:52:03

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	10.78	11.00
CH116	5580	10.83	11.00
CH140	5700	9.94	11.00

CH110

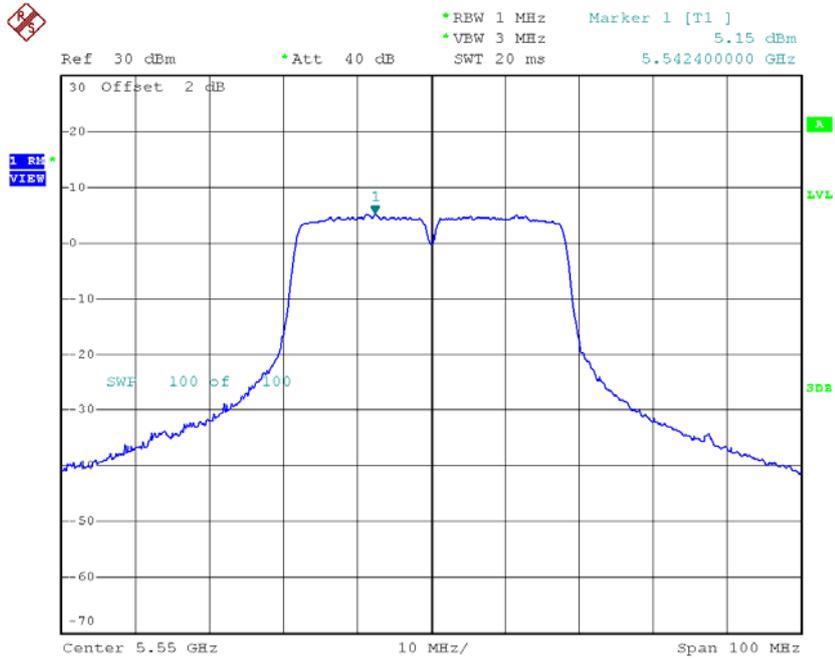

Date: 3.DEC.2015 15:03:04


CH134

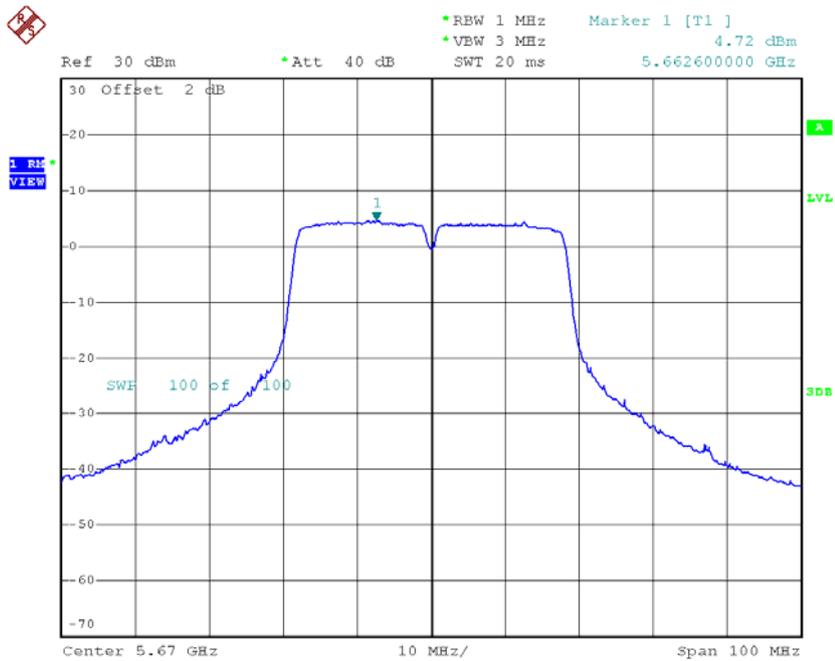

Date: 3.DEC.2015 15:04:26


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	5.59	1.83	7.42	11.00
CH110	5550	5.33	1.83	7.16	11.00
CH134	5670	4.66	1.83	6.49	11.00

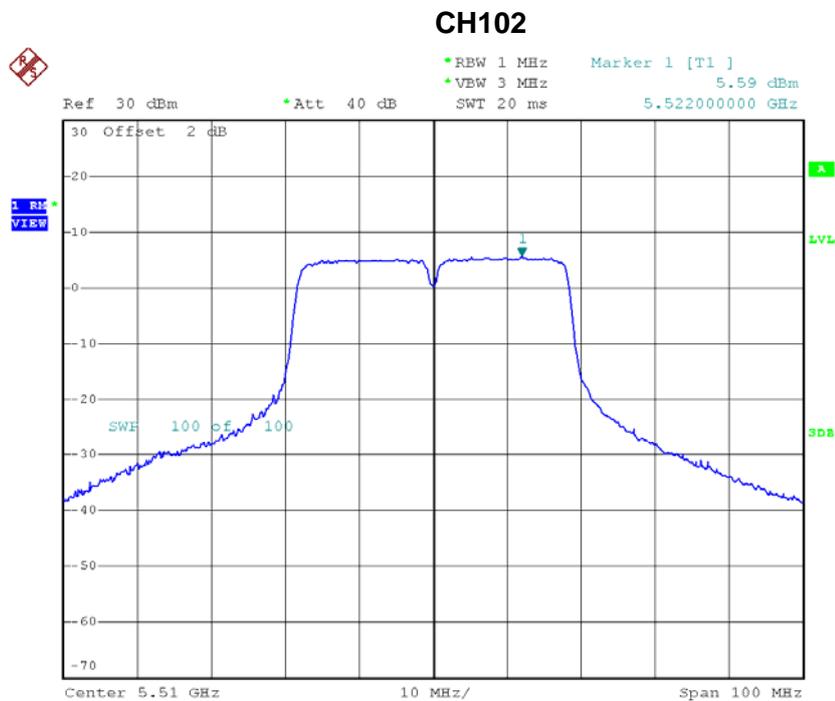


Date: 3.DEC.2015 15:00:53

CH110

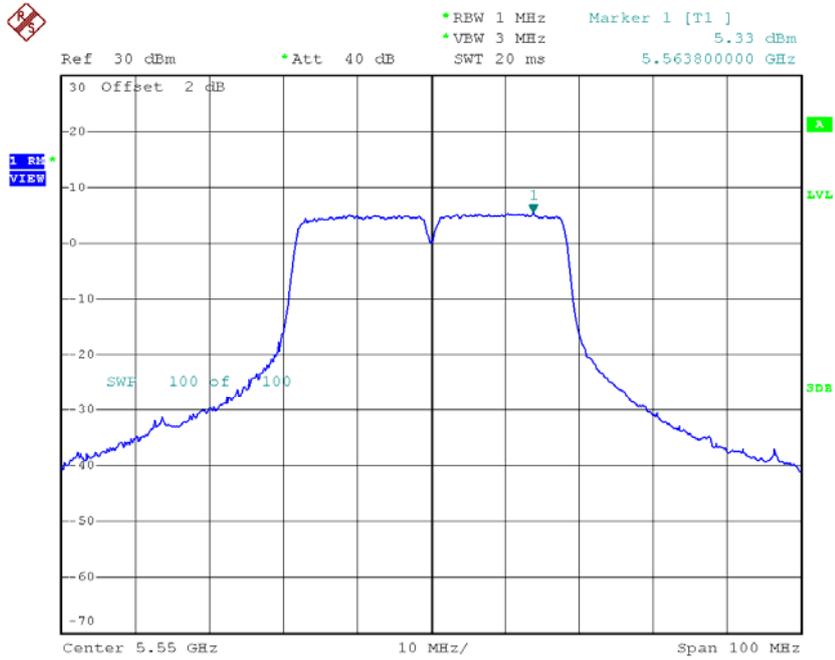

Date: 3.DEC.2015 15:02:35

CH134

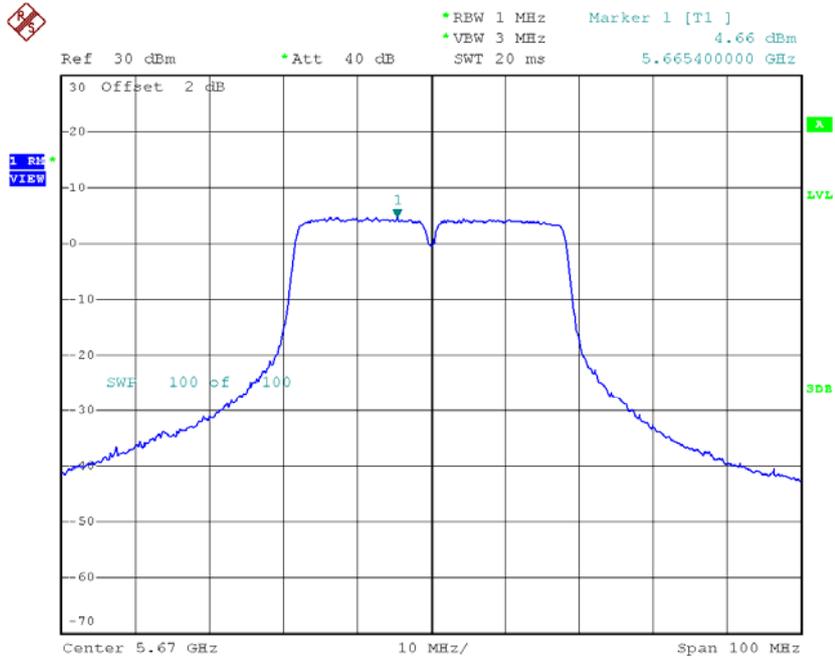

Date: 3.DEC.2015 15:03:58


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	10.34	11.00
CH110	5550	10.08	11.00
CH134	5670	9.53	11.00

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	2.02	0.58	2.60	30.00
CH157	5785	6.84	0.58	7.42	30.00
CH165	5825	5.94	0.58	6.52	30.00

TX CH149

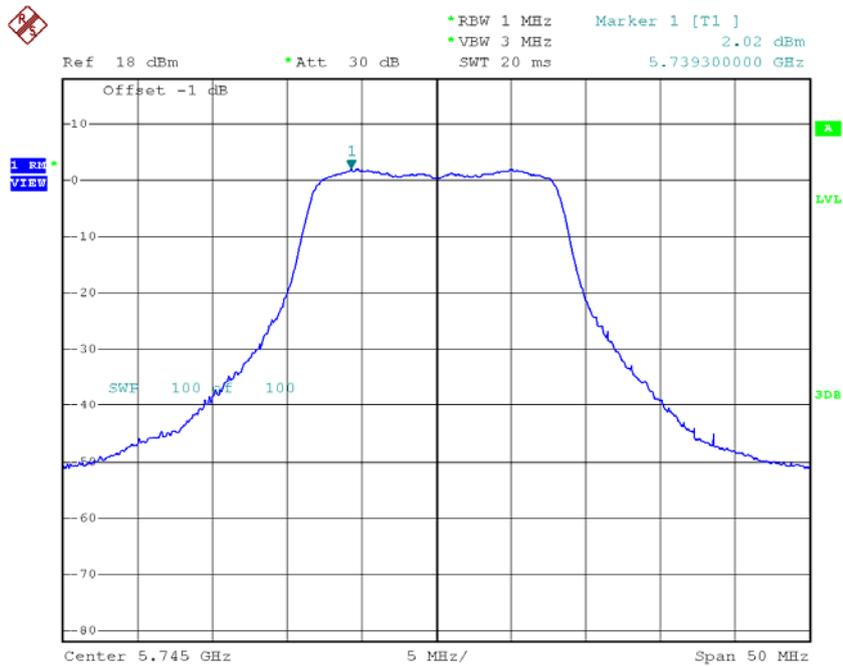


Date: 2.NOV.2015 19:10:40

TX CH157

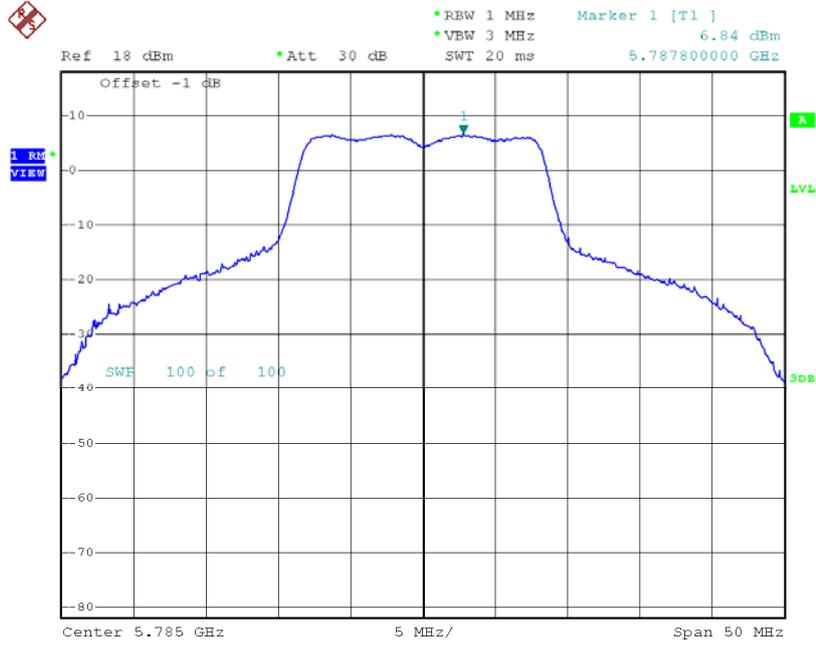

Date: 2.NOV.2015 19:11:03

TX CH165

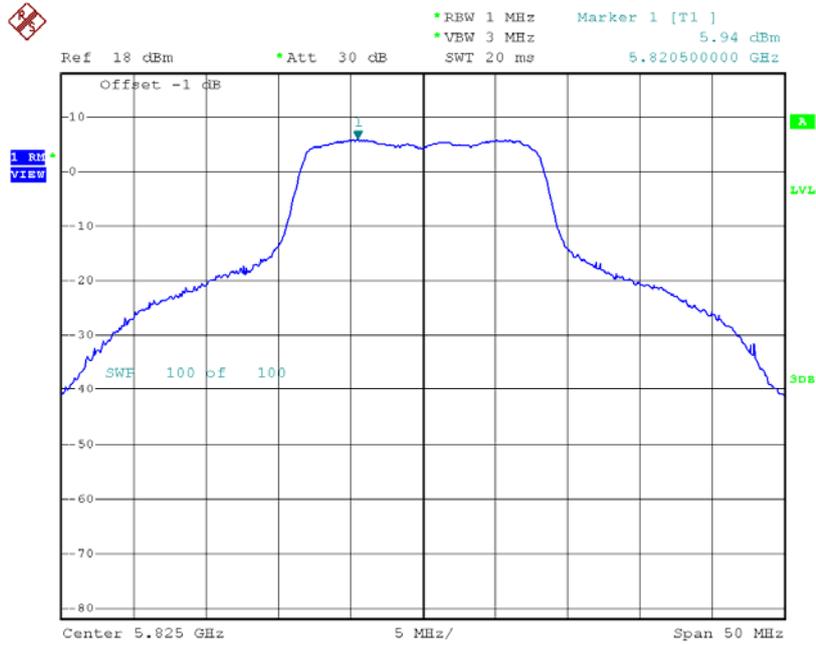


Date: 2.NOV.2015 19:11:25

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	5.01	0.58	5.59	30.00
CH157	5785	9.33	0.58	9.91	30.00
CH165	5825	8.85	0.58	9.43	30.00

TX CH149

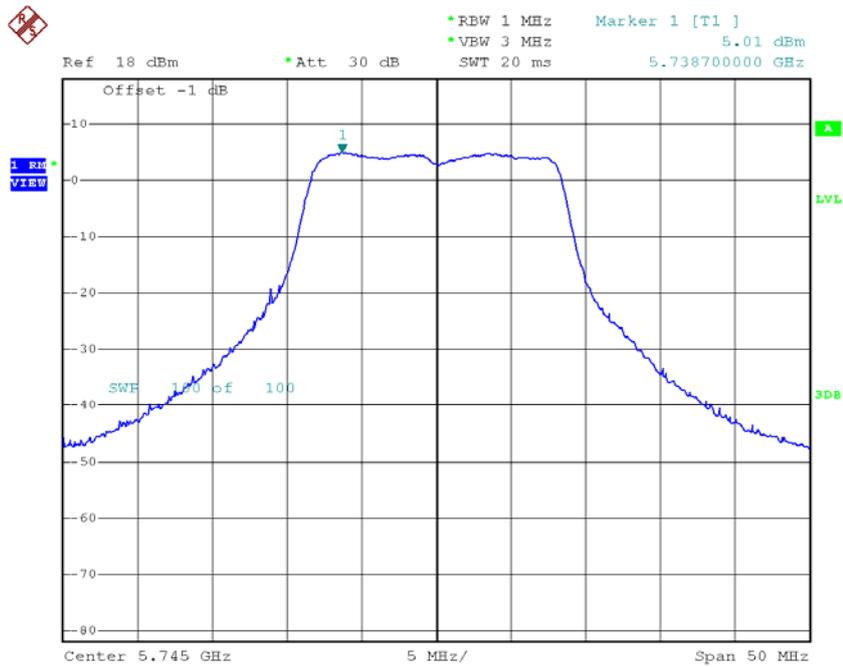

Date: 2.NOV.2015 19:16:27


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	7.36	30.00
CH157	5785	11.85	30.00
CH165	5825	11.22	30.00

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	4.96	1.07	6.03	30.00
CH157	5785	8.92	1.07	9.99	30.00
CH165	5825	6.23	1.07	7.30	30.00

TX CH149

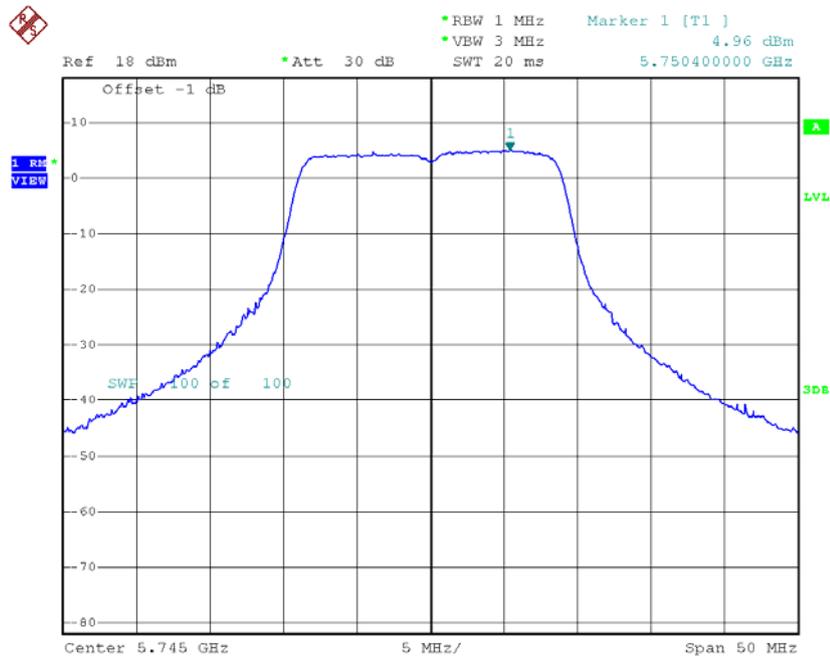


Date: 2.NOV.2015 18:57:01

TX CH157

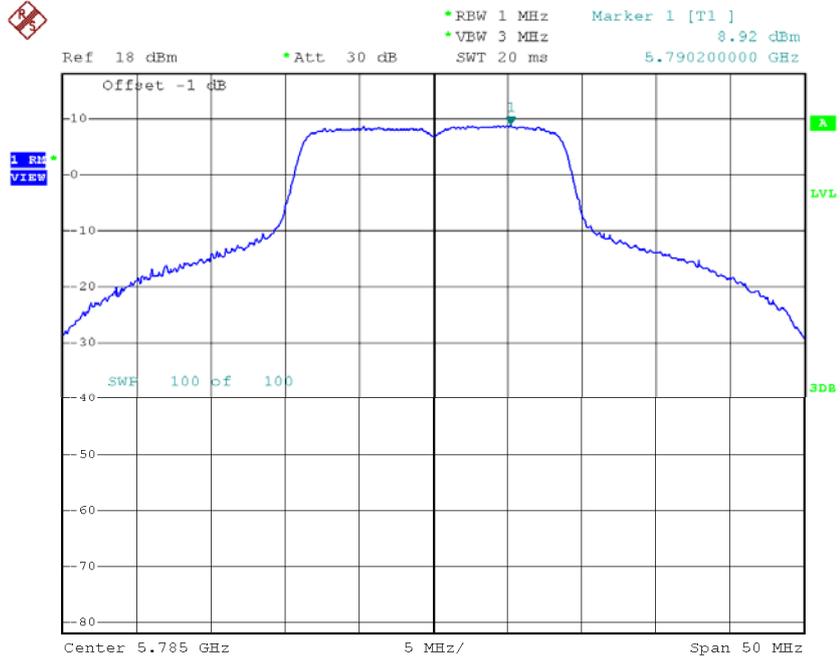

Date: 2.NOV.2015 18:57:23

TX CH165

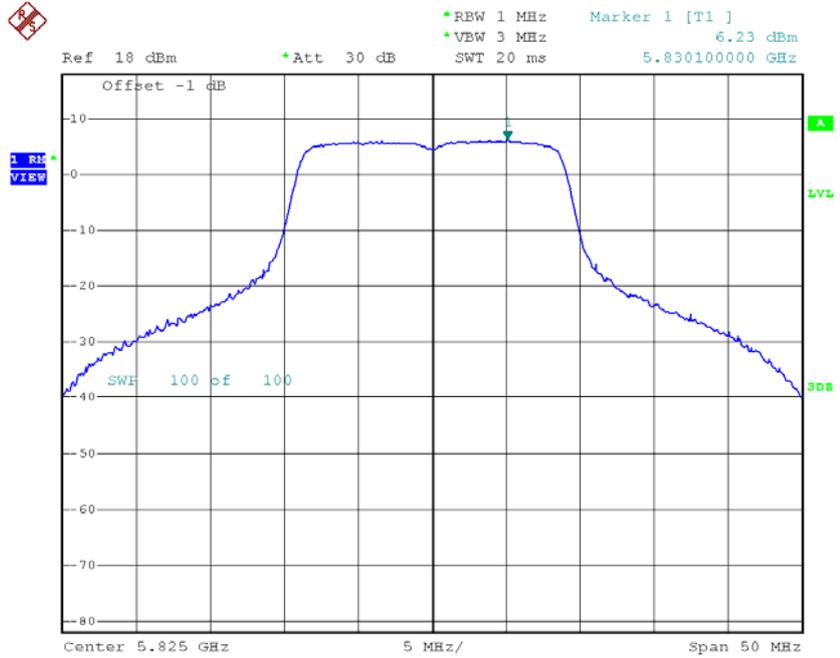

Date: 2.NOV.2015 18:57:46


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	7.74	30.00
CH157	5785	11.89	30.00
CH165	5825	9.34	30.00

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	2.95	1.83	4.78	30.00
CH159	5795	5.99	1.83	7.82	30.00

TX CH151

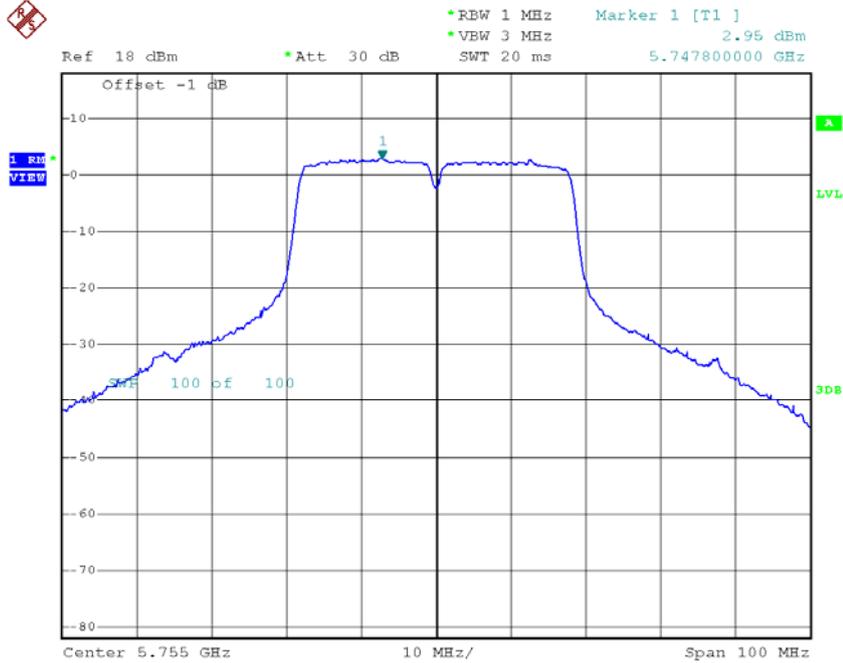

Date: 4.DEC.2015 08:25:15

TX CH159

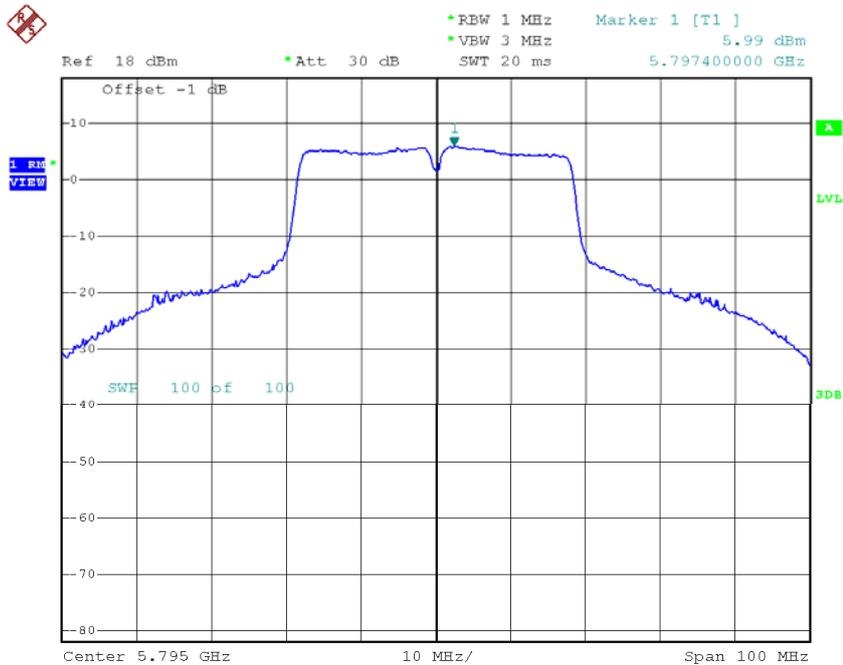


Date: 2.NOV.2015 18:44:55

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	3.27	1.83	5.10	30.00
CH159	5795	6.03	1.83	7.86	30.00

TX CH151

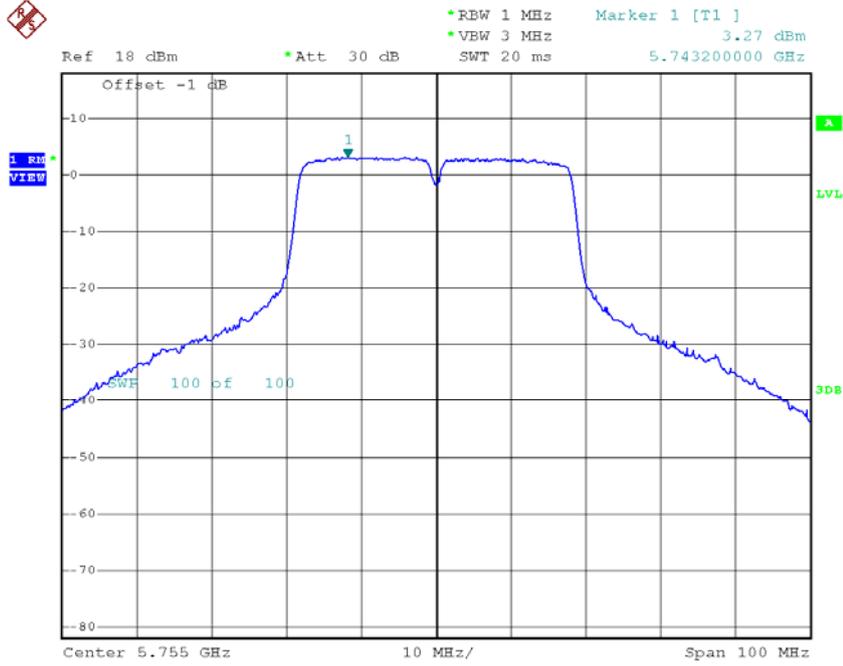

Date: 4.DEC.2015 08:25:53

TX CH159

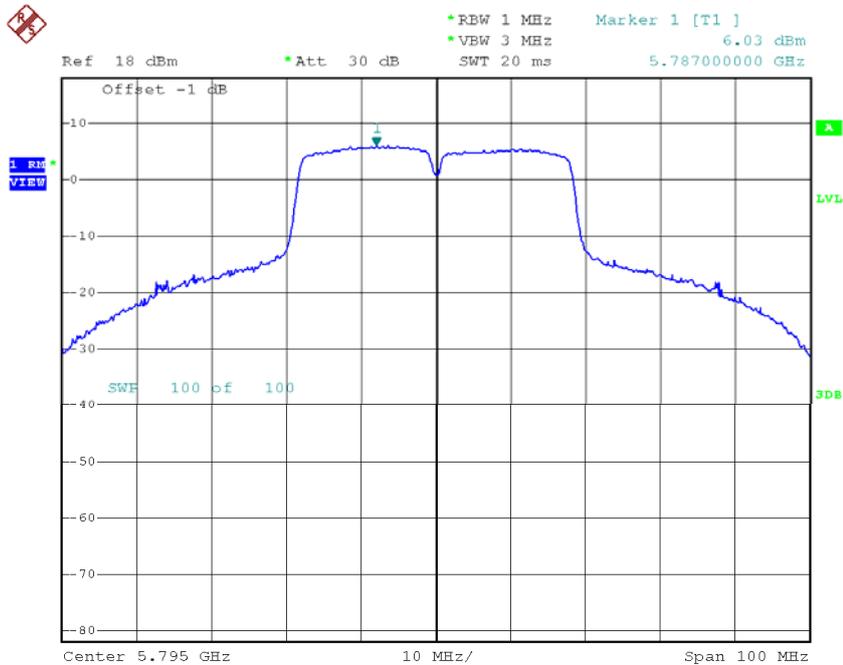


Date: 2.NOV.2015 18:50:13

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	7.95	30.00
CH159	5795	10.85	30.00


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	7.00	0.86	7.86	17.00
CH40	5200	12.25	0.86	13.11	17.00
CH48	5240	12.27	0.86	13.13	17.00

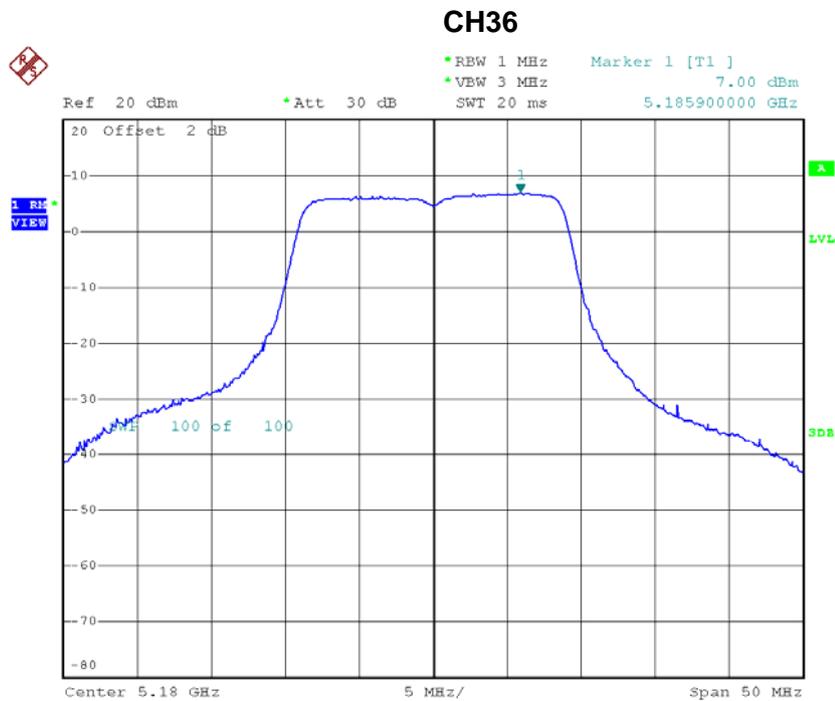


Date: 2.NOV.2015 18:25:07

CH40

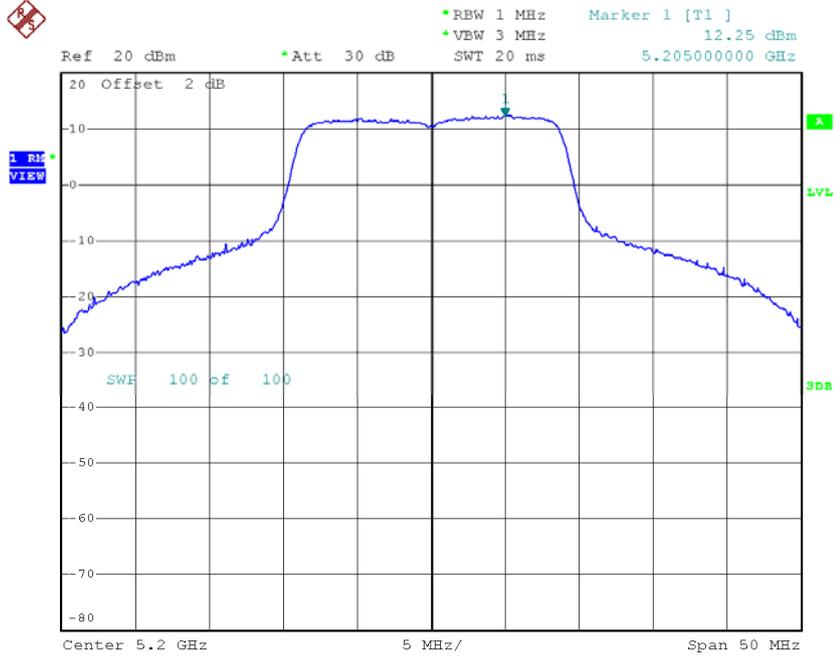

Date: 2.NOV.2015 18:25:31


CH48

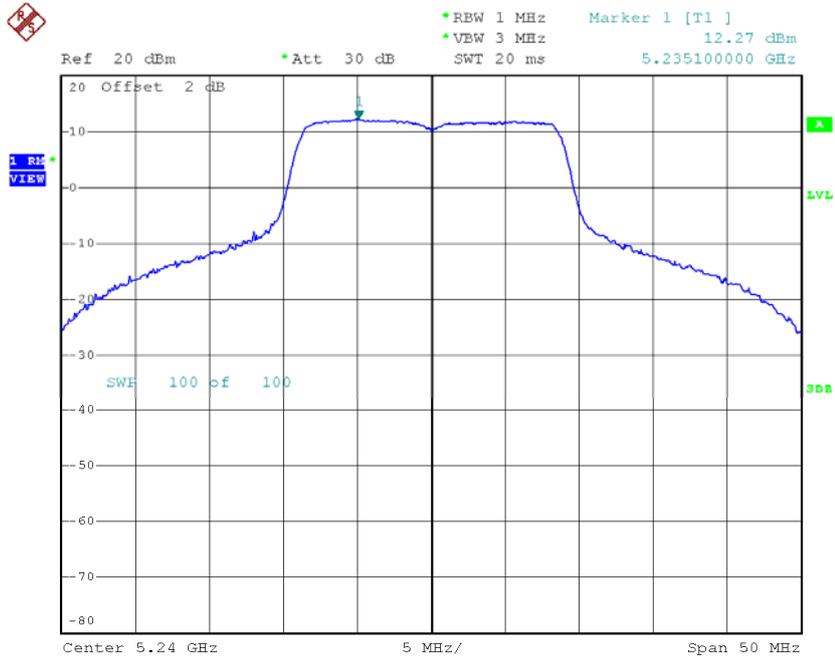

Date: 2.NOV.2015 18:25:52


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	6.88	0.86	7.74	17.00
CH40	5200	12.07	0.86	12.93	17.00
CH48	5240	12.13	0.86	12.99	17.00

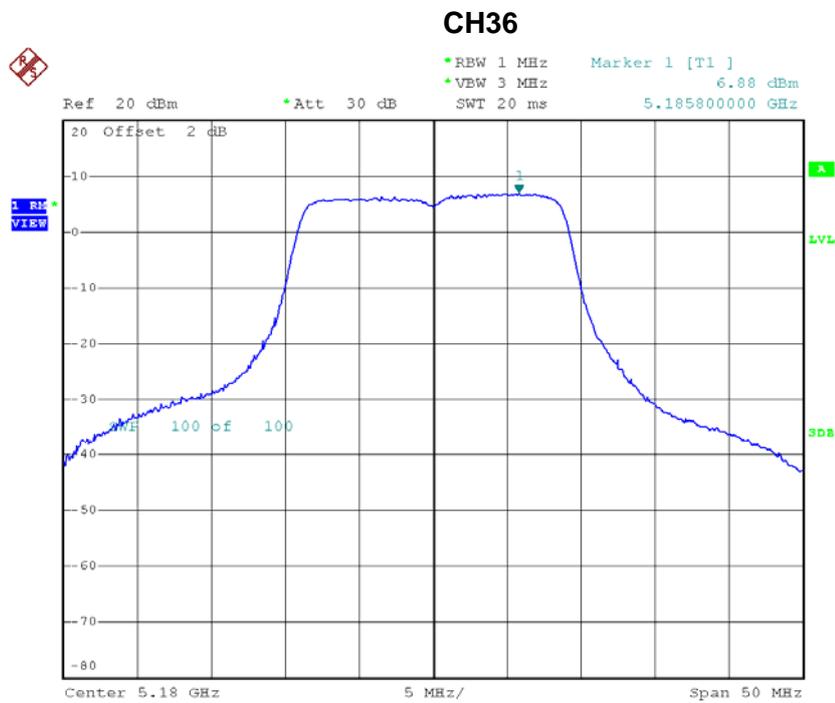


Date: 2.NOV.2015 18:30:55

CH40

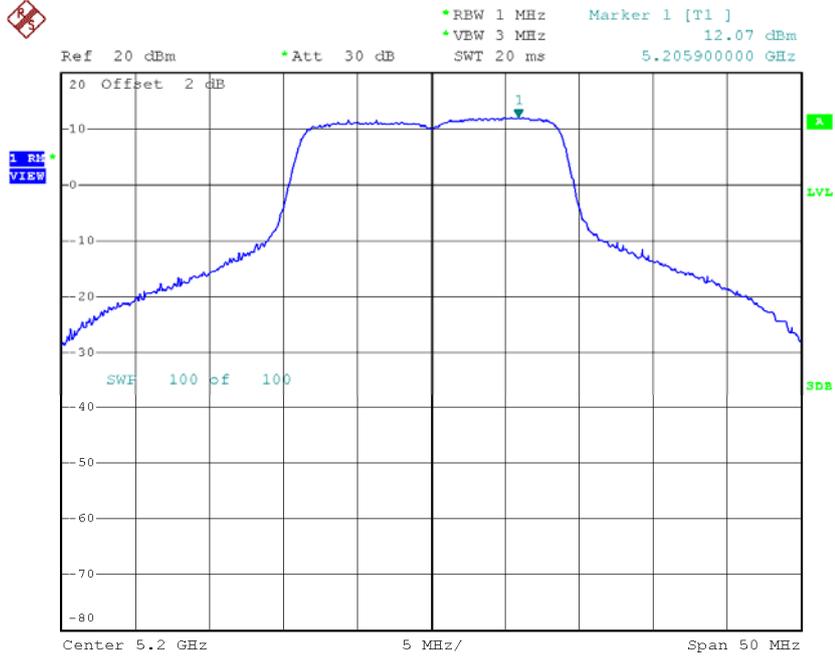

Date: 2.NOV.2015 18:31:31

CH48

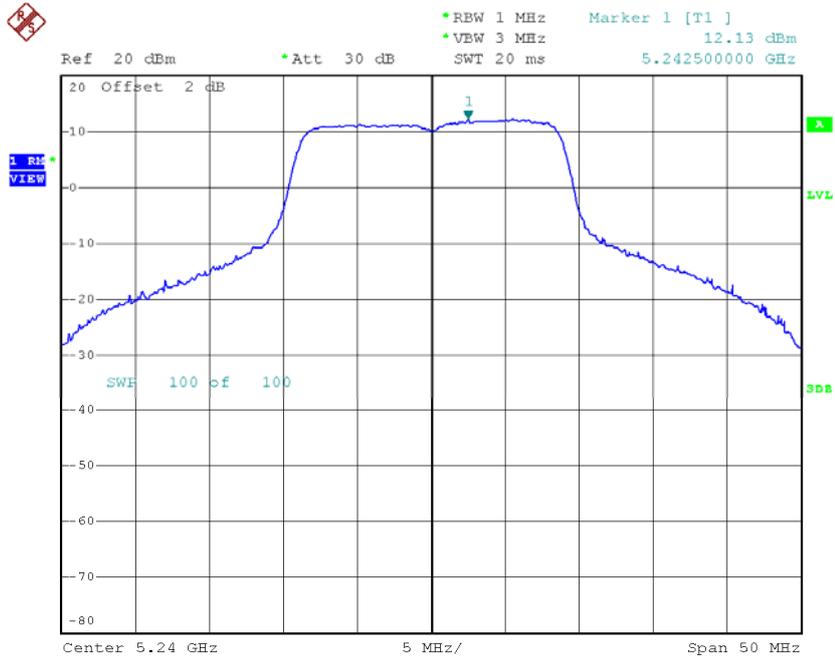

Date: 2.NOV.2015 18:31:52


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	10.81	17.00
CH40	5200	16.03	17.00
CH48	5240	16.07	17.00

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	1.22	2.91	4.13	17.00
CH46	5230	9.24	2.91	12.15	17.00

CH38

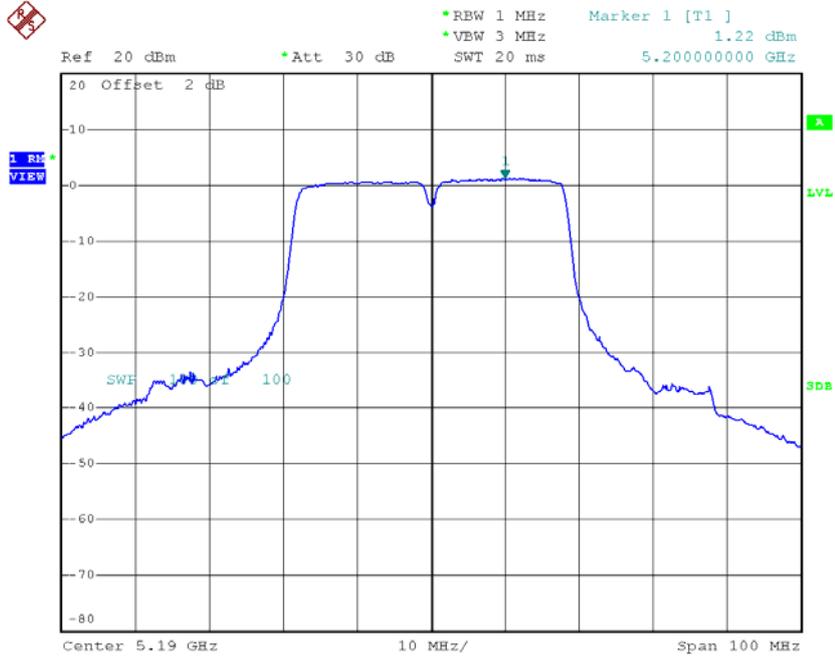

Date: 4.DEC.2015 08:28:24

CH46

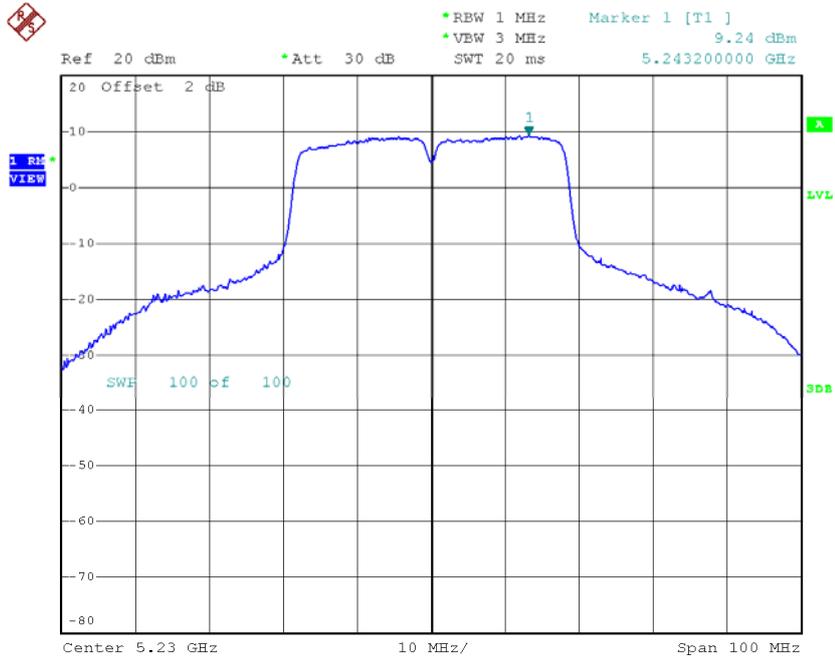


Date: 2.NOV.2015 18:09:20

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	3.51	2.91	6.42	17.00
CH46	5230	9.55	2.91	12.46	17.00

CH38

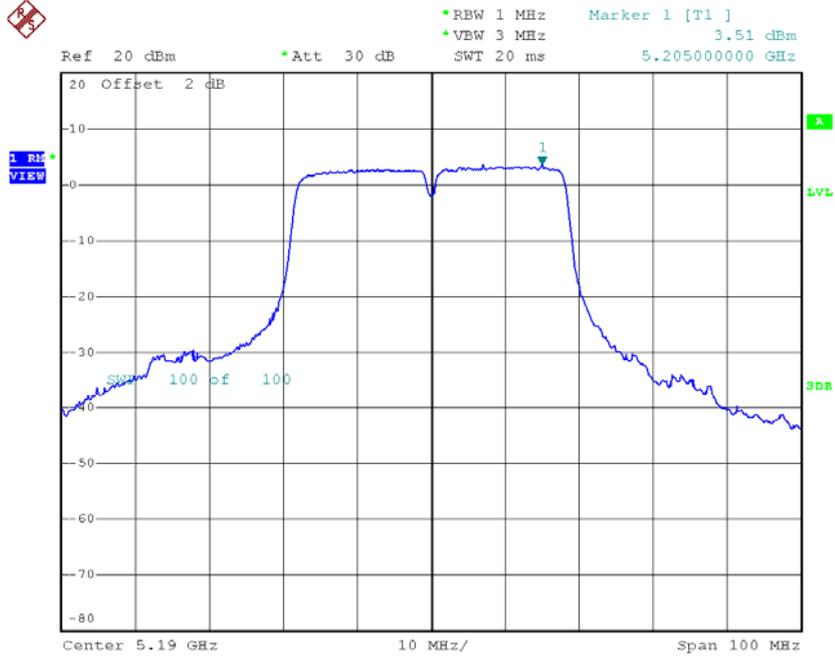

Date: 4.DEC.2015 08:27:46

CH46

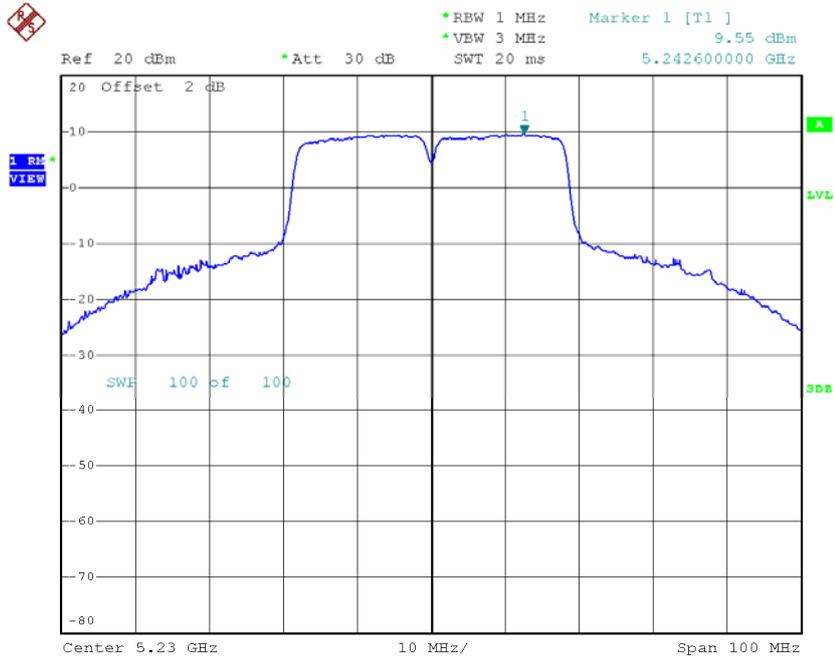

Date: 2.NOV.2015 18:15:14

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	8.43	17.00
CH46	5230	15.32	17.00

Test Mode: UNII-1/TX AC80 Mode_CH42_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	6.23	17.00


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.70	0.86	6.56	11.00
CH60	5300	5.78	0.86	6.64	11.00
CH64	5320	5.59	0.86	6.45	11.00

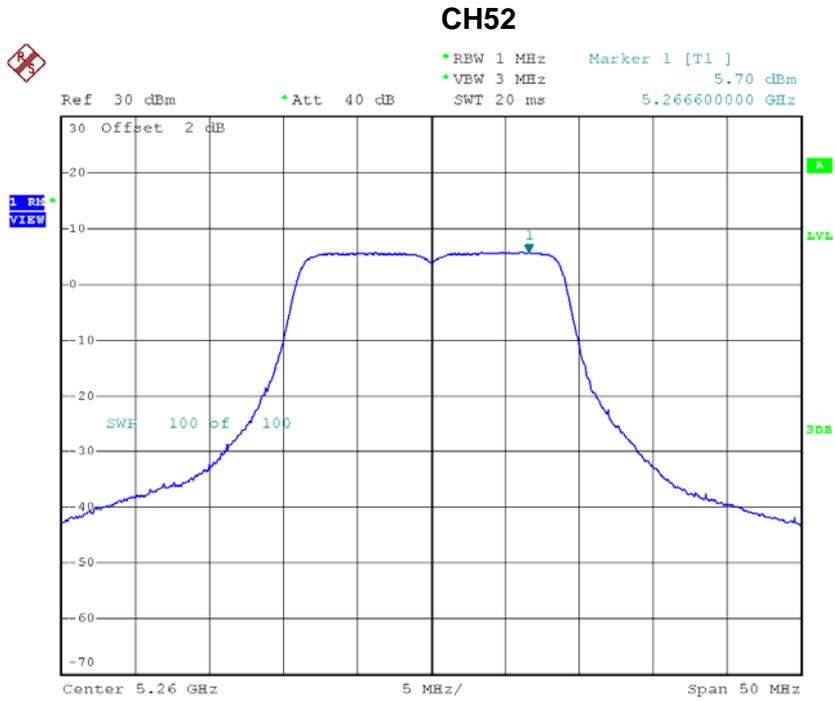


Date: 3.DEC.2015 15:08:10

CH60

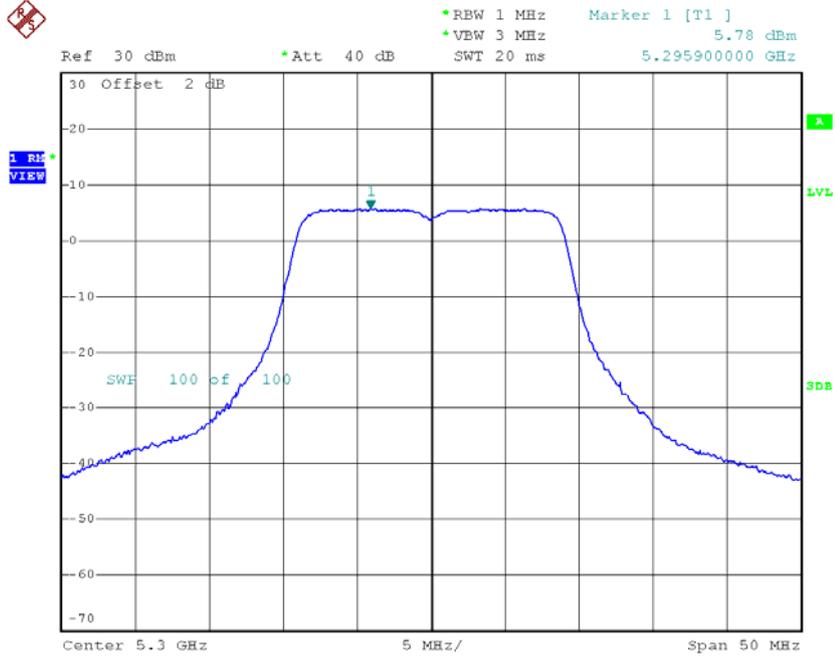

Date: 3.DEC.2015 15:10:08


CH64

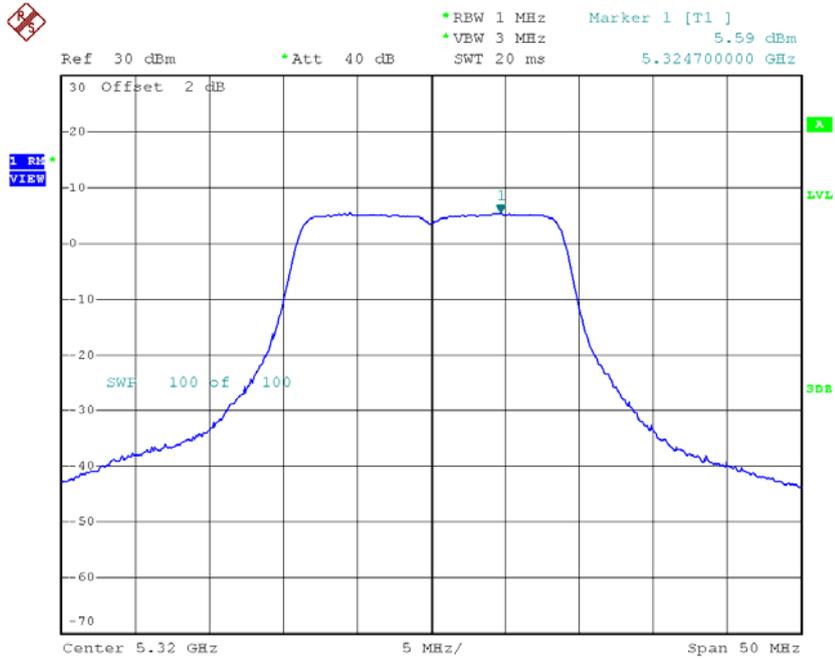

Date: 3.DEC.2015 15:12:02


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	6.90	0.86	7.76	11.00
CH60	5300	7.22	0.86	8.08	11.00
CH64	5320	6.74	0.86	7.60	11.00

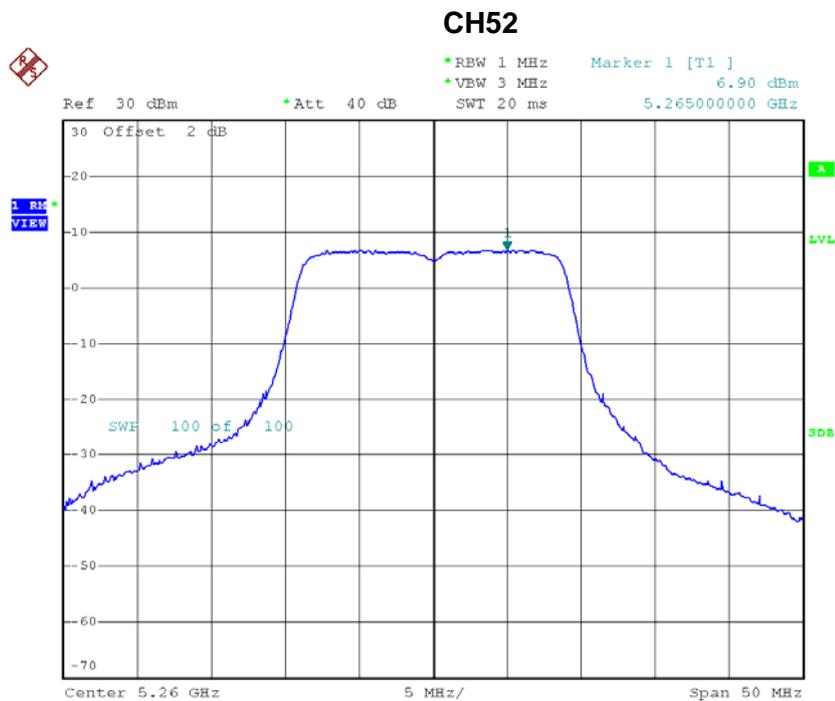


Date: 3.DEC.2015 15:07:42

CH60

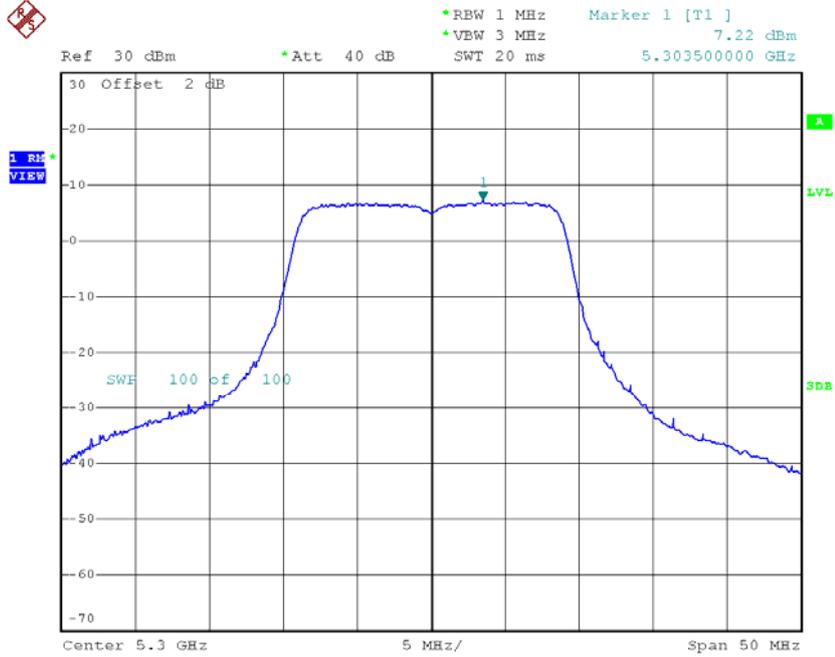

Date: 3.DEC.2015 15:09:41

CH64

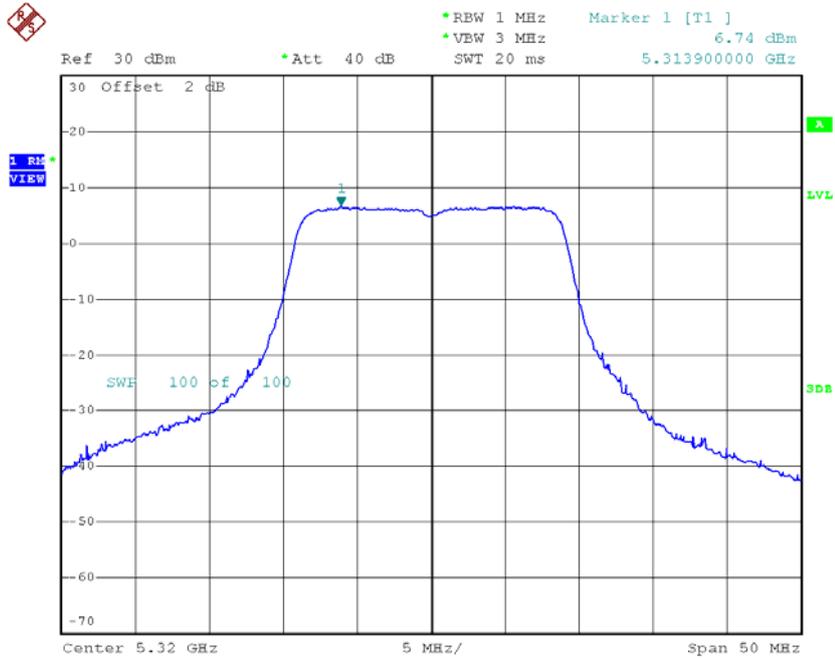

Date: 3.DEC.2015 15:11:39


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	10.21	11.00
CH60	5300	10.43	11.00
CH64	5320	10.07	11.00

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	3.47	2.91	6.38	11.00
CH62	5310	3.31	2.91	6.22	11.00

CH54

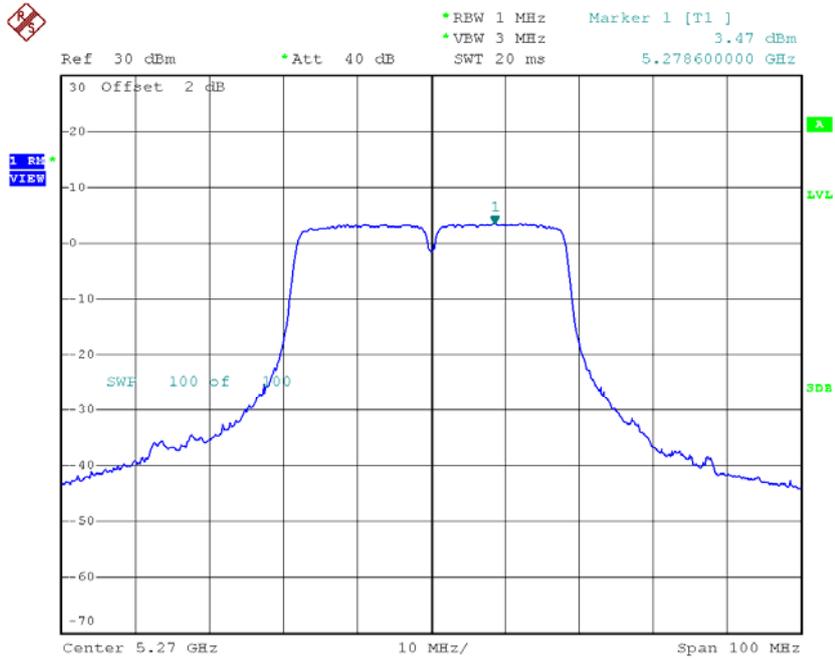

Date: 3.DEC.2015 15:22:33

CH62

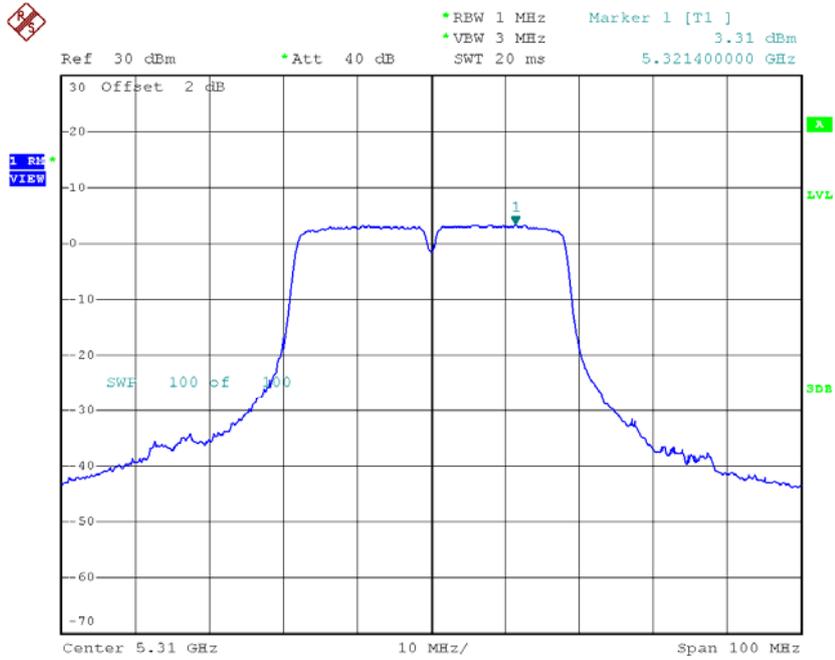


Date: 3.DEC.2015 15:25:48

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	4.41	2.91	7.32	11.00
CH62	5310	4.14	2.91	7.05	11.00

CH54

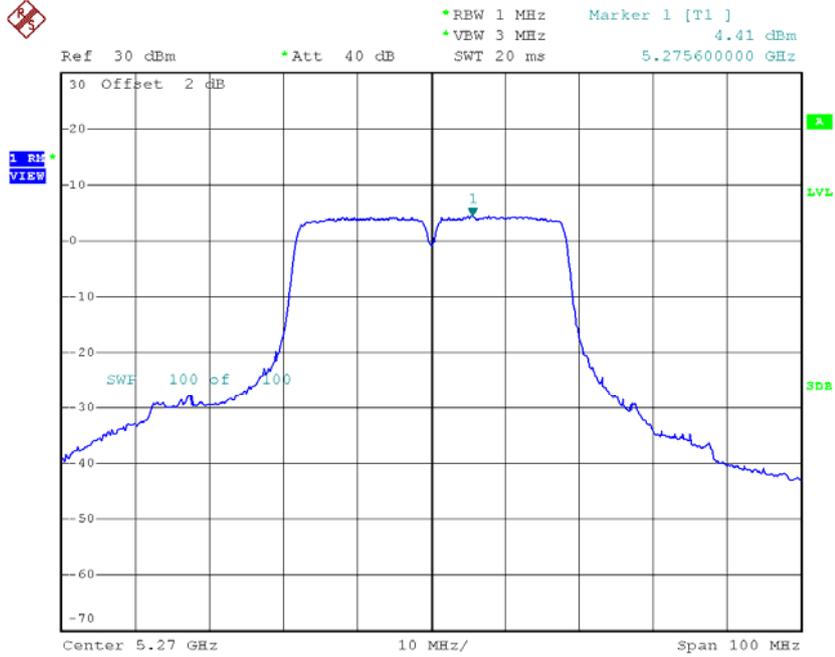

Date: 3.DEC.2015 15:22:10

CH62

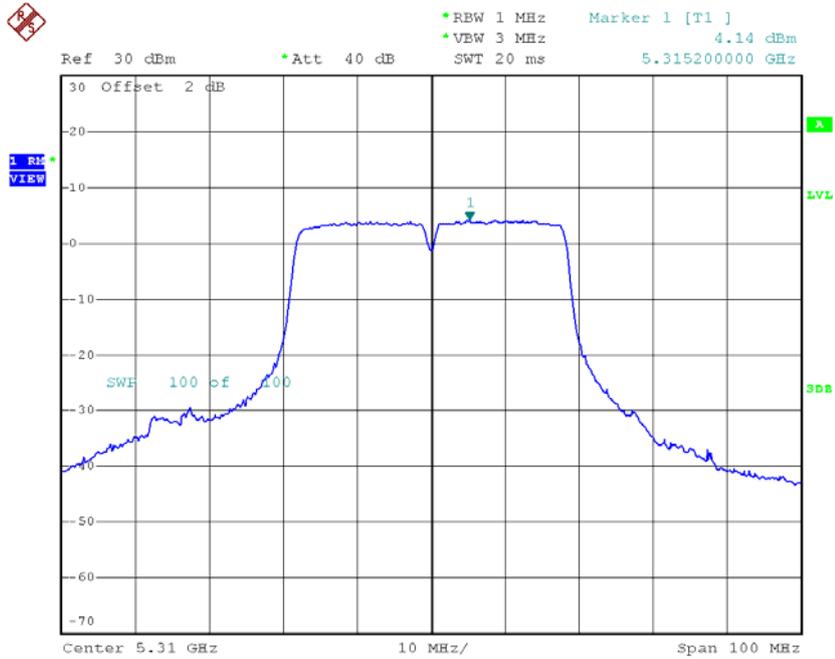


Date: 3.DEC.2015 15:25:12

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	9.89	11.00
CH62	5310	9.67	11.00

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	1.66	2.63	4.29	11.00

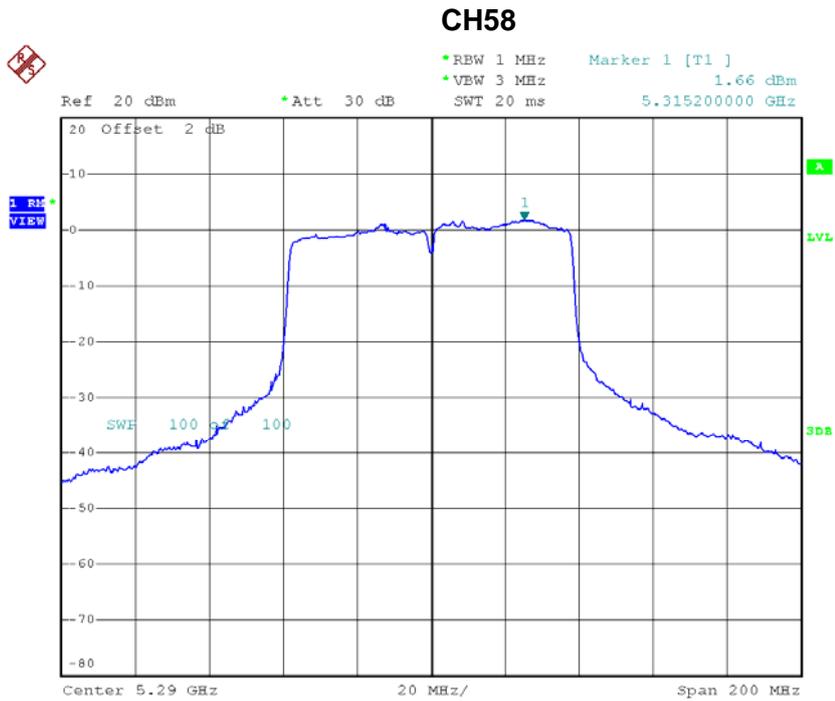

Date: 3.DEC.2015 17:55:12

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	2.24	2.63	4.87	11.00

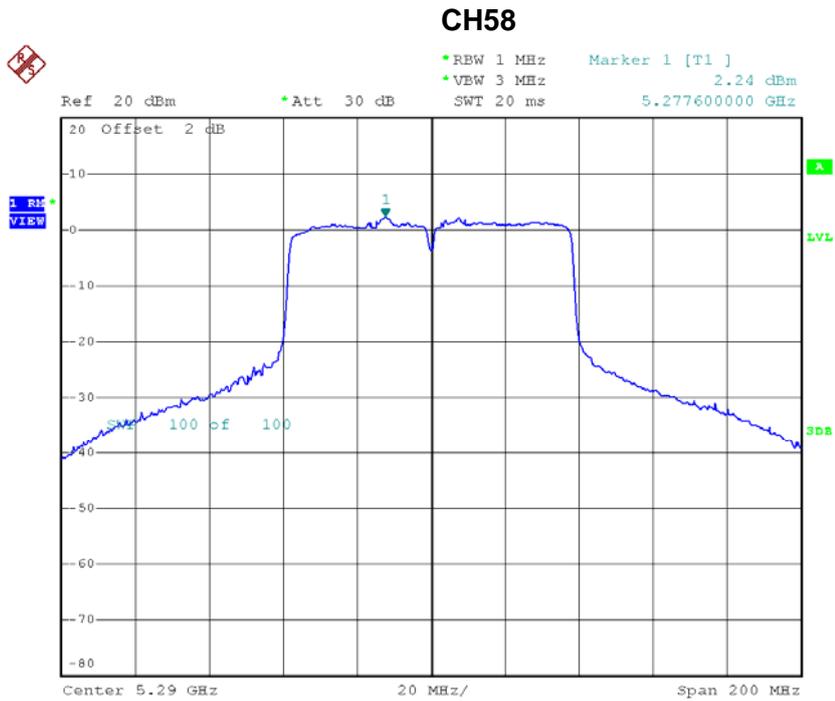

Date: 3.DEC.2015 17:55:51


Test Mode: UNII-2A/TX AC80 Mode_CH58_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	7.60	11.00

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	6.28	0.86	7.14	11.00
CH116	5580	6.53	0.86	7.39	11.00
CH140	5700	2.95	0.86	3.81	11.00

CH100

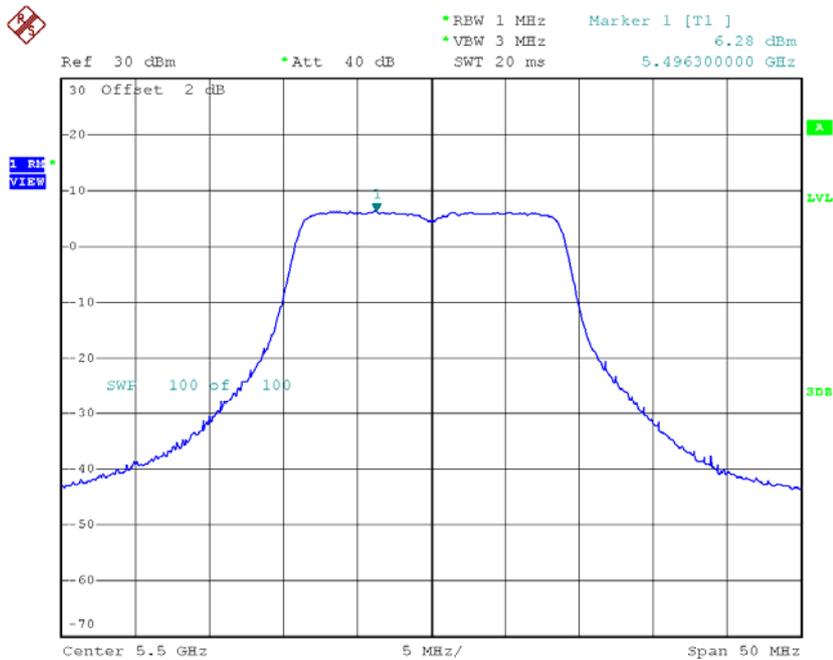


Date: 3.DEC.2015 15:14:29

CH116

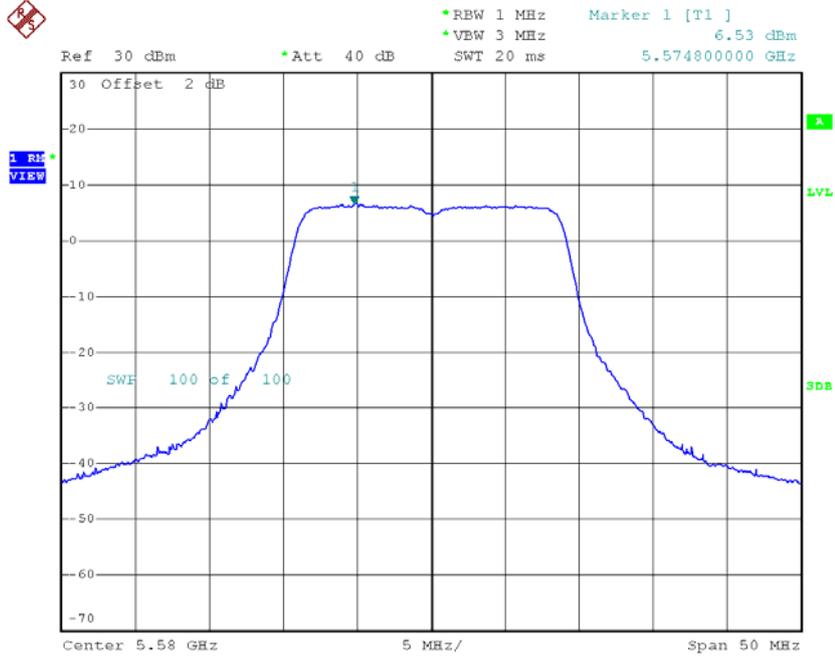

Date: 3.DEC.2015 15:16:32


CH140

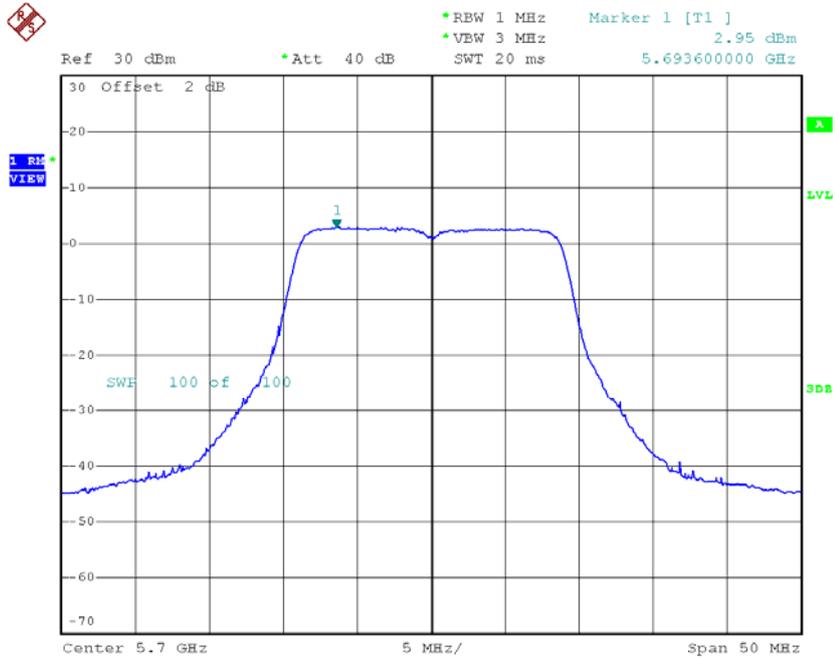

Date: 3.DEC.2015 15:18:20


Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	5.78	0.86	6.64	11.00
CH116	5580	7.03	0.86	7.89	11.00
CH140	5700	3.64	0.86	4.50	11.00

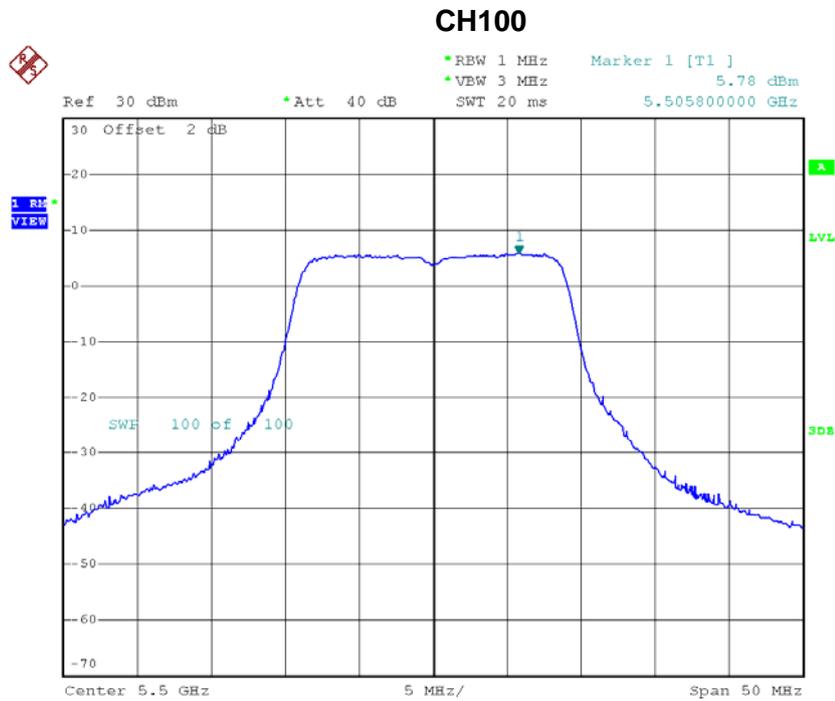


Date: 3.DEC.2015 15:14:51

CH116

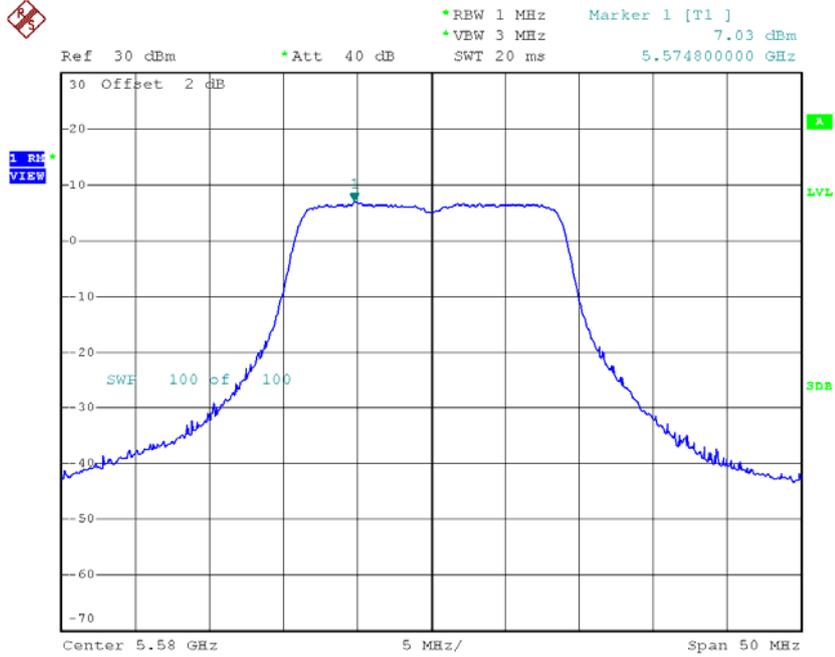

Date: 3.DEC.2015 15:16:07

CH140

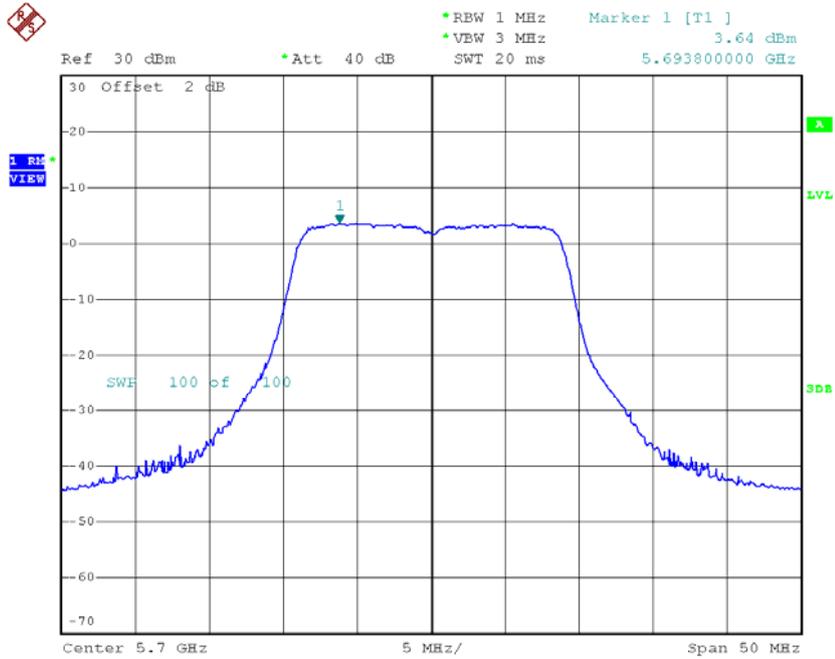

Date: 3.DEC.2015 15:18:45


Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	9.91	11.00
CH116	5580	10.66	11.00
CH140	5700	7.18	11.00

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	4.75	2.91	7.66	11.00
CH110	5550	4.76	2.91	7.67	11.00
CH134	5670	4.73	2.91	7.64	11.00

CH102

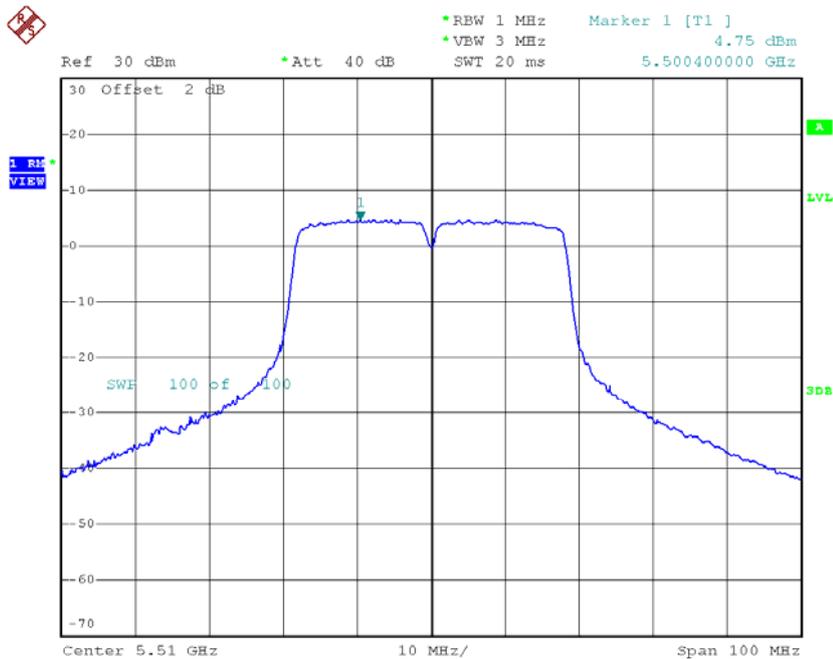


Date: 3.DEC.2015 15:27:24

CH110

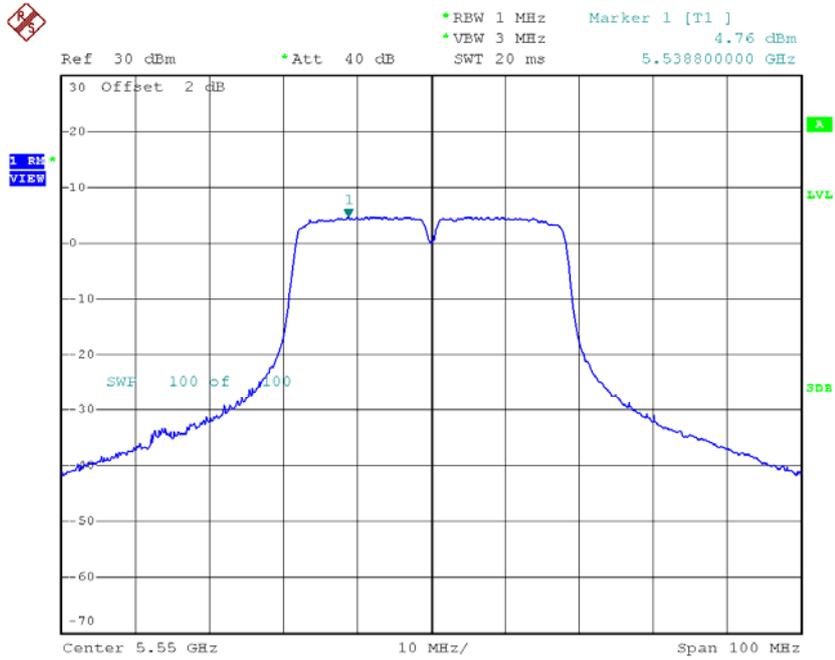

Date: 3.DEC.2015 15:29:10


CH134

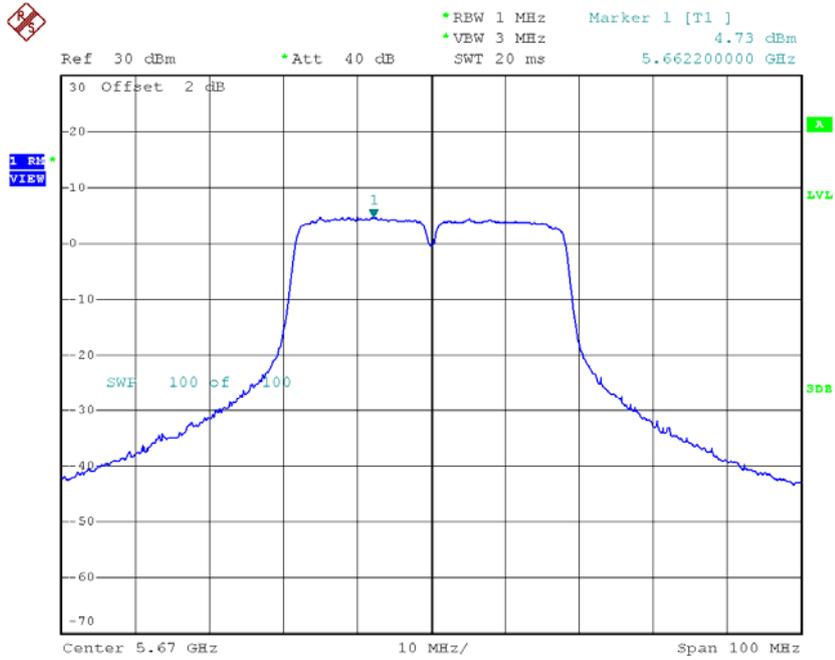

Date: 3.DEC.2015 15:30:27


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	4.64	2.91	7.55	11.00
CH110	5550	4.05	2.91	6.96	11.00
CH134	5670	4.77	2.91	7.68	11.00

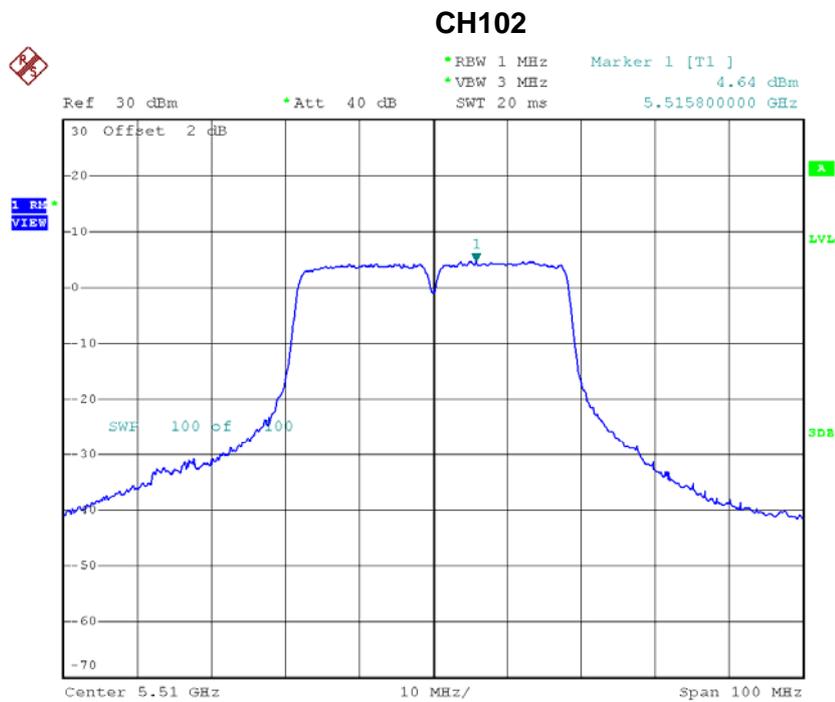


Date: 3.DEC.2015 15:27:01

CH110

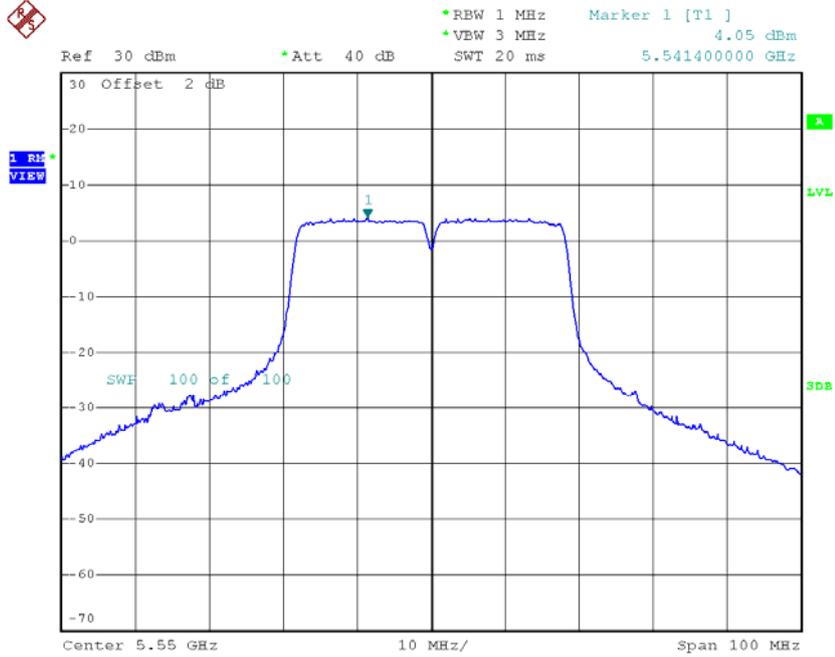

Date: 3.DEC.2015 18:17:31

CH134

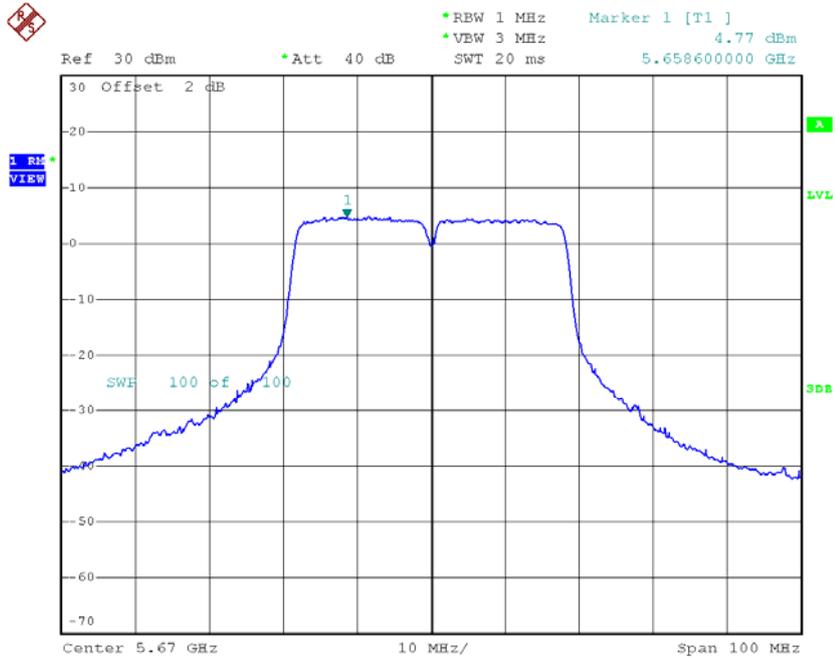

Date: 3.DEC.2015 15:29:52


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	10.62	11.00
CH110	5550	10.34	11.00
CH134	5670	10.67	11.00

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	1.99	2.63	4.62	11.00
CH122	5610	4.14	2.63	6.77	11.00

CH106

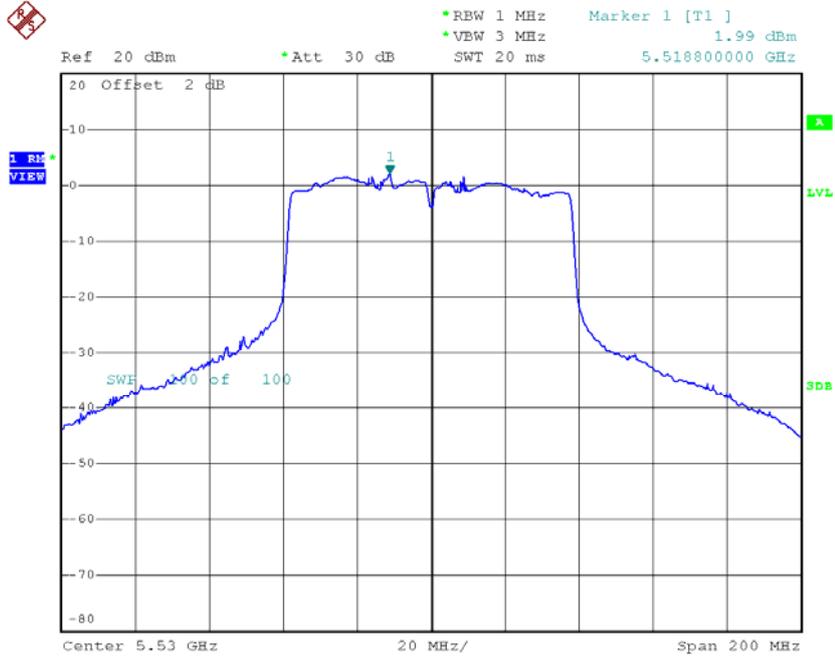

Date: 3.DEC.2015 17:58:12

CH122

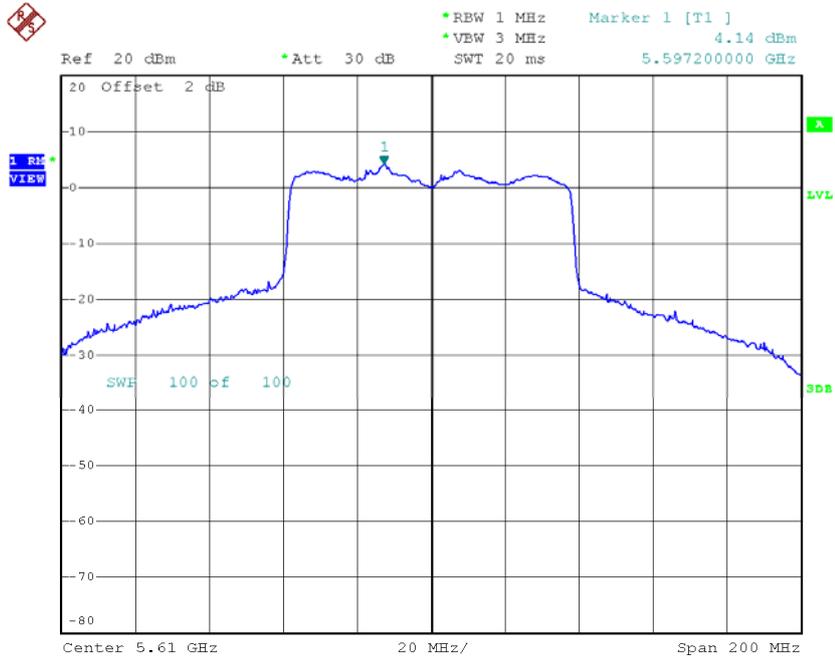


Date: 3.DEC.2015 17:59:07

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	0.73	2.63	3.36	11.00
CH122	5610	3.84	2.63	6.47	11.00

CH106

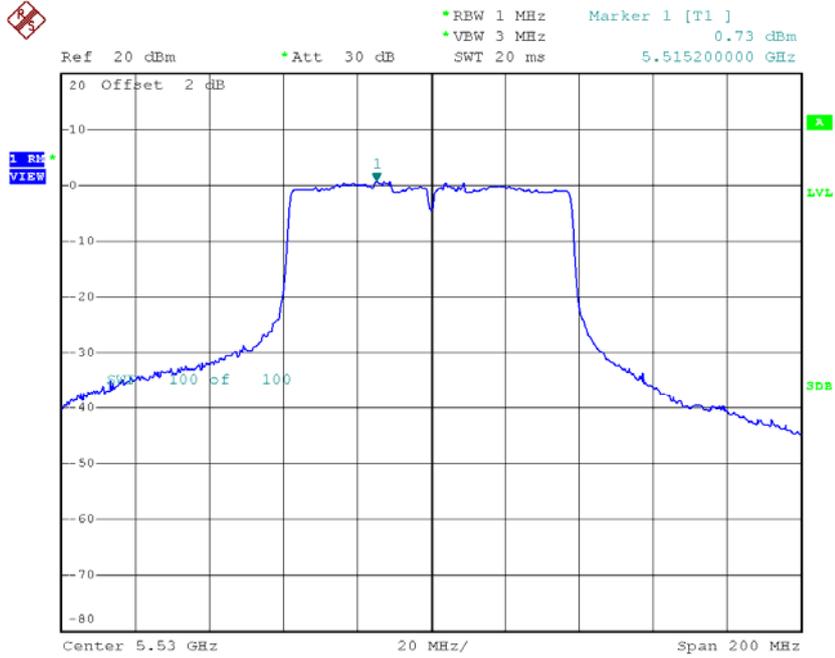

Date: 3.DEC.2015 17:57:36

CH122

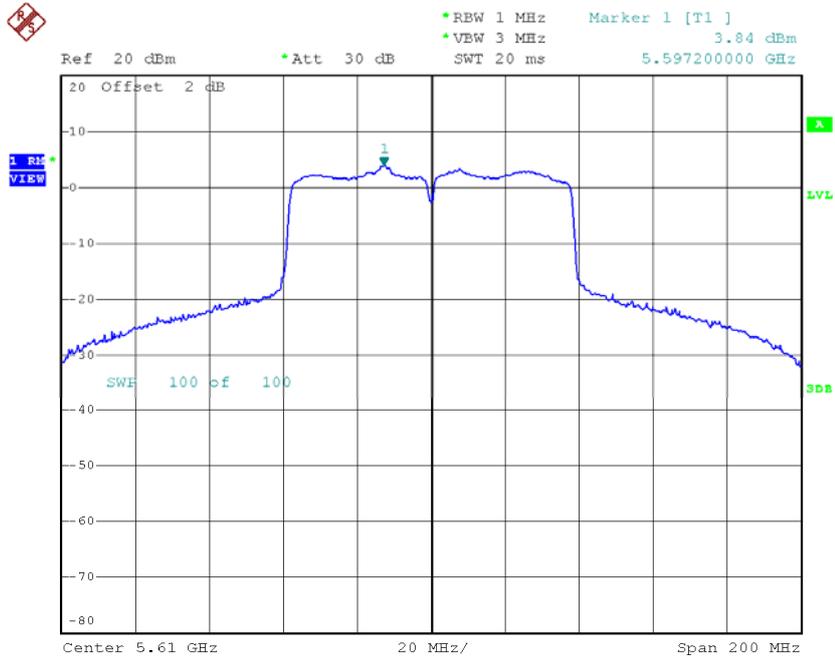

Date: 3.DEC.2015 17:59:49


Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	7.05	11.00
CH122	5610	9.63	11.00

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	4.40	0.86	5.26	30.00
CH157	5785	8.96	0.86	9.82	30.00
CH165	5825	5.92	0.86	6.78	30.00

TX CH149

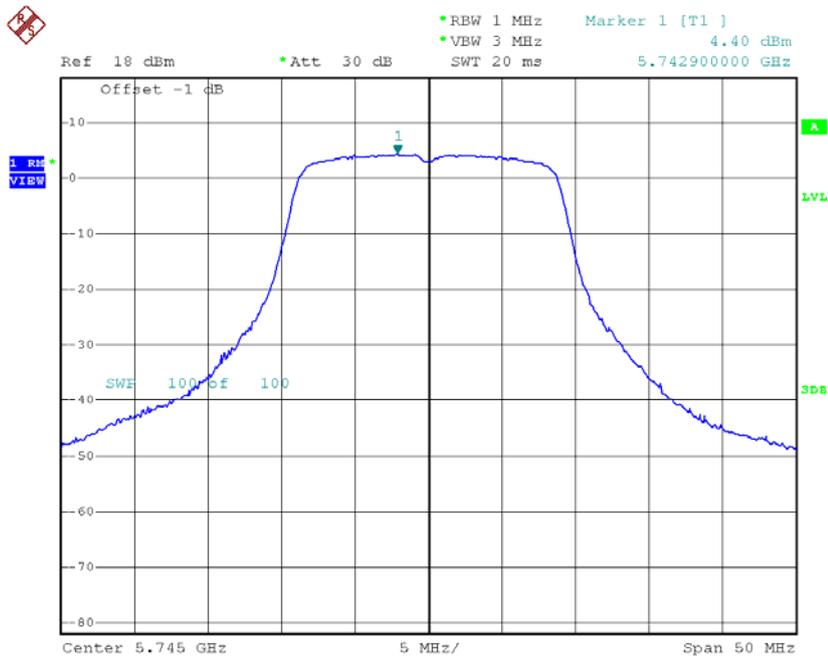


Date: 2.NOV.2015 18:36:10

TX CH157

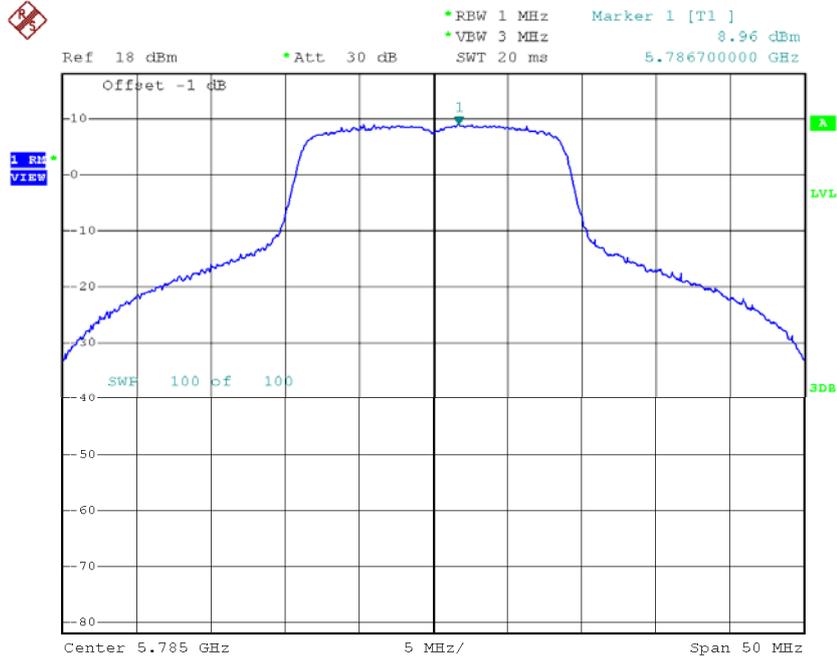

Date: 2.NOV.2015 18:36:36

TX CH165

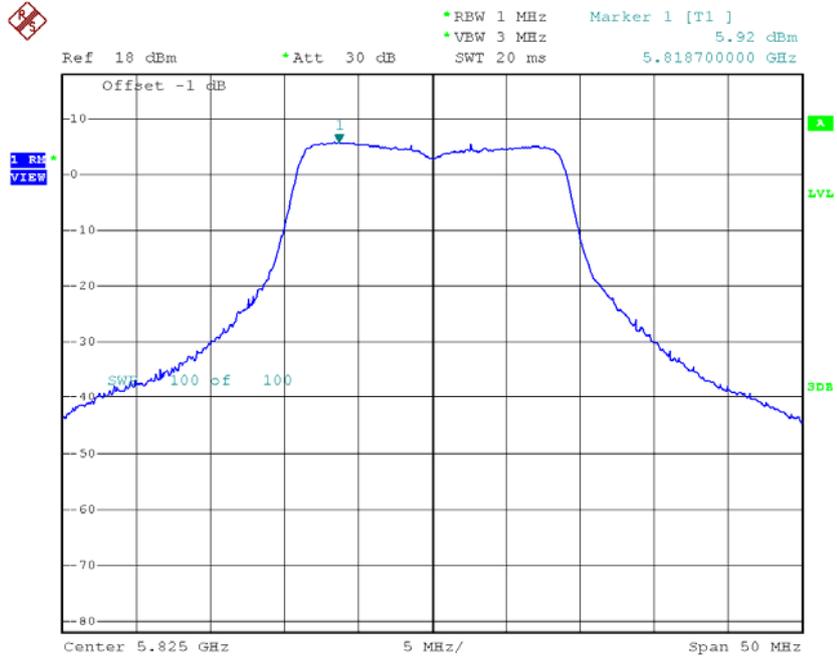

Date: 2.NOV.2015 18:37:03


Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	8.36	30.00
CH157	5785	12.84	30.00
CH165	5825	9.55	30.00

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	3.12	2.91	6.03	30.00
CH159	5795	3.63	2.91	6.54	30.00

TX CH151

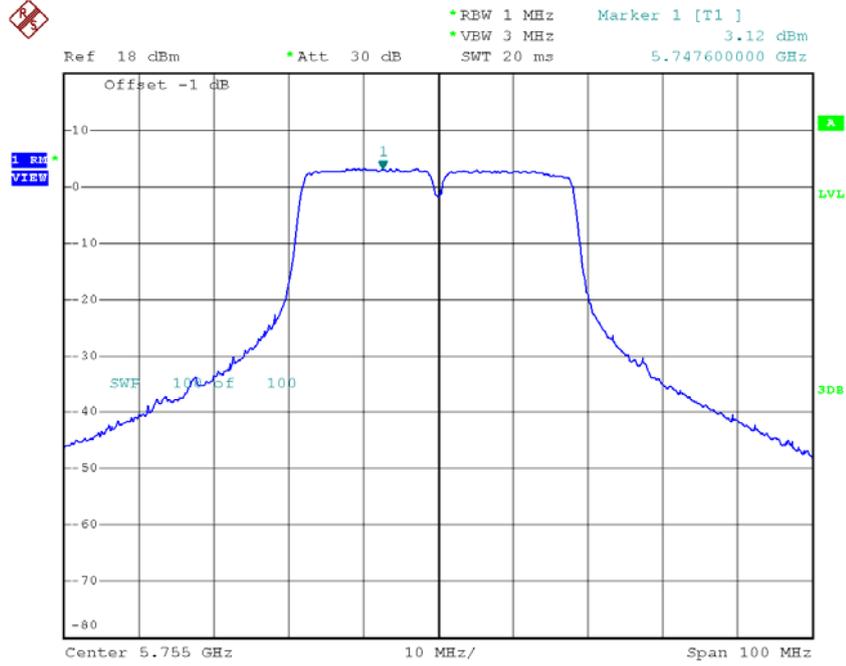

Date: 3.DEC.2015 18:30:52

TX CH159

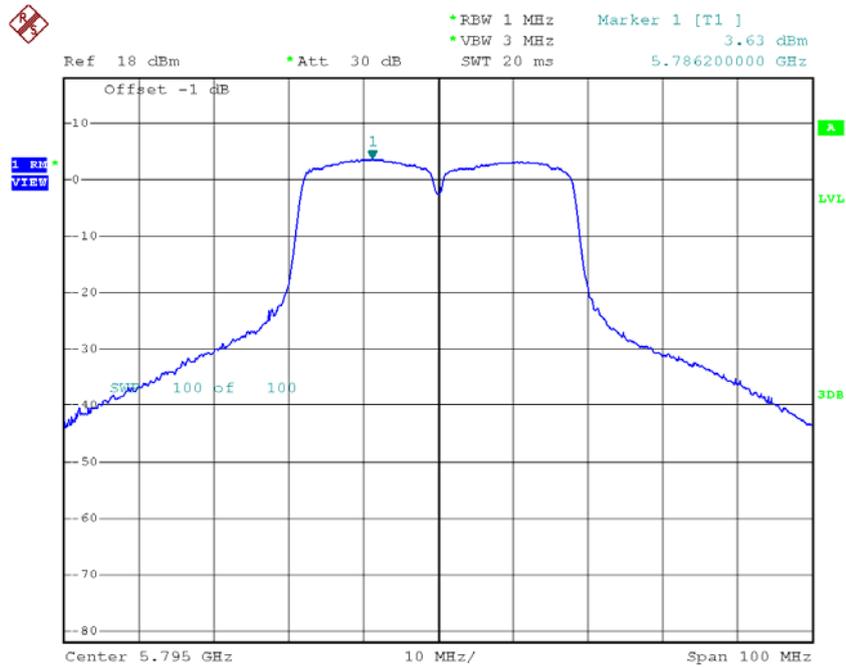


Date: 2.NOV.2015 18:13:37

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	3.99	2.91	6.90	30.00
CH159	5795	3.32	2.91	6.23	30.00

TX CH151

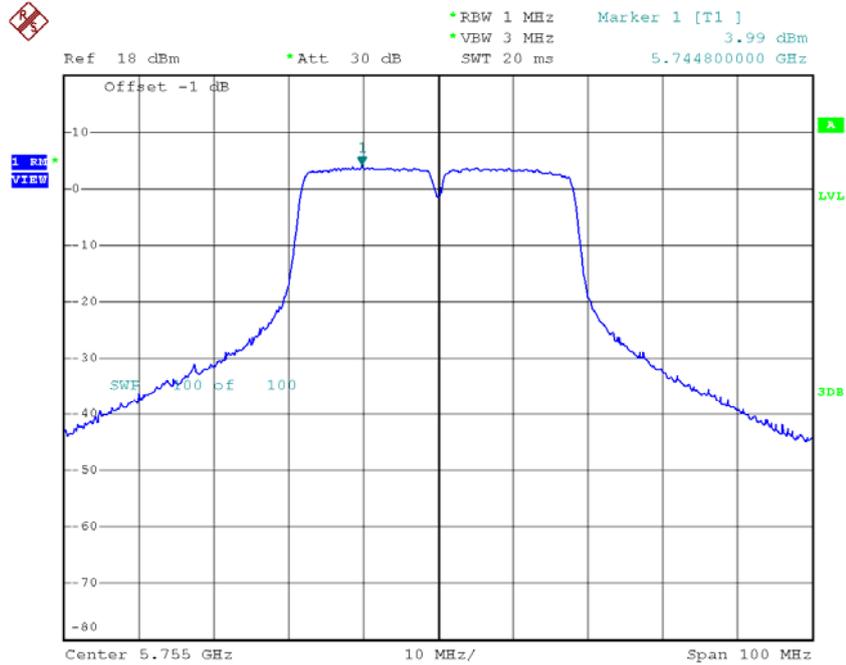

Date: 3.DEC.2015 18:30:13

TX CH159

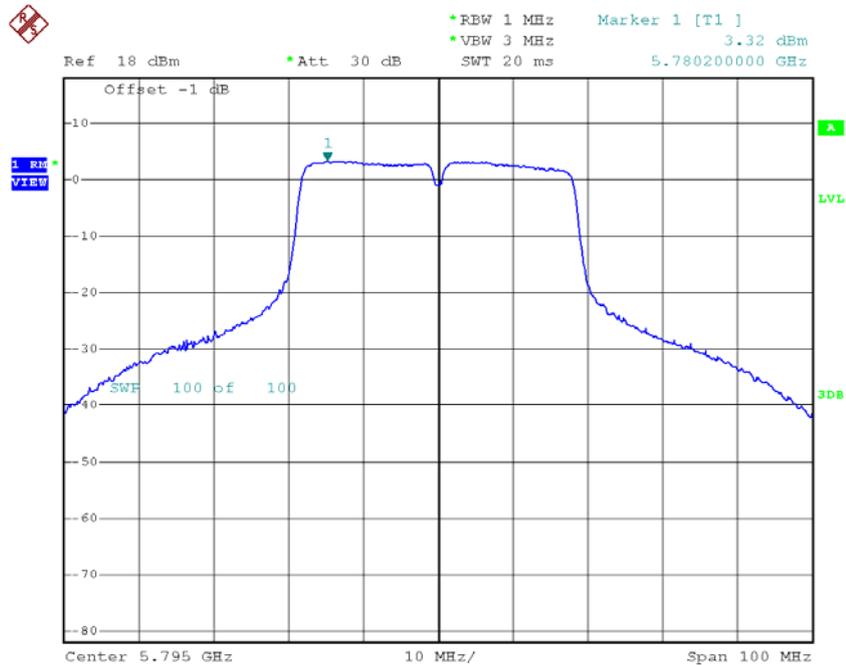

Date: 2.NOV.2015 18:19:55


Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	9.50	30.00
CH159	5795	9.40	30.00

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-1.21	2.63	1.42	30.00

TX CH155

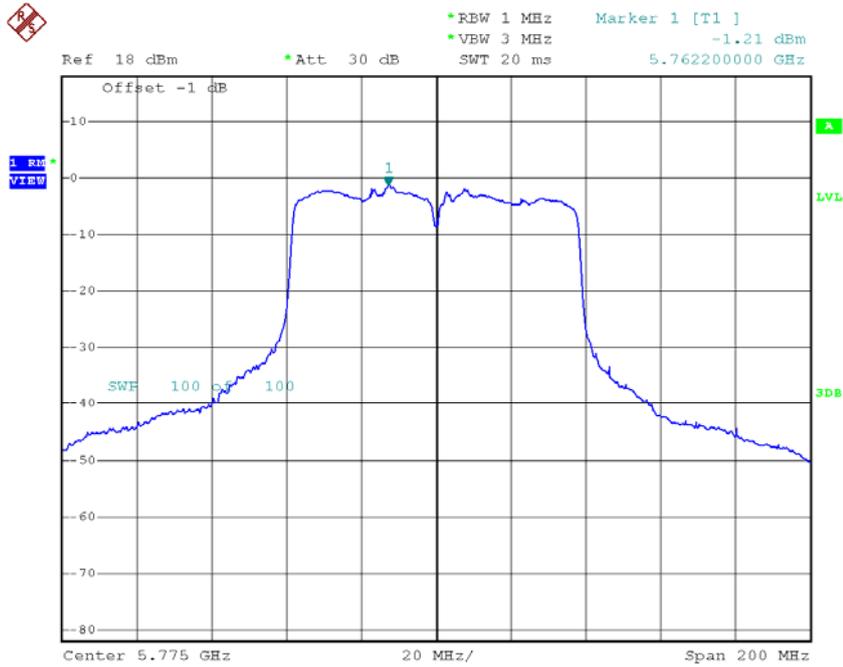


Date: 3.DEC.2015 18:02:14

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-1.18	2.63	1.45	30.00

TX CH155

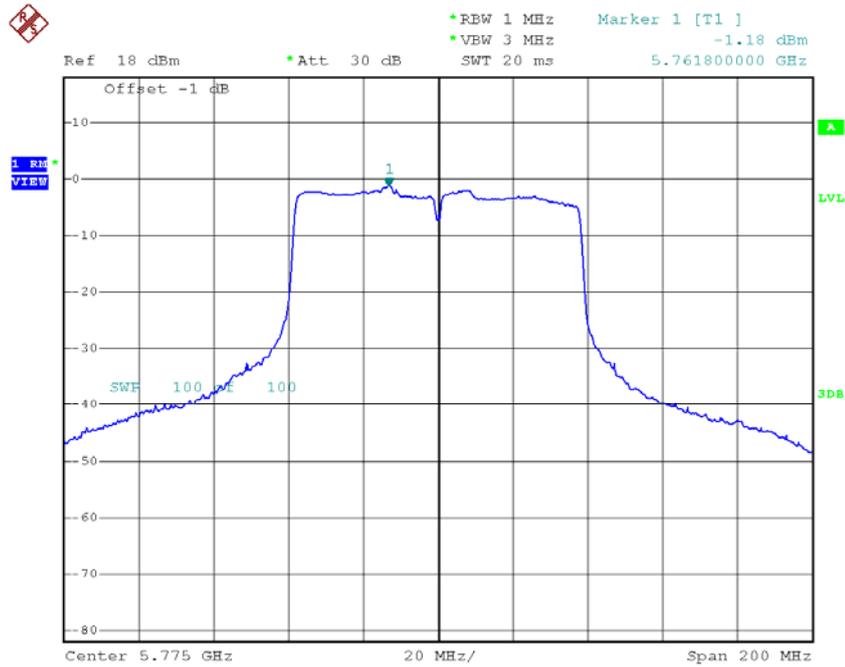

Date: 3.DEC.2015 18:01:35

Test Mode: UNII-3/ TX AC80 Mode_CH155_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	4.45	30.00

ATTACHMENT I - FREQUENCY STABILITY

Test Mode:	UNII-1
-------------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5180.0064
120	5180.0076
108	5180.0080
Max. Deviation (MHz)	0.0080
Max. Deviation (ppm)	1.5444

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5180.0000
-5	5180.0076
5	5180.0080
15	5180.0084
25	5180.0084
35	5180.0080
40	5180.0088
Max. Deviation (MHz)	0.0088
Max. Deviation (ppm)	1.6988

Test Mode:	UNII-2A
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5260.0096
120	5260.0084
108	5260.0096
Max. Deviation (MHz)	0.0096
Max. Deviation (ppm)	1.8251

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5260.0000
-5	5260.0092
5	5260.0092
15	5260.0092
25	5260.0096
35	5260.0100
40	5260.0100
Max. Deviation (MHz)	0.0104
Max. Deviation (ppm)	1.9772

Test Mode:	UNII-2C
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5500.0112
120	5500.0104
108	5500.0104
Max. Deviation (MHz)	0.0112
Max. Deviation (ppm)	2.0364

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5500.0000
-5	5500.0104
5	5500.0100
15	5500.0120
25	5500.0100
35	5500.0108
40	5500.0116
Max. Deviation (MHz)	0.0120
Max. Deviation (ppm)	2.1818

Test Mode:	UNII-3
-------------------	---------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5745.0132
120	5745.0124
108	5745.0120
Max. Deviation (MHz)	0.0132
Max. Deviation (ppm)	2.2977

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5745.0000
-5	5745.0116
5	5745.0112
15	5745.0132
25	5745.0108
35	5745.0116
40	5745.0124
Max. Deviation (MHz)	0.0132
Max. Deviation (ppm)	2.2977