

Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information											
Brand	ODM		****End product model name			Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)		
ASUS	Inventec		FX707V, FX707VI, FX707VV, FX707VU, FX707VJ, FX707ZI, FX707ZV, FX707ZU, FX707ZJ, FX707VI4, FX707VV4, FX707VU4, FX707VJ4, FX707ZI4, FX707ZV4, FX707ZU4, FX707ZJ4, TUF767, TUF767V, TUF767VI, TUF767VV, TUF767VU, TUF767VJ, TUF767ZI, TUF767ZV, TUF767ZU, TUF767ZJ, TUF767VI4, TUF767VV4, TUF767VU4, TUF767VJ4, TUF767ZI4, TUF767ZV4, TUF767ZU4, TUF767ZJ4, TUF707, TUF707V, TUF707VI, TUF707VV, TUF707VU, TUF707VJ, TUF707ZI, TUF707ZV, TUF707ZU, TUF707ZJ, TUF707VI4, TUF707VV4, TUF707VU4, TUF707VJ4, TUF707ZI4, TUF707ZV4, TUF707ZU4, TUF707ZJ4			Yes	Regular NB		10.02		
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.											
Antenna information											
Vendor		Type			Antenna Part number (Main)			Antenna Part number (Aux)			
AWAN		PIFA			6036B0336401 (AYP6Y-200056)			6036B0336401 (AYP6Y-200056)			
Peak gain w/ cable loss (dBi)*											
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	2.55	3.27	2.84	4.29	3.46	3.15	NA	NA	NA	NA	
Aux	2.29	2.88	3.06	3.81	3.7	3.64	NA	NA	NA	NA	
Intel Reference Gain/Type/ Separation distance											
Antenna Type	Antenna Peak gain (In dBi)*										Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59	
Dipole	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34	

Notes (marked with *)

*** SAR minimum separation (mm)**

- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)

*** 3D Peak Antenna gain should be equal or greater than -2 dBi**

- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list

3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)


1. Applicable test methods

This test report is prepared for host antenna testing under a Full Anechoic Chamber.

2. Test & System Description

a. Test setup

Radiated Setup 0.6 GHz - 10 GHz

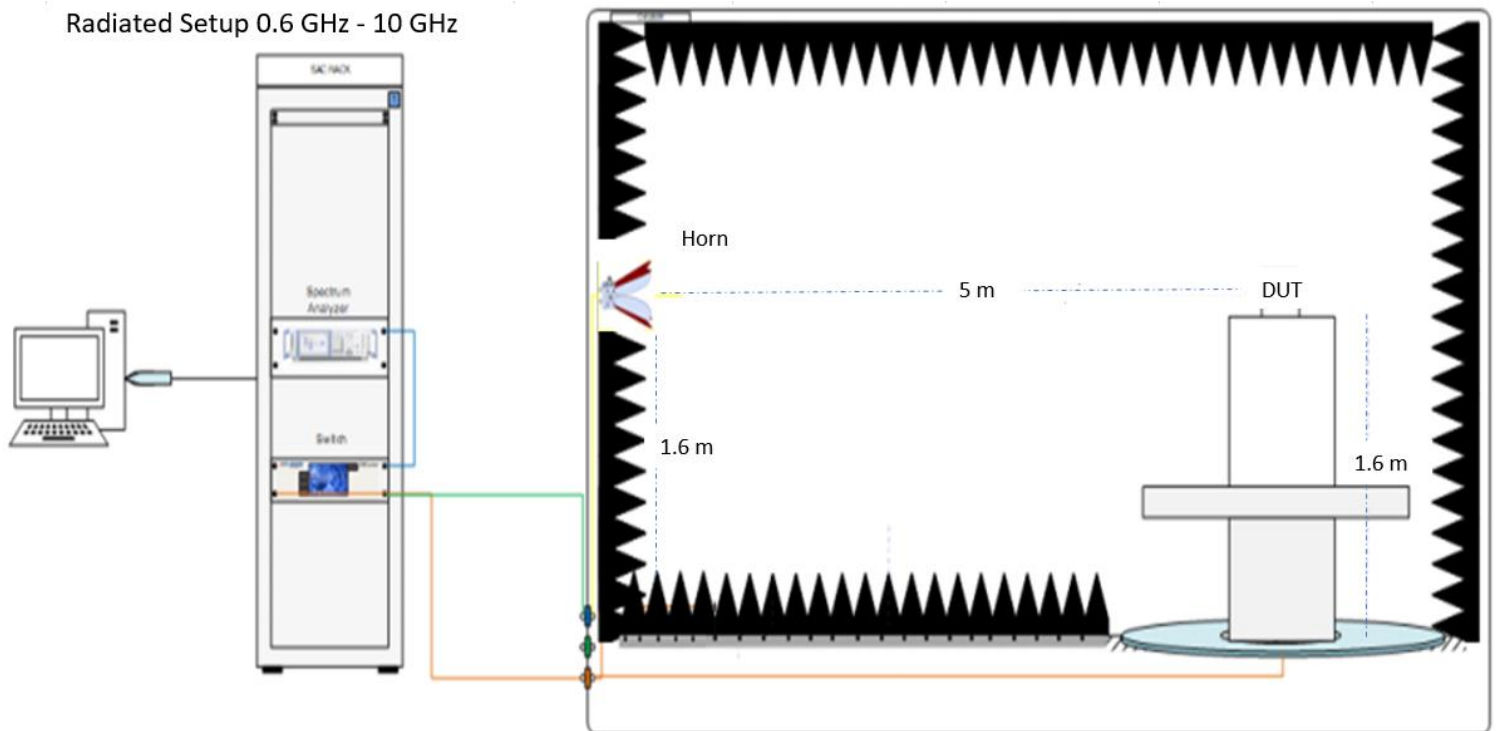

b. Equipment list

Device	Type/Module	Serial#	Manufacturer	Cal. Date	Cal. Due Date
Anechoic Chamber	AMS-8500	1047	ETS-Lindgren	2022/1/21	2023/7/22
Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
Rotate controller	2090	SN 00035073	ETS-Lindgren	N/A	N/A
Horn Antenna	HAD-0710	111025-02	Bwant	2021/5/16	2023/5/16
Vector Network Analyzer	E5071C	MY46733781	Keysight	2022/1/21	2023/1/21
Cable 40cm 18 GHz	201EH012010400	201EH012010400#1	Jmtt	2022/3/27	2023/3/27
Cable 6m 18 GHz	201EH012016000	201EH012016000#3	Jmtt	2022/3/27	2023/3/27
Cable 6m 18 GHz	201EH012016000	201EH012016000#5	Jmtt	2022/3/27	2023/3/27
Cable 3.5m 18 GHz	201EH012013500	201EH012013500#3	Jmtt	2022/3/27	2023/3/27
Cable 1.5m 18 GHz	201EH012011500	201EH012011500#2	Jmtt	2022/3/27	2023/3/27

3. Setup photo



Antenna Information

Section 1. Antenna Assembly Specifications

1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
(P/N: xxxxxx) Main Antenna	Example: Intel Corporation	Example: Folded Dipole or PIFA	Example: (P/N: U.FL-2LP-XXX) 50 ohm Coaxial length: 22cm diameter: 1.1mm	2400-2483.5	2.55	3.06	2	0.51
				5150-5250	3.27	4.08	2	0.81
				5250-5350	2.84	3.65	2	0.81
				5470-5725	4.29	5.11	2	0.82
				5725-5850	3.46	4.31	2	0.85
				5850-5895	3.15	4	2	0.85
				5925-6425	NA	NA	NA	NA
				6425-6525	NA	NA	NA	NA
				6525-6875	NA	NA	NA	NA
				6875-7125	NA	NA	NA	NA
(P/N: xxxxxx) Aux Antenna	Example: Intel Corporation	Example: Folded Dipole or PIFA	Example: (P/N: U.FL-2LP-XXX) 50 ohm Coaxial length: 22cm diameter: 1.1mm	2400-2483.5	2.29	2.82	2	0.53
				5150-5250	2.88	3.74	2	0.86
				5250-5350	3.06	3.92	2	0.86
				5470-5725	3.81	4.67	2	0.86
				5725-5850	3.7	4.59	2	0.89
				5850-5895	3.64	4.53	2	0.89
				5925-6425	NA	NA	NA	NA
				6425-6525	NA	NA	NA	NA
				6525-6875	NA	NA	NA	NA
				6875-7125	NA	NA	NA	NA


- 3D Antenna Peak Gain required being test in system basis.

Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.55

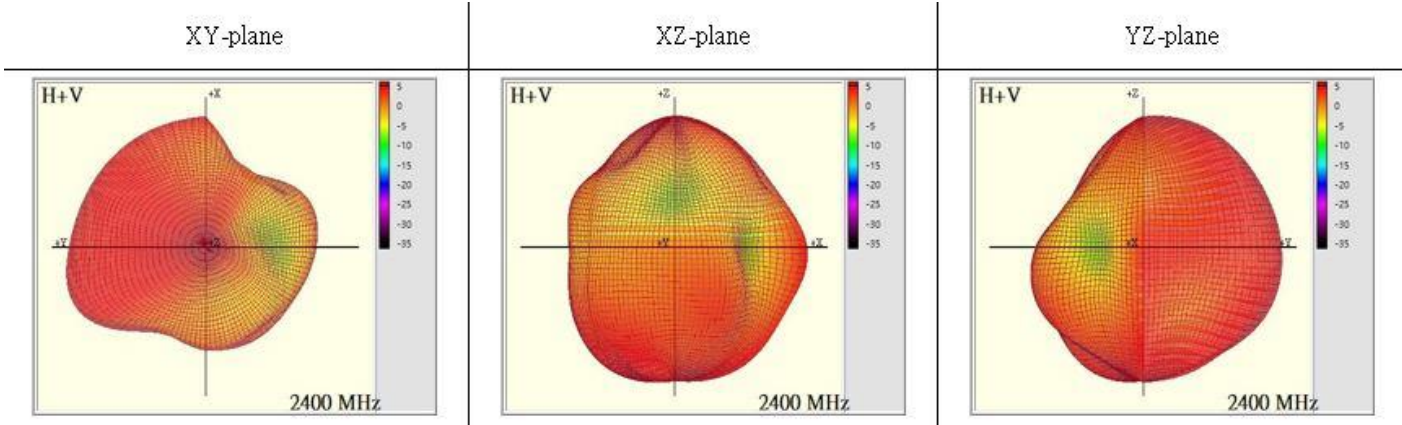


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	3.27

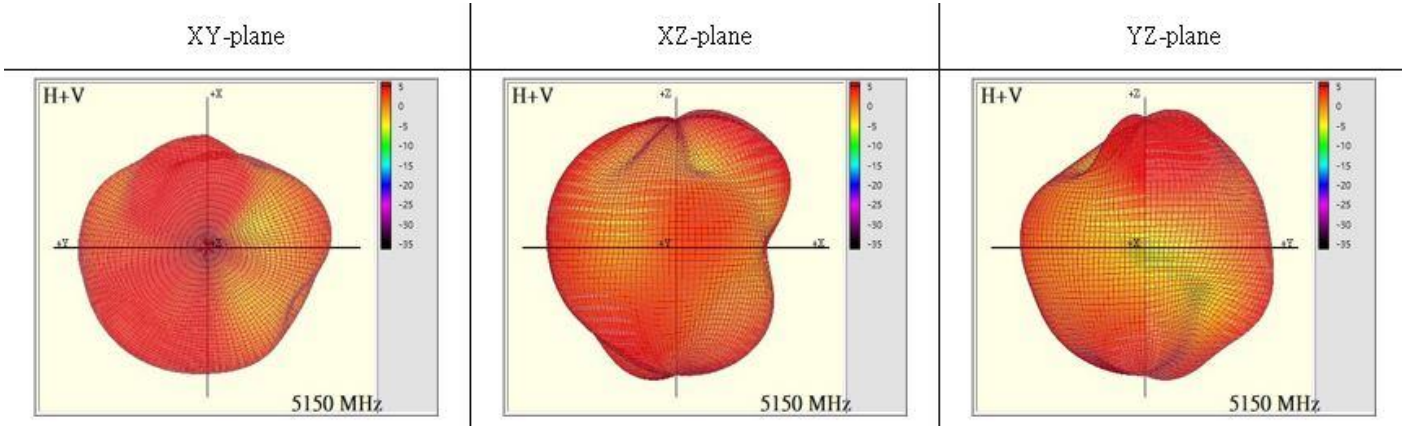


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.84

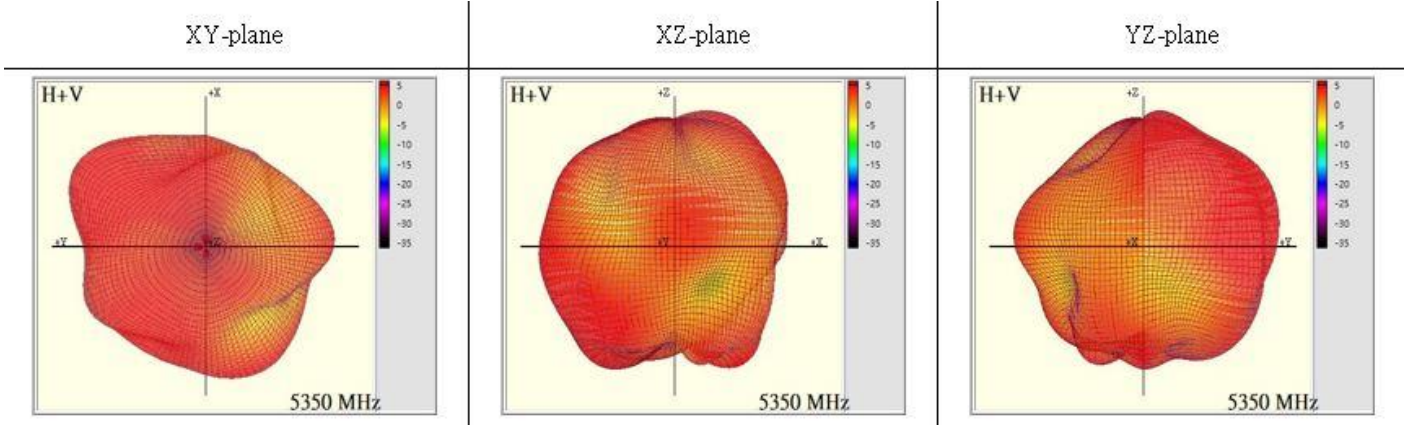


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	4.29

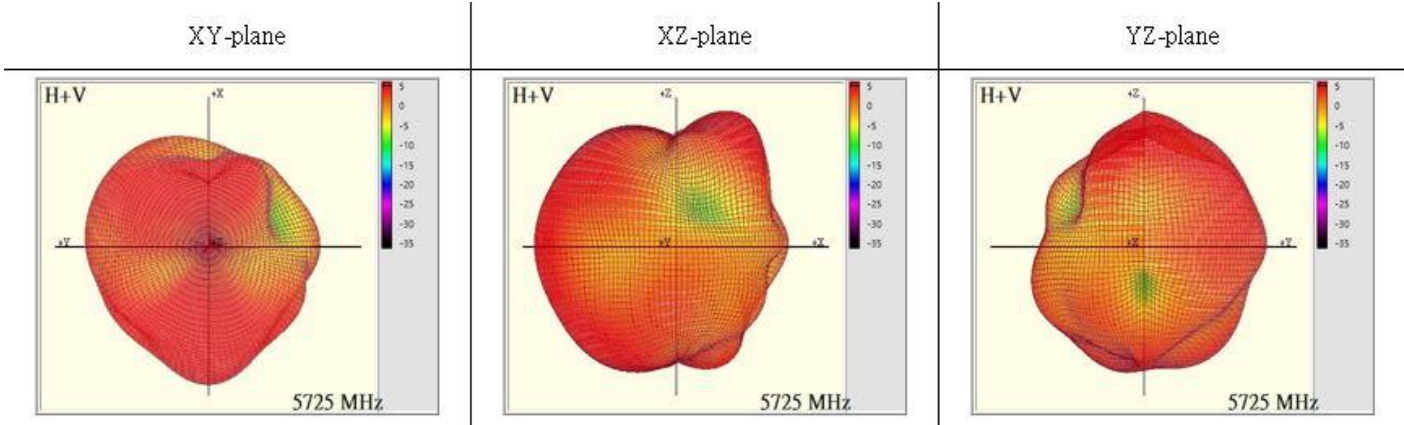


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.46

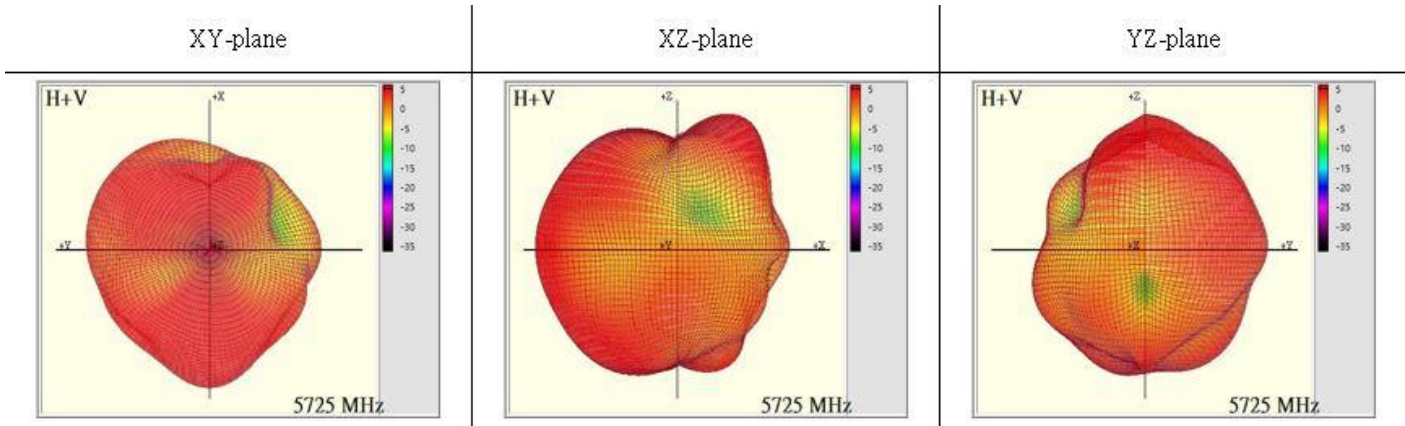

Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	3.15

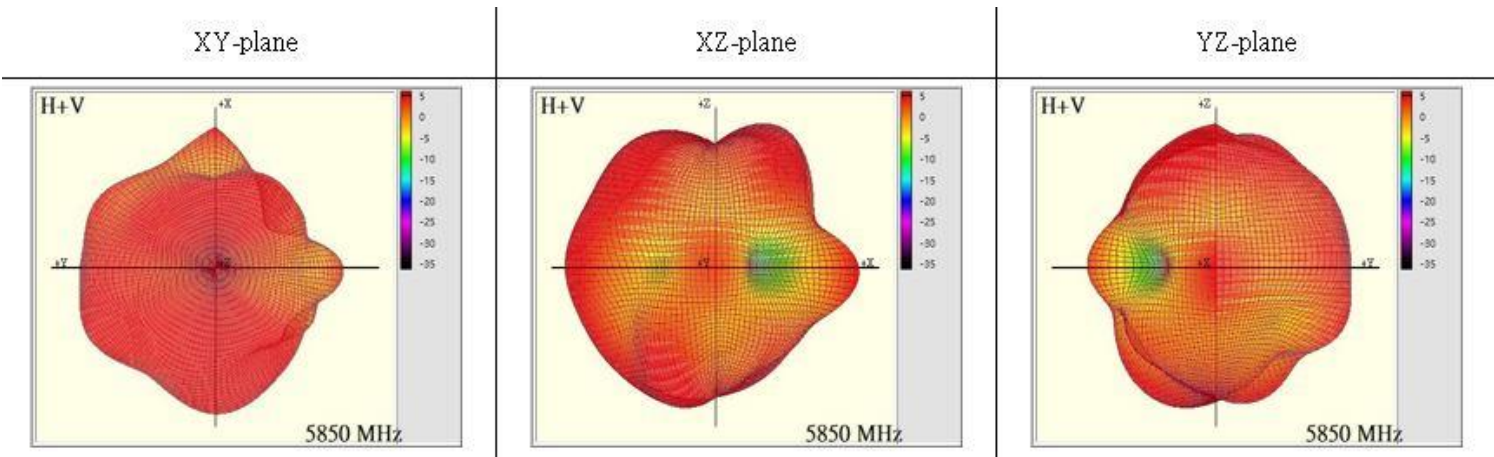

Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	NA

Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	NA

Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	NA


Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	NA

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.29

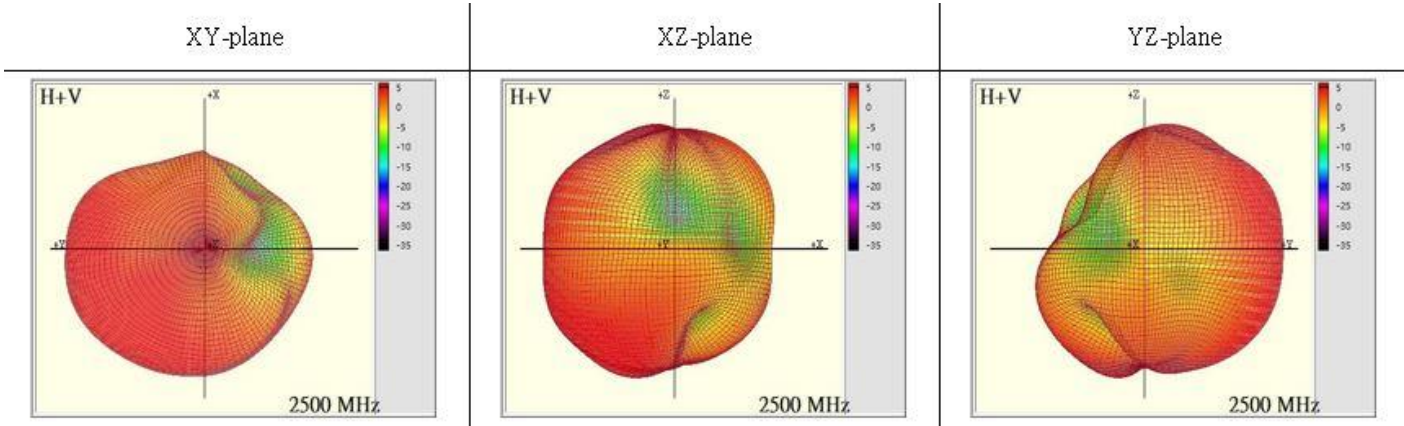


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.88

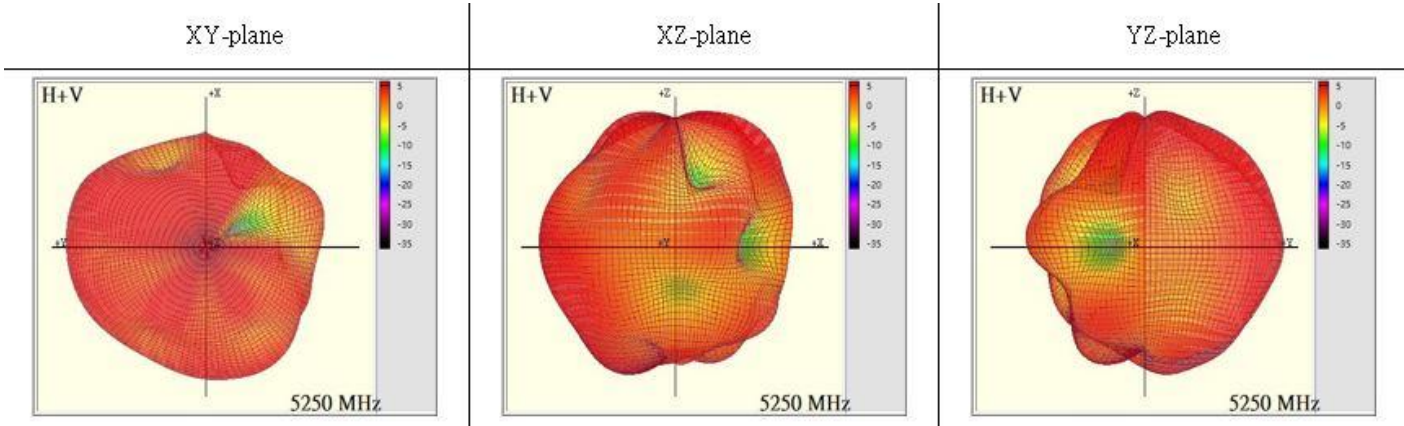


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	3.06

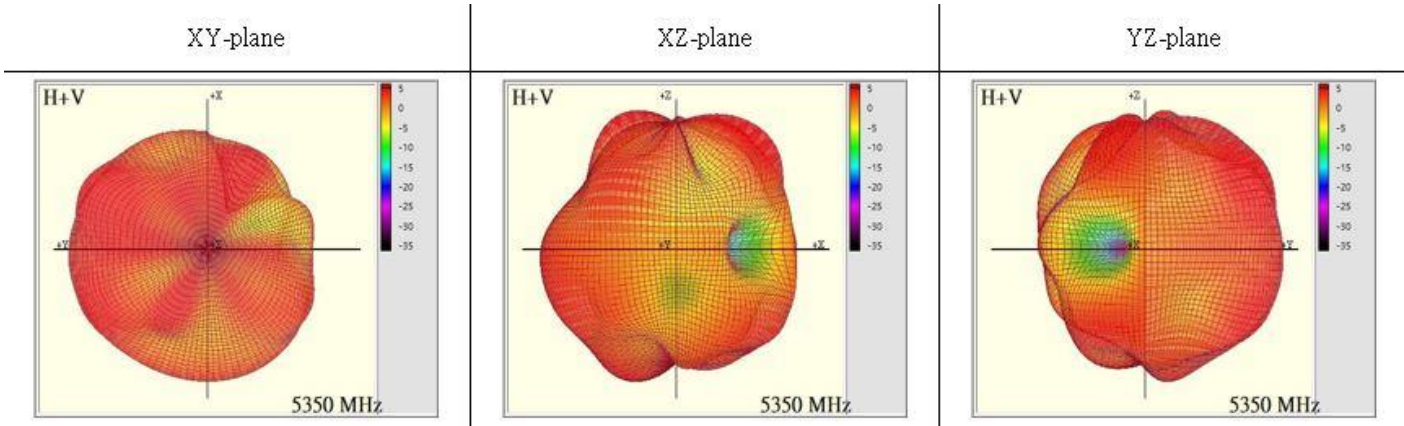


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	3.81

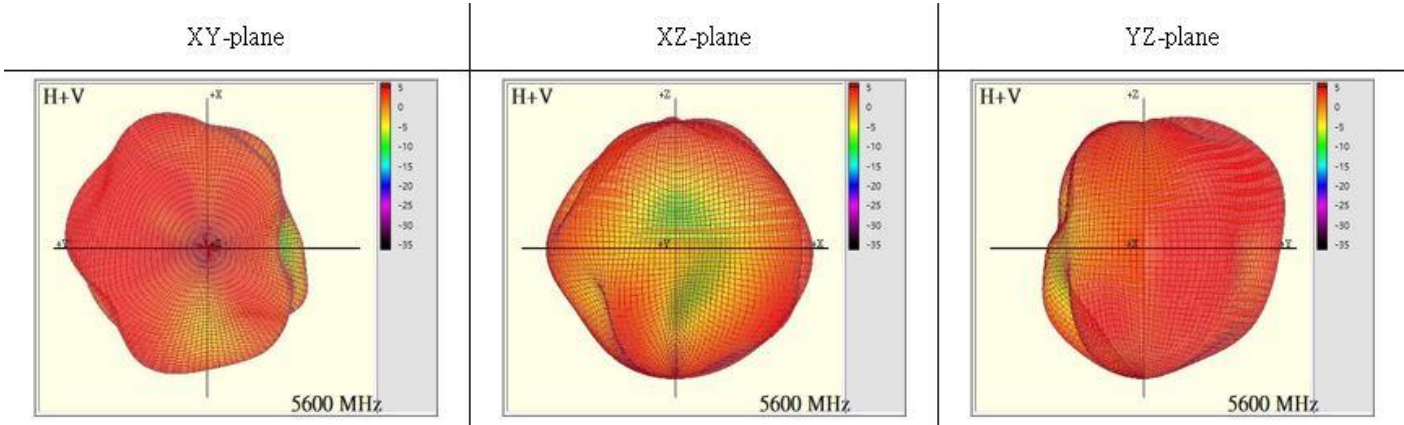


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.7

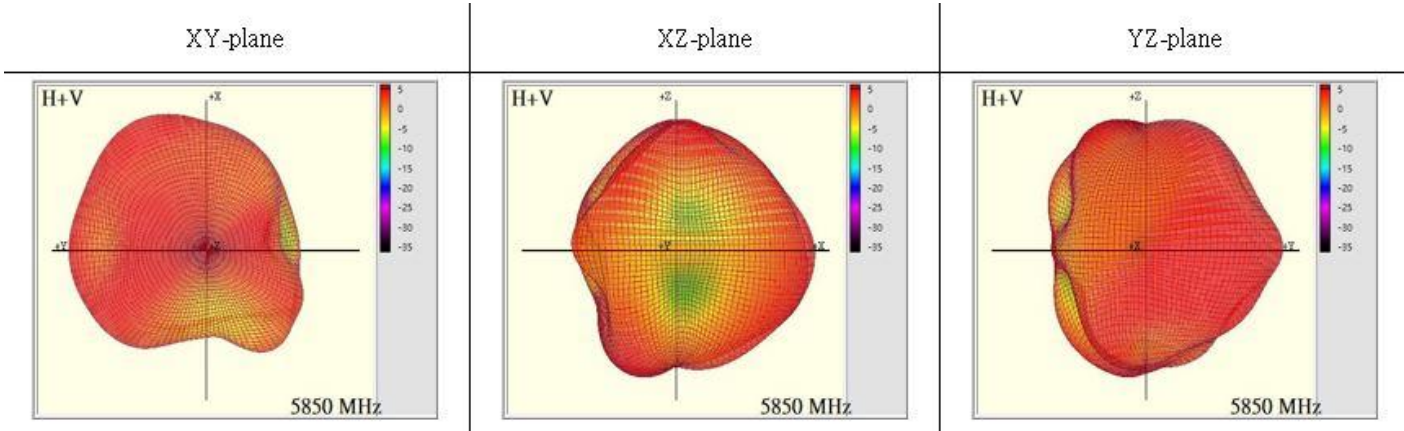

Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	3.64

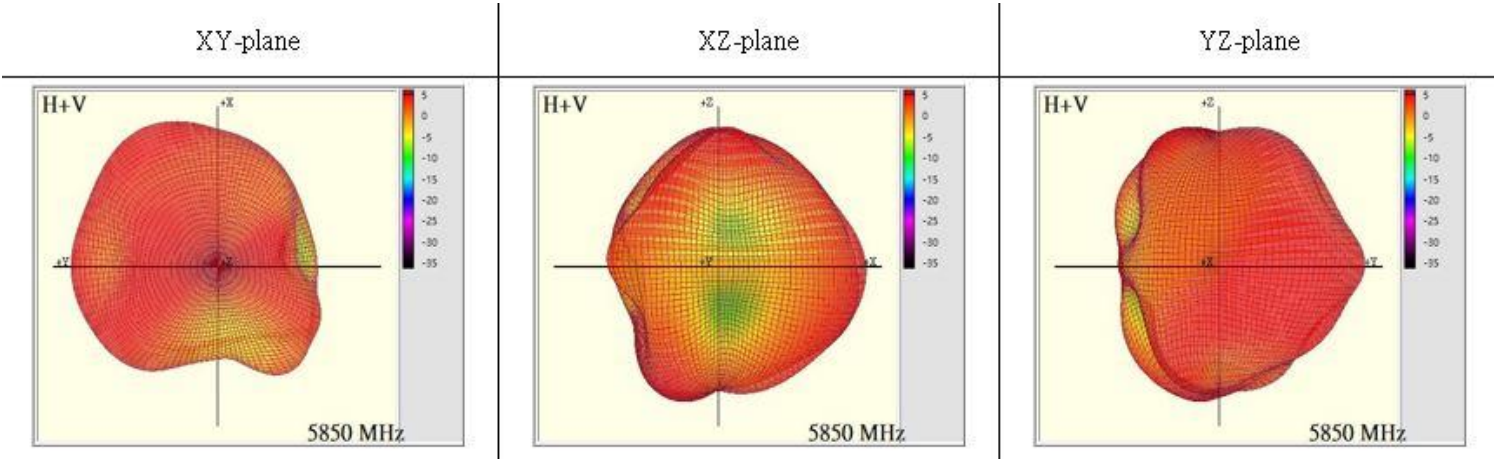

Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	NA

Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	NA

Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	NA


Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	NA

Section 4. Antenna Host Platform Location Information


Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

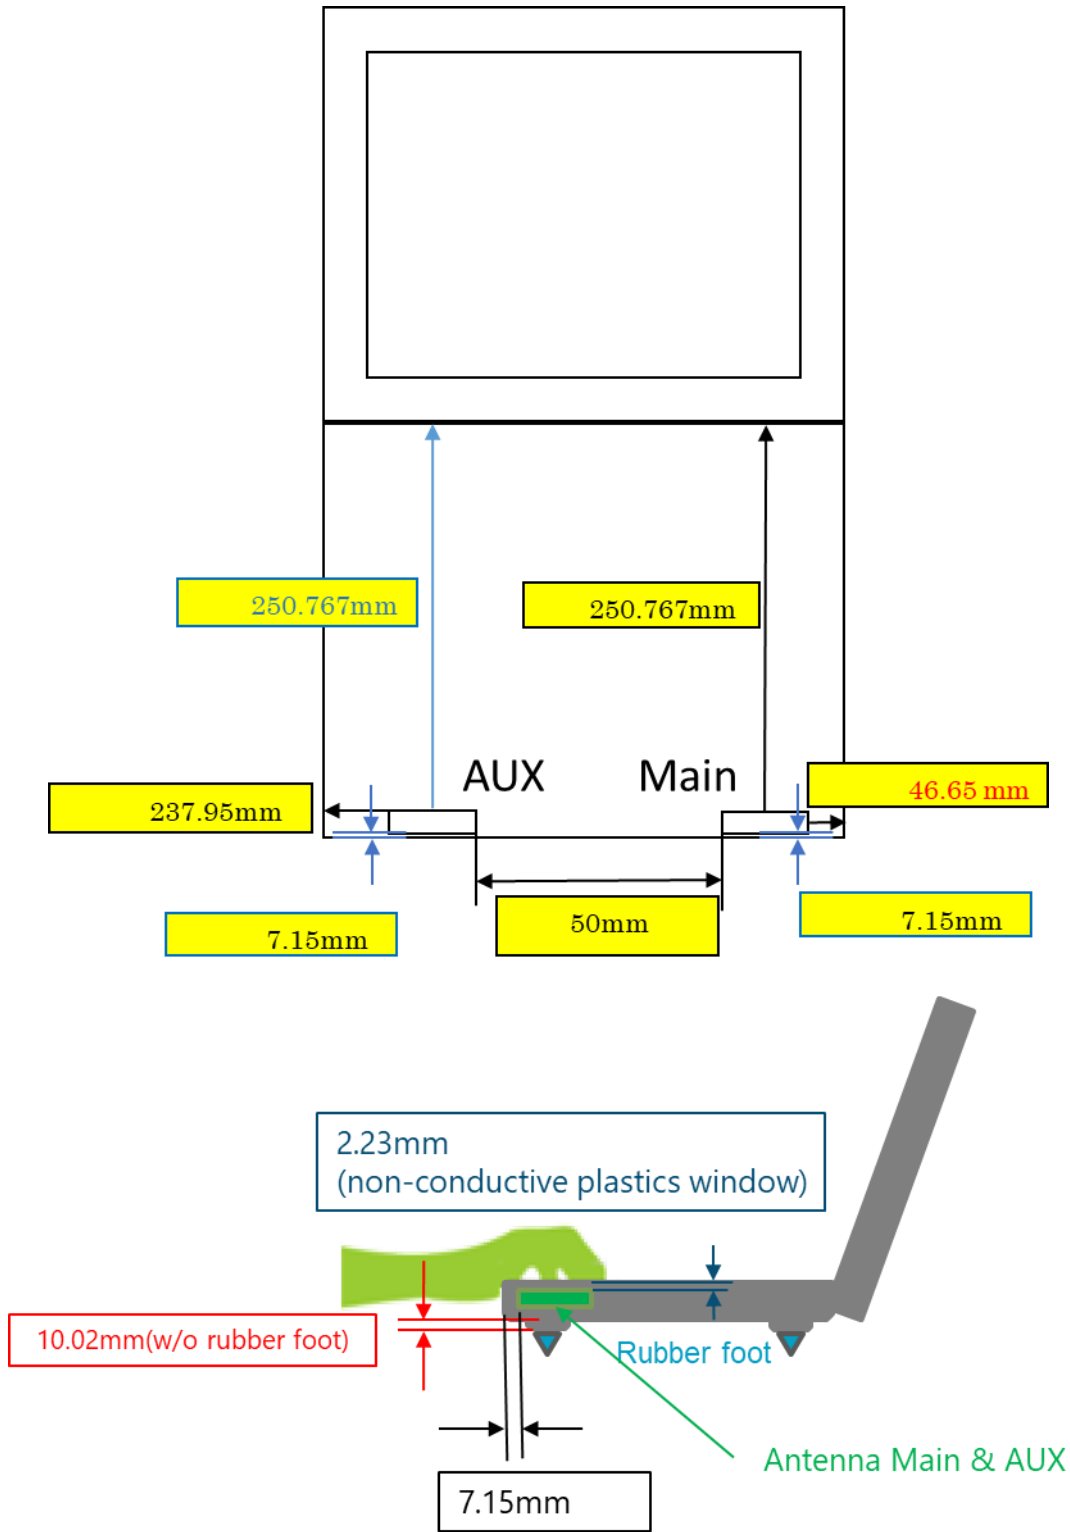

Section 5. Antenna dimensional information for SAR evaluation


Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

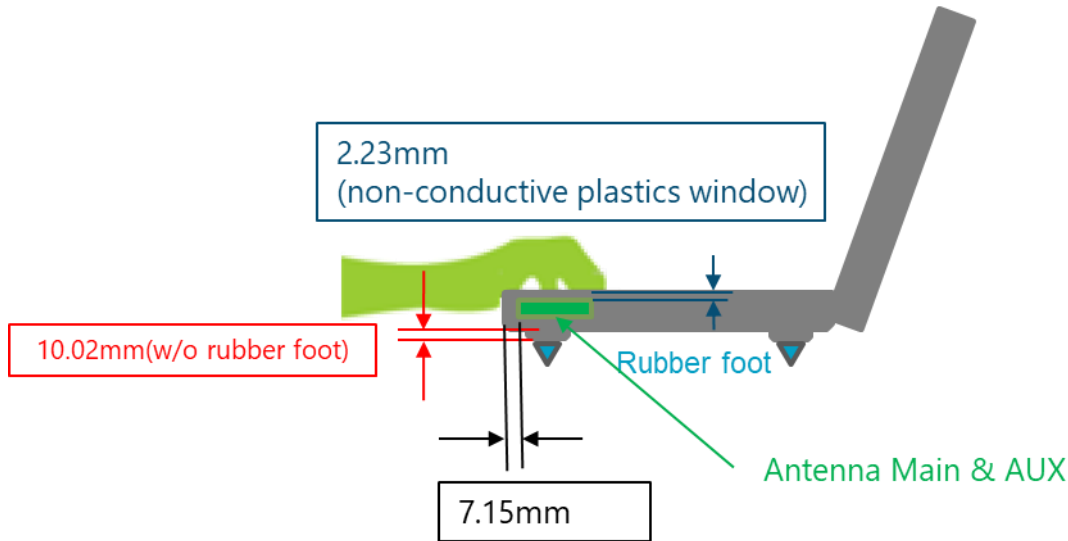

Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

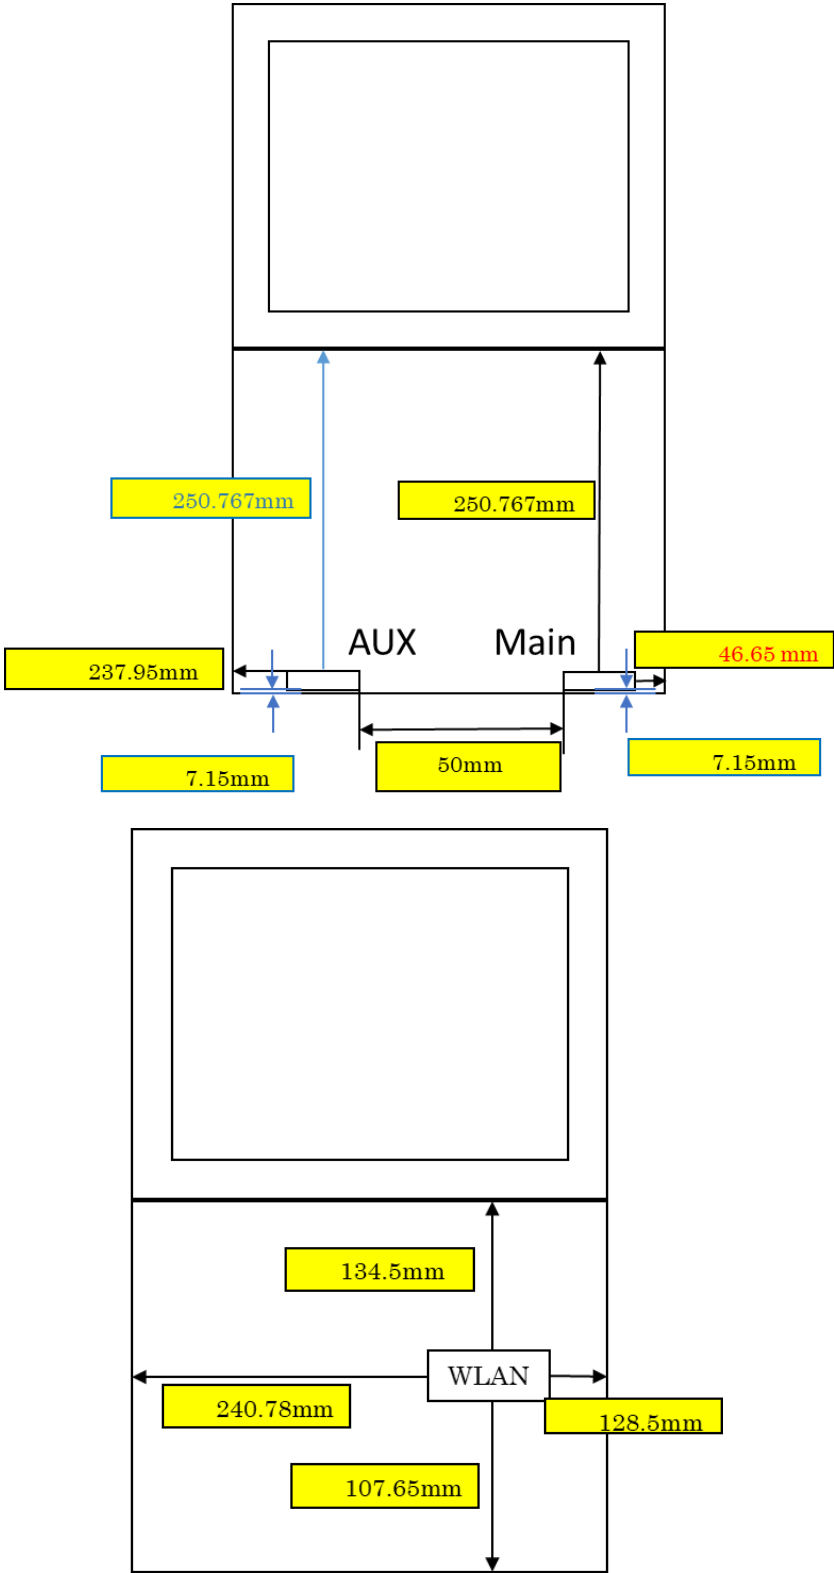

Revision History

Revision	Description	Date
10.3	<u>Page2-5</u> Add Applicable test method, Test & System Description and Setup photo	July 24, 2022
10.4	<u>Cover page</u> Add Intel 5.9GHz reference antenna gain <u>Cover page/Section1/Section3</u> Add 5.9GHz antenna gain information	September 15, 2022