


5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5755MHz_TX

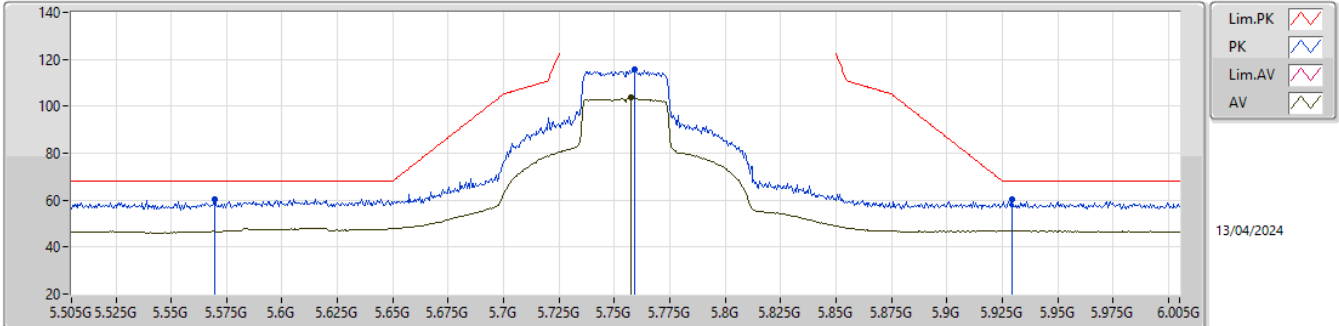


EUT_Y_4TX
Setting 29
02-C-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.5695G	60.54	68.20	-7.66	53.38	3	Horizontal	256	2.94	-	32.60	5.55	30.99			
PK	5.759G	115.79	Inf	-Inf	107.83	3	Horizontal	256	2.94	-	33.42	5.62	31.08			
AV	5.7575G	103.83	Inf	-Inf	95.88	3	Horizontal	256	2.94	-	33.41	5.62	31.08			
PK	5.9295G	60.21	68.20	-7.99	51.60	3	Horizontal	256	2.94	-	34.00	5.77	31.16			

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5755MHz_TX

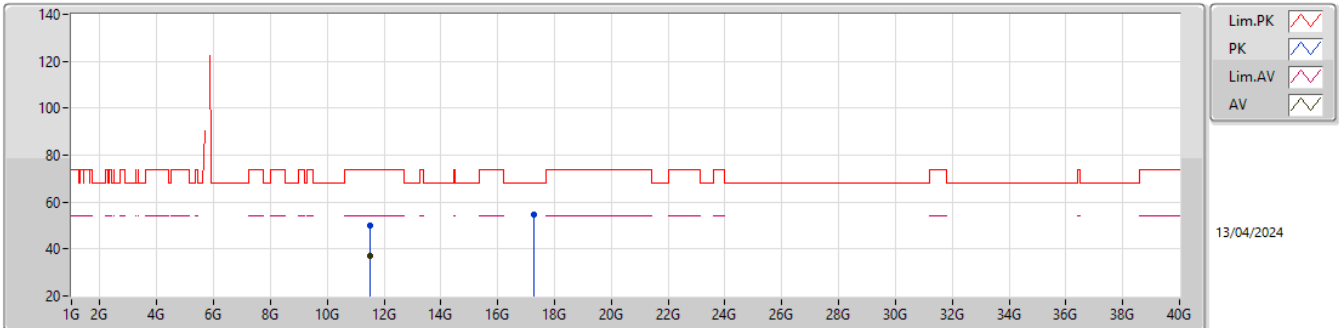


EUT_Y_4TX
Setting 29
02-C-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4936G	50.23	74.00	-23.77	68.95	3	Vertical	74	1.02	-	38.79	8.57	66.08			
AV	11.5238G	37.13	54.00	-16.87	55.85	3	Vertical	74	1.02	-	38.75	8.58	66.05			
PK	17.2868G	54.45	68.20	-13.75	67.51	3	Vertical	94	2.18	-	38.90	11.17	63.13			

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5755MHz_TX

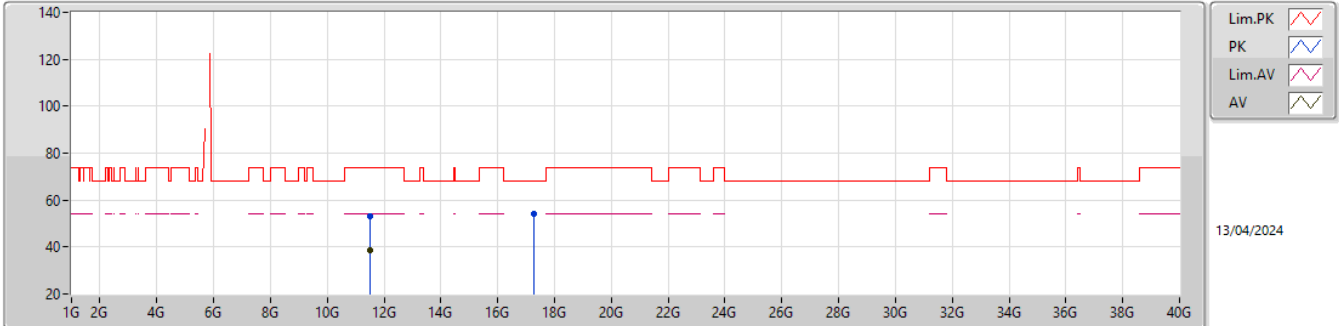


EUT_Y_4TX
Setting 29
02-C-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5071G	53.25	74.00	-20.75	71.96	3	Horizontal	353	1.80	-	38.79	8.57	66.07			
AV	11.5098G	38.72	54.00	-15.28	57.43	3	Horizontal	353	1.80	-	38.78	8.57	66.06			
PK	17.2813G	53.94	68.20	-14.26	67.00	3	Horizontal	223	1.80	-	38.90	11.17	63.13			

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5795MHz_TX

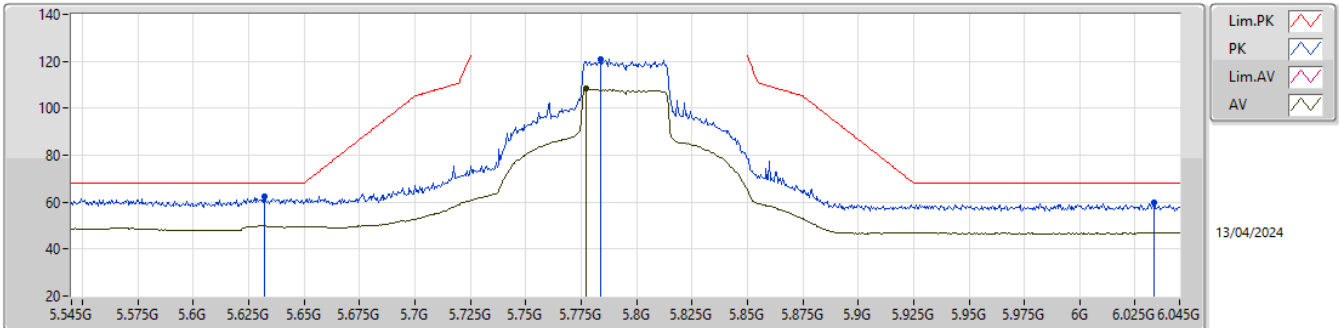


EUT_Y_4TX
Setting 29
02-C-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.632G	62.16	68.20	-6.04	55.00	3	Vertical	197	1.79	-	32.60	5.58	31.02			
PK	5.784G	120.74	Inf	-Inf	112.73	3	Vertical	197	1.79	-	33.47	5.63	31.09			
AV	5.777G	108.38	Inf	-Inf	100.40	3	Vertical	197	1.79	-	33.45	5.62	31.09			
PK	6.0335G	59.82	68.20	-8.38	51.19	3	Vertical	197	1.79	-	33.97	5.86	31.20			

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5795MHz_TX

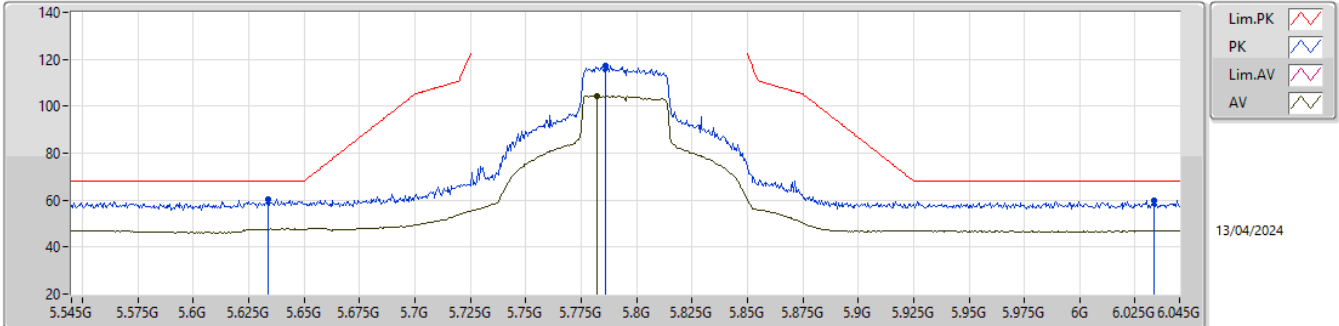


EUT_Y_4TX
Setting 29
02-C-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6335G	60.30	68.20	-7.90	53.14	3	Horizontal	242	2.64	-	32.60	5.58	31.02			
PK	5.786G	117.22	Inf	-Inf	109.21	3	Horizontal	242	2.64	-	33.47	5.63	31.09			
AV	5.782G	104.51	Inf	-Inf	96.52	3	Horizontal	242	2.64	-	33.46	5.62	31.09			
PK	6.0335G	59.90	68.20	-8.30	51.27	3	Horizontal	242	2.64	-	33.97	5.86	31.20			

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5795MHz_TX

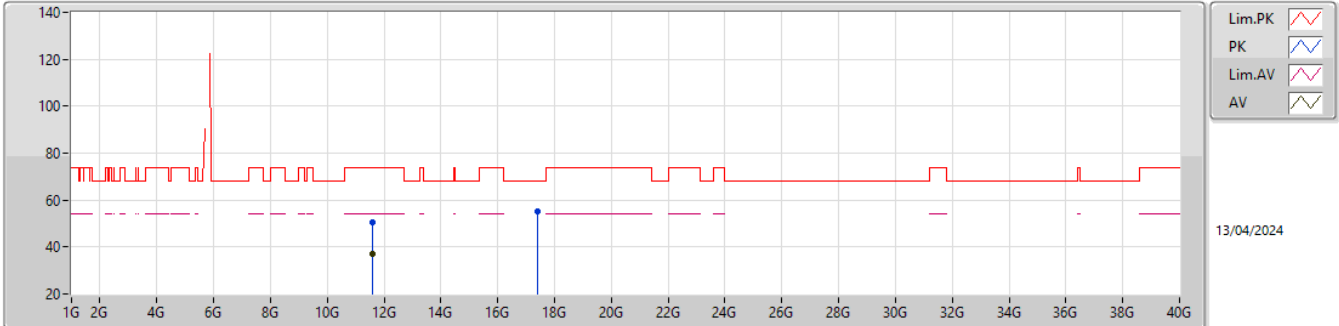


EUT_Y_4TX
Setting 29
02-C-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5867G	50.41	74.00	-23.59	69.27	3	Vertical	94	1.40	-	38.55	8.60	66.01			
AV	11.5748G	37.07	54.00	-16.93	55.89	3	Vertical	94	1.40	-	38.60	8.60	66.02			
PK	17.4235G	55.33	68.20	-12.87	67.77	3	Vertical	249	1.89	-	39.50	11.27	63.21			

5.725-5.85GHz_802.11be EHT40_Nss4,(MCS0)_4TX

5795MHz_TX

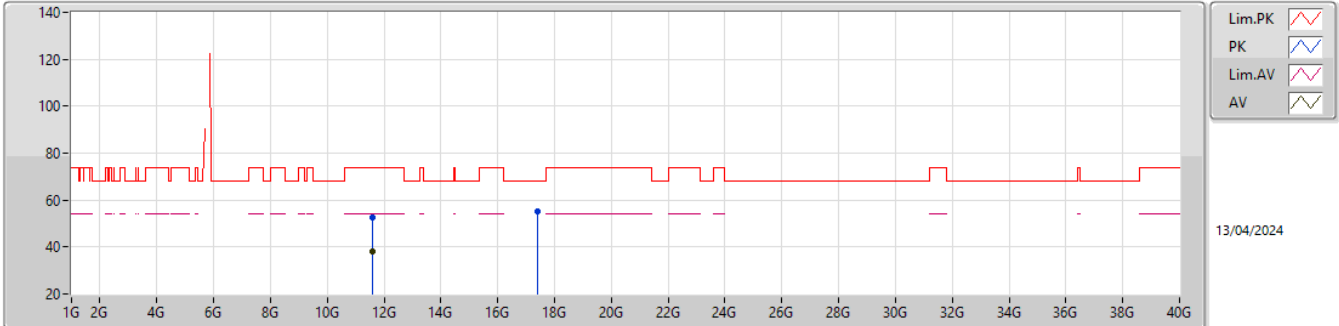


EUT_Y_4TX
Setting 29
02-C-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.591G	52.33	74.00	-21.67	71.20	3	Horizontal	54	1.80	-	38.54	8.60	66.01			
AV	11.5898G	38.16	54.00	-15.84	57.03	3	Horizontal	54	1.80	-	38.54	8.60	66.01			
PK	17.4081G	55.42	68.20	-12.78	67.86	3	Horizontal	42	1.70	-	39.50	11.26	63.20			

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5210MHz_TX

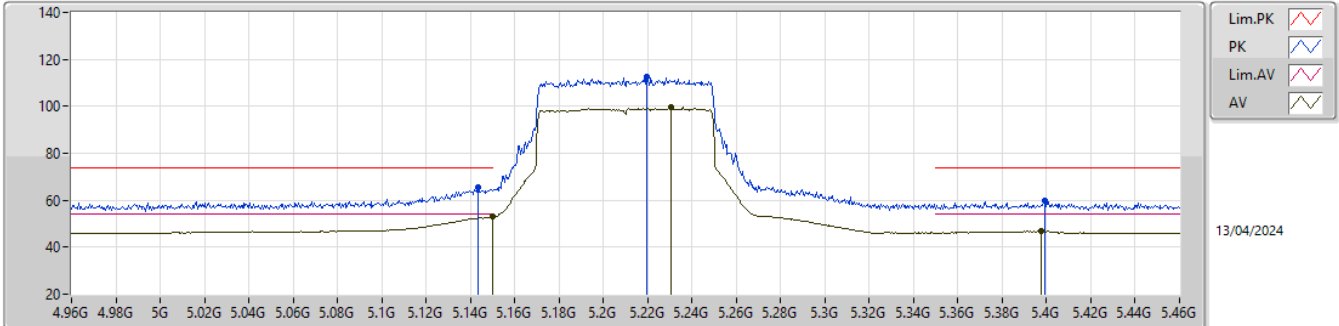


EUT_Y_4TX
Setting 19.5
02-C-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1435G	65.74	74.00	-8.26	58.39	3	Vertical	343	2.00	-	32.71	5.31	30.67			
AV	5.15G	52.86	54.00	-1.14	45.52	3	Vertical	343	2.00	-	32.70	5.32	30.68			
PK	5.2195G	112.39	Inf	-Inf	104.96	3	Vertical	343	2.00	-	32.80	5.37	30.74			
AV	5.2305G	99.63	Inf	-Inf	92.19	3	Vertical	343	2.00	-	32.80	5.38	30.74			
PK	5.399G	59.59	74.00	-14.41	52.36	3	Vertical	343	2.00	-	32.70	5.41	30.88			
AV	5.3975G	46.85	54.00	-7.15	39.62	3	Vertical	343	2.00	-	32.70	5.41	30.88			

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5210MHz_TX

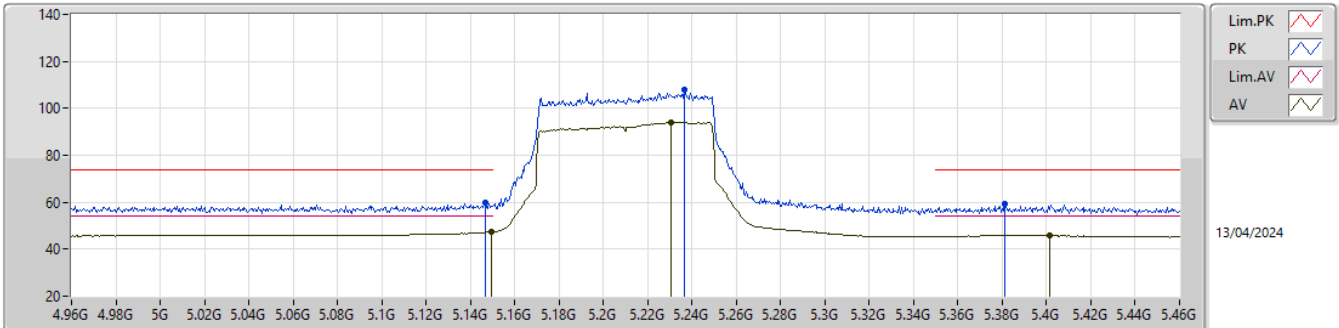


EUT Y_4TX
Setting 19.5
02-C-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.147G	59.62	74.00	-14.38	52.28	3	Horizontal	277	1.36	-	32.71	5.31	30.68			
AV	5.1495G	47.41	54.00	-6.59	40.08	3	Horizontal	277	1.36	-	32.70	5.31	30.68			
PK	5.2365G	107.84	Inf	-Inf	100.41	3	Horizontal	277	1.36	-	32.80	5.38	30.75			
AV	5.2305G	94.07	Inf	-Inf	86.63	3	Horizontal	277	1.36	-	32.80	5.38	30.74			
PK	5.381G	59.19	74.00	-14.81	51.98	3	Horizontal	277	1.36	-	32.66	5.41	30.86			
AV	5.4015G	45.85	54.00	-8.15	38.62	3	Horizontal	277	1.36	-	32.70	5.41	30.88			

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5210MHz_TX

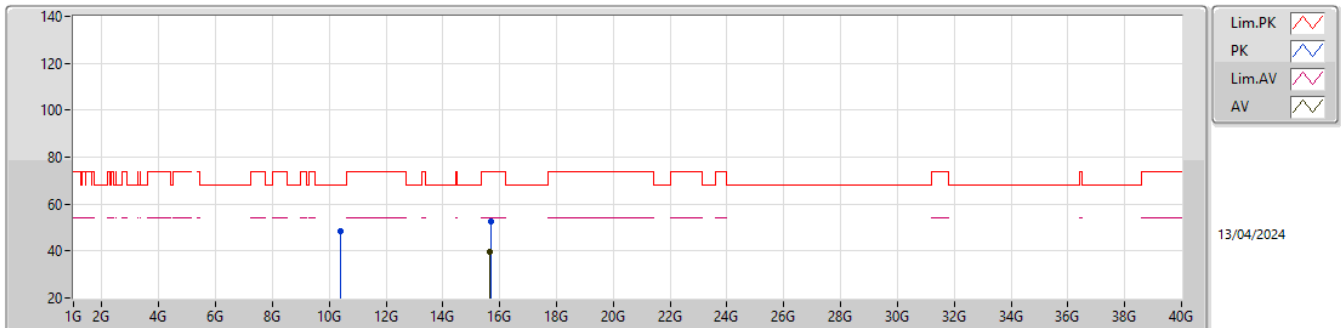


EUT Y_4TX
Setting 19.5
02-C-M-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.3976G	48.38	68.20	-19.82	67.95	3	Vertical	70	2.30	-	38.50	8.20	66.27			
PK	15.677G	52.38	74.00	-21.62	67.42	3	Vertical	235	1.85	-	37.56	10.18	62.78			
AV	15.672G	39.50	54.00	-14.50	54.56	3	Vertical	235	1.85	-	37.53	10.18	62.77			

5.15-5.25GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5210MHz_TX

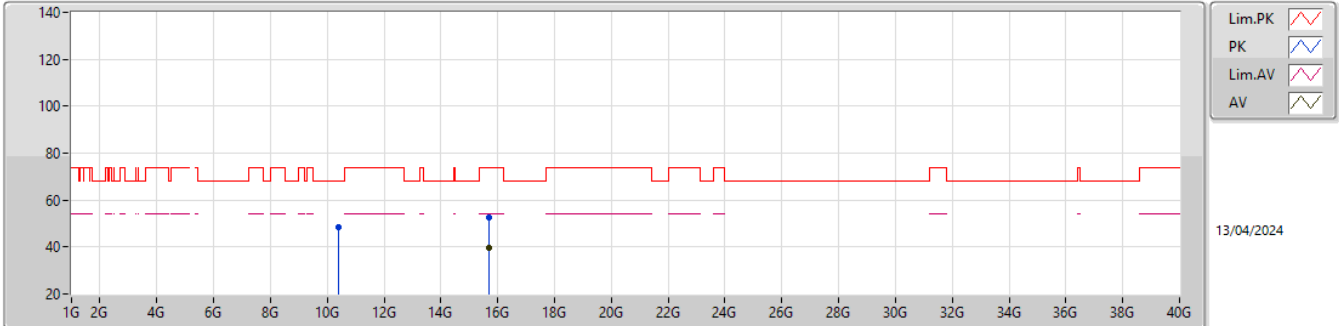


EUT_Y_4TX
Setting 19.5
02-C-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4144G	48.42	68.20	-19.78	67.97	3	Horizontal	320	2.70	-	38.50	8.20	66.25			
PK	15.6733G	52.68	74.00	-21.32	67.73	3	Horizontal	357	1.23	-	37.54	10.18	62.77			
AV	15.6982G	39.66	54.00	-14.34	54.57	3	Horizontal	357	1.23	-	37.69	10.19	62.79			

5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5775MHz_TX

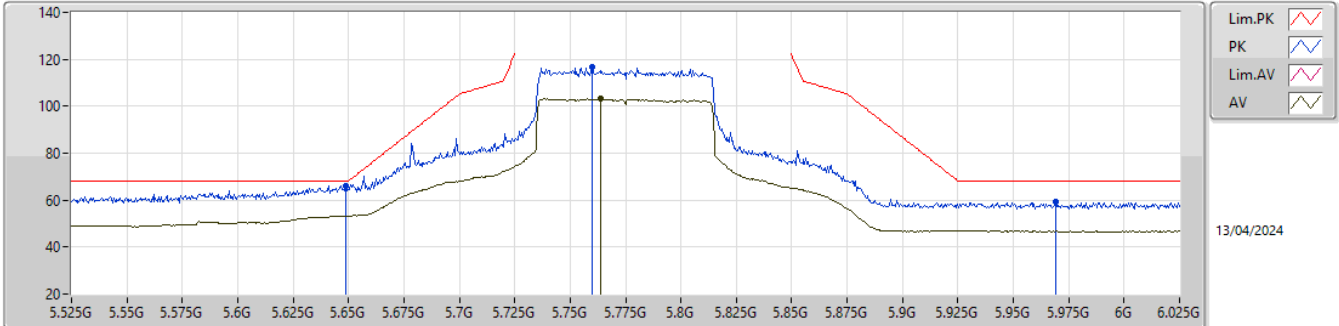


EUT_Y_4TX
Setting 24.5
02-C-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6485G	66.08	68.20	-2.12	58.93	3	Vertical	194	1.80	-	32.60	5.58	31.03			
PK	5.76G	116.48	Inf	-Inf	108.52	3	Vertical	194	1.80	-	33.42	5.62	31.08			
AV	5.7635G	103.25	Inf	-Inf	95.28	3	Vertical	194	1.80	-	33.43	5.62	31.08			
PK	5.969G	59.48	68.20	-8.72	50.88	3	Vertical	194	1.80	-	33.96	5.82	31.18			

5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5775MHz_TX

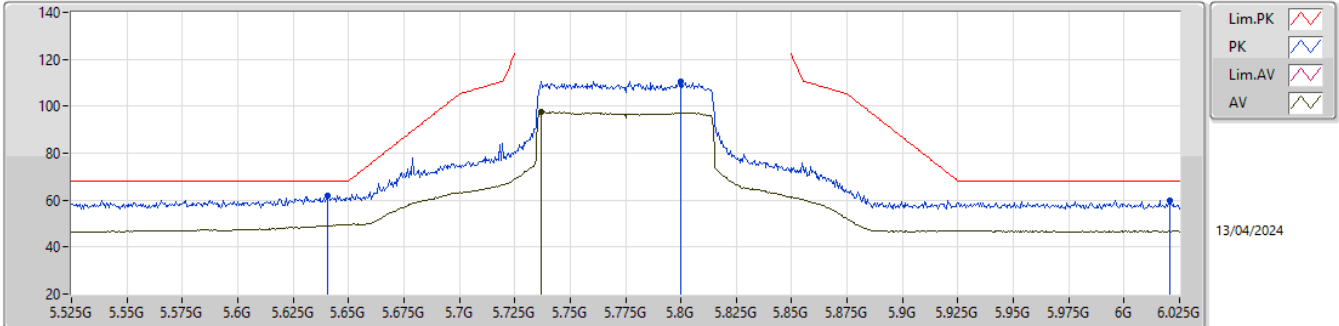


EUT_Y_4TX
Setting 24.5
02-C-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6405G	62.15	68.20	-6.05	54.99	3	Horizontal	254	2.10	-	32.60	5.58	31.02			
PK	5.8G	110.40	Inf	-Inf	102.37	3	Horizontal	254	2.10	-	33.50	5.63	31.10			
AV	5.737G	97.55	Inf	-Inf	89.71	3	Horizontal	254	2.10	-	33.30	5.61	31.07			
PK	6.0205G	60.06	68.20	-8.14	51.46	3	Horizontal	254	2.10	-	33.94	5.86	31.20			

5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5775MHz_TX

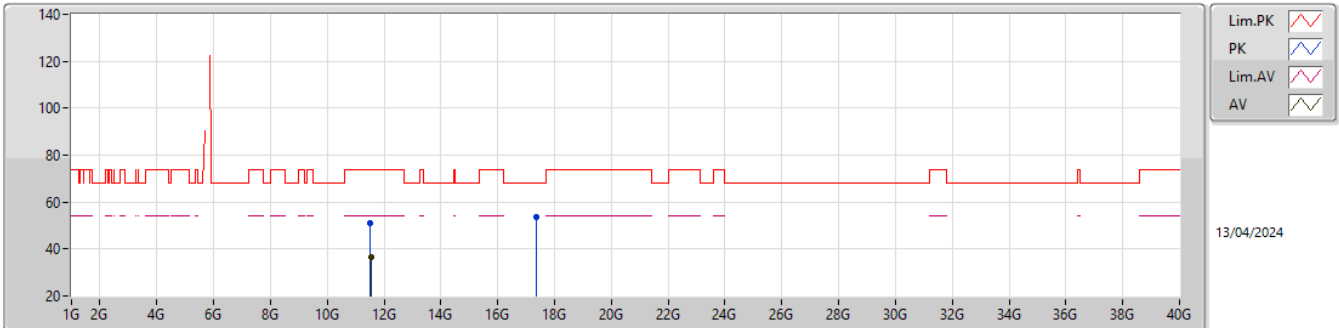


EUT_Y_4TX
Setting 24.5
02-C-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5086G	50.91	74.00	-23.09	69.62	3	Vertical	173	2.02	-	38.78	8.57	66.06			
AV	11.5617G	36.65	54.00	-17.35	55.44	3	Vertical	173	2.02	-	38.65	8.59	66.03			
PK	17.3629G	53.64	68.20	-14.56	66.39	3	Vertical	208	2.96	-	39.20	11.23	63.18			

5.725-5.85GHz_802.11be EHT80_Nss4,(MCS0)_4TX

5775MHz_TX

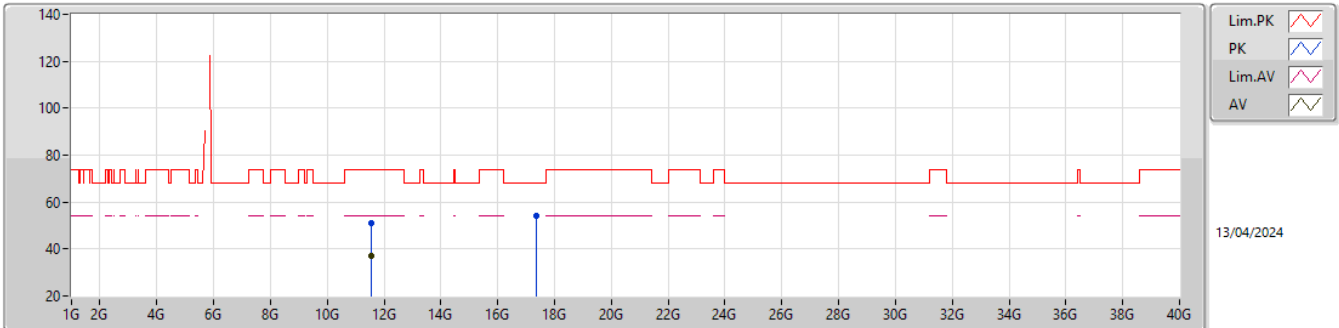EUT_Y_4TX
Setting 24.5
02-C-M-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5349G	50.79	74.00	-23.21	69.53	3	Horizontal	1	1.80	-	38.73	8.58	66.05			
AV	11.5568G	36.94	54.00	-17.06	55.71	3	Horizontal	1	1.80	-	38.67	8.59	66.03			
PK	17.3552G	54.35	68.20	-13.85	67.16	3	Horizontal	304	2.95	-	39.14	11.22	63.17			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	PK	5.646G	67.71	68.20	-0.49	3	Vertical	197	1.80	-

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5180MHz_TX

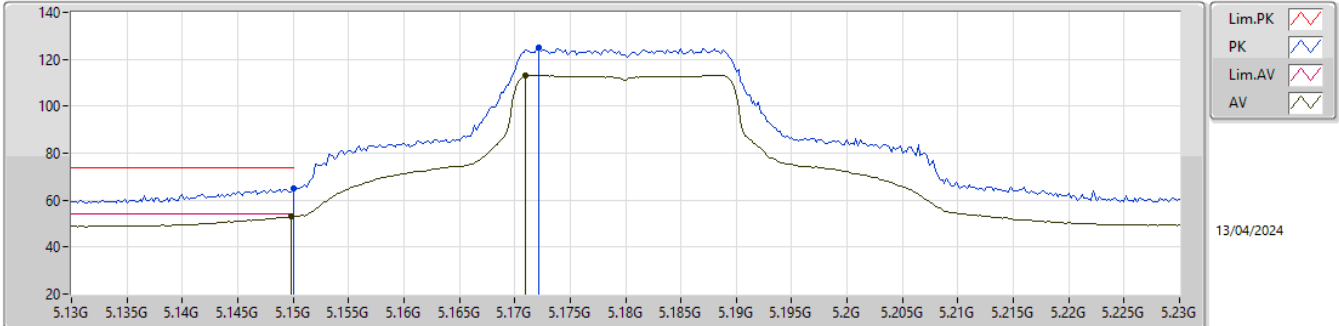


EUT_Y_4TX
Setting 24
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	64.91	74.00	-9.09	60.03	3	Vertical	199	1.80	-	33.00	7.40	35.52			
AV	5.1498G	53.16	54.00	-0.84	48.28	3	Vertical	199	1.80	-	33.00	7.40	35.52			
PK	5.1722G	125.21	Inf	-Inf	120.26	3	Vertical	199	1.80	-	33.04	7.42	35.51			
AV	5.171G	113.00	Inf	-Inf	108.05	3	Vertical	199	1.80	-	33.04	7.42	35.51			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5180MHz_TX

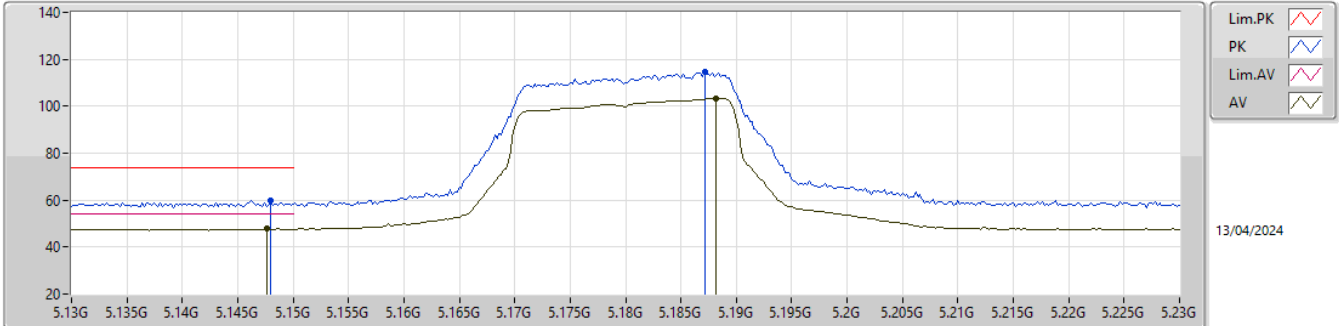


EUT_Y_4TX
Setting 24
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.148G	59.94	74.00	-14.06	55.06	3	Horizontal	15.1	1.57	-	33.00	7.40	35.52			
AV	5.1476G	47.71	54.00	-6.29	42.83	3	Horizontal	15.1	1.57	-	33.00	7.40	35.52			
PK	5.1872G	114.56	Inf	-Inf	109.56	3	Horizontal	15.1	1.57	-	33.07	7.44	35.51			
AV	5.1882G	103.35	Inf	-Inf	98.34	3	Horizontal	15.1	1.57	-	33.08	7.44	35.51			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5180MHz_TX

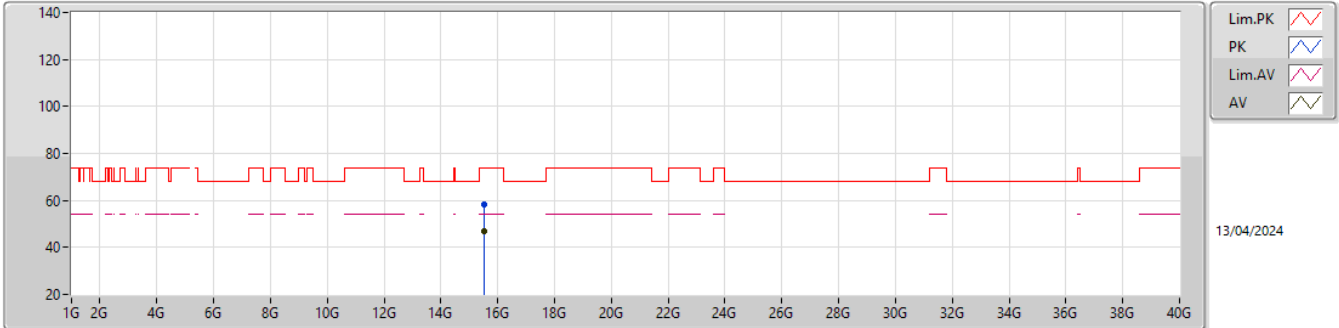


EUT_Y_4TX
Setting 24
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.53958G	58.22	74.00	-15.78	41.21	3	Vertical	125	1.56	-	38.26	12.28	33.53			
AV	15.54234G	46.76	54.00	-7.24	29.76	3	Vertical	125	1.56	-	38.25	12.28	33.53			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5180MHz_TX

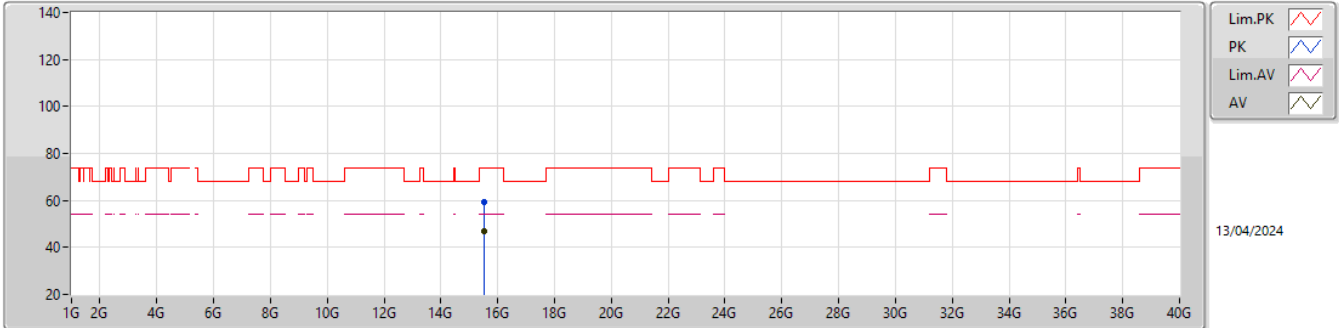


EUT_V_4TX
Setting 24
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.53076G	59.10	74.00	-14.90	42.05	3	Horizontal	338	1.60	-	38.32	12.27	33.54			
AV	15.53244G	46.87	54.00	-7.13	29.83	3	Horizontal	338	1.60	-	38.31	12.27	33.54			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5200MHz_TX

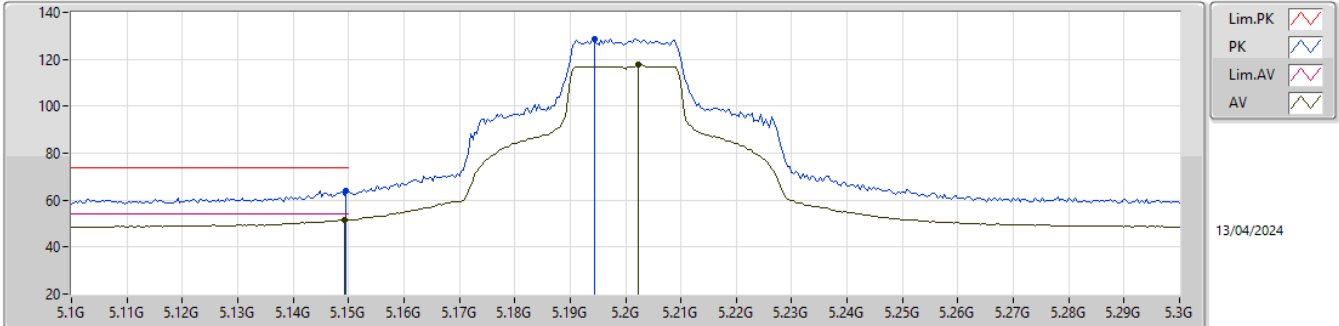


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1496G	64.06	74.00	-9.94	59.18	3	Vertical	198	1.80	-	33.00	7.40	35.52			
AV	5.1492G	51.54	54.00	-2.46	46.66	3	Vertical	198	1.80	-	33.00	7.40	35.52			
PK	5.1944G	128.77	Inf	-Inf	123.75	3	Vertical	198	1.80	-	33.09	7.44	35.51			
AV	5.2024G	117.93	Inf	-Inf	112.88	3	Vertical	198	1.80	-	33.10	7.45	35.50			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5200MHz_TX

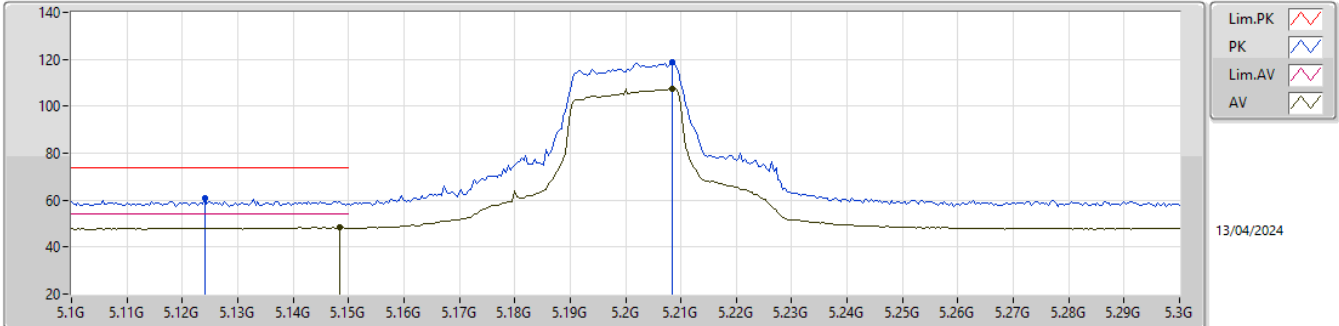


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.124G	60.84	74.00	-13.16	55.99	3	Horizontal	279	1.73	-	33.00	7.38	35.53			
AV	5.1484G	48.42	54.00	-5.58	43.54	3	Horizontal	279	1.73	-	33.00	7.40	35.52			
PK	5.2084G	118.83	Inf	-Inf	113.80	3	Horizontal	279	1.73	-	33.08	7.45	35.50			
AV	5.2084G	107.65	Inf	-Inf	102.62	3	Horizontal	279	1.73	-	33.08	7.45	35.50			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5200MHz_TX

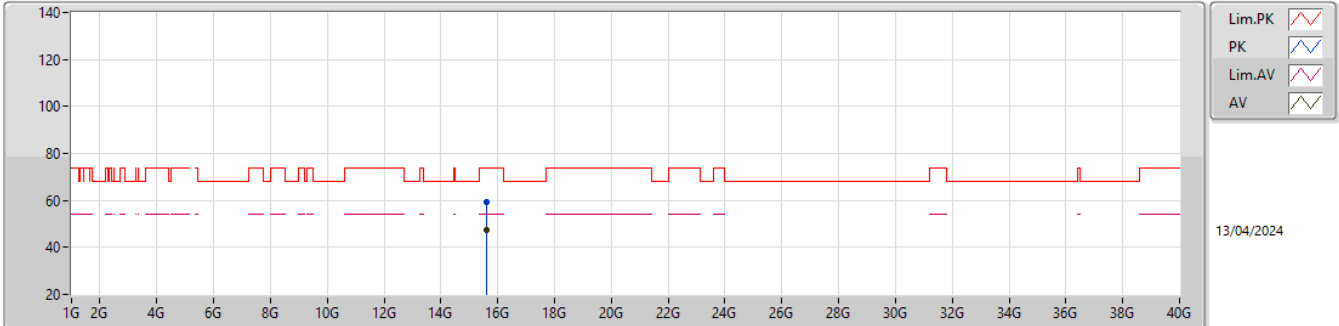


EUT_Y_4TX
Setting 28
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.6144G	59.19	74.00	-14.81	42.45	3	Vertical	359	1.62	-	37.86	12.30	33.42			
AV	15.60852G	47.17	54.00	-6.83	30.39	3	Vertical	359	1.62	-	37.91	12.30	33.43			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5200MHz_TX

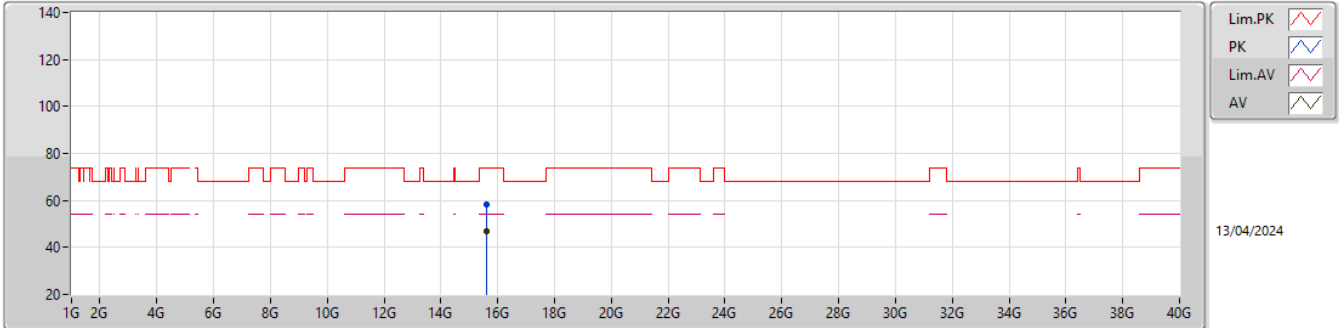


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.59106G	58.53	74.00	-15.47	41.65	3	Horizontal	285	1.70	-	38.04	12.29	33.45			
AV	15.60048G	47.07	54.00	-6.93	30.21	3	Horizontal	285	1.70	-	38.00	12.30	33.44			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5240MHz_TX

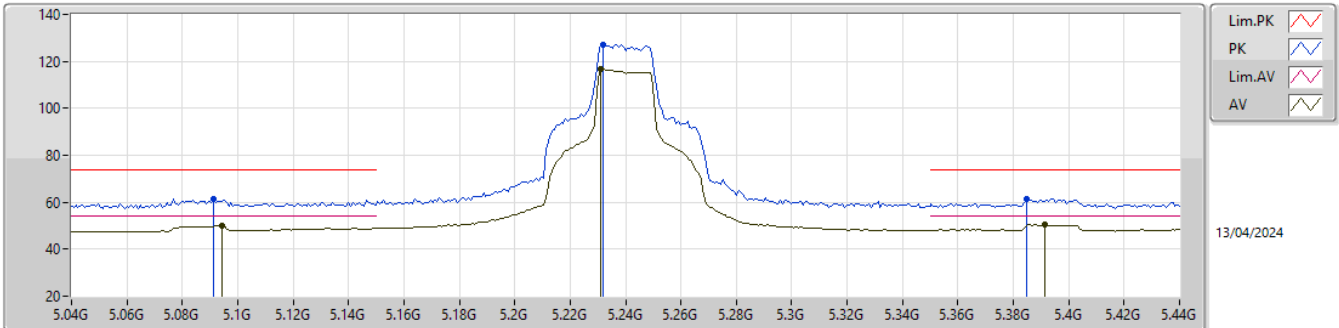


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.0912G	61.37	74.00	-12.63	56.53	3	Vertical	195	1.80	-	33.02	7.35	35.53			
AV	5.0944G	49.92	54.00	-4.08	45.09	3	Vertical	195	1.80	-	33.01	7.35	35.53			
PK	5.232G	127.09	Inf	-Inf	122.08	3	Vertical	195	1.80	-	33.04	7.47	35.50			
AV	5.2312G	116.60	Inf	-Inf	111.59	3	Vertical	195	1.80	-	33.04	7.47	35.50			
PK	5.3848G	61.35	74.00	-12.65	56.39	3	Vertical	195	1.80	-	32.87	7.54	35.45			
AV	5.3912G	50.47	54.00	-3.53	45.49	3	Vertical	195	1.80	-	32.88	7.55	35.45			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5240MHz_TX

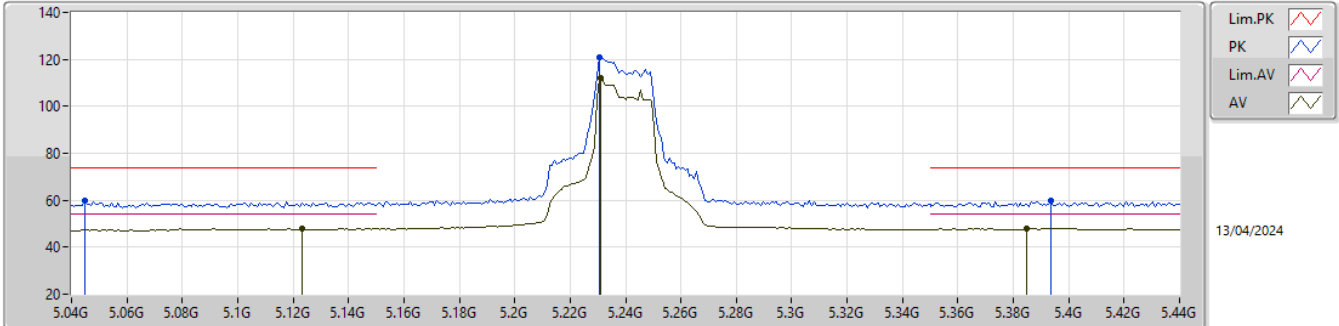


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.0448G	59.75	74.00	-14.25	54.91	3	Horizontal	264	1.70	-	33.09	7.30	35.55			
AV	5.1232G	47.81	54.00	-6.19	42.96	3	Horizontal	264	1.70	-	33.00	7.38	35.53			
PK	5.2304G	121.10	Inf	-Inf	116.09	3	Horizontal	264	1.70	-	33.04	7.47	35.50			
AV	5.2312G	112.00	Inf	-Inf	106.99	3	Horizontal	264	1.70	-	33.04	7.47	35.50			
PK	5.3936G	59.95	74.00	-14.05	54.96	3	Horizontal	264	1.70	-	32.89	7.55	35.45			
AV	5.3848G	48.02	54.00	-5.98	43.06	3	Horizontal	264	1.70	-	32.87	7.54	35.45			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5240MHz_TX

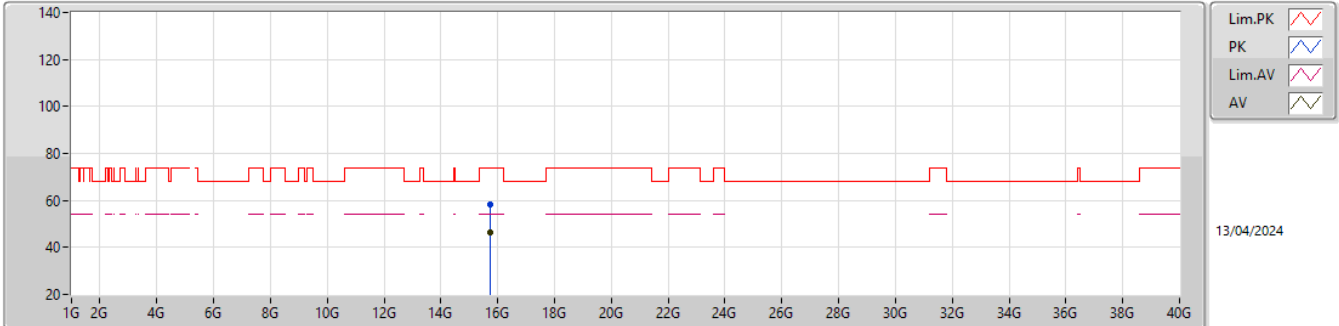


EUT_Y_4TX
Setting 28
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.73008G	58.53	74.00	-15.47	41.67	3	Vertical	189	1.80	-	37.76	12.34	33.24			
AV	15.72108G	46.26	54.00	-7.74	29.43	3	Vertical	189	1.80	-	37.74	12.34	33.25			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5240MHz_TX

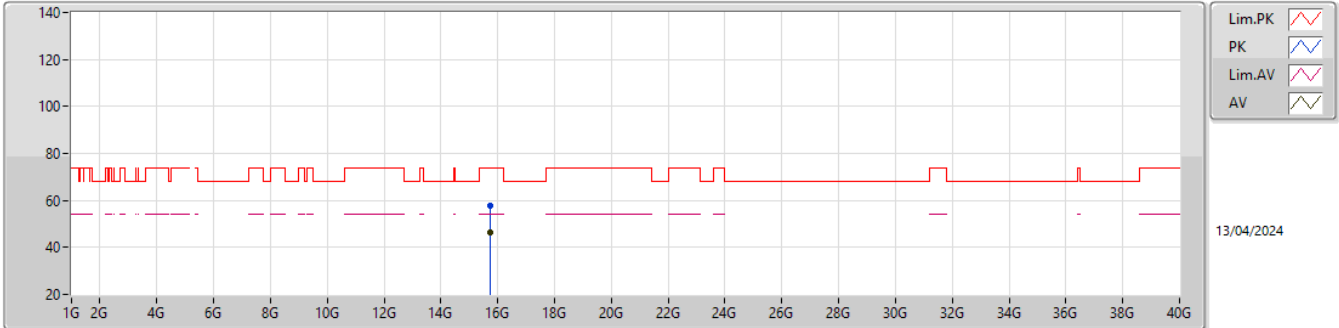


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.72762G	58.01	74.00	-15.99	41.15	3	Horizontal	0	1.80	-	37.76	12.34	33.24			
AV	15.7245G	46.18	54.00	-7.82	29.34	3	Horizontal	0	1.80	-	37.75	12.34	33.25			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5745MHz_TX

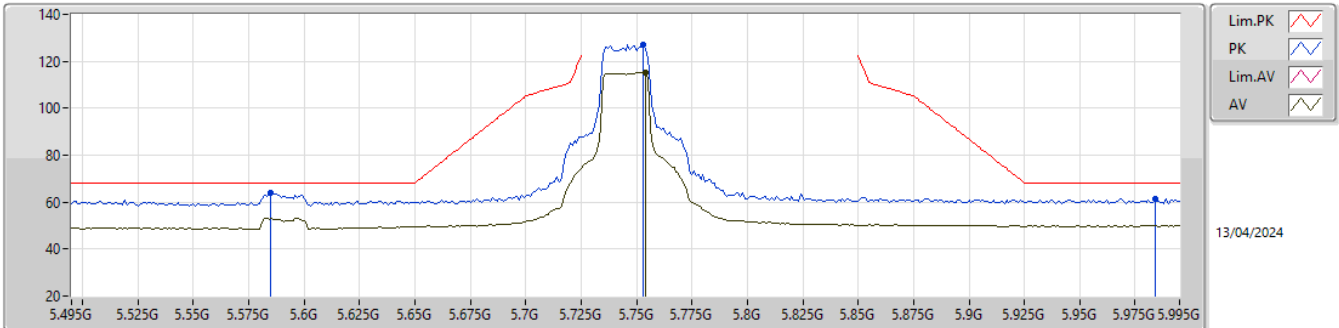


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.585G	64.00	68.20	-4.20	58.95	3	Vertical	195	1.80	-	32.80	7.70	35.45			
PK	5.753G	127.27	Inf	-Inf	121.13	3	Vertical	195	1.80	-	33.71	7.95	35.52			
AV	5.754G	115.34	Inf	-Inf	109.18	3	Vertical	195	1.80	-	33.72	7.96	35.52			
PK	5.984G	61.47	68.20	-6.73	54.79	3	Vertical	195	1.80	-	34.13	8.15	35.60			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5745MHz_TX

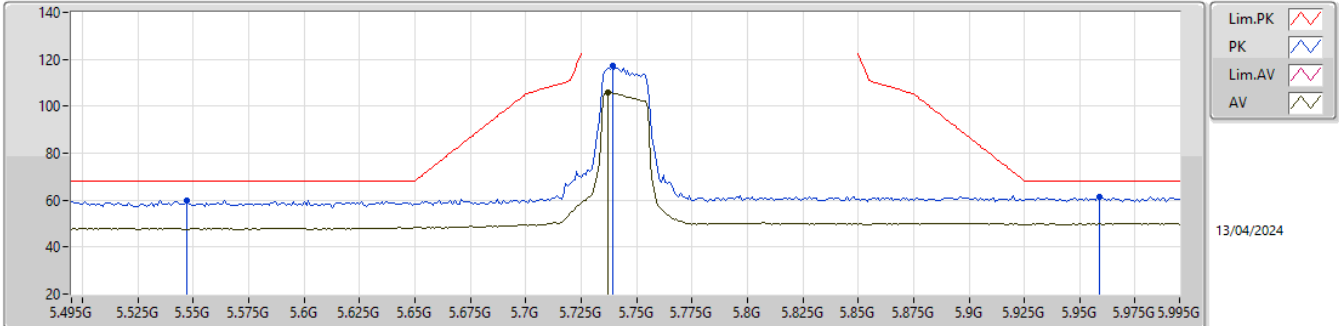


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.547G	60.00	68.20	-8.20	54.96	3	Horizontal	232	1.80	-	32.81	7.67	35.44			
PK	5.739G	117.08	Inf	-Inf	111.03	3	Horizontal	232	1.80	-	33.63	7.93	35.51			
AV	5.737G	105.89	Inf	-Inf	99.85	3	Horizontal	232	1.80	-	33.62	7.93	35.51			
PK	5.959G	61.15	68.20	-7.05	54.43	3	Horizontal	232	1.80	-	34.18	8.13	35.59			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5745MHz_TX

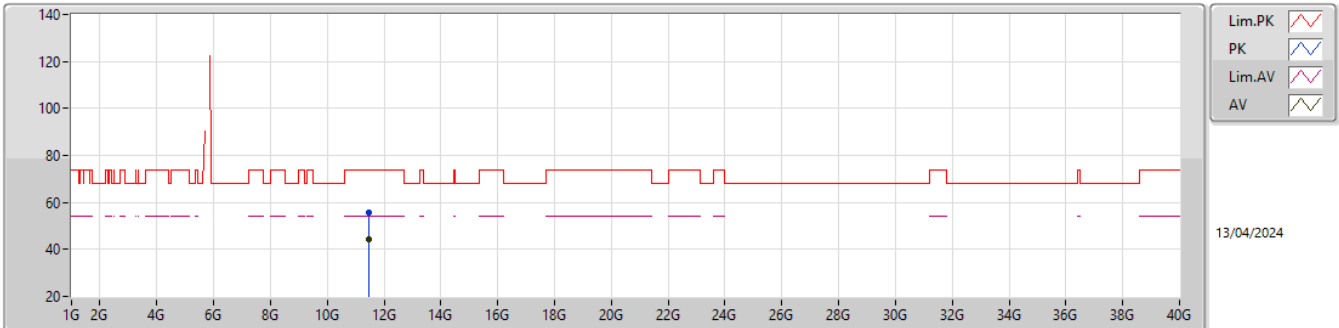EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48376G	55.81	74.00	-18.19	38.95	3	Vertical	354	1.71	-	39.04	10.84	33.02			
AV	11.47812G	44.43	54.00	-9.57	27.61	3	Vertical	354	1.71	-	39.01	10.84	33.03			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5745MHz_TX

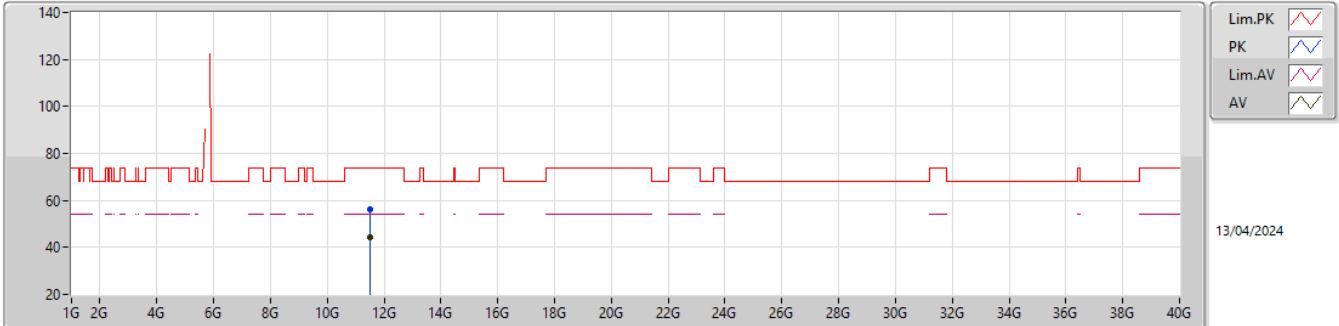


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.49738G	56.29	74.00	-17.71	39.36	3	Horizontal	228	1.68	-	39.09	10.85	33.01			
AV	11.50092G	44.36	54.00	-9.64	27.42	3	Horizontal	228	1.68	-	39.10	10.85	33.01			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5785MHz_TX

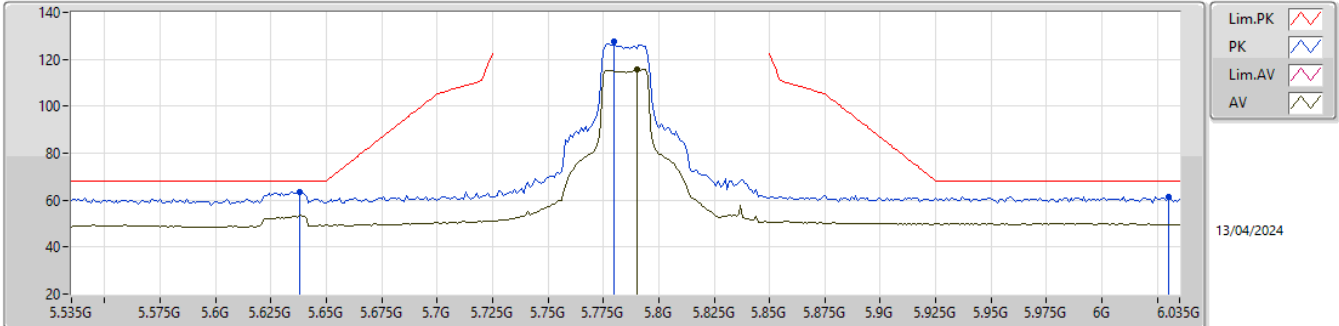


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.638G	63.58	68.20	-4.62	58.40	3	Vertical	197	1.80	-	32.88	7.77	35.47			
PK	5.78G	127.35	Inf	-Inf	121.06	3	Vertical	197	1.80	-	33.82	8.00	35.53			
AV	5.79G	115.80	Inf	-Inf	109.46	3	Vertical	197	1.80	-	33.86	8.01	35.53			
PK	6.03G	61.58	68.20	-6.62	54.86	3	Vertical	197	1.80	-	34.10	8.17	35.55			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5785MHz_TX

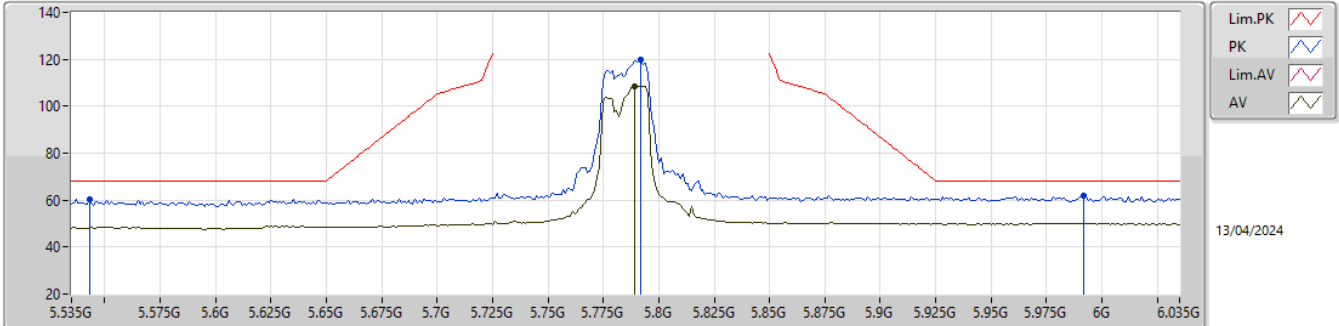


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.543G	60.21	68.20	-7.99	55.18	3	Horizontal	238	2.76	-	32.81	7.66	35.44			
PK	5.792G	119.80	Inf	-Inf	113.44	3	Horizontal	238	2.76	-	33.87	8.02	35.53			
AV	5.789G	108.36	Inf	-Inf	102.02	3	Horizontal	238	2.76	-	33.86	8.01	35.53			
PK	5.992G	61.83	68.20	-6.37	55.17	3	Horizontal	238	2.76	-	34.12	8.15	35.61			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5785MHz_TX

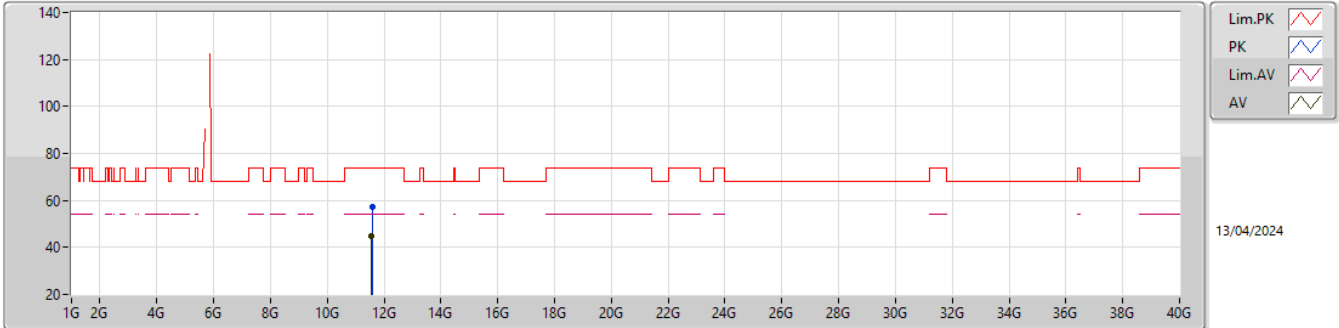


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57954G	57.00	74.00	-17.00	40.42	3	Vertical	64	1.65	-	38.78	10.88	33.08			
AV	11.5712G	44.76	54.00	-9.24	28.13	3	Vertical	64	1.65	-	38.82	10.88	33.07			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5785MHz_TX

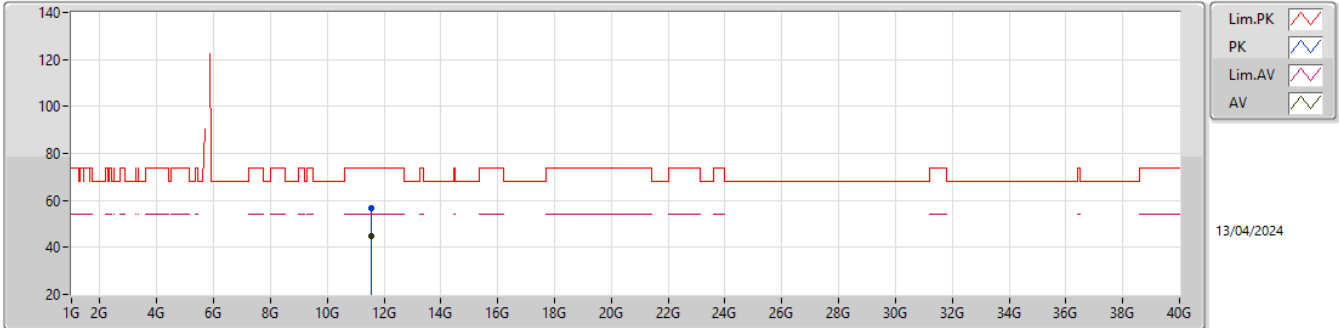


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5643G	56.78	74.00	-17.22	40.13	3	Horizontal	95	1.69	-	38.84	10.88	33.07			
AV	11.57072G	44.69	54.00	-9.31	28.06	3	Horizontal	95	1.69	-	38.82	10.88	33.07			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5825MHz_TX

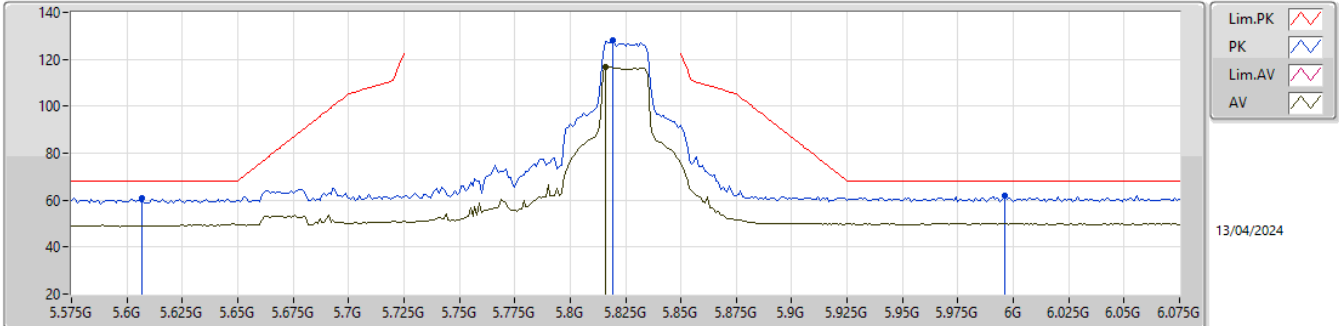


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.607G	60.82	68.20	-7.38	55.75	3	Vertical	198	1.80	-	32.81	7.72	35.46			
PK	5.819G	128.11	Inf	-Inf	121.67	3	Vertical	198	1.80	-	33.94	8.04	35.54			
AV	5.816G	116.66	Inf	-Inf	110.23	3	Vertical	198	1.80	-	33.93	8.04	35.54			
PK	5.996G	61.68	68.20	-6.52	55.02	3	Vertical	198	1.80	-	34.11	8.16	35.61			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5825MHz_TX

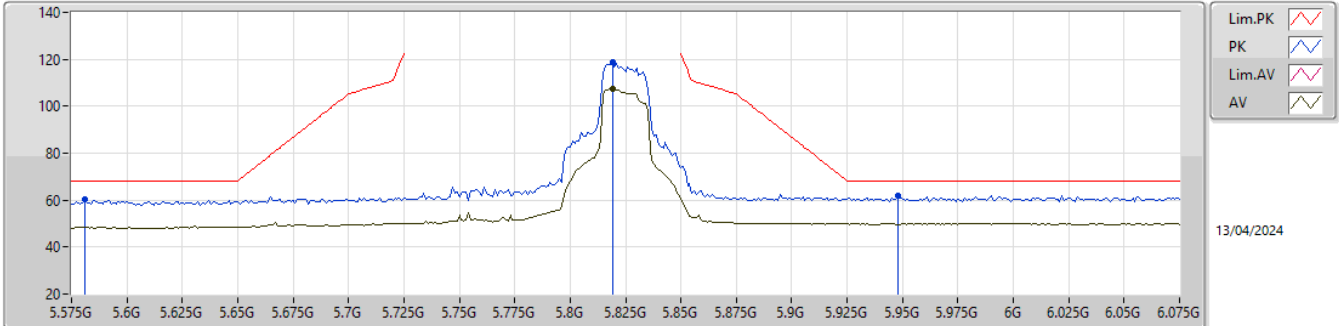


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.581G	60.44	68.20	-7.76	55.40	3	Horizontal	239	2.80	-	32.80	7.69	35.45			
PK	5.819G	118.67	Inf	-Inf	112.23	3	Horizontal	239	2.80	-	33.94	8.04	35.54			
AV	5.819G	107.32	Inf	-Inf	100.88	3	Horizontal	239	2.80	-	33.94	8.04	35.54			
PK	5.948G	61.83	68.20	-6.37	55.09	3	Horizontal	239	2.80	-	34.20	8.13	35.59			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5825MHz_TX

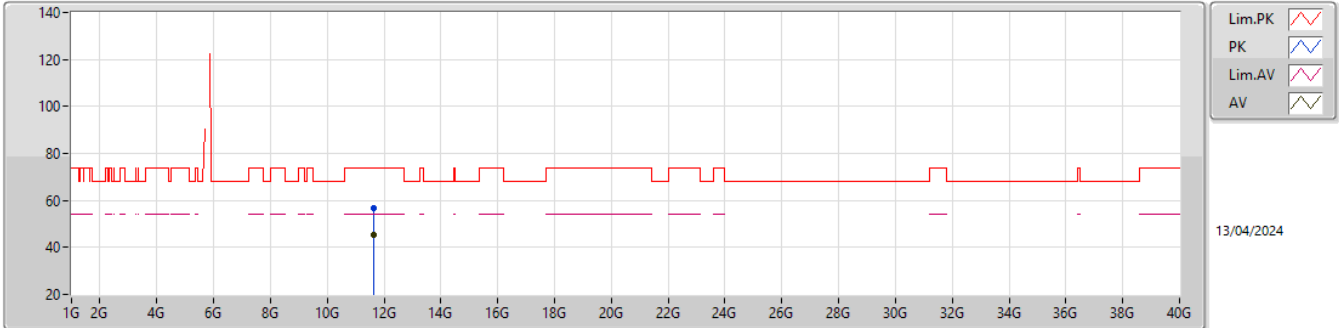


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64004G	56.62	74.00	-17.38	40.38	3	Vertical	210	1.74	-	38.46	10.91	33.13			
AV	11.64514G	45.10	54.00	-8.90	28.90	3	Vertical	210	1.74	-	38.43	10.91	33.14			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5825MHz_TX

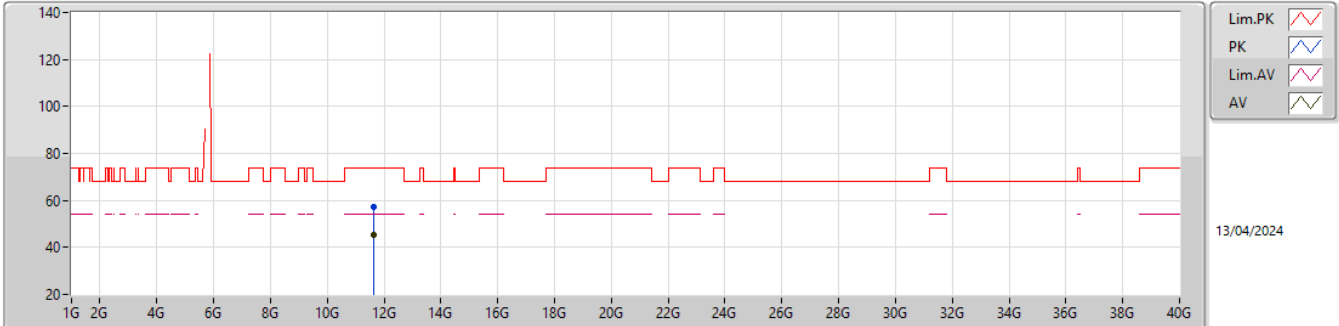EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.64976G	57.48	74.00	-16.52	41.30	3	Horizontal	122	1.89	-	38.40	10.92	33.14			
AV	11.65096G	45.32	54.00	-8.68	29.14	3	Horizontal	122	1.89	-	38.40	10.92	33.14			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5190MHz_TX

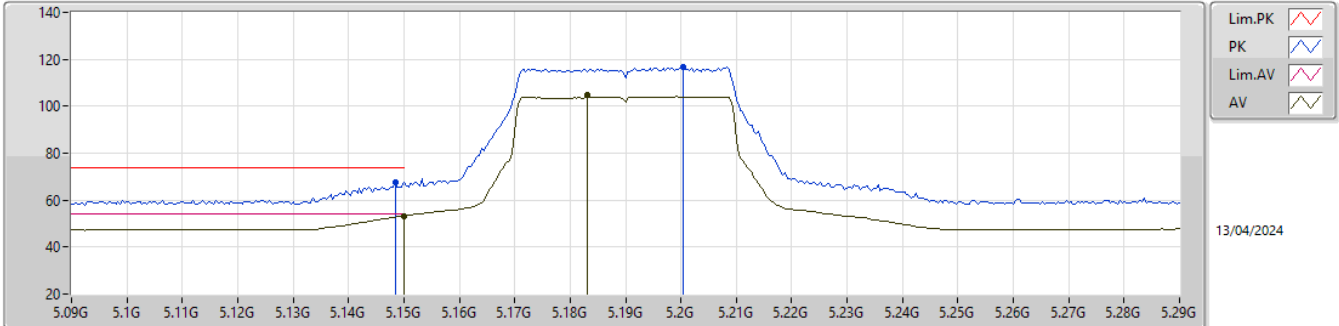


EUT_Y_4TX
Setting 18
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1484G	67.80	74.00	-6.20	62.92	3	Vertical	203	1.80	-	33.00	7.40	35.52			
AV	5.15G	53.16	54.00	-0.84	48.28	3	Vertical	203	1.80	-	33.00	7.40	35.52			
PK	5.2004G	116.53	Inf	-Inf	111.48	3	Vertical	203	1.80	-	33.10	7.45	35.50			
AV	5.1832G	104.59	Inf	-Inf	99.60	3	Vertical	203	1.80	-	33.07	7.43	35.51			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5190MHz_TX

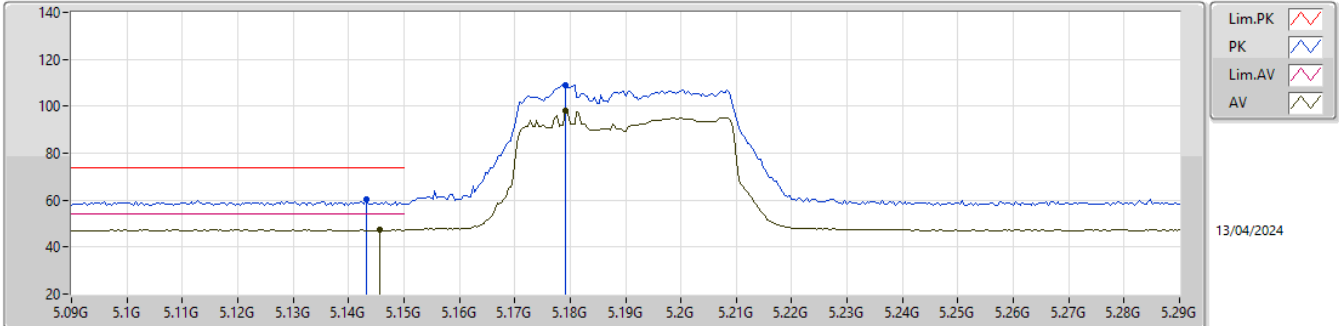


EUT_Y_4TX
Setting 18
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1432G	60.11	74.00	-13.89	55.23	3	Horizontal	251	2.90	-	33.00	7.40	35.52			
AV	5.1456G	47.33	54.00	-6.67	42.45	3	Horizontal	251	2.90	-	33.00	7.40	35.52			
PK	5.1792G	109.09	Inf	-Inf	104.11	3	Horizontal	251	2.90	-	33.06	7.43	35.51			
AV	5.1792G	98.01	Inf	-Inf	93.03	3	Horizontal	251	2.90	-	33.06	7.43	35.51			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5190MHz_TX

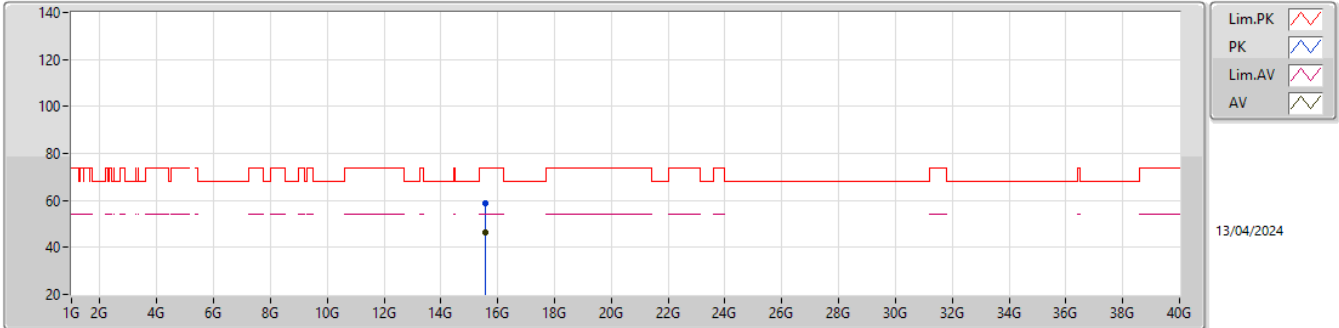


EUT_V_4TX
Setting 18
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.57954G	58.76	74.00	-15.24	41.86	3	Vertical	349	1.43	-	38.08	12.29	33.47			
AV	15.5829G	46.31	54.00	-7.69	29.41	3	Vertical	349	1.43	-	38.07	12.29	33.46			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5190MHz_TX

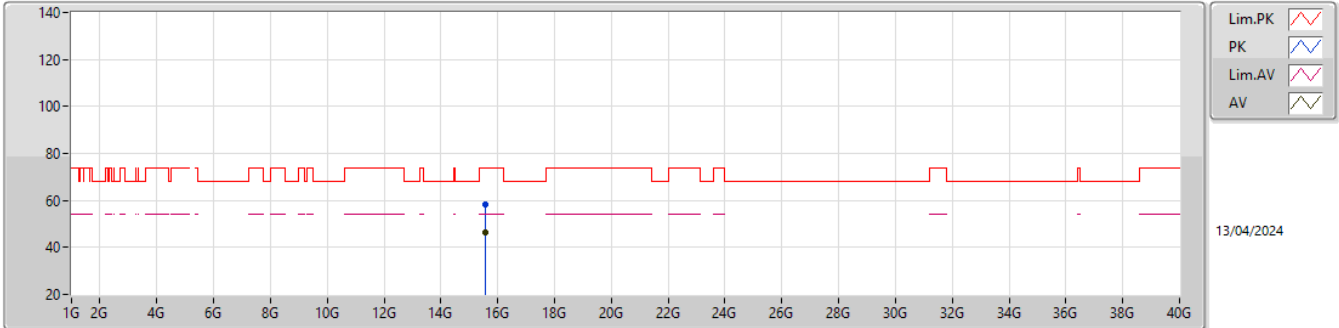


EUT_V_4TX
Setting 18
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.57402G	58.25	74.00	-15.75	41.34	3	Horizontal	240	1.46	-	38.10	12.29	33.48			
AV	15.58482G	46.39	54.00	-7.61	29.50	3	Horizontal	240	1.46	-	38.06	12.29	33.46			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5230MHz_TX

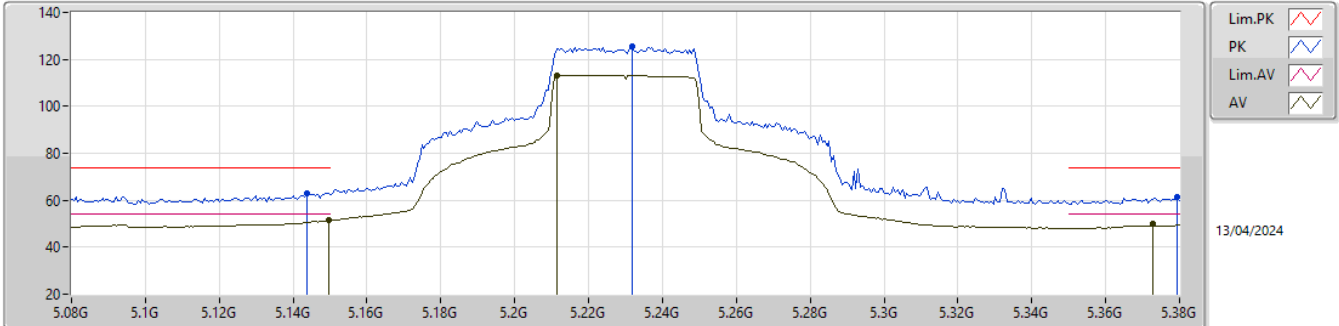


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1436G	62.88	74.00	-11.12	58.00	3	Vertical	200	1.80	-	33.00	7.40	35.52			
AV	5.1496G	51.30	54.00	-2.70	46.42	3	Vertical	200	1.80	-	33.00	7.40	35.52			
PK	5.2318G	125.52	Inf	-Inf	120.51	3	Vertical	200	1.80	-	33.04	7.47	35.50			
AV	5.2114G	113.26	Inf	-Inf	108.22	3	Vertical	200	1.80	-	33.08	7.46	35.50			
PK	5.3794G	61.62	74.00	-12.38	56.67	3	Vertical	200	1.80	-	32.86	7.54	35.45			
AV	5.3728G	49.91	54.00	-4.09	44.98	3	Vertical	200	1.80	-	32.85	7.54	35.46			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5230MHz_TX

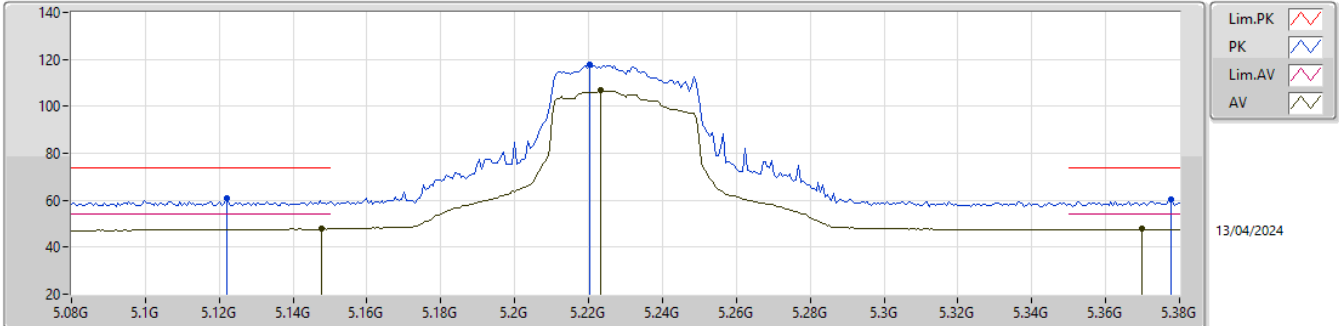


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.122G	60.71	74.00	-13.29	55.86	3	Horizontal	261	1.69	-	33.00	7.38	35.53			
AV	5.1478G	47.71	54.00	-6.29	42.83	3	Horizontal	261	1.69	-	33.00	7.40	35.52			
PK	5.2204G	117.65	Inf	-Inf	112.63	3	Horizontal	261	1.69	-	33.06	7.46	35.50			
AV	5.2234G	106.67	Inf	-Inf	101.66	3	Horizontal	261	1.69	-	33.05	7.46	35.50			
PK	5.3776G	60.16	74.00	-13.84	55.21	3	Horizontal	261	1.69	-	32.86	7.54	35.45			
AV	5.3698G	47.71	54.00	-6.29	42.80	3	Horizontal	261	1.69	-	32.84	7.53	35.46			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5230MHz_TX

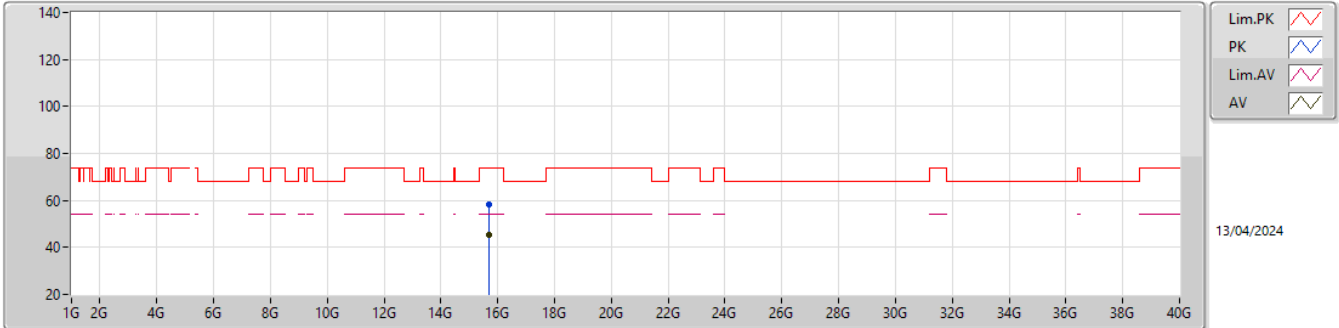


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.6954G	58.45	74.00	-15.55	41.73	3	Vertical	237	1.14	-	37.68	12.33	33.29			
AV	15.67536G	45.58	54.00	-8.42	28.98	3	Vertical	237	1.14	-	37.60	12.32	33.32			

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5230MHz_TX

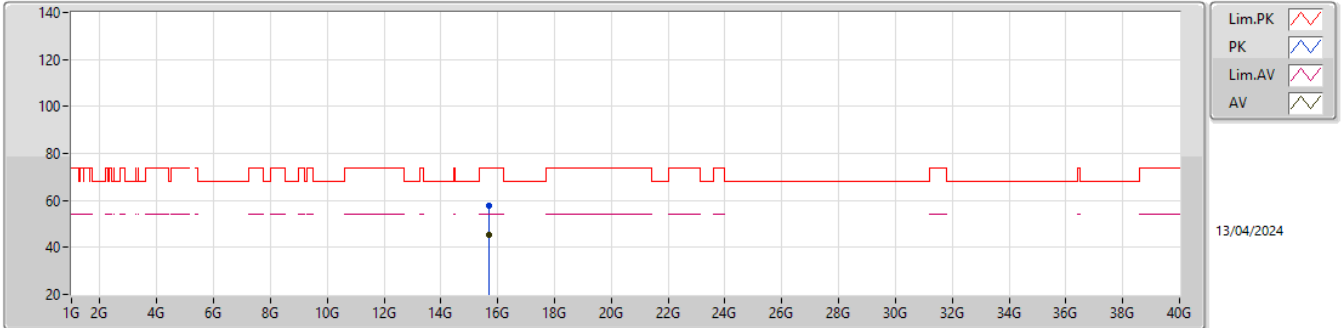


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.69084G	57.89	74.00	-16.11	41.20	3	Horizontal	117	1.80	-	37.66	12.33	33.30			
AV	15.67554G	45.42	54.00	-8.58	28.82	3	Horizontal	117	1.80	-	37.60	12.32	33.32			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5755MHz_TX

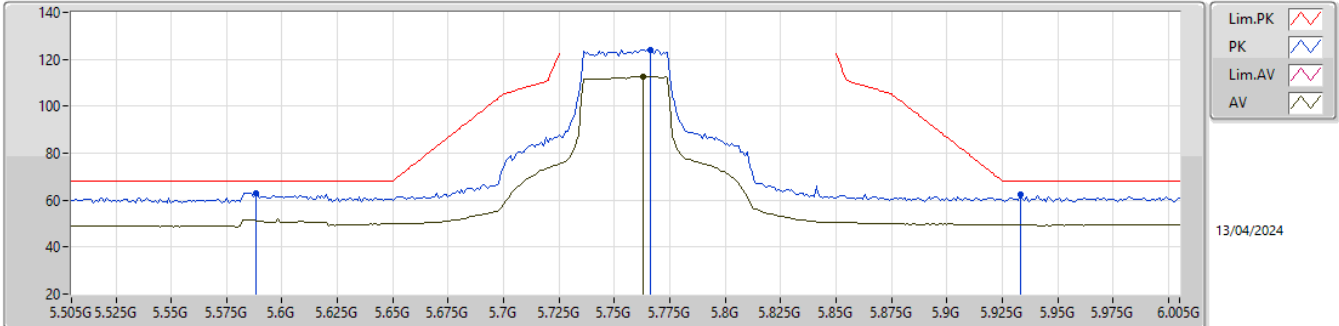


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.588G	63.12	68.20	-5.08	58.07	3	Vertical	198	1.80	-	32.80	7.70	35.45			
PK	5.766G	124.11	Inf	-Inf	117.89	3	Vertical	198	1.80	-	33.76	7.98	35.52			
AV	5.763G	112.68	Inf	-Inf	106.48	3	Vertical	198	1.80	-	33.75	7.97	35.52			
PK	5.933G	62.40	68.20	-5.80	55.66	3	Vertical	198	1.80	-	34.20	8.12	35.58			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5755MHz_TX

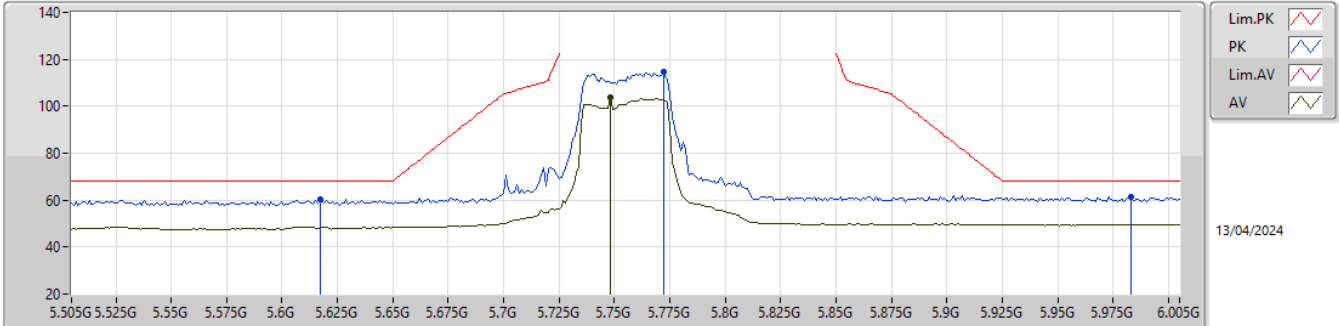


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.617G	60.09	68.20	-8.11	54.98	3	Horizontal	257	1.80	-	32.83	7.74	35.46			
PK	5.772G	114.47	Inf	-Inf	108.21	3	Horizontal	257	1.80	-	33.79	7.99	35.52			
AV	5.748G	103.93	Inf	-Inf	97.80	3	Horizontal	257	1.80	-	33.69	7.95	35.51			
PK	5.983G	61.41	68.20	-6.79	54.73	3	Horizontal	257	1.80	-	34.13	8.15	35.60			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5755MHz_TX

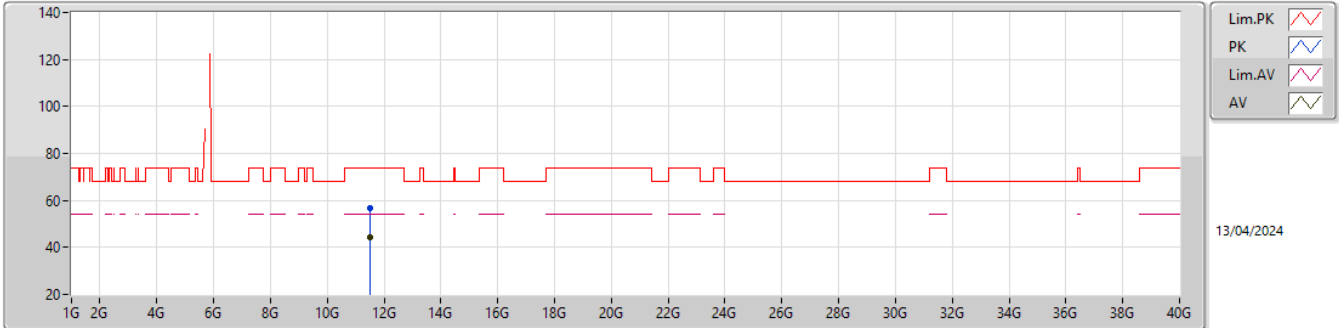


EUT_Y_4TX
Setting 28
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.50556G	56.72	74.00	-17.28	39.80	3	Vertical	213	1.43	-	39.08	10.85	33.01			
AV	11.51654G	44.25	54.00	-9.75	27.38	3	Vertical	213	1.43	-	39.03	10.86	33.02			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5755MHz_TX

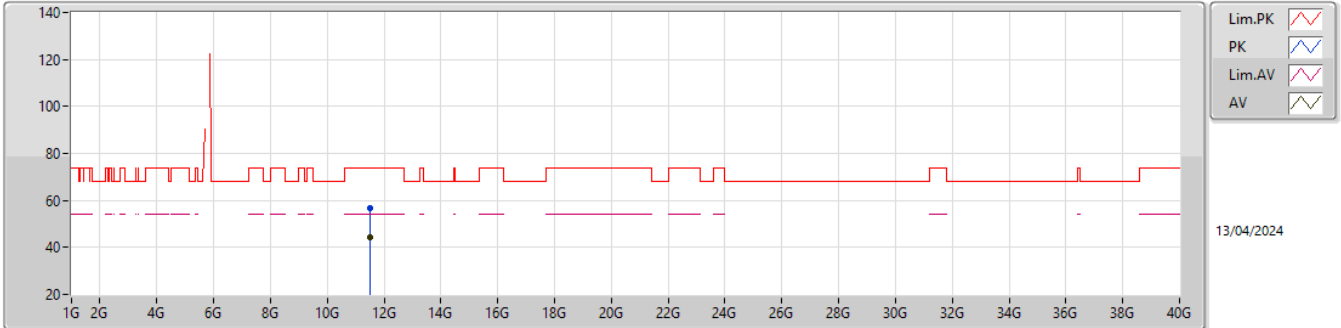


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.52062G	56.52	74.00	-17.48	39.67	3	Horizontal	278	1.63	-	39.02	10.86	33.03			
AV	11.52158G	44.20	54.00	-9.80	27.36	3	Horizontal	278	1.63	-	39.01	10.86	33.03			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5795MHz_TX

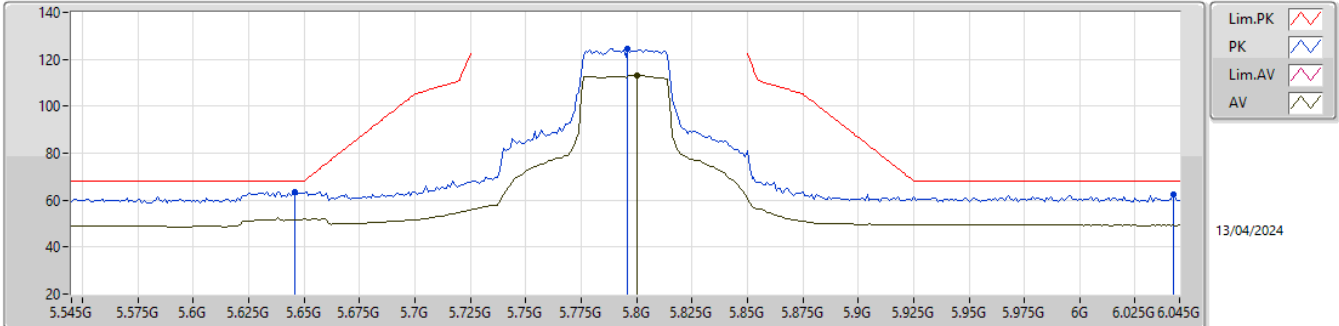


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.646G	63.56	68.20	-4.64	58.37	3	Vertical	193	1.80	-	32.89	7.78	35.48			
PK	5.796G	124.58	Inf	-Inf	118.21	3	Vertical	193	1.80	-	33.88	8.02	35.53			
AV	5.8G	113.09	Inf	-Inf	106.69	3	Vertical	193	1.80	-	33.90	8.03	35.53			
PK	6.042G	62.28	68.20	-5.92	55.54	3	Vertical	193	1.80	-	34.10	8.17	35.53			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5795MHz_TX

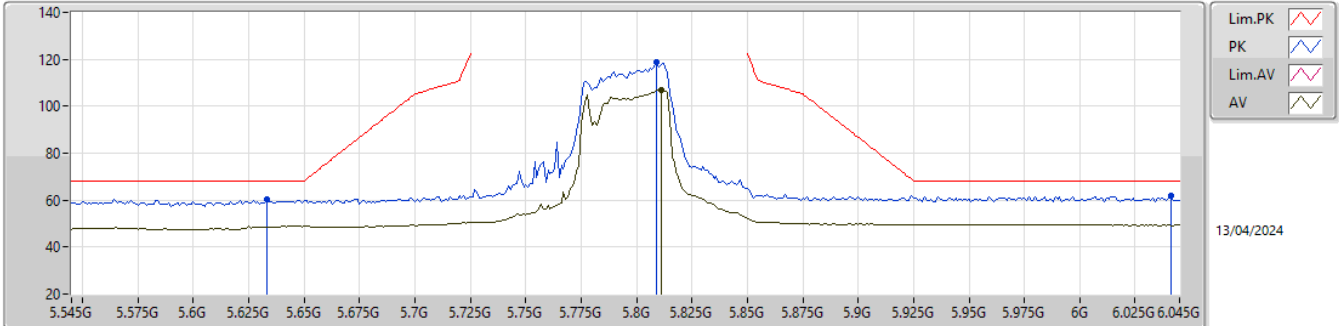


EUT_Y_4TX
Setting 28
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.633G	60.23	68.20	-7.97	55.07	3	Horizontal	235	2.82	-	32.87	7.76	35.47			
PK	5.809G	118.85	Inf	-Inf	112.43	3	Horizontal	235	2.82	-	33.92	8.04	35.54			
AV	5.811G	107.04	Inf	-Inf	100.62	3	Horizontal	235	2.82	-	33.92	8.04	35.54			
PK	6.041G	61.92	68.20	-6.28	55.18	3	Horizontal	235	2.82	-	34.10	8.17	35.53			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5795MHz_TX

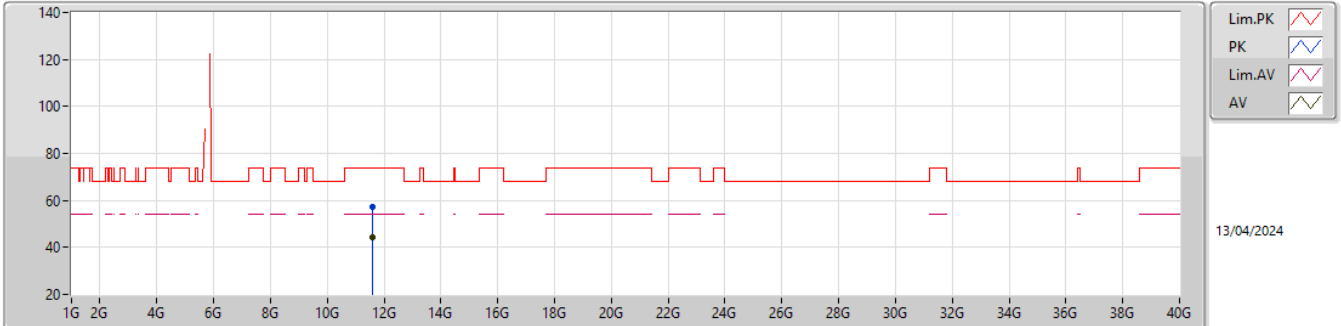


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.58736G	57.06	74.00	-16.94	40.51	3	Vertical	112	1.80	-	38.75	10.89	33.09			
AV	11.59006G	44.36	54.00	-9.64	27.82	3	Vertical	112	1.80	-	38.74	10.89	33.09			

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5795MHz_TX

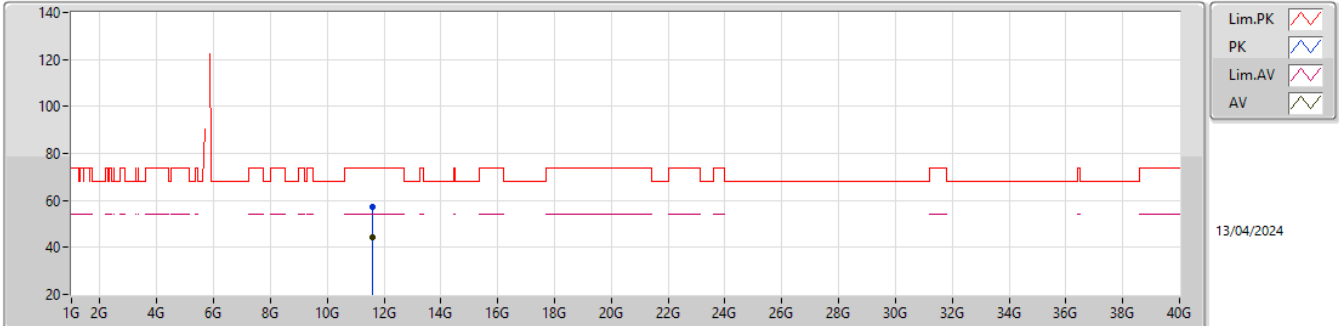


EUT_V_4TX
Setting 28
05-P-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5753G	57.23	74.00	-16.77	40.63	3	Horizontal	323	1.85	-	38.80	10.88	33.08			
AV	11.58988G	44.29	54.00	-9.71	27.75	3	Horizontal	323	1.85	-	38.74	10.89	33.09			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

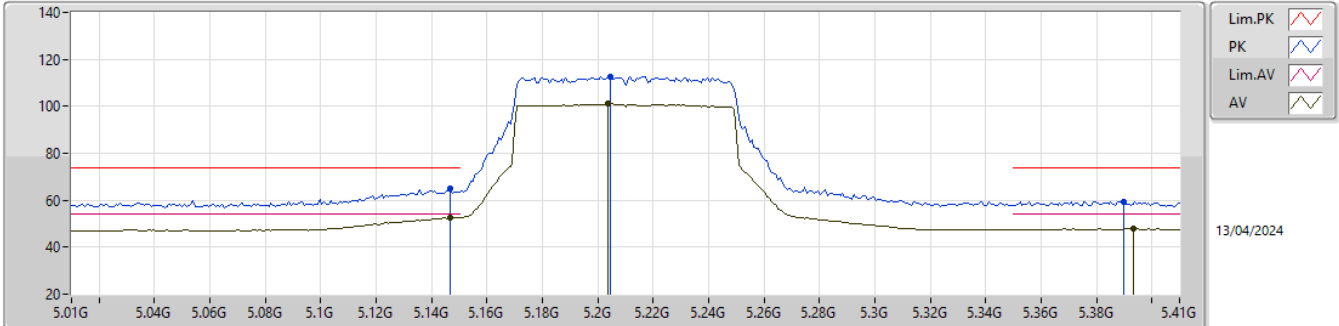


EUT_Y_4TX
Setting 18
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1468G	64.88	74.00	-9.12	60.00	3	Vertical	199	1.80	-	33.00	7.40	35.52			
AV	5.1468G	52.75	54.00	-1.25	47.87	3	Vertical	199	1.80	-	33.00	7.40	35.52			
PK	5.2044G	112.79	Inf	-Inf	107.75	3	Vertical	199	1.80	-	33.09	7.45	35.50			
AV	5.2036G	101.03	Inf	-Inf	95.99	3	Vertical	199	1.80	-	33.09	7.45	35.50			
PK	5.39G	59.53	74.00	-14.47	54.56	3	Vertical	199	1.80	-	32.88	7.54	35.45			
AV	5.3932G	47.89	54.00	-6.11	42.90	3	Vertical	199	1.80	-	32.89	7.55	35.45			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

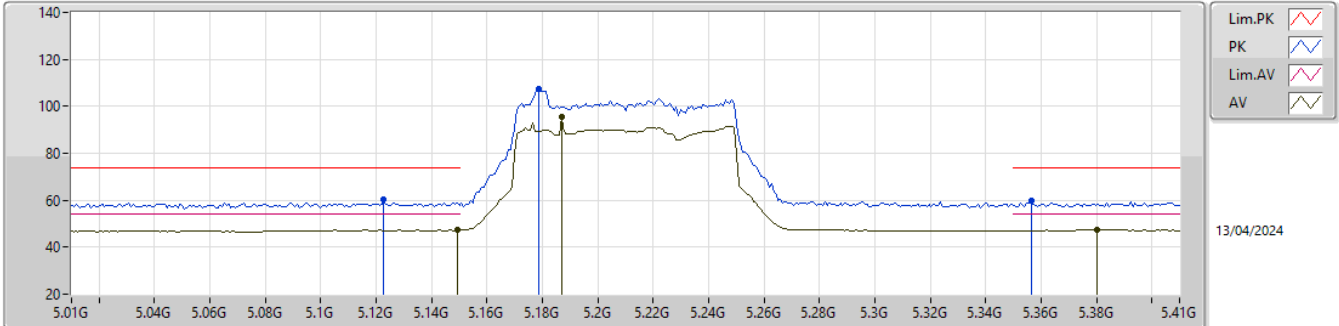


EUT_Y_4TX
Setting 18
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1228G	60.17	74.00	-13.83	55.32	3	Horizontal	249	3.00	-	33.00	7.38	35.53			
AV	5.1492G	47.34	54.00	-6.66	42.46	3	Horizontal	249	3.00	-	33.00	7.40	35.52			
PK	5.1788G	107.60	Inf	-Inf	102.62	3	Horizontal	249	3.00	-	33.06	7.43	35.51			
AV	5.1868G	95.31	Inf	-Inf	90.31	3	Horizontal	249	3.00	-	33.07	7.44	35.51			
PK	5.3564G	59.73	74.00	-14.27	54.85	3	Horizontal	249	3.00	-	32.81	7.53	35.46			
AV	5.3804G	47.41	54.00	-6.59	42.46	3	Horizontal	249	3.00	-	32.86	7.54	35.45			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

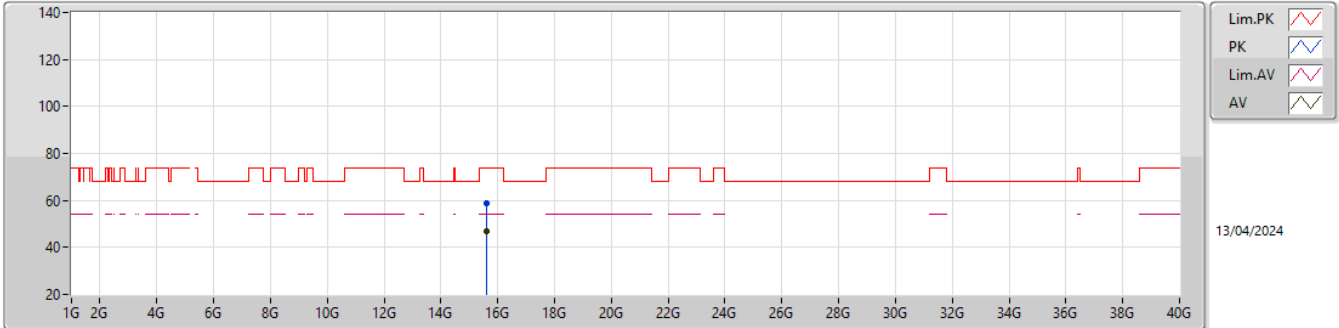


EUT_V_4TX
Setting 18
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.6228G	58.76	74.00	-15.24	42.09	3	Vertical	0	1.80	-	37.77	12.30	33.40			
AV	15.61656G	46.68	54.00	-7.32	29.96	3	Vertical	0	1.80	-	37.83	12.30	33.41			

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5210MHz_TX

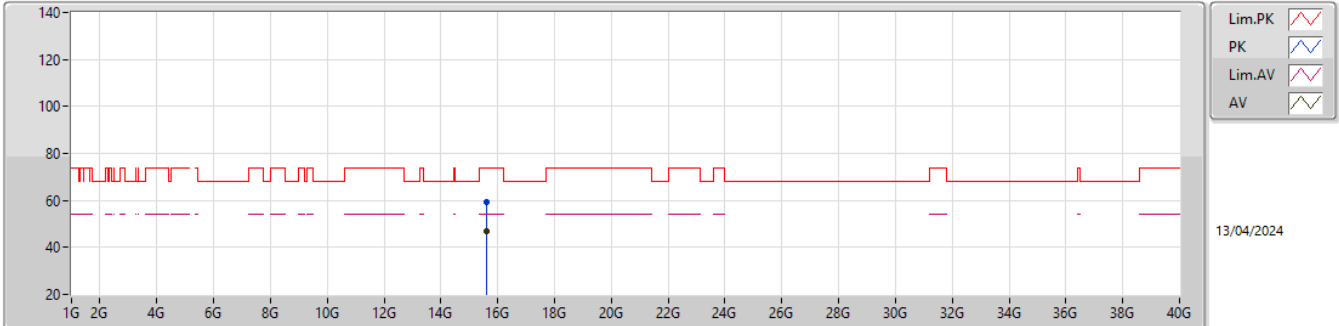


EUT_V_4TX
Setting 18
05-P-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	15.61638G	59.12	74.00	-14.88	42.39	3	Horizontal	350	2.80	-	37.84	12.30	33.41			
AV	15.61644G	46.76	54.00	-7.24	30.03	3	Horizontal	350	2.80	-	37.84	12.30	33.41			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5775MHz_TX

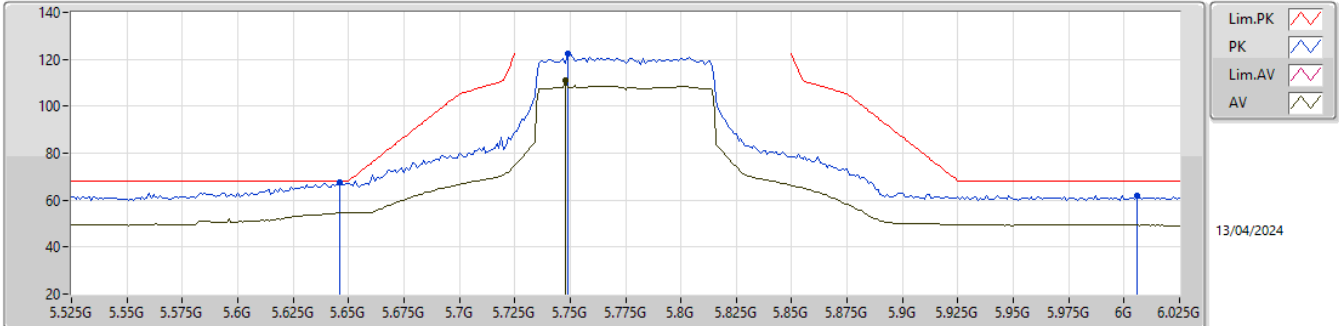


EUT_Y_4TX
Setting 27
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.646G	67.71	68.20	-0.49	62.52	3	Vertical	197	1.80	-	32.89	7.78	35.48			
PK	5.749G	122.41	Inf	-Inf	116.28	3	Vertical	197	1.80	-	33.69	7.95	35.51			
AV	5.748G	111.23	Inf	-Inf	105.10	3	Vertical	197	1.80	-	33.69	7.95	35.51			
PK	6.006G	62.10	68.20	-6.10	55.44	3	Vertical	197	1.80	-	34.10	8.16	35.60			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5775MHz_TX

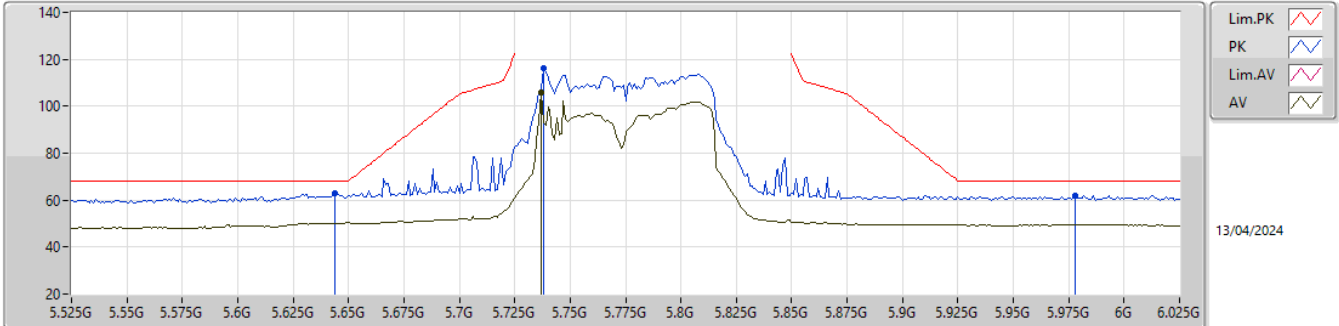


EUT_Y_4TX
Setting 27
05-P-K-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.644G	62.71	68.20	-5.49	57.51	3	Horizontal	244.5	2.78	-	32.89	7.78	35.47			
PK	5.738G	116.15	Inf	-Inf	110.10	3	Horizontal	244.5	2.78	-	33.63	7.93	35.51			
AV	5.737G	105.82	Inf	-Inf	99.78	3	Horizontal	244.5	2.78	-	33.62	7.93	35.51			
PK	5.978G	62.06	68.20	-6.14	55.37	3	Horizontal	244.5	2.78	-	34.14	8.15	35.60			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX


5775MHz_TX

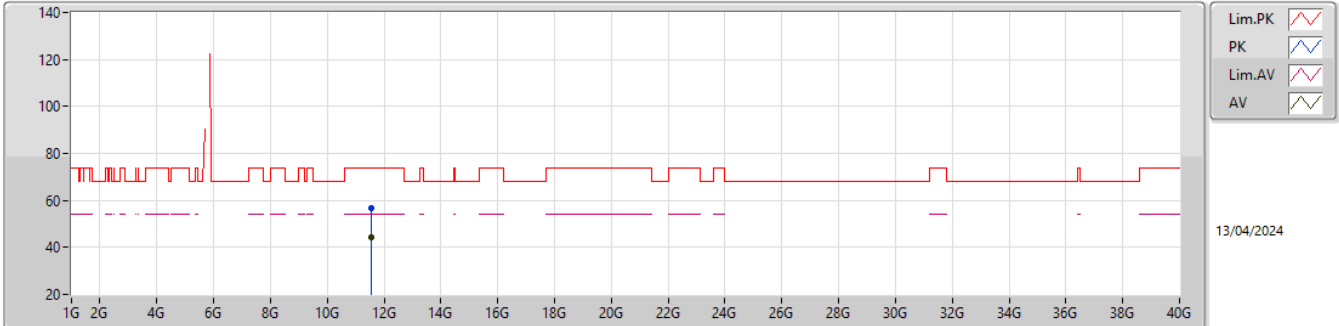EUT_Y_4TX
Setting 27
05-P-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.54286G	56.90	74.00	-17.10	40.15	3	Vertical	30	2.88	-	38.93	10.87	33.05			
AV	11.54028G	44.44	54.00	-9.56	27.68	3	Vertical	30	2.88	-	38.94	10.87	33.05			

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5775MHz_TX

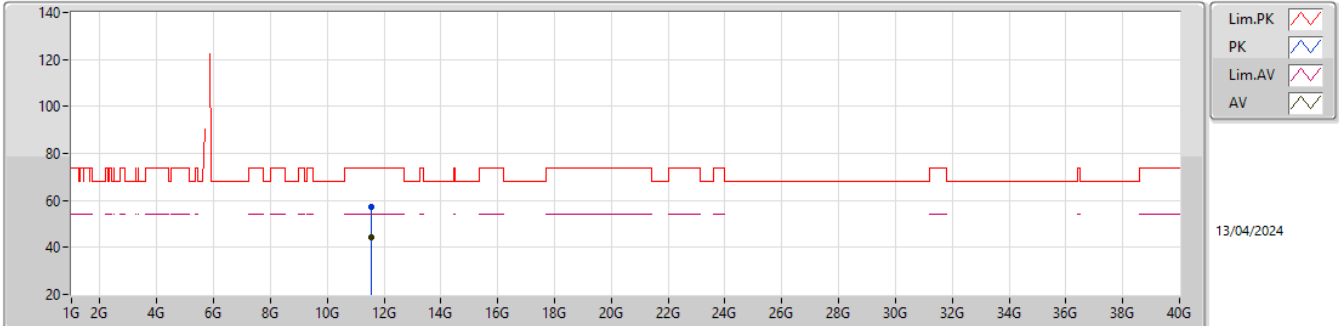EUT_V_4TX
Setting 27
05-P-E-2


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.53656G	57.32	74.00	-16.68	40.54	3	Horizontal	38	1.80	-	38.95	10.87	33.04			
AV	11.53824G	44.54	54.00	-9.46	27.76	3	Horizontal	38	1.80	-	38.95	10.87	33.04			



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	1.45201G	37.70	54.00	-16.30	Horizontal

Mode 1

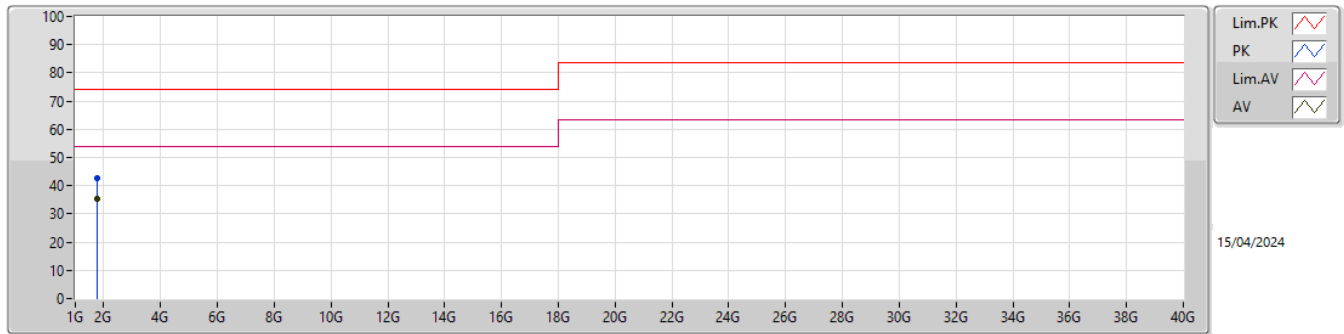

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)		
PK	1.75410G	42.73	74.00	-31.27	-7.37	3	Vertical	27	1.66	-	50.10	24.84	4.51	36.72		
AV	1.763G	35.46	54.00	-18.54	-7.30	3	Vertical	27	1.66	"Worst"	42.76	24.90	4.52	36.72		

Mode 1

