



Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 5V

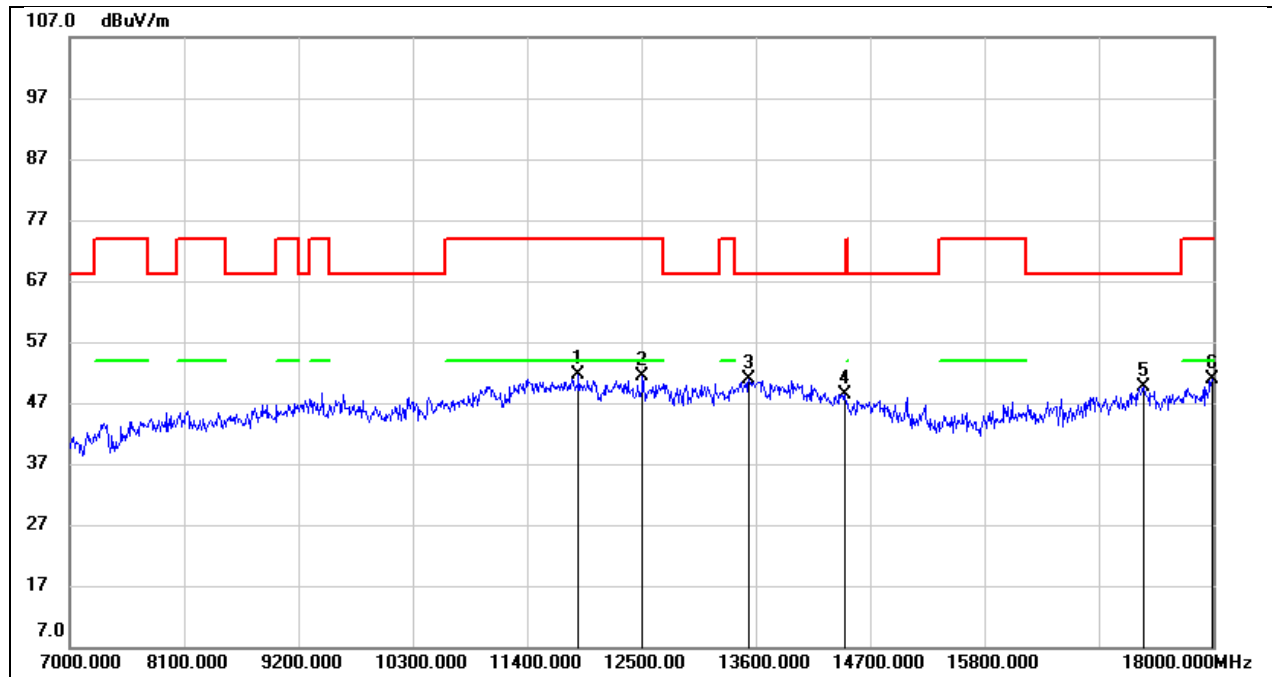


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11895.000	33.33	18.25	51.58	74.00	-22.42	peak
2	12511.000	31.54	19.80	51.34	74.00	-22.66	peak
3	13534.000	28.36	22.49	50.85	68.20	-17.35	peak
4	14458.000	27.06	21.32	48.38	68.20	-19.82	peak
5	17329.000	25.55	24.16	49.71	68.20	-18.49	peak
6	17989.000	22.41	28.40	50.81	74.00	-23.19	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 5V

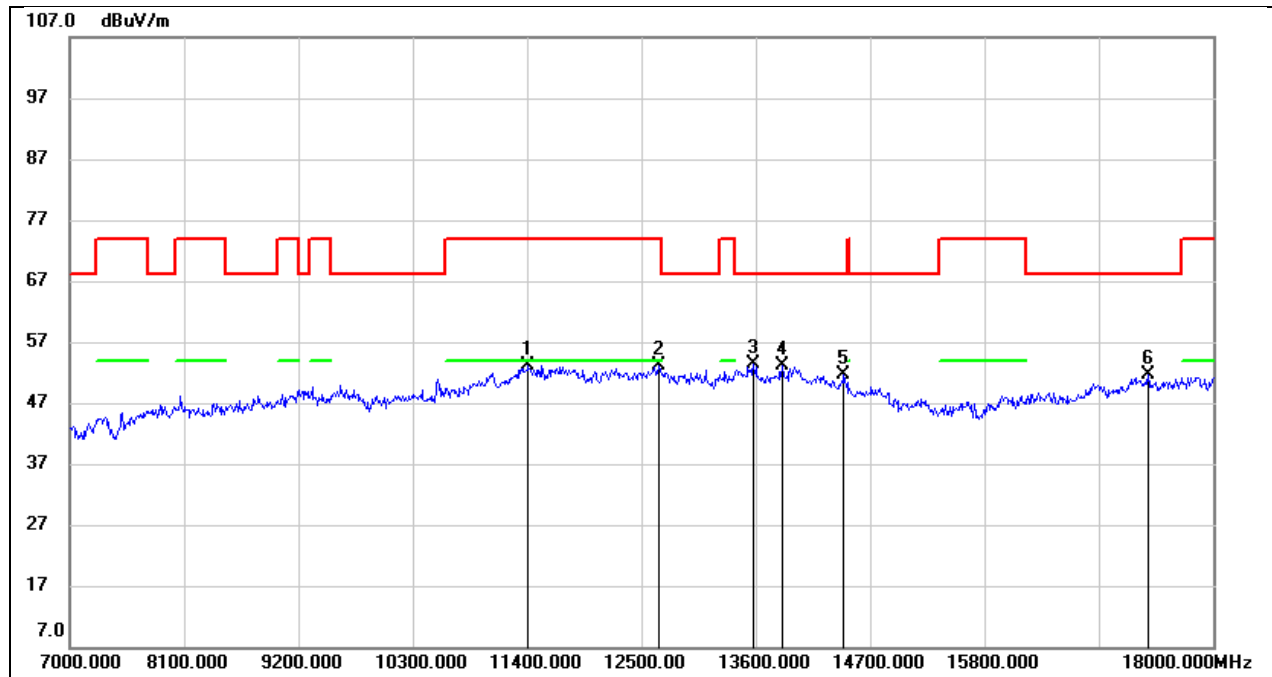


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11411.000	35.98	17.24	53.22	74.00	-20.78	peak
2	12665.000	33.06	20.09	53.15	74.00	-20.85	peak
3	13578.000	30.85	22.56	53.41	68.20	-14.79	peak
4	13853.000	29.79	23.34	53.13	68.20	-15.07	peak
5	14447.000	30.31	21.35	51.66	68.20	-16.54	peak
6	17373.000	27.20	24.31	51.51	68.20	-16.69	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 5V

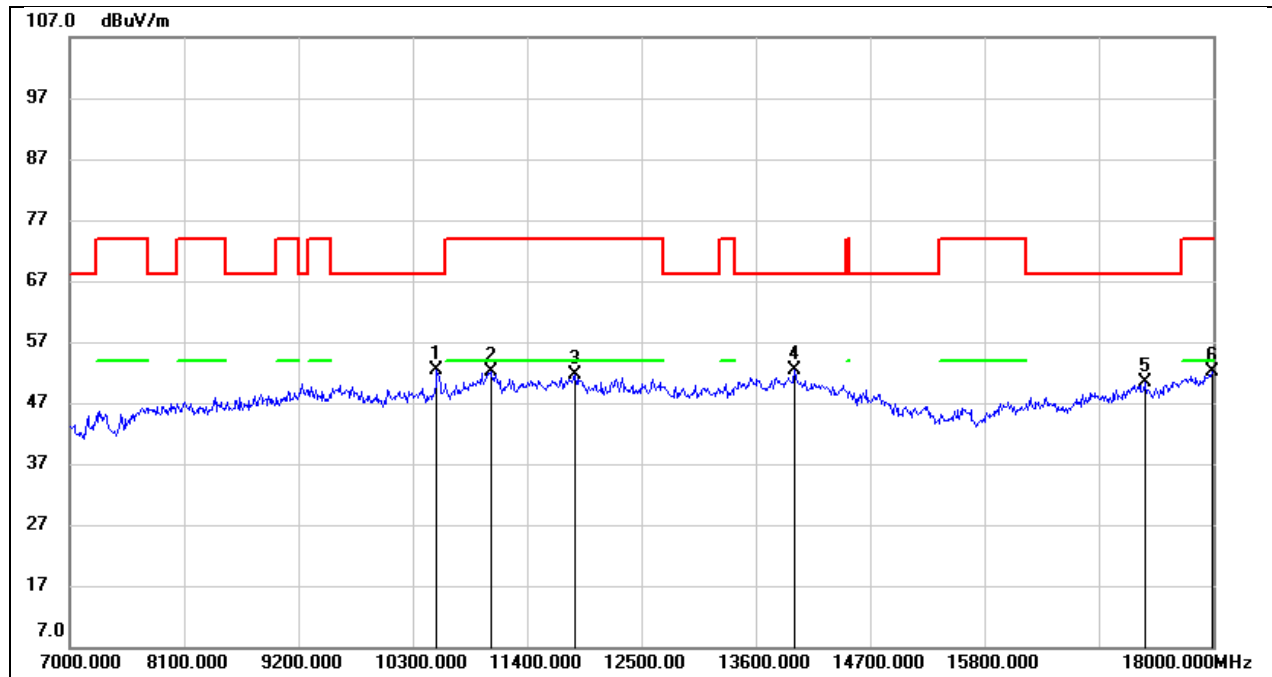


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10531.000	38.32	14.12	52.44	68.20	-15.76	peak
2	11048.000	36.46	15.66	52.12	74.00	-21.88	peak
3	11862.000	33.43	18.13	51.56	74.00	-22.44	peak
4	13974.000	28.61	23.81	52.42	68.20	-15.78	peak
5	17340.000	26.16	24.20	50.36	68.20	-17.84	peak
6	17989.000	23.65	28.40	52.05	74.00	-21.95	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 5V

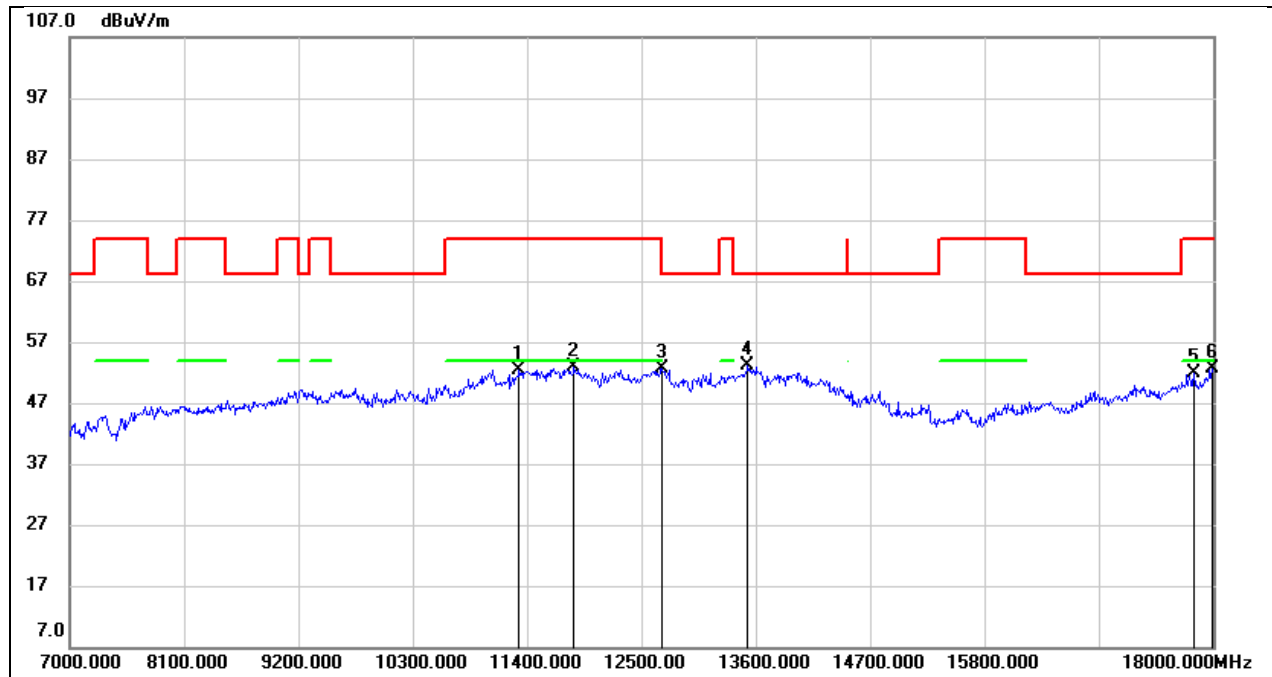


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11323.000	35.52	16.84	52.36	74.00	-21.64	peak
2	11851.000	34.81	18.09	52.90	74.00	-21.10	peak
3	12698.000	32.47	20.20	52.67	74.00	-21.33	peak
4	13523.000	30.72	22.48	53.20	68.20	-15.00	peak
5	17813.000	25.06	26.78	51.84	74.00	-22.16	peak
6	17989.000	24.33	28.40	52.73	74.00	-21.27	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 5V

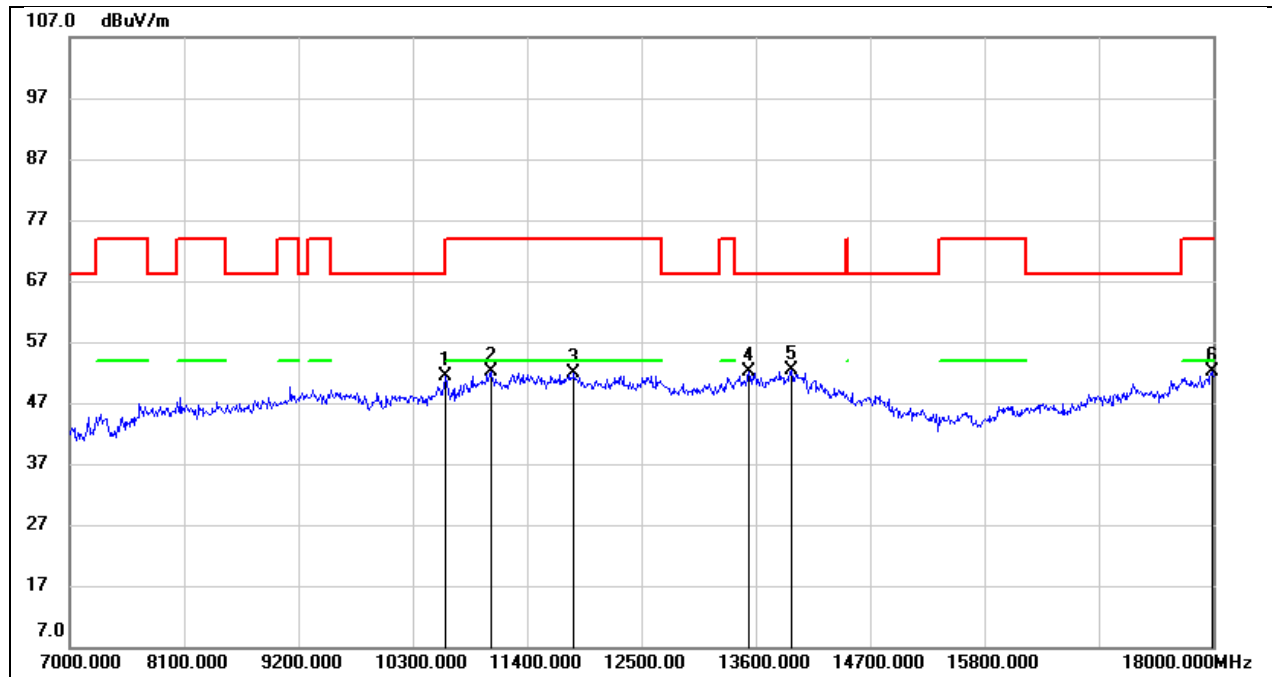


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10619.000	37.10	14.36	51.46	74.00	-22.54	peak
2	11048.000	36.44	15.66	52.10	74.00	-21.90	peak
3	11851.000	33.84	18.09	51.93	74.00	-22.07	peak
4	13534.000	29.53	22.49	52.02	68.20	-16.18	peak
5	13941.000	28.58	23.68	52.26	68.20	-15.94	peak
6	17989.000	23.62	28.40	52.02	74.00	-21.98	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 5V

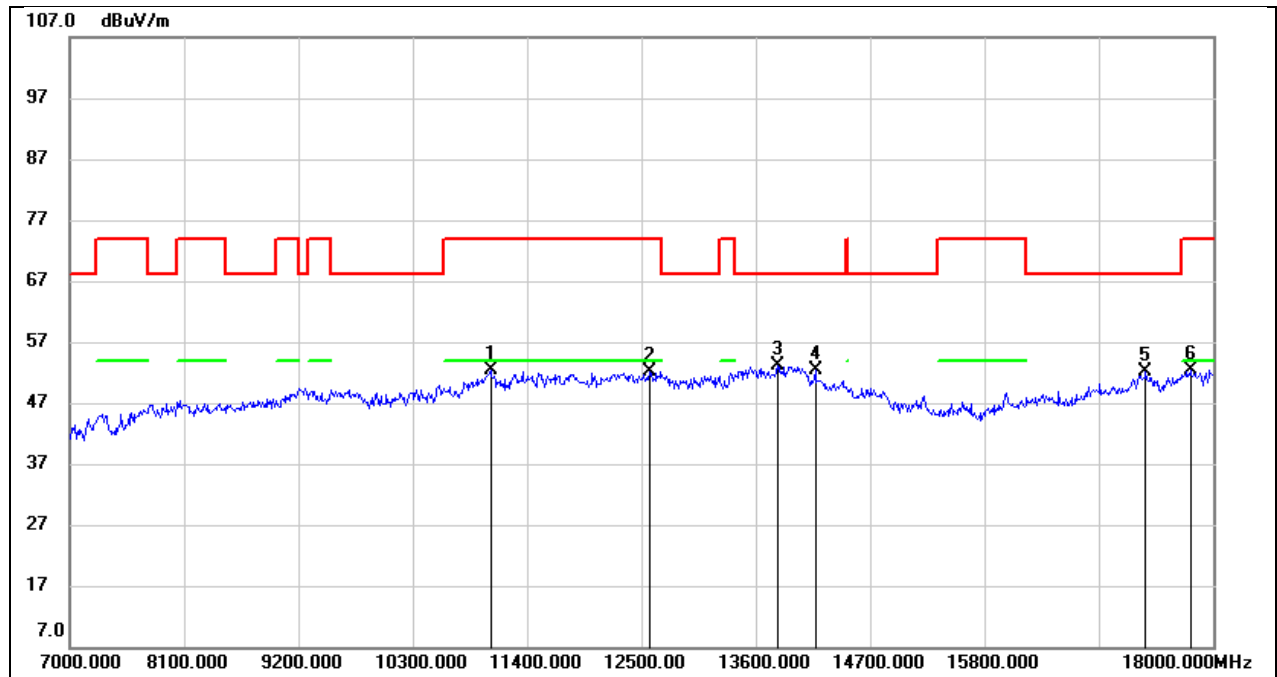


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	36.71	15.66	52.37	74.00	-21.63	peak
2	12577.000	32.34	19.87	52.21	74.00	-21.79	peak
3	13809.000	29.90	23.17	53.07	68.20	-15.13	peak
4	14172.000	29.27	23.06	52.33	68.20	-15.87	peak
5	17351.000	27.95	24.23	52.18	68.20	-16.02	peak
6	17780.000	25.84	26.50	52.34	74.00	-21.66	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 5V

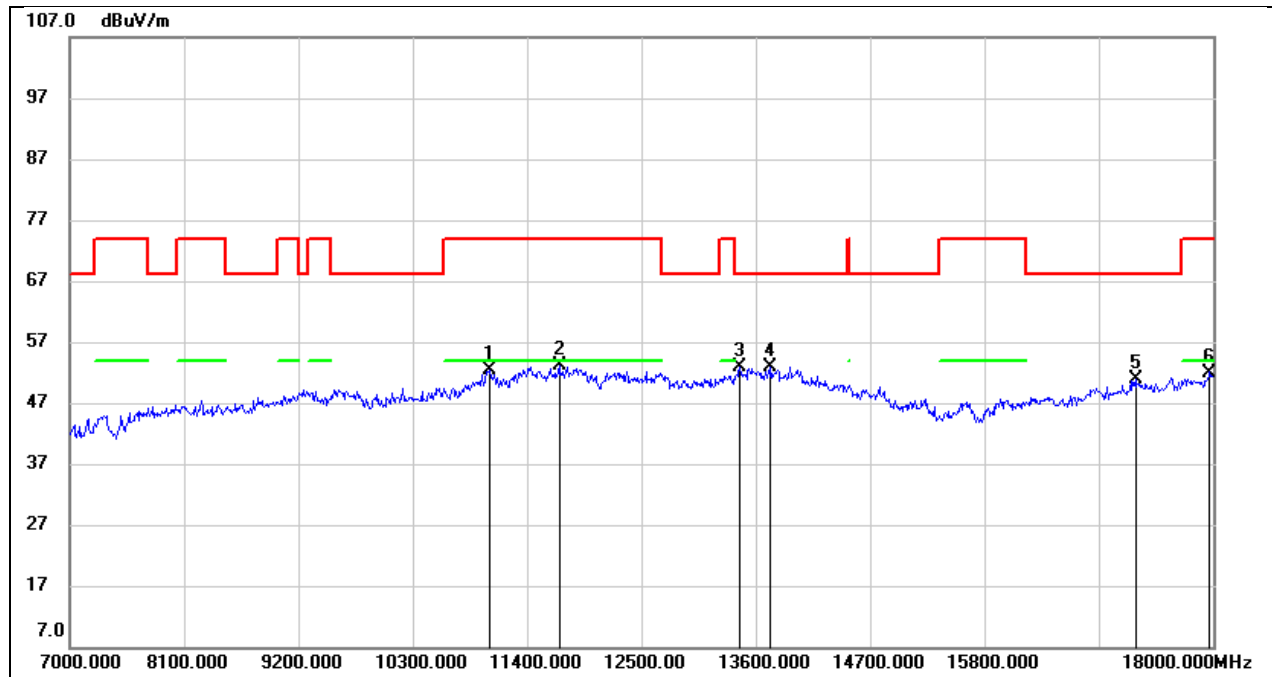


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11037.000	36.77	15.62	52.39	74.00	-21.61	peak
2	11708.000	35.17	17.91	53.08	74.00	-20.92	peak
3	13446.000	30.55	22.22	52.77	68.20	-15.43	peak
4	13743.000	29.89	22.99	52.88	68.20	-15.32	peak
5	17252.000	26.92	23.90	50.82	68.20	-17.38	peak
6	17967.000	23.79	28.21	52.00	74.00	-22.00	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 5V

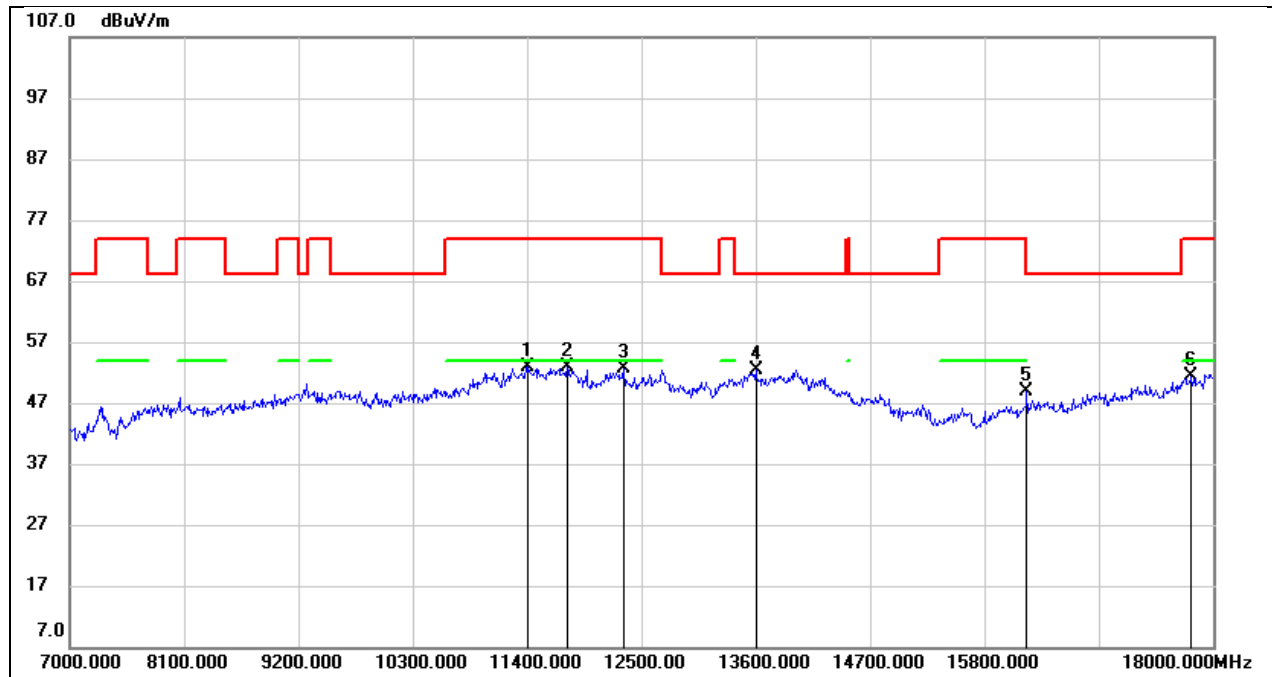


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11411.000	35.57	17.24	52.81	74.00	-21.19	peak
2	11785.000	34.96	17.92	52.88	74.00	-21.12	peak
3	12324.000	33.19	19.43	52.62	74.00	-21.38	peak
4	13600.000	29.73	22.60	52.33	68.20	-15.87	peak
5	16207.000	27.31	21.58	48.89	68.20	-19.31	peak
6	17791.000	24.70	26.58	51.28	74.00	-22.72	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 5V

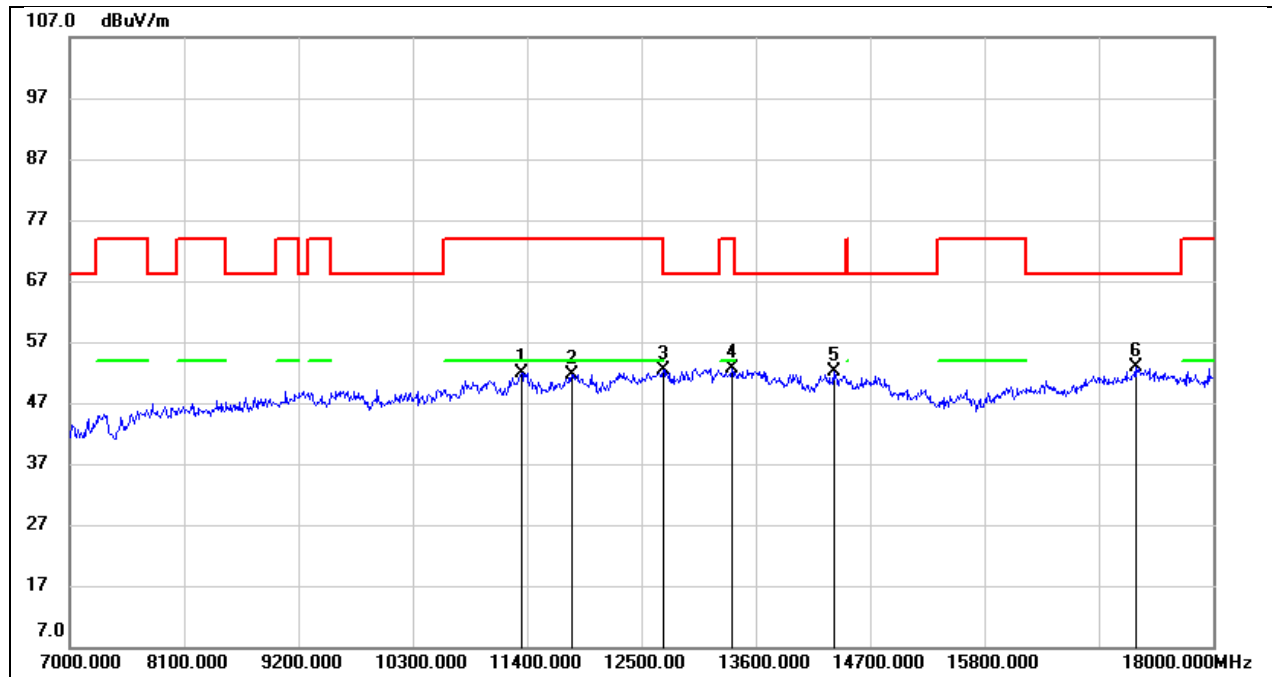


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11345.000	34.97	16.96	51.93	74.00	-22.07	peak
2	11829.000	33.67	18.02	51.69	74.00	-22.31	peak
3	12709.000	32.21	20.24	52.45	68.20	-15.75	peak
4	13369.000	30.59	21.92	52.51	74.00	-21.49	peak
5	14348.000	30.16	21.90	52.06	68.20	-16.14	peak
6	17252.000	28.94	23.90	52.84	68.20	-15.36	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 5V

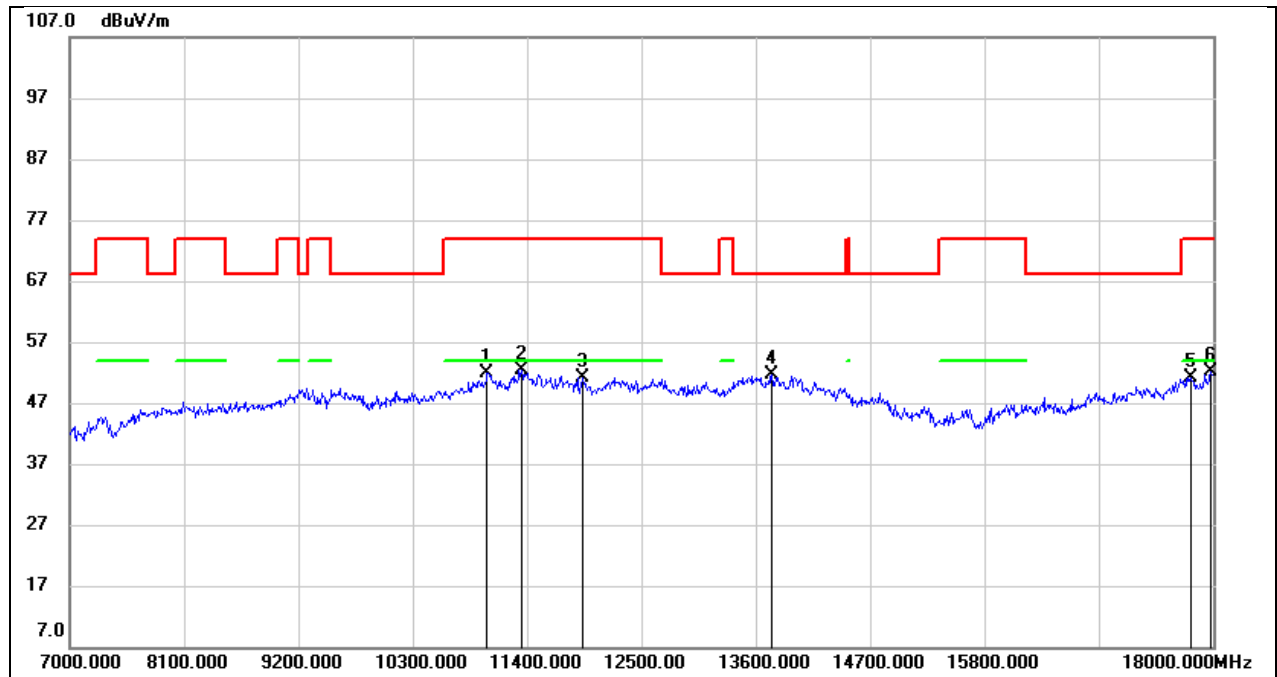


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11015.000	36.43	15.52	51.95	74.00	-22.05	peak
2	11345.000	35.53	16.96	52.49	74.00	-21.51	peak
3	11939.000	32.84	18.39	51.23	74.00	-22.77	peak
4	13754.000	28.65	23.01	51.66	68.20	-16.54	peak
5	17791.000	24.49	26.58	51.07	74.00	-22.93	peak
6	17978.000	23.93	28.31	52.24	74.00	-21.76	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 5V

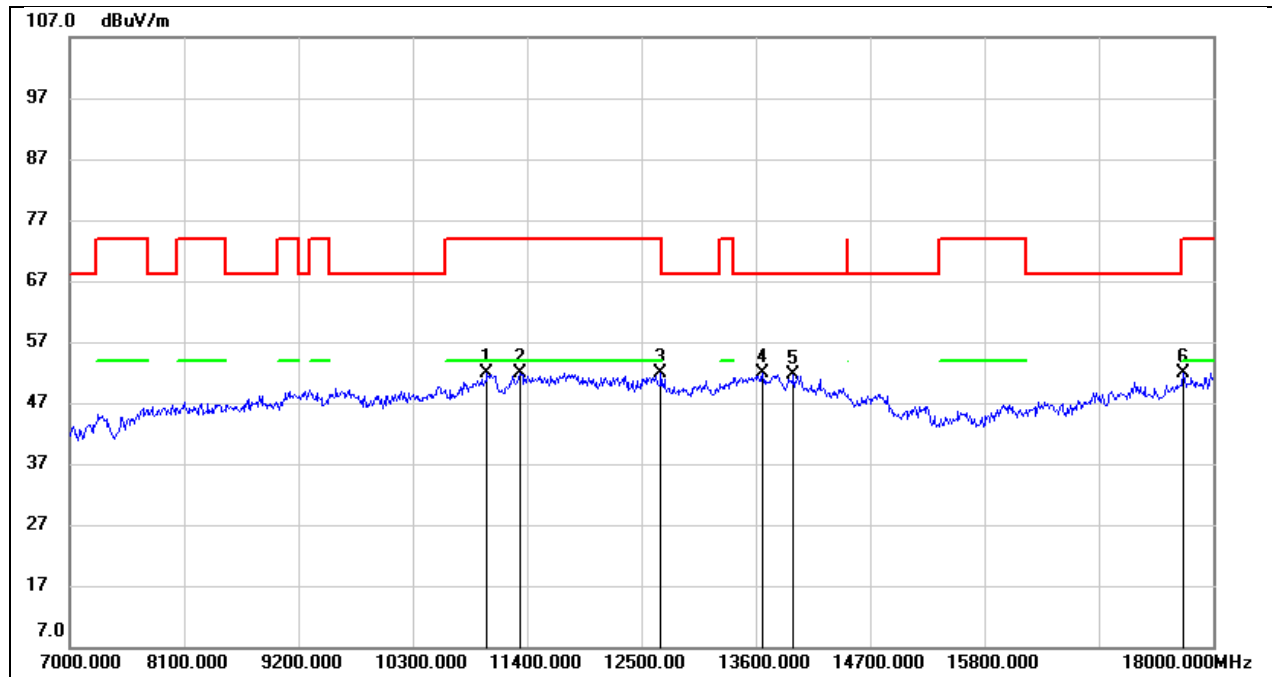


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11015.000	36.26	15.52	51.78	74.00	-22.22	peak
2	11334.000	35.00	16.90	51.90	74.00	-22.10	peak
3	12687.000	31.68	20.17	51.85	74.00	-22.15	peak
4	13666.000	29.07	22.78	51.85	68.20	-16.35	peak
5	13963.000	27.96	23.77	51.73	68.20	-16.47	peak
6	17714.000	25.90	25.96	51.86	74.00	-22.14	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 5V

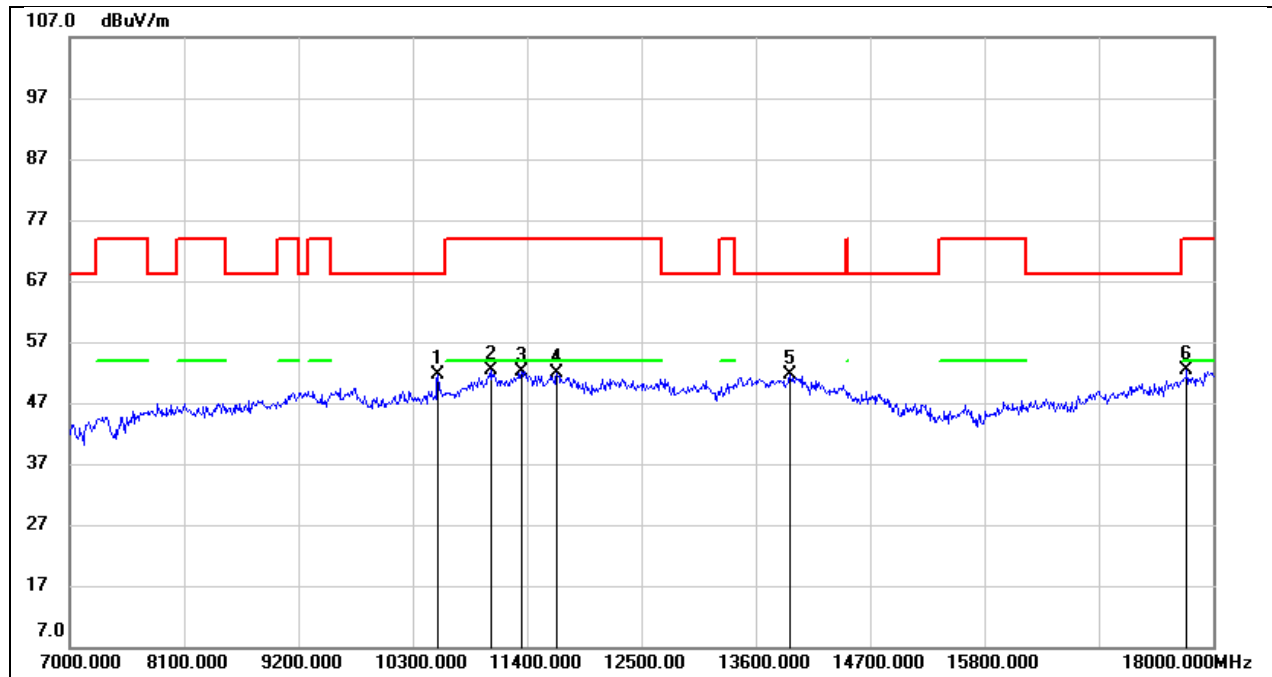


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10542.000	37.44	14.15	51.59	68.20	-16.61	peak
2	11048.000	36.63	15.66	52.29	74.00	-21.71	peak
3	11345.000	35.17	16.96	52.13	74.00	-21.87	peak
4	11686.000	33.93	17.91	51.84	74.00	-22.16	peak
5	13930.000	27.92	23.63	51.55	68.20	-16.65	peak
6	17747.000	26.19	26.23	52.42	74.00	-21.58	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 5V

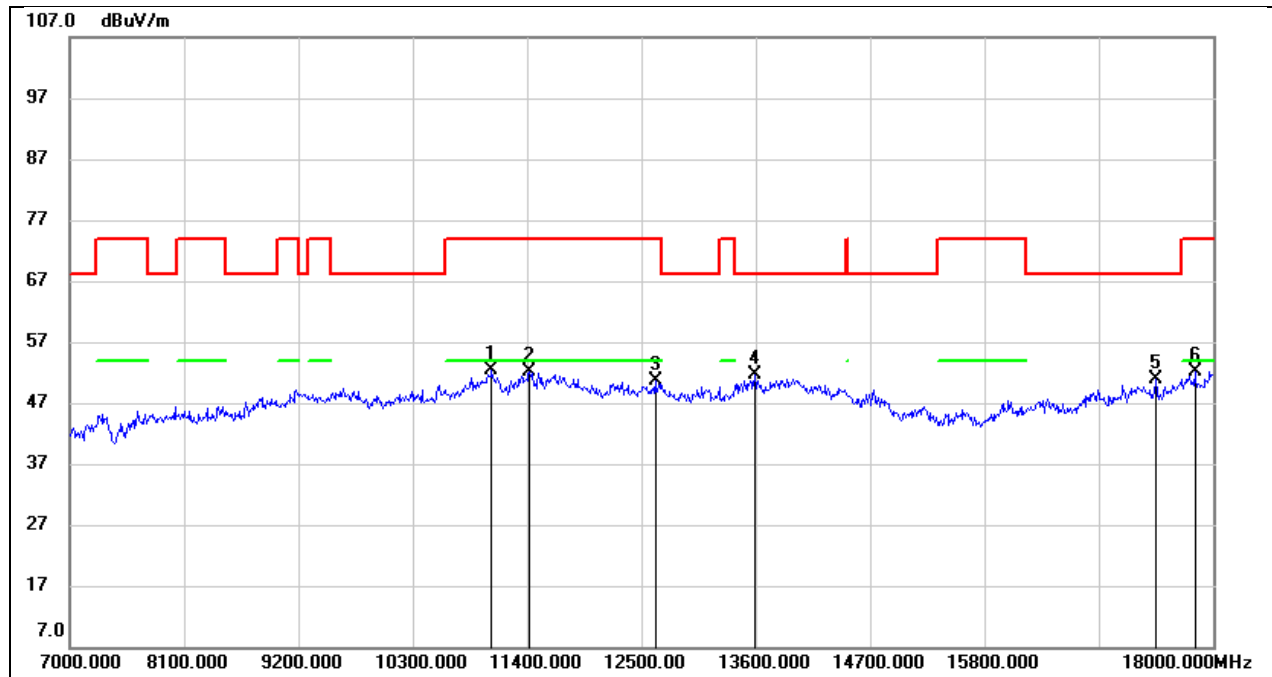


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11059.000	36.64	15.71	52.35	74.00	-21.65	peak
2	11422.000	34.78	17.27	52.05	74.00	-21.95	peak
3	12632.000	30.57	19.99	50.56	74.00	-23.44	peak
4	13589.000	29.13	22.58	51.71	68.20	-16.49	peak
5	17450.000	26.41	24.49	50.90	68.20	-17.30	peak
6	17824.000	25.36	26.88	52.24	74.00	-21.76	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 5V

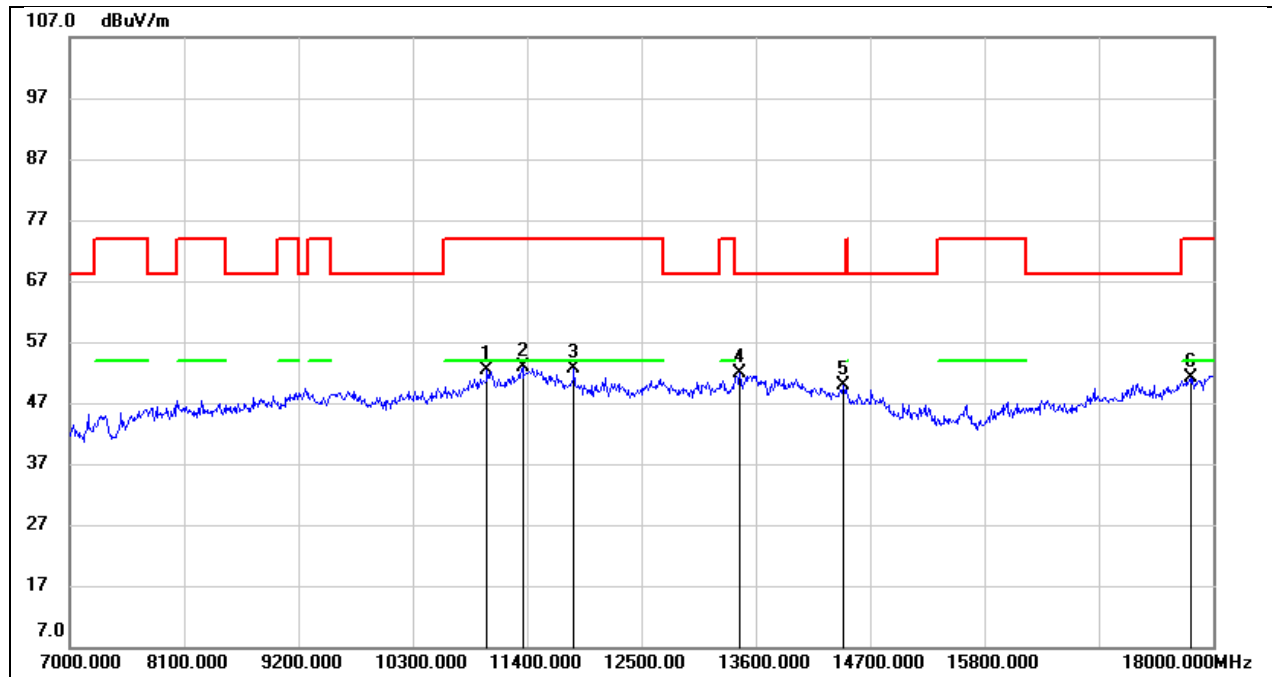


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11015.000	36.84	15.52	52.36	74.00	-21.64	peak
2	11356.000	35.80	17.00	52.80	74.00	-21.20	peak
3	11851.000	34.57	18.09	52.66	74.00	-21.34	peak
4	13446.000	29.62	22.22	51.84	68.20	-16.36	peak
5	14447.000	28.52	21.35	49.87	68.20	-18.33	peak
6	17780.000	24.53	26.50	51.03	74.00	-22.97	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 5V

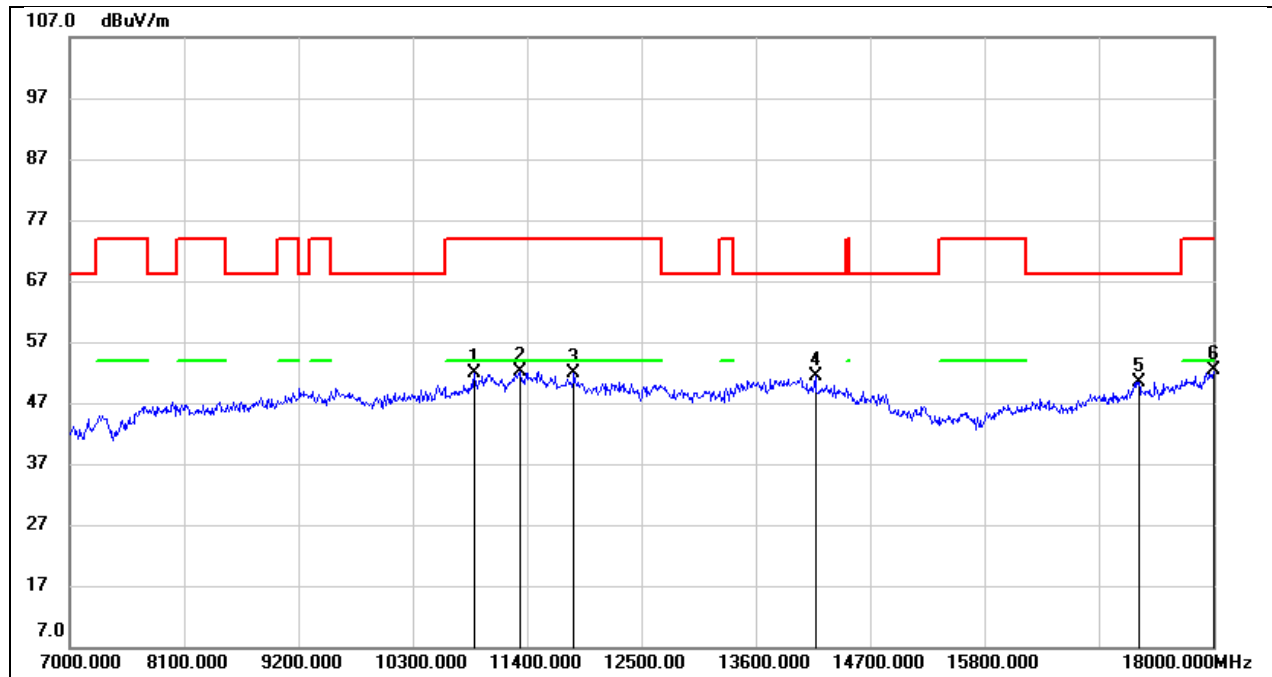


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10894.000	36.64	15.14	51.78	74.00	-22.22	peak
2	11334.000	35.19	16.90	52.09	74.00	-21.91	peak
3	11851.000	33.74	18.09	51.83	74.00	-22.17	peak
4	14172.000	28.21	23.06	51.27	68.20	-16.93	peak
5	17285.000	26.48	24.01	50.49	68.20	-17.71	peak
6	18000.000	23.81	28.51	52.32	74.00	-21.68	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 5V

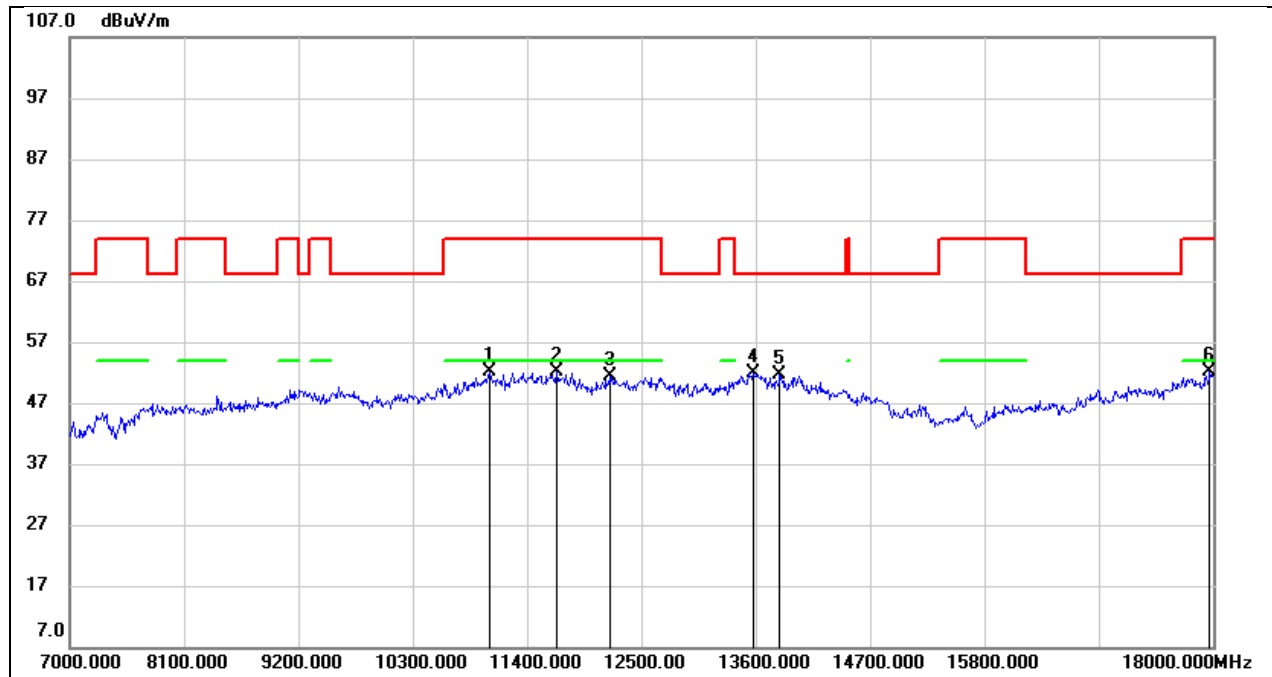


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11037.000	36.57	15.62	52.19	74.00	-21.81	peak
2	11686.000	34.14	17.91	52.05	74.00	-21.95	peak
3	12192.000	32.27	19.07	51.34	74.00	-22.66	peak
4	13578.000	29.34	22.56	51.90	68.20	-16.30	peak
5	13831.000	28.34	23.26	51.60	68.20	-16.60	peak
6	17967.000	23.86	28.21	52.07	74.00	-21.93	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 5V

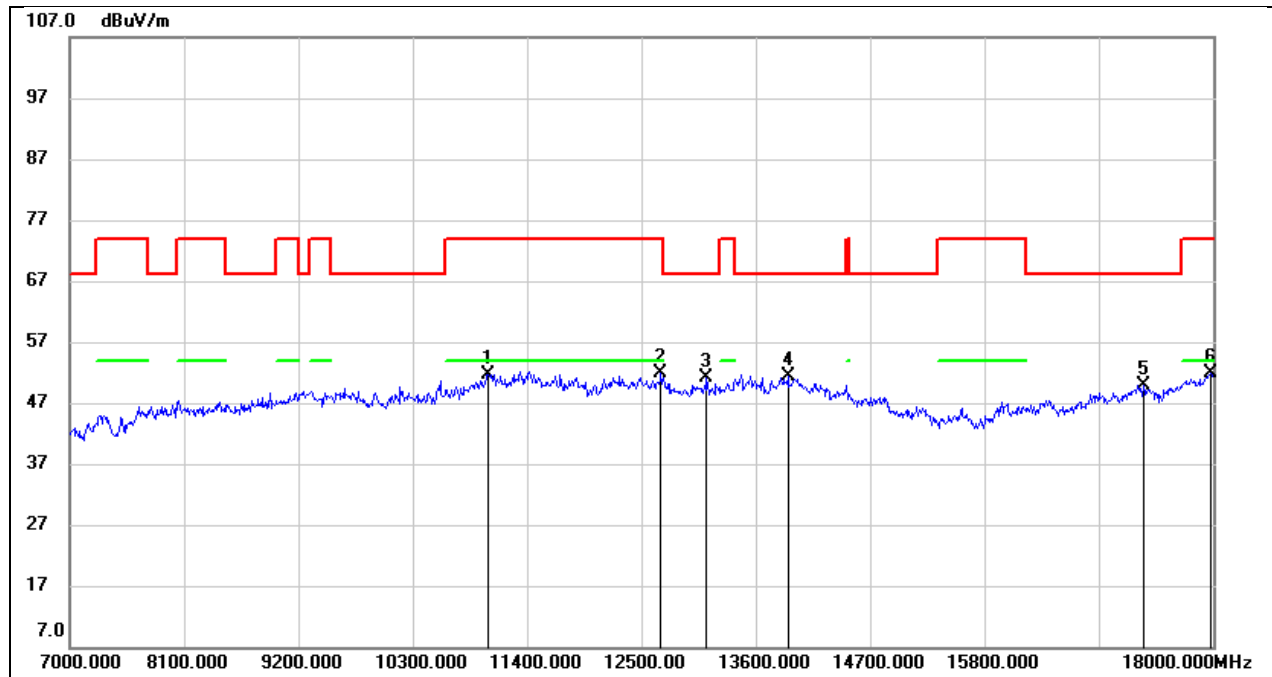


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11026.000	36.16	15.57	51.73	74.00	-22.27	peak
2	12687.000	31.64	20.17	51.81	74.00	-22.19	peak
3	13127.000	30.16	21.00	51.16	68.20	-17.04	peak
4	13908.000	27.70	23.56	51.26	68.20	-16.94	peak
5	17329.000	25.80	24.16	49.96	68.20	-18.24	peak
6	17978.000	23.61	28.31	51.92	74.00	-22.08	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 5V

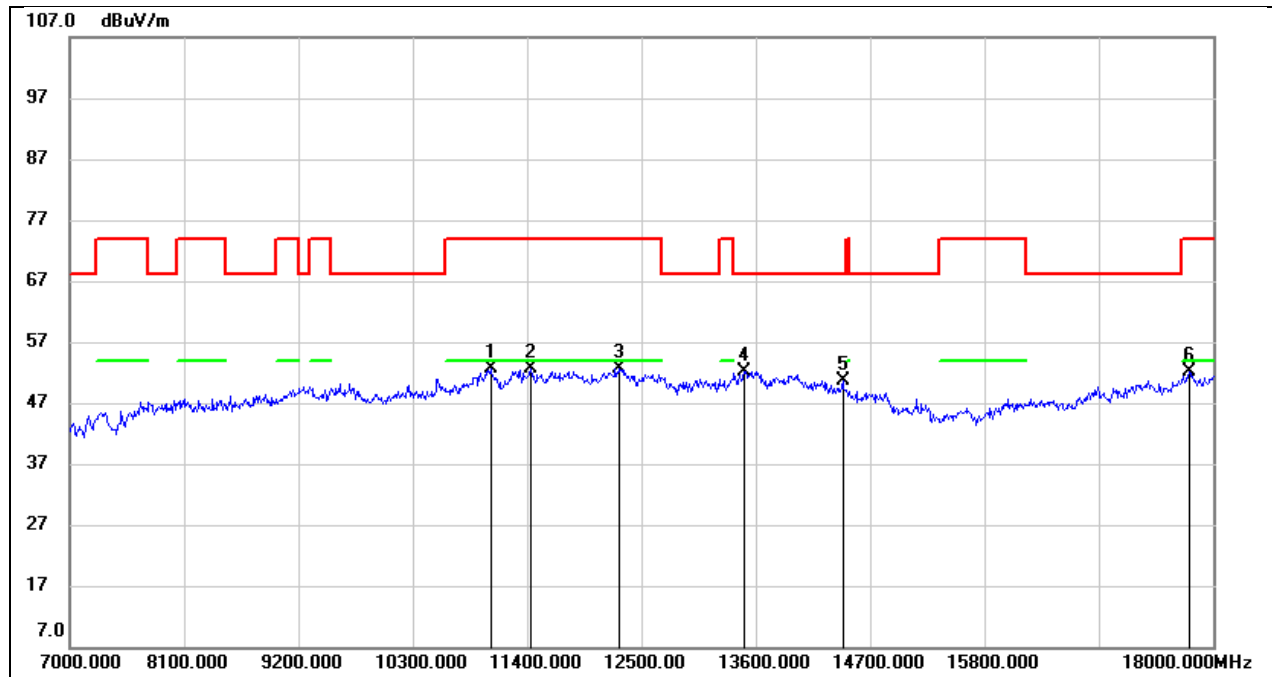


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	36.92	15.66	52.58	74.00	-21.42	peak
2	11433.000	35.30	17.31	52.61	74.00	-21.39	peak
3	12280.000	33.28	19.32	52.60	74.00	-21.40	peak
4	13490.000	29.75	22.40	52.15	68.20	-16.05	peak
5	14436.000	29.13	21.40	50.53	68.20	-17.67	peak
6	17769.000	25.65	26.41	52.06	74.00	-21.94	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 5V

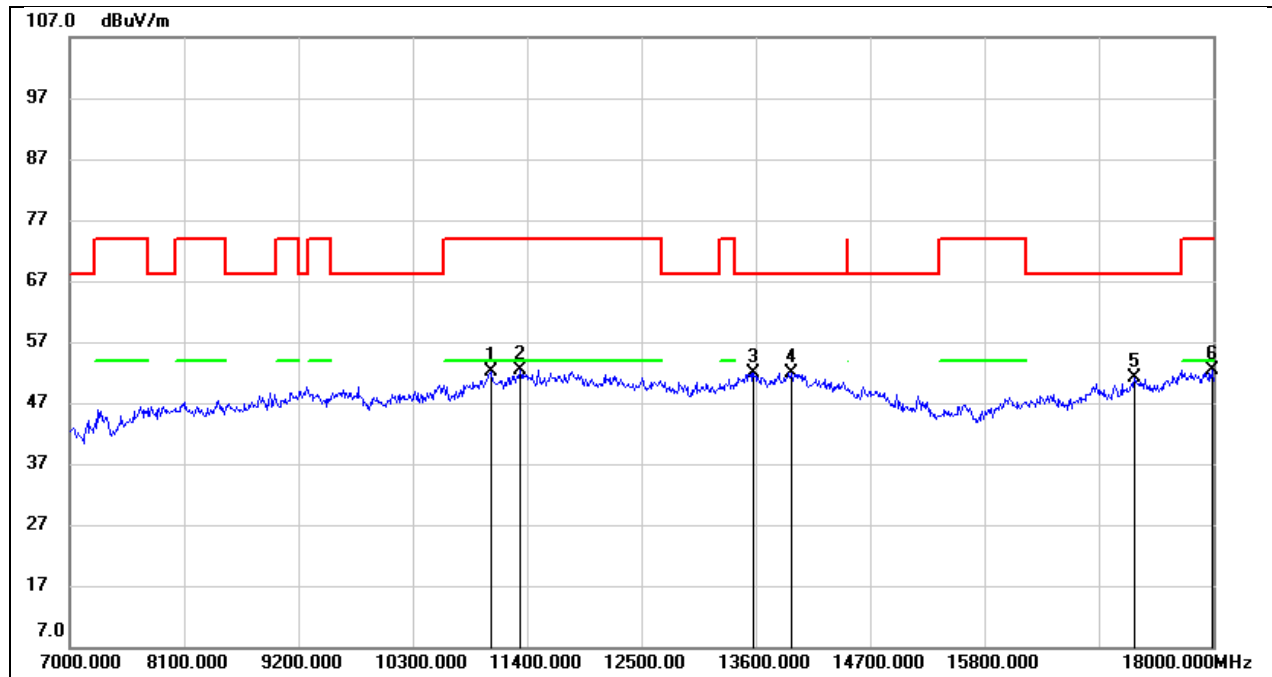


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	36.39	15.66	52.05	74.00	-21.95	peak
2	11334.000	35.57	16.90	52.47	74.00	-21.53	peak
3	13578.000	29.29	22.56	51.85	68.20	-16.35	peak
4	13941.000	28.13	23.68	51.81	68.20	-16.39	peak
5	17241.000	27.31	23.87	51.18	68.20	-17.02	peak
6	17989.000	23.99	28.40	52.39	74.00	-21.61	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 5V

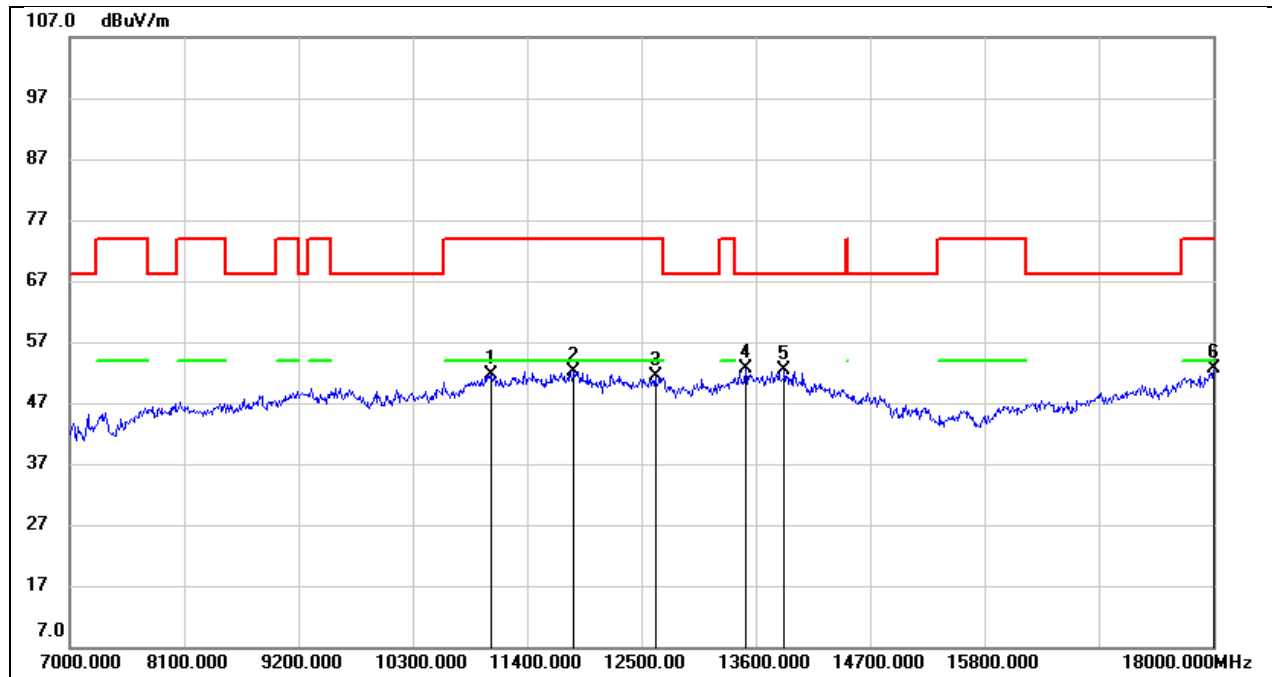


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	35.95	15.66	51.61	74.00	-22.39	peak
2	11851.000	33.97	18.09	52.06	74.00	-21.94	peak
3	12632.000	31.32	19.99	51.31	74.00	-22.69	peak
4	13501.000	30.18	22.44	52.62	68.20	-15.58	peak
5	13875.000	28.87	23.44	52.31	68.20	-15.89	peak
6	18000.000	24.10	28.51	52.61	74.00	-21.39	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 5V

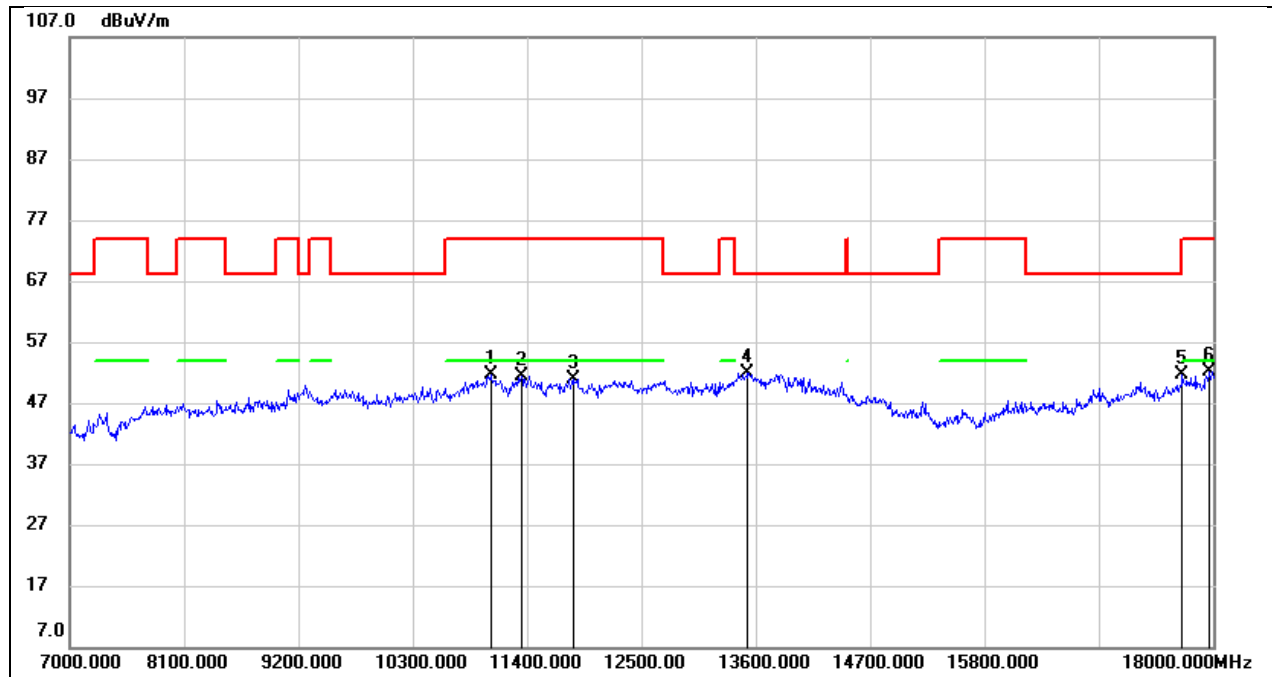


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	35.85	15.66	51.51	74.00	-22.49	peak
2	11345.000	34.31	16.96	51.27	74.00	-22.73	peak
3	11851.000	32.86	18.09	50.95	74.00	-23.05	peak
4	13523.000	29.40	22.48	51.88	68.20	-16.32	peak
5	17703.000	25.77	25.86	51.63	74.00	-22.37	peak
6	17967.000	23.98	28.21	52.19	74.00	-21.81	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 5V

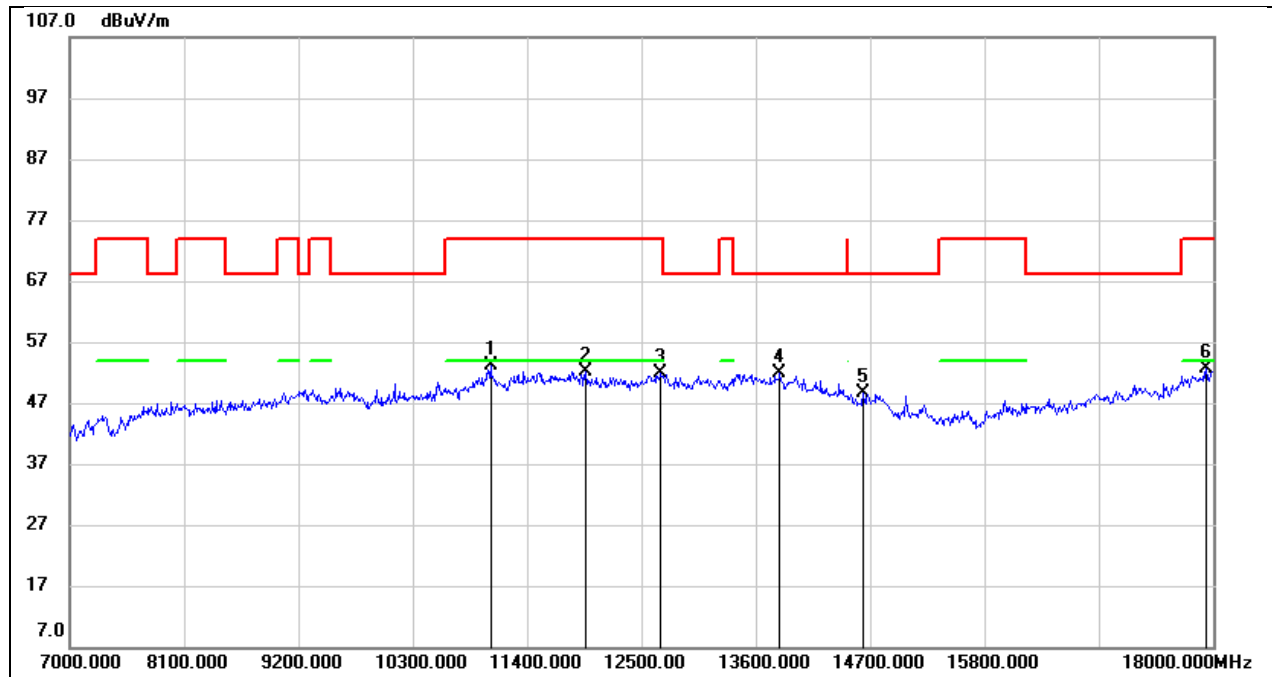


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	37.37	15.66	53.03	74.00	-20.97	peak
2	11961.000	33.61	18.47	52.08	74.00	-21.92	peak
3	12687.000	31.78	20.17	51.95	74.00	-22.05	peak
4	13831.000	28.51	23.26	51.77	68.20	-16.43	peak
5	14634.000	28.02	20.72	48.74	68.20	-19.46	peak
6	17934.000	24.70	27.90	52.60	74.00	-21.40	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 5V

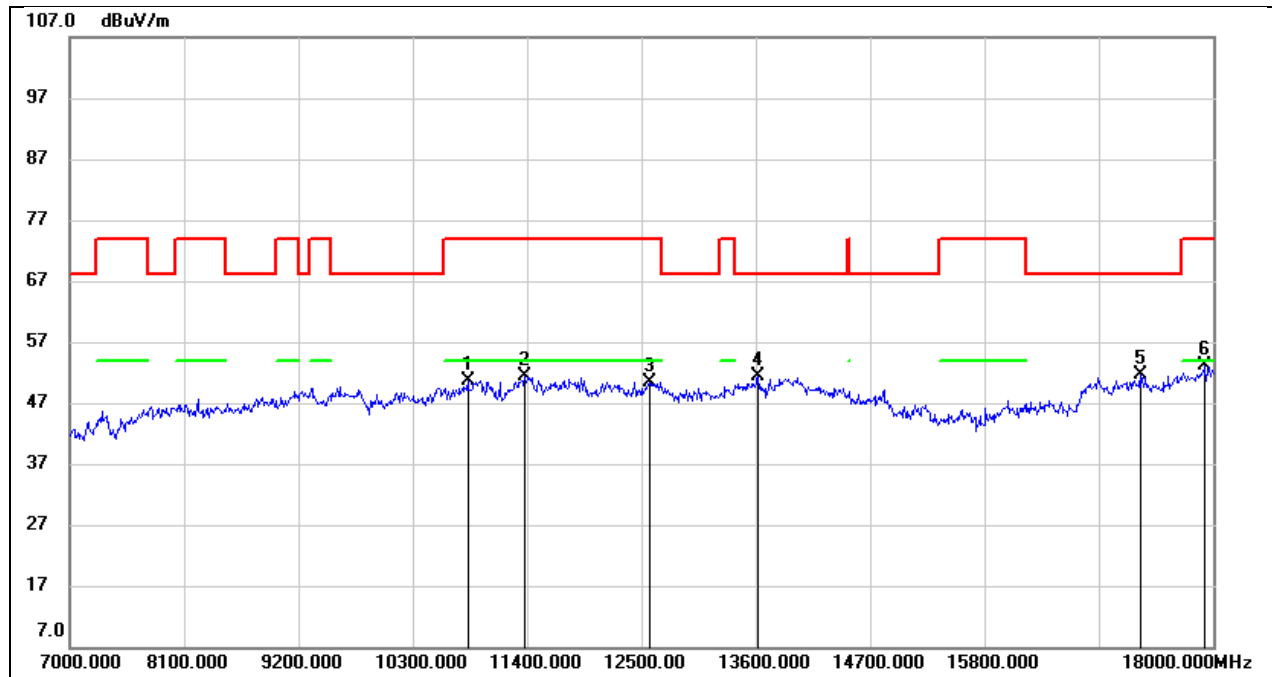


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10828.000	35.65	14.94	50.59	74.00	-23.41	peak
2	11378.000	34.26	17.10	51.36	74.00	-22.64	peak
3	12577.000	30.57	19.87	50.44	74.00	-23.56	peak
4	13622.000	28.73	22.66	51.39	68.20	-16.81	peak
5	17296.000	27.51	24.05	51.56	68.20	-16.64	peak
6	17923.000	25.44	27.79	53.23	74.00	-20.77	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 5V

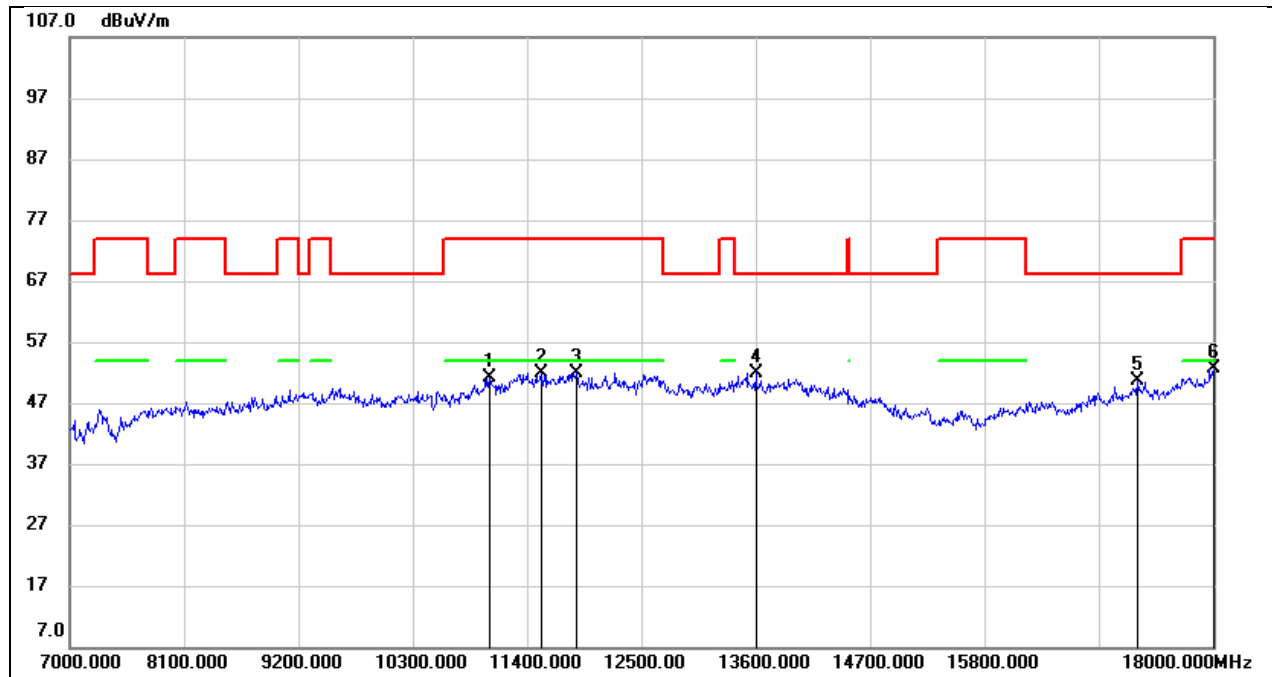


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11037.000	35.56	15.62	51.18	74.00	-22.82	peak
2	11532.000	34.26	17.64	51.90	74.00	-22.10	peak
3	11873.000	33.75	18.16	51.91	74.00	-22.09	peak
4	13600.000	29.34	22.60	51.94	68.20	-16.26	peak
5	17274.000	26.59	23.98	50.57	68.20	-17.63	peak
6	18000.000	24.13	28.51	52.64	74.00	-21.36	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 5V

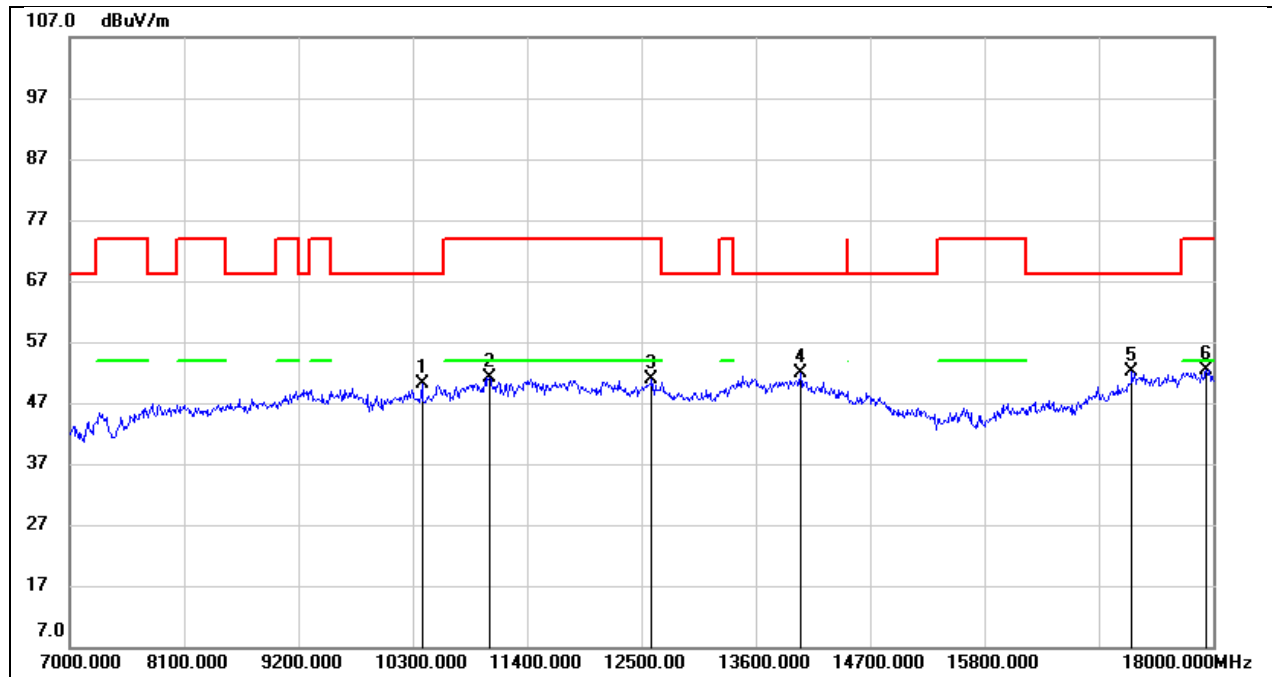


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10388.000	36.44	13.70	50.14	68.20	-18.06	peak
2	11037.000	35.53	15.62	51.15	74.00	-22.85	peak
3	12599.000	31.06	19.88	50.94	74.00	-23.06	peak
4	14029.000	28.09	23.76	51.85	68.20	-16.35	peak
5	17219.000	28.28	23.78	52.06	68.20	-16.14	peak
6	17934.000	24.53	27.90	52.43	74.00	-21.57	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 5V

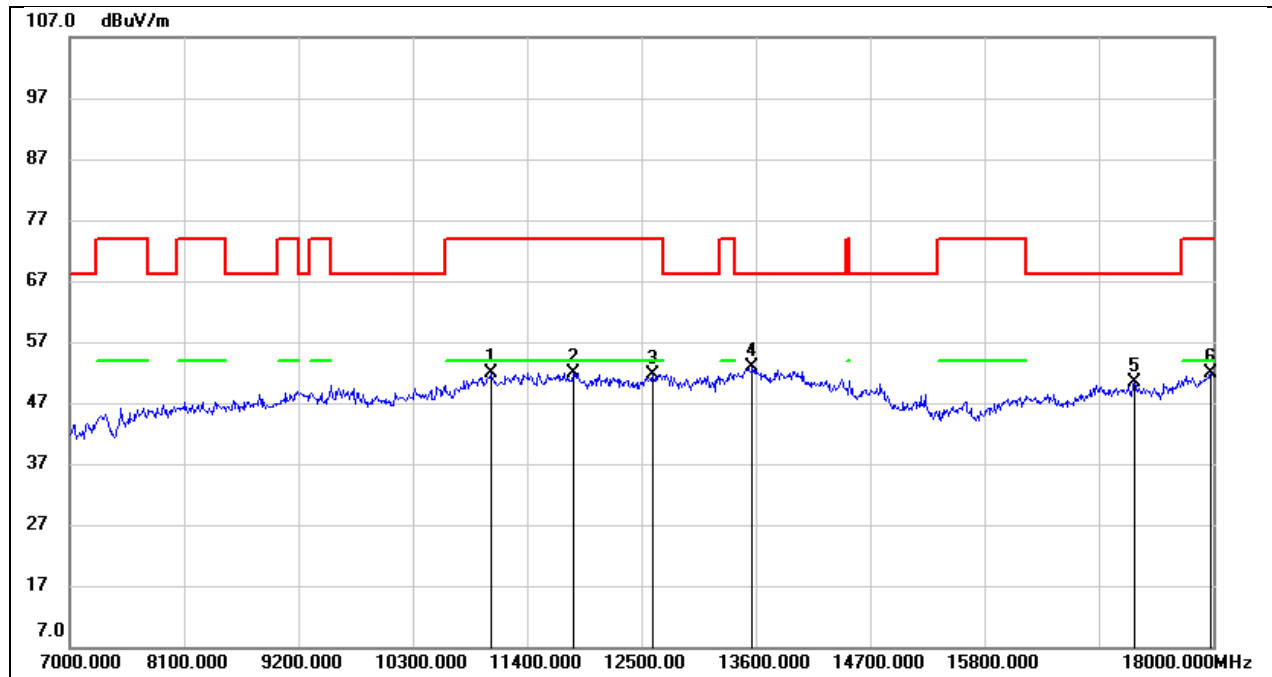


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	36.15	15.66	51.81	74.00	-22.19	peak
2	11840.000	33.93	18.06	51.99	74.00	-22.01	peak
3	12610.000	31.83	19.92	51.75	74.00	-22.25	peak
4	13567.000	30.27	22.55	52.82	68.20	-15.38	peak
5	17241.000	26.49	23.87	50.36	68.20	-17.84	peak
6	17978.000	23.65	28.31	51.96	74.00	-22.04	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 5V

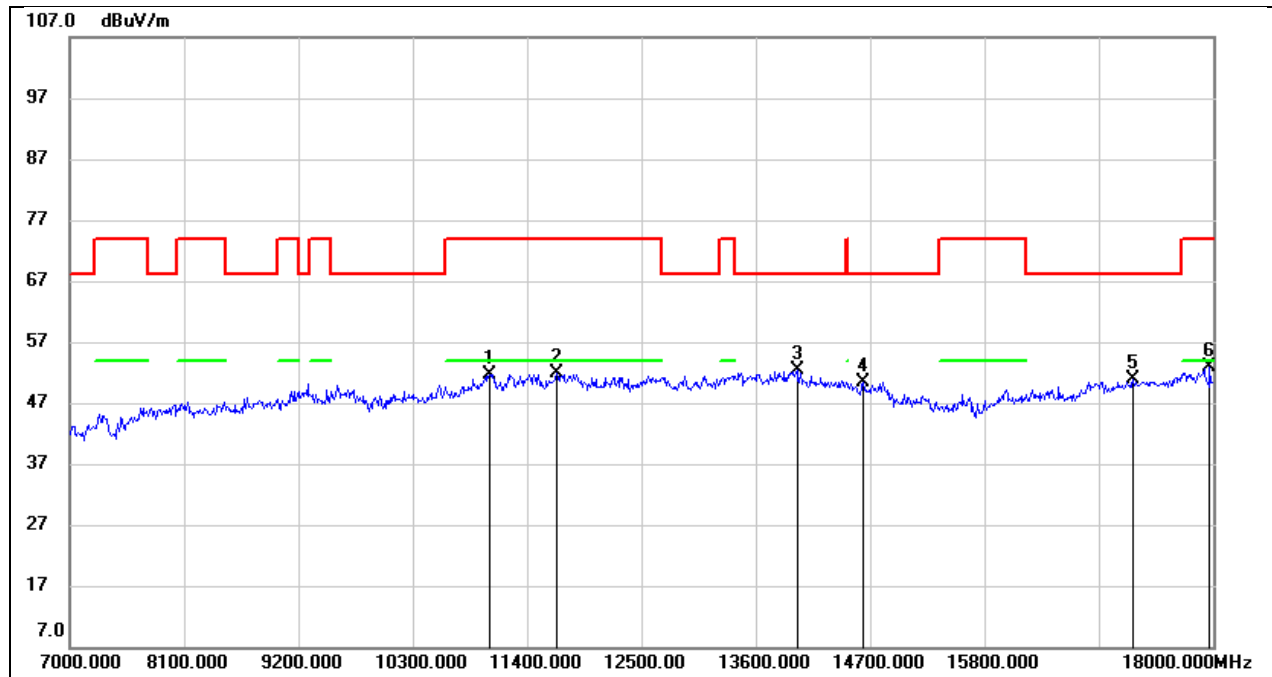


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11037.000	36.08	15.62	51.70	74.00	-22.30	peak
2	11686.000	34.07	17.91	51.98	74.00	-22.02	peak
3	13996.000	28.56	23.89	52.45	68.20	-15.75	peak
4	14634.000	29.73	20.72	50.45	68.20	-17.75	peak
5	17230.000	27.08	23.83	50.91	68.20	-17.29	peak
6	17967.000	24.74	28.21	52.95	74.00	-21.05	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 5V

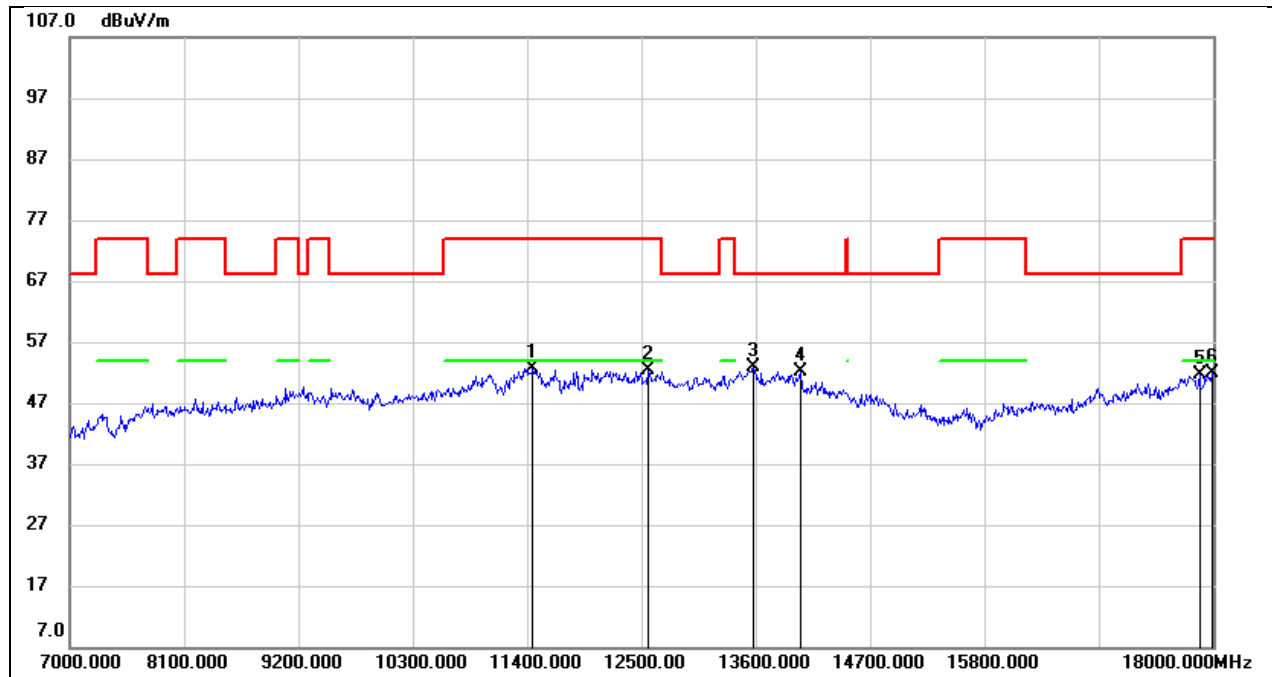


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11455.000	35.19	17.38	52.57	74.00	-21.43	peak
2	12566.000	32.56	19.85	52.41	74.00	-21.59	peak
3	13578.000	30.36	22.56	52.92	68.20	-15.28	peak
4	14029.000	28.35	23.76	52.11	68.20	-16.09	peak
5	17868.000	24.28	27.29	51.57	74.00	-22.43	peak
6	17989.000	23.59	28.40	51.99	74.00	-22.01	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 5V

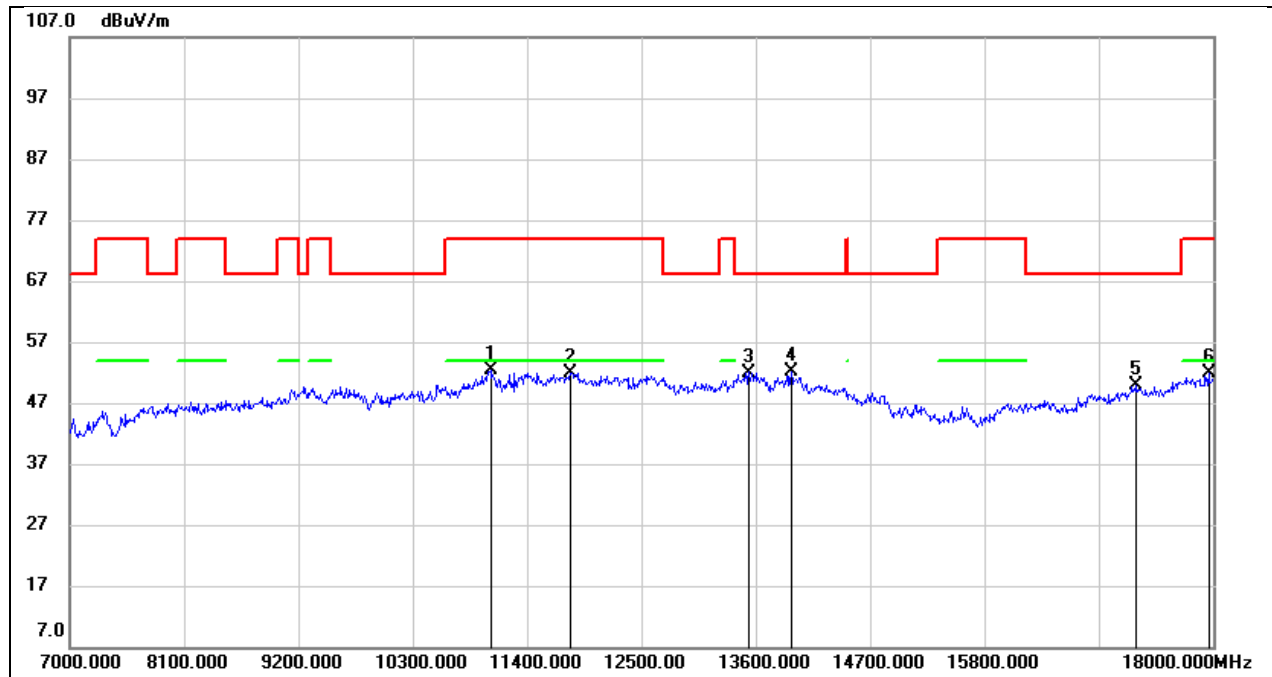


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	36.62	15.66	52.28	74.00	-21.72	peak
2	11818.000	33.98	17.99	51.97	74.00	-22.03	peak
3	13534.000	29.51	22.49	52.00	68.20	-16.20	peak
4	13941.000	28.39	23.68	52.07	68.20	-16.13	peak
5	17263.000	25.91	23.94	49.85	68.20	-18.35	peak
6	17956.000	23.71	28.10	51.81	74.00	-22.19	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

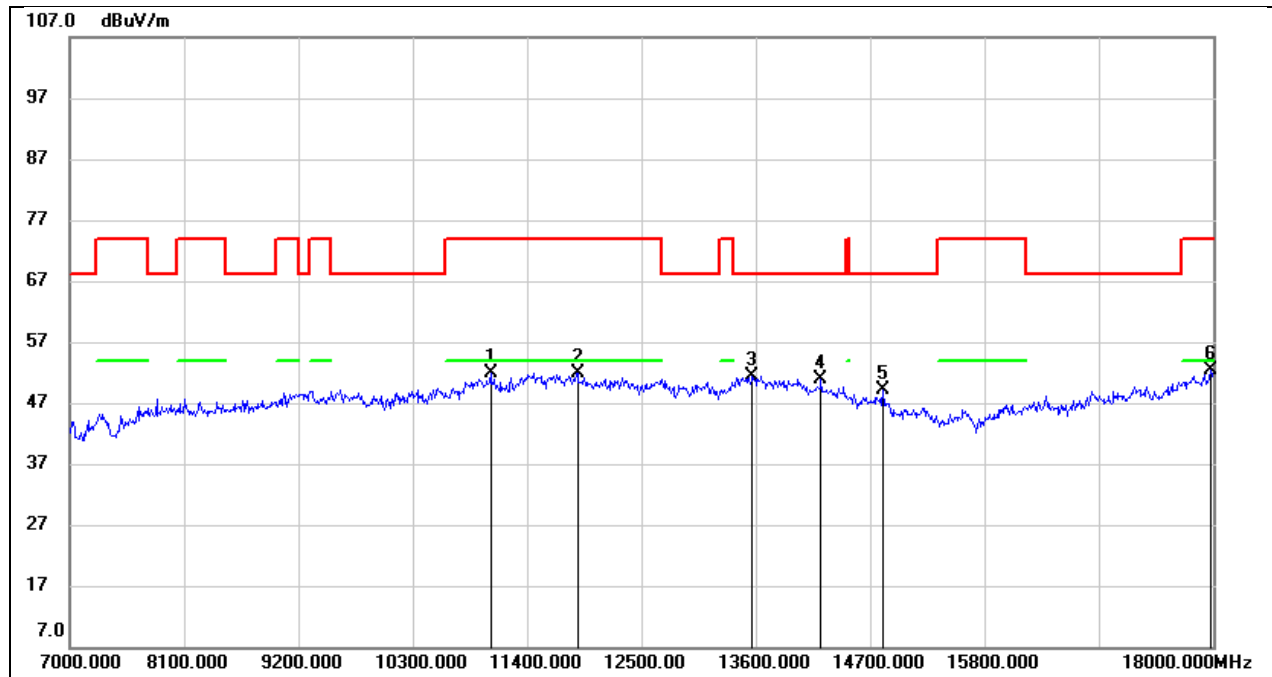


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	36.12	15.66	51.78	74.00	-22.22	peak
2	11884.000	33.67	18.20	51.87	74.00	-22.13	peak
3	13567.000	28.94	22.55	51.49	68.20	-16.71	peak
4	14227.000	28.25	22.74	50.99	68.20	-17.21	peak
5	14821.000	29.10	20.03	49.13	68.20	-19.07	peak
6	17978.000	23.95	28.31	52.26	74.00	-21.74	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

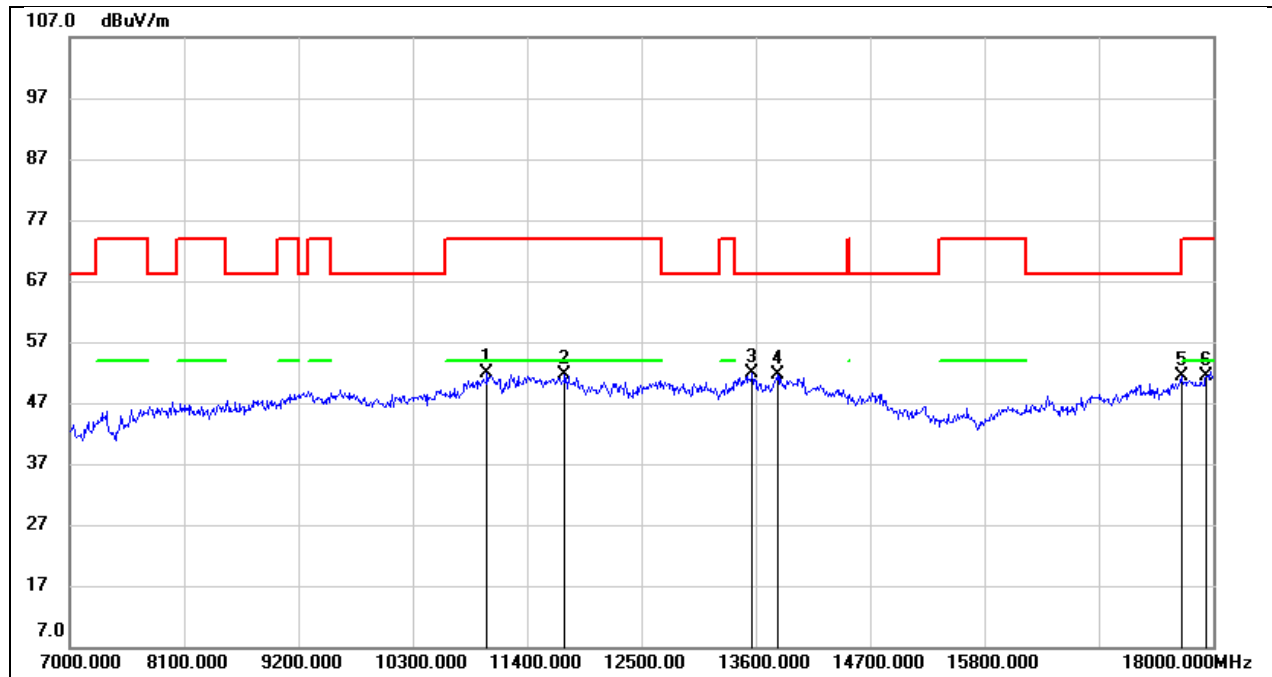


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11015.000	36.32	15.52	51.84	74.00	-22.16	peak
2	11763.000	33.71	17.91	51.62	74.00	-22.38	peak
3	13567.000	29.36	22.55	51.91	68.20	-16.29	peak
4	13809.000	28.36	23.17	51.53	68.20	-16.67	peak
5	17692.000	25.62	25.77	51.39	68.20	-16.81	peak
6	17934.000	23.50	27.90	51.40	74.00	-22.60	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 5V

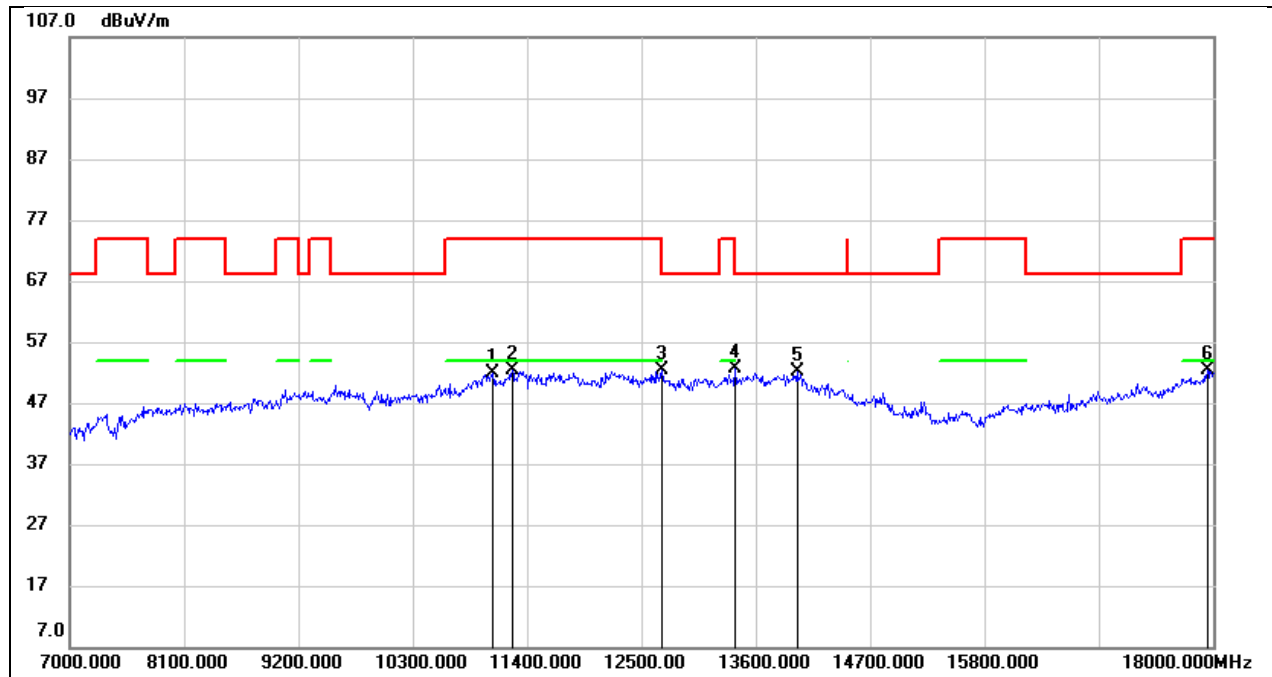


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11070.000	36.01	15.75	51.76	74.00	-22.24	peak
2	11257.000	35.94	16.55	52.49	74.00	-21.51	peak
3	12698.000	32.06	20.20	52.26	74.00	-21.74	peak
4	13402.000	30.54	22.04	52.58	68.20	-15.62	peak
5	13996.000	28.19	23.89	52.08	68.20	-16.12	peak
6	17945.000	24.35	28.01	52.36	74.00	-21.64	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 5V

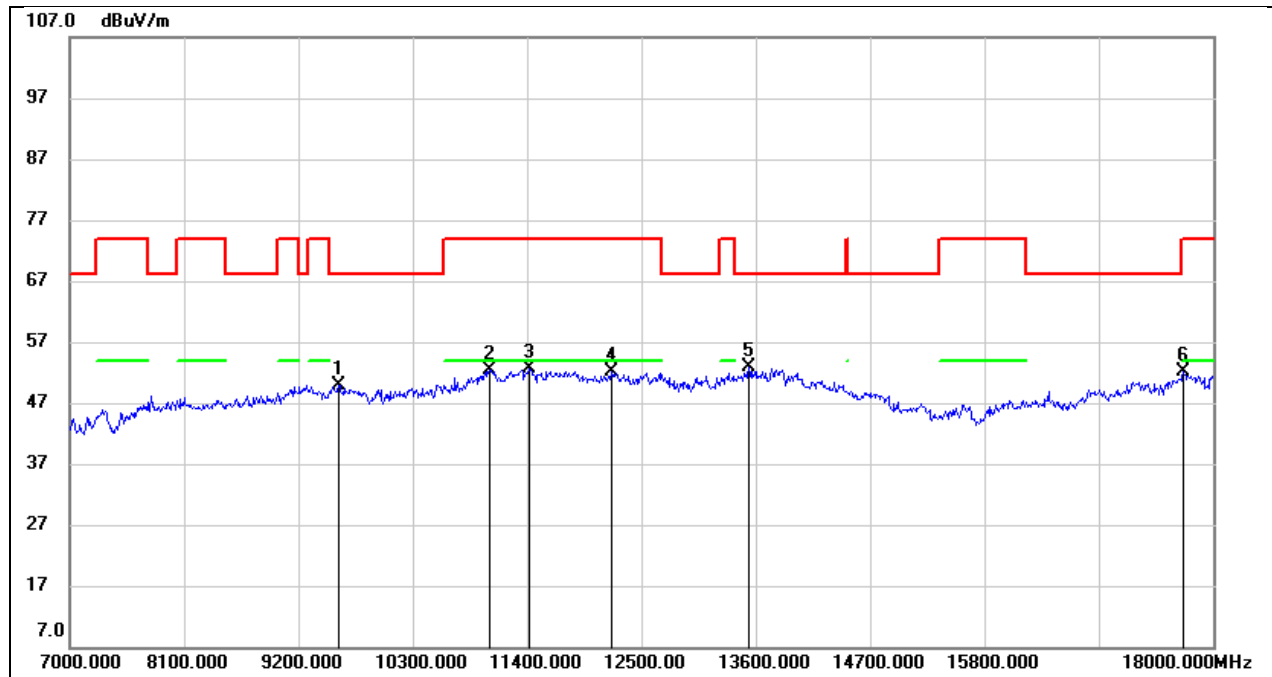


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	36.70	13.19	49.89	68.20	-18.31	peak
2	11037.000	36.75	15.62	52.37	74.00	-21.63	peak
3	11422.000	35.30	17.27	52.57	74.00	-21.43	peak
4	12214.000	32.90	19.13	52.03	74.00	-21.97	peak
5	13534.000	30.37	22.49	52.86	68.20	-15.34	peak
6	17714.000	26.08	25.96	52.04	74.00	-21.96	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 5V

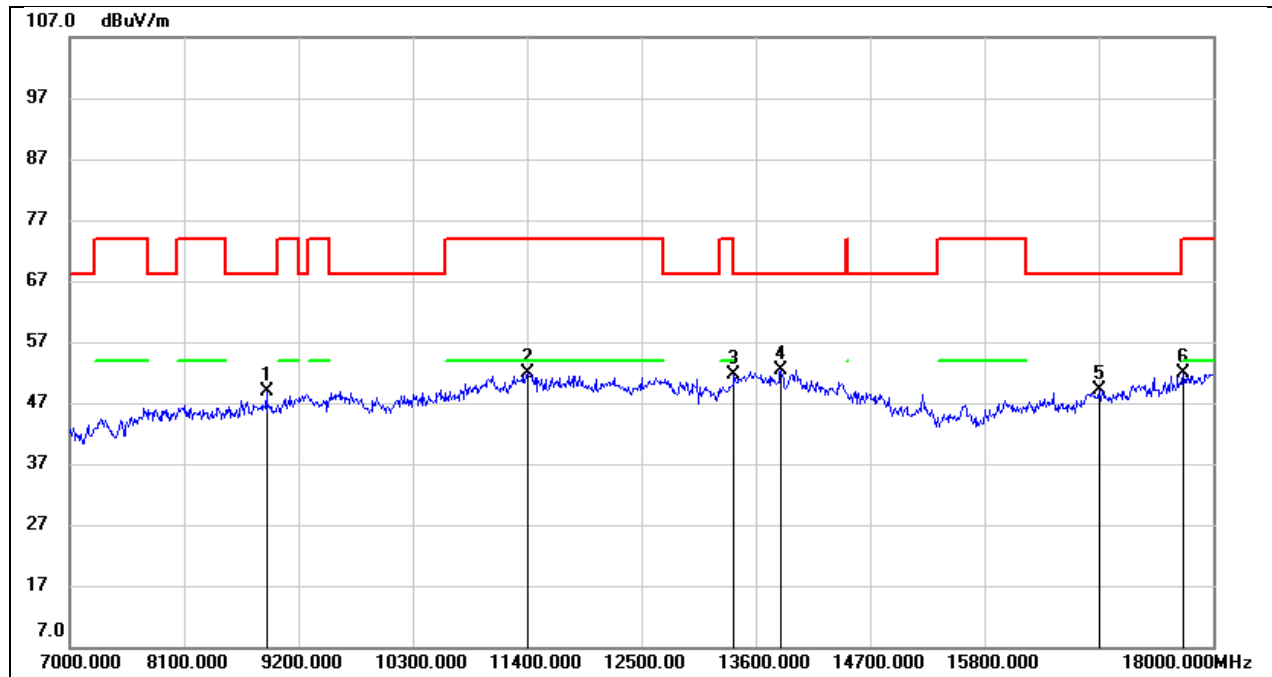


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8892.000	38.80	10.04	48.84	68.20	-19.36	peak
2	11411.000	34.76	17.24	52.00	74.00	-22.00	peak
3	13391.000	29.59	22.01	51.60	74.00	-22.40	peak
4	13842.000	29.18	23.29	52.47	68.20	-15.73	peak
5	16900.000	26.63	22.38	49.01	68.20	-19.19	peak
6	17714.000	26.01	25.96	51.97	74.00	-22.03	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 5V

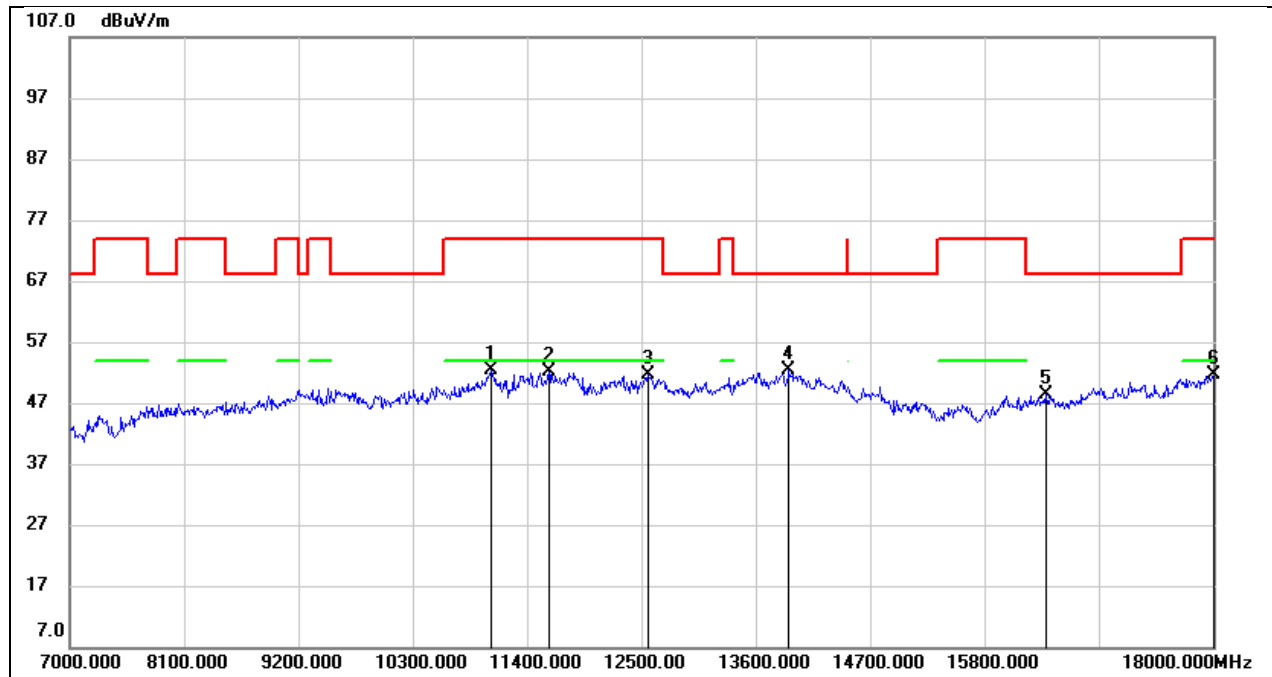


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11059.000	36.60	15.71	52.31	74.00	-21.69	peak
2	11609.000	34.29	17.88	52.17	74.00	-21.83	peak
3	12566.000	31.84	19.85	51.69	74.00	-22.31	peak
4	13919.000	28.67	23.60	52.27	68.20	-15.93	peak
5	16394.000	27.24	21.09	48.33	68.20	-19.87	peak
6	18000.000	23.01	28.51	51.52	74.00	-22.48	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 5V

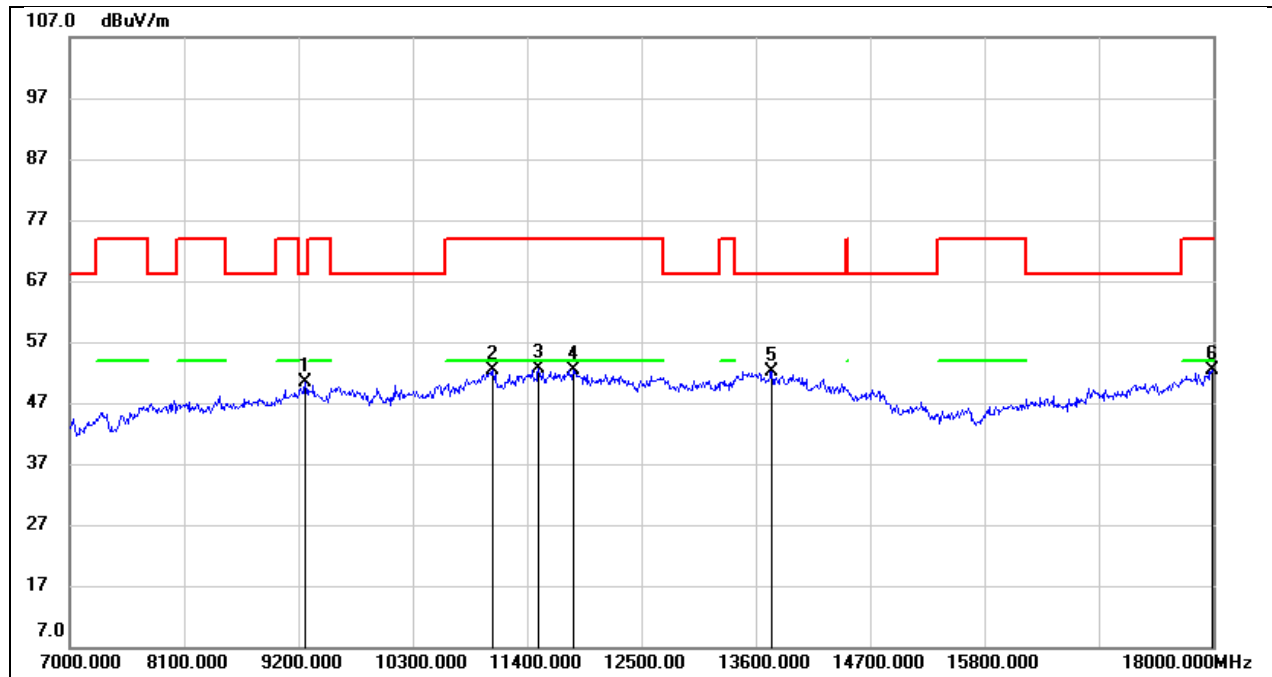


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	38.73	11.62	50.35	68.20	-17.85	peak
2	11070.000	36.62	15.75	52.37	74.00	-21.63	peak
3	11510.000	34.95	17.57	52.52	74.00	-21.48	peak
4	11840.000	34.37	18.06	52.43	74.00	-21.57	peak
5	13754.000	29.22	23.01	52.23	68.20	-15.97	peak
6	17989.000	23.87	28.40	52.27	74.00	-21.73	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 5V

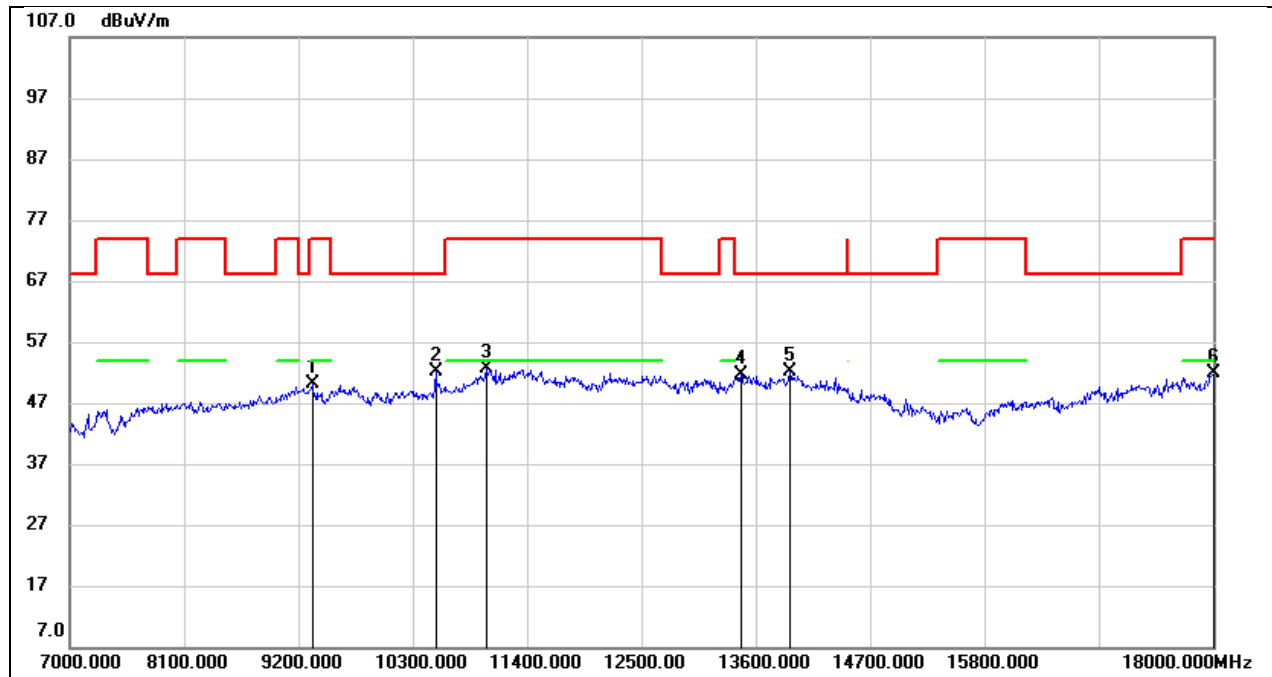


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	38.30	11.82	50.12	74.00	-23.88	peak
2	10520.000	38.12	14.08	52.20	68.20	-16.00	peak
3	11004.000	37.09	15.47	52.56	74.00	-21.44	peak
4	13457.000	29.45	22.27	51.72	68.20	-16.48	peak
5	13930.000	28.39	23.63	52.02	68.20	-16.18	peak
6	18000.000	23.44	28.51	51.95	74.00	-22.05	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 5V

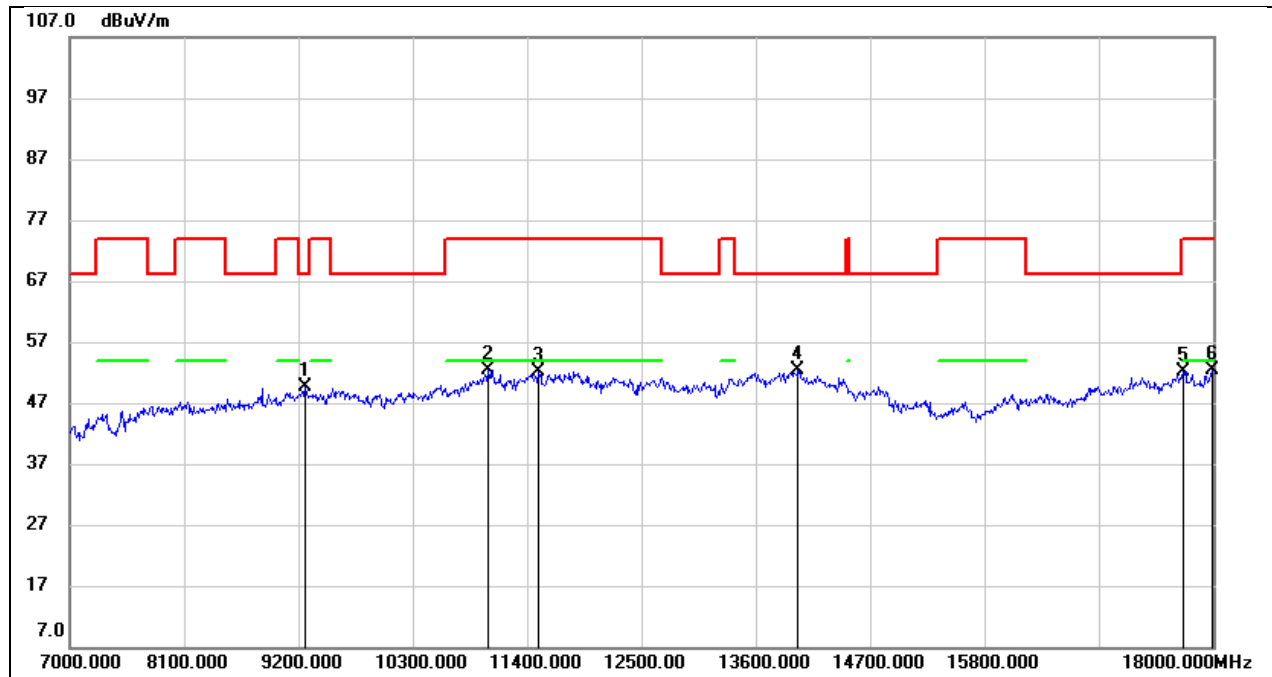


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.93	11.62	49.55	68.20	-18.65	peak
2	11026.000	36.76	15.57	52.33	74.00	-21.67	peak
3	11510.000	34.49	17.57	52.06	74.00	-21.94	peak
4	14007.000	28.46	23.88	52.34	68.20	-15.86	peak
5	17714.000	26.13	25.96	52.09	74.00	-21.91	peak
6	17989.000	23.92	28.40	52.32	74.00	-21.68	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 5V

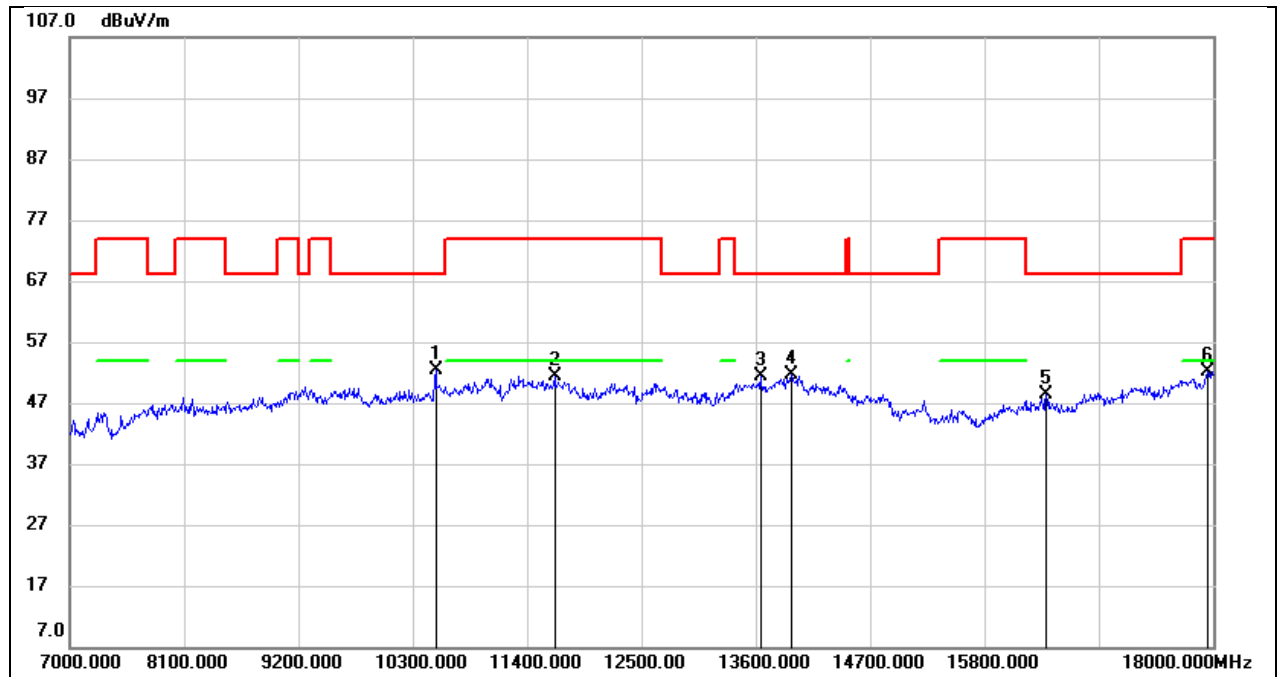


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	38.24	14.08	52.32	68.20	-15.88	peak
2	11664.000	33.46	17.88	51.34	74.00	-22.66	peak
3	13644.000	28.71	22.72	51.43	68.20	-16.77	peak
4	13941.000	27.91	23.68	51.59	68.20	-16.61	peak
5	16394.000	27.23	21.09	48.32	68.20	-19.88	peak
6	17945.000	24.15	28.01	52.16	74.00	-21.84	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 5V

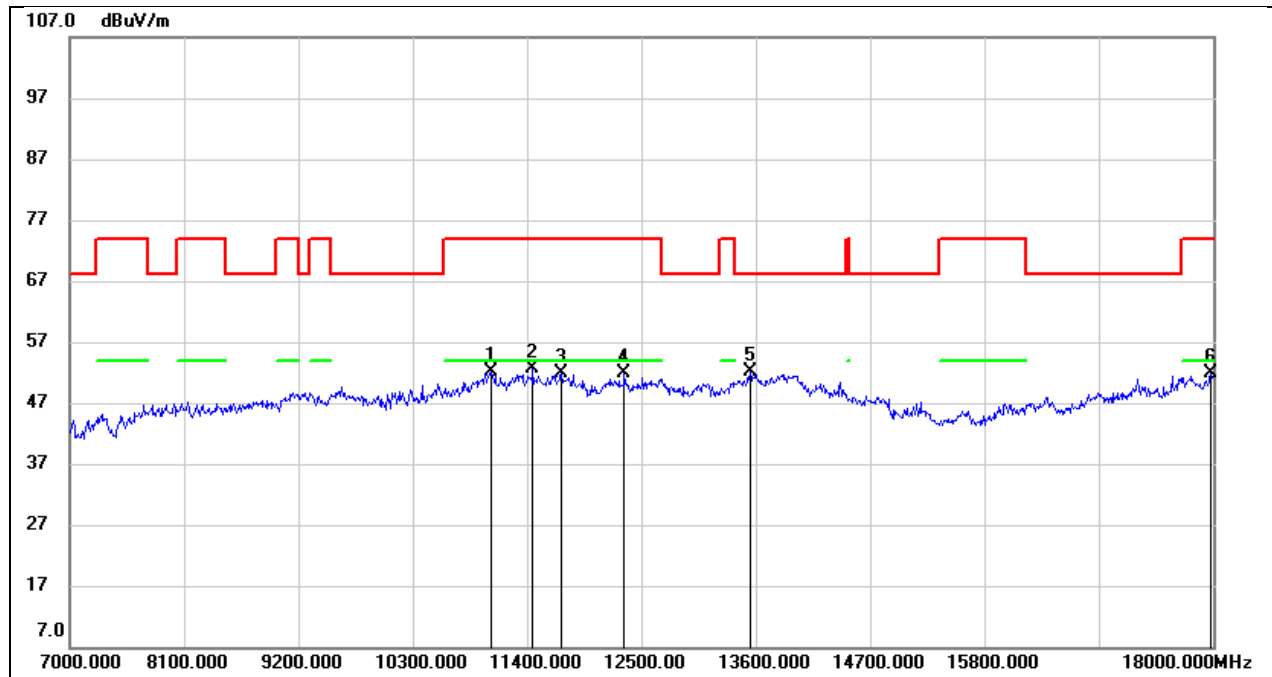


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	36.35	15.66	52.01	74.00	-21.99	peak
2	11455.000	35.33	17.38	52.71	74.00	-21.29	peak
3	11730.000	34.08	17.91	51.99	74.00	-22.01	peak
4	12335.000	32.34	19.46	51.80	74.00	-22.20	peak
5	13545.000	29.63	22.51	52.14	68.20	-16.06	peak
6	17978.000	23.65	28.31	51.96	74.00	-22.04	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 5V

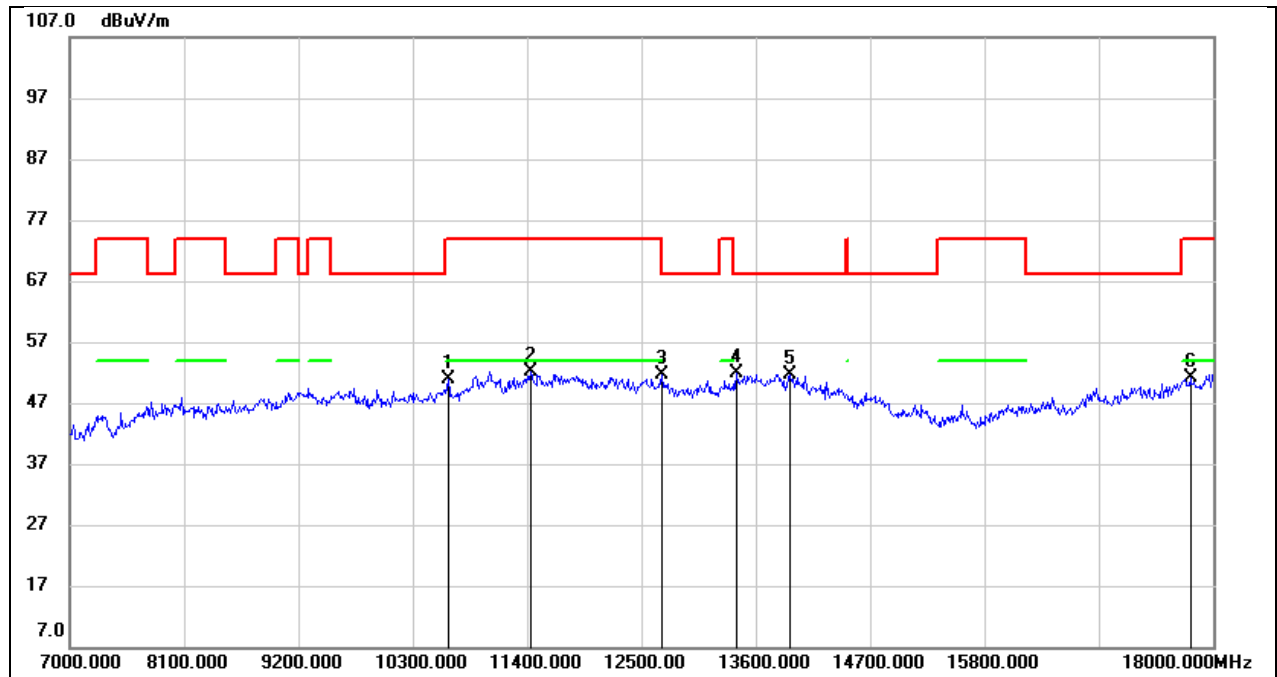


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10641.000	36.34	14.43	50.77	74.00	-23.23	peak
2	11433.000	34.81	17.31	52.12	74.00	-21.88	peak
3	12698.000	31.35	20.20	51.55	74.00	-22.45	peak
4	13413.000	29.72	22.09	51.81	68.20	-16.39	peak
5	13930.000	27.88	23.63	51.51	68.20	-16.69	peak
6	17780.000	24.58	26.50	51.08	74.00	-22.92	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 5V

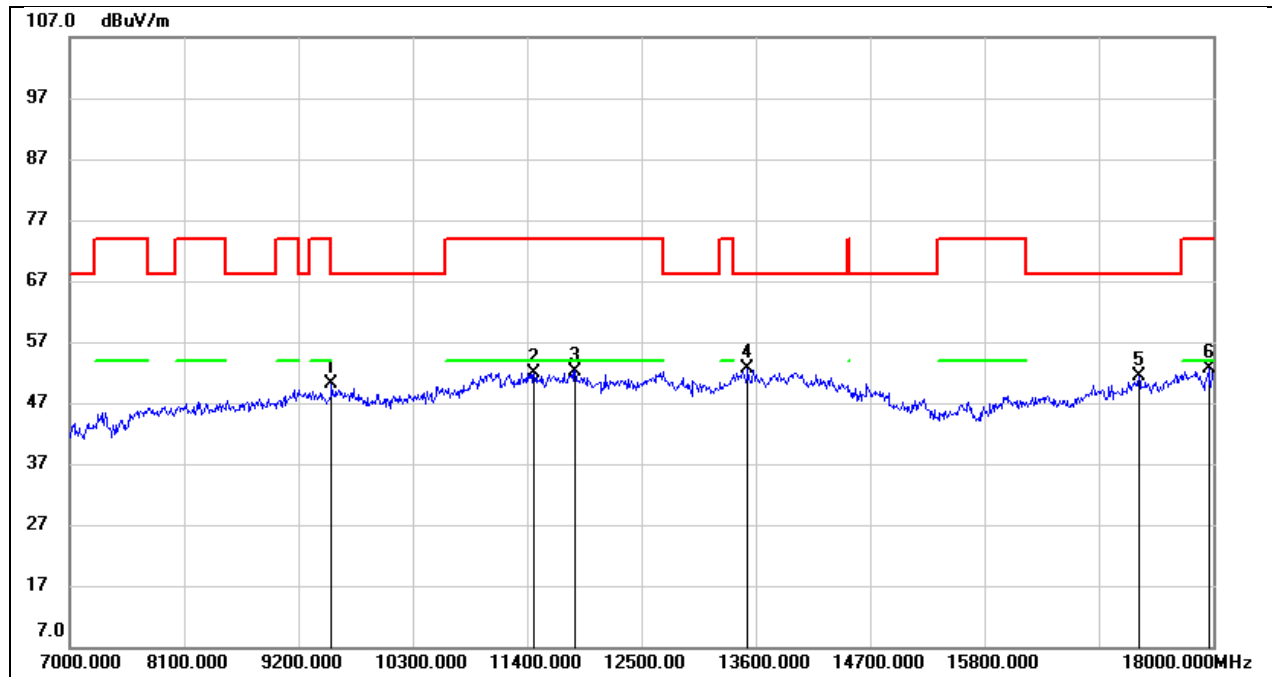


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9519.000	37.24	12.77	50.01	68.20	-18.19	peak
2	11466.000	34.50	17.42	51.92	74.00	-22.08	peak
3	11862.000	34.12	18.13	52.25	74.00	-21.75	peak
4	13523.000	30.25	22.48	52.73	68.20	-15.47	peak
5	17285.000	27.36	24.01	51.37	68.20	-16.83	peak
6	17956.000	24.44	28.10	52.54	74.00	-21.46	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 5V

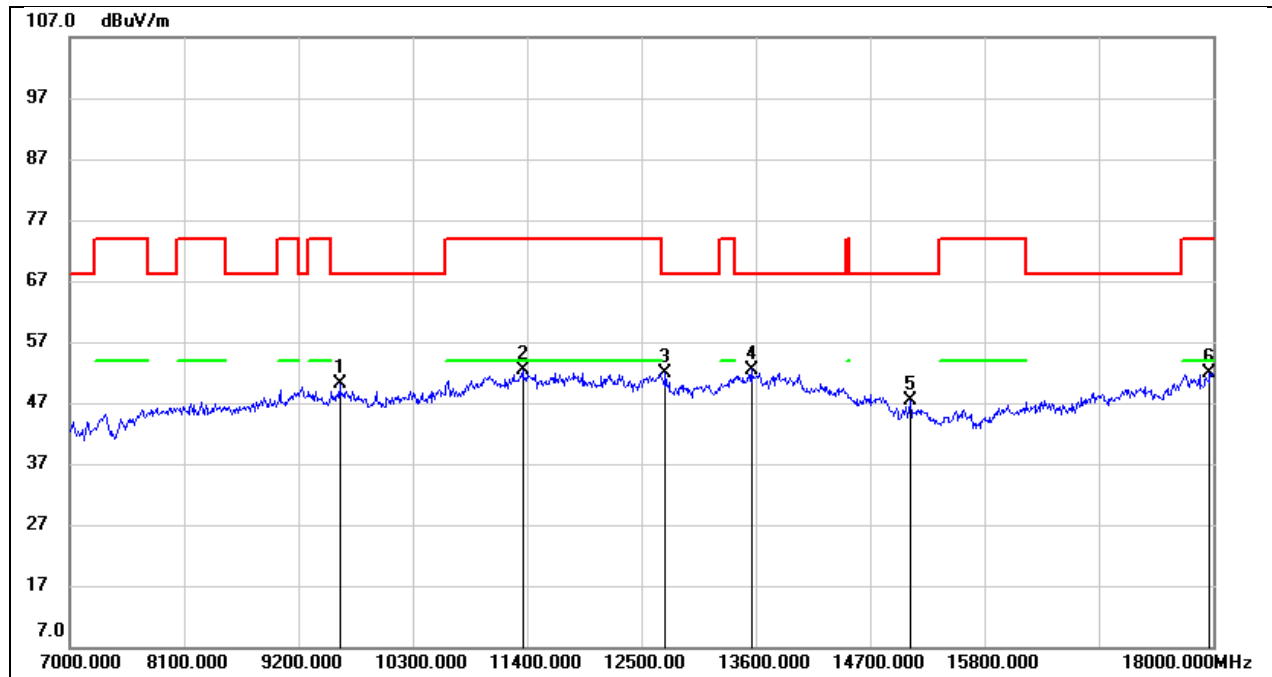


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	36.81	13.26	50.07	68.20	-18.13	peak
2	11356.000	35.31	17.00	52.31	74.00	-21.69	peak
3	12731.000	31.67	20.32	51.99	68.20	-16.21	peak
4	13556.000	29.97	22.53	52.50	68.20	-15.70	peak
5	15085.000	28.57	18.92	47.49	68.20	-20.71	peak
6	17967.000	23.67	28.21	51.88	74.00	-22.12	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 5V

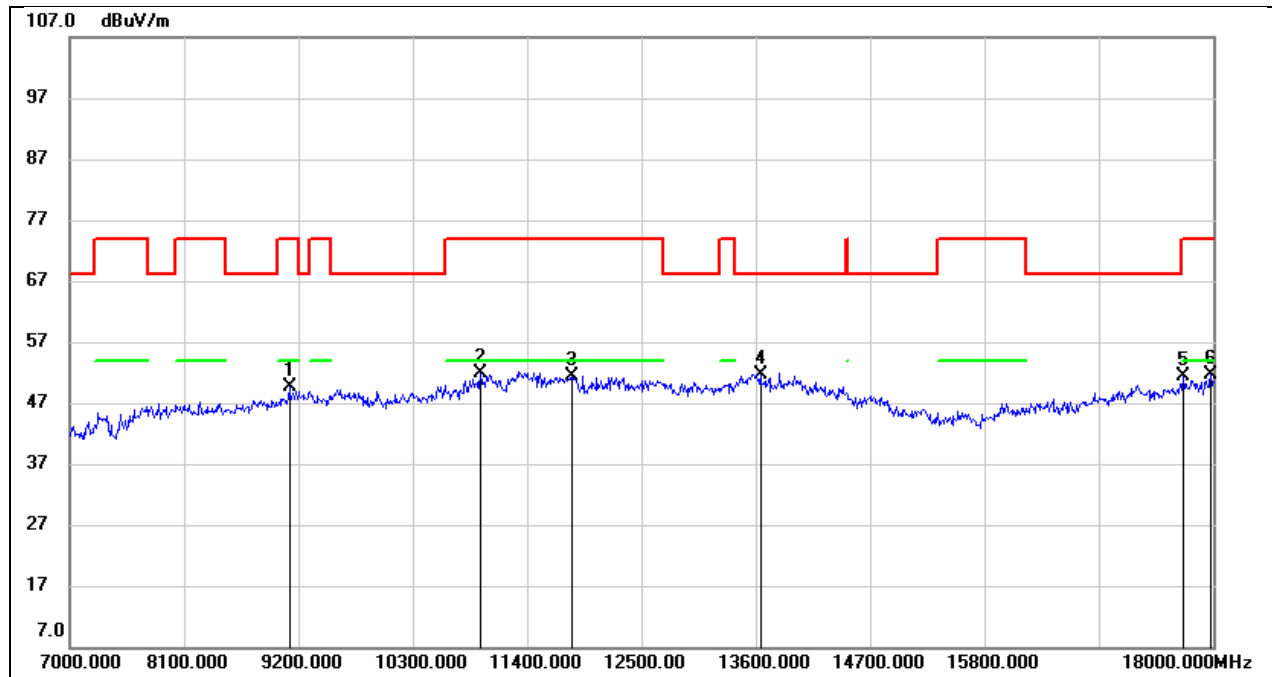


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	38.53	11.05	49.58	74.00	-24.42	peak
2	10949.000	36.65	15.30	51.95	74.00	-22.05	peak
3	11829.000	33.44	18.02	51.46	74.00	-22.54	peak
4	13644.000	29.00	22.72	51.72	68.20	-16.48	peak
5	17714.000	25.50	25.96	51.46	74.00	-22.54	peak
6	17978.000	23.29	28.31	51.60	74.00	-22.40	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 5V

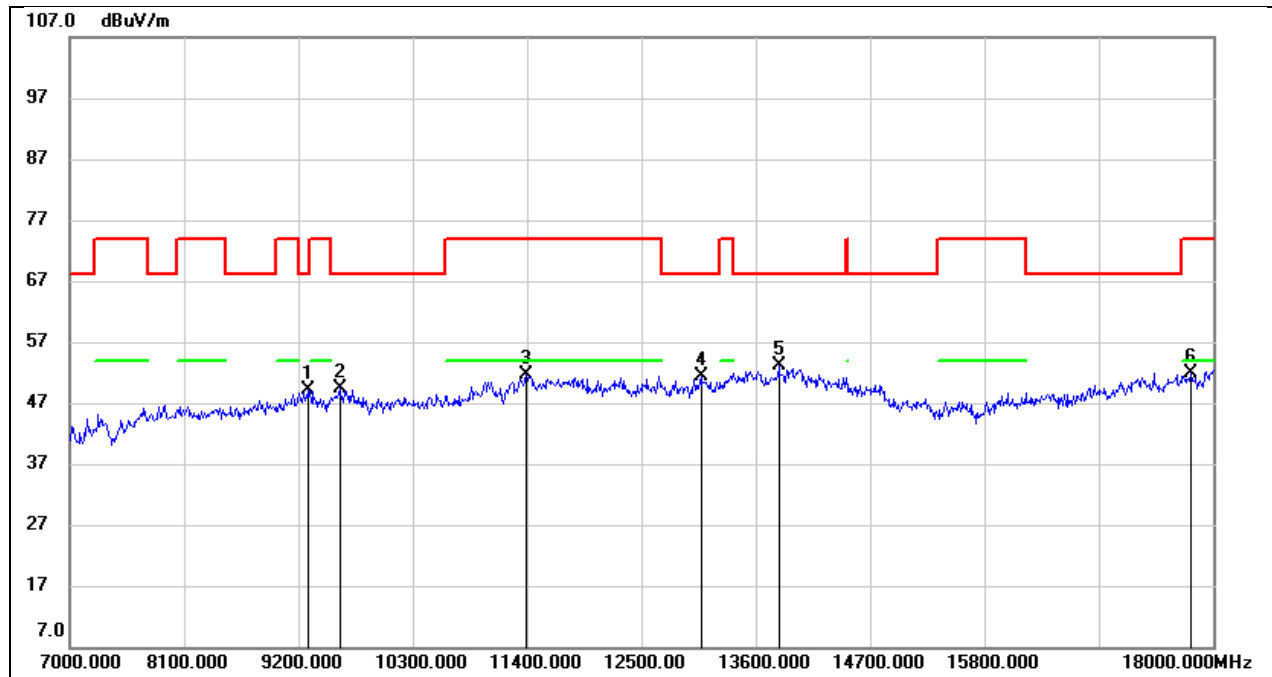


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	37.54	11.68	49.22	68.20	-18.98	peak
2	9596.000	36.11	13.26	49.37	68.20	-18.83	peak
3	11389.000	34.46	17.15	51.61	74.00	-22.39	peak
4	13072.000	30.66	20.77	51.43	68.20	-16.77	peak
5	13820.000	29.93	23.22	53.15	68.20	-15.05	peak
6	17791.000	25.32	26.58	51.90	74.00	-22.10	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 5V

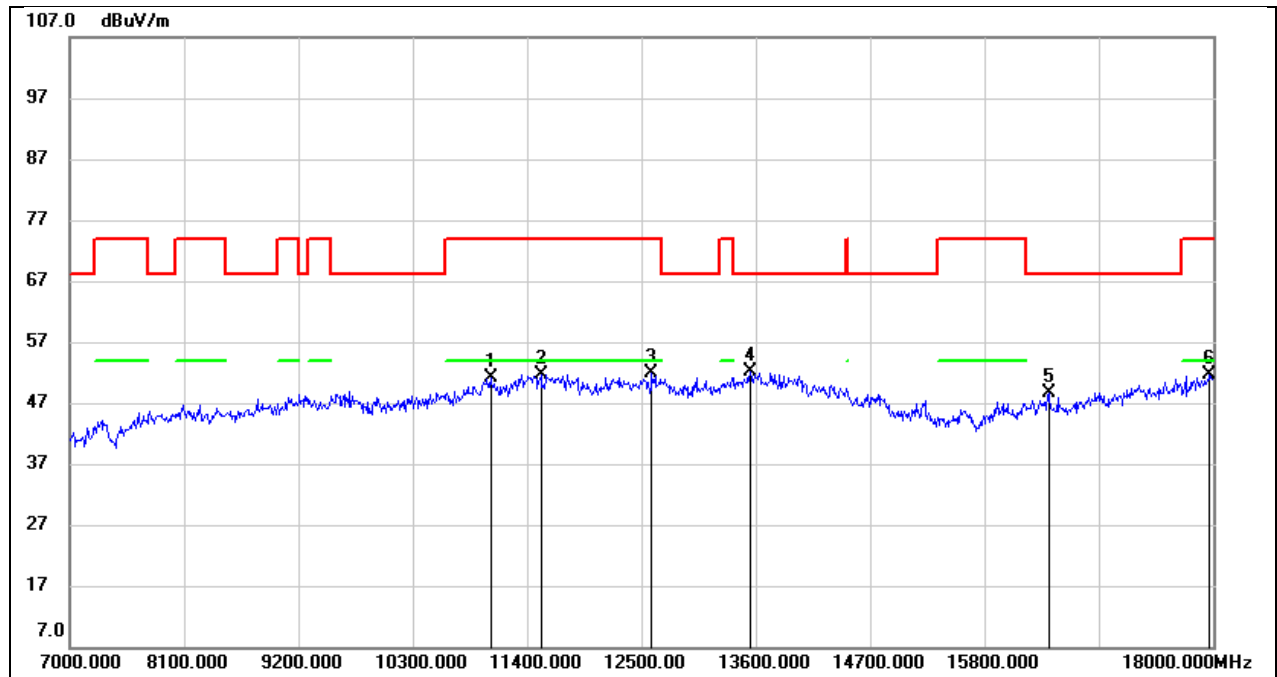


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11048.000	35.35	15.66	51.01	74.00	-22.99	peak
2	11532.000	34.10	17.64	51.74	74.00	-22.26	peak
3	12599.000	31.90	19.88	51.78	74.00	-22.22	peak
4	13545.000	29.72	22.51	52.23	68.20	-15.97	peak
5	16416.000	27.51	21.08	48.59	68.20	-19.61	peak
6	17967.000	23.48	28.21	51.69	74.00	-22.31	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 5V

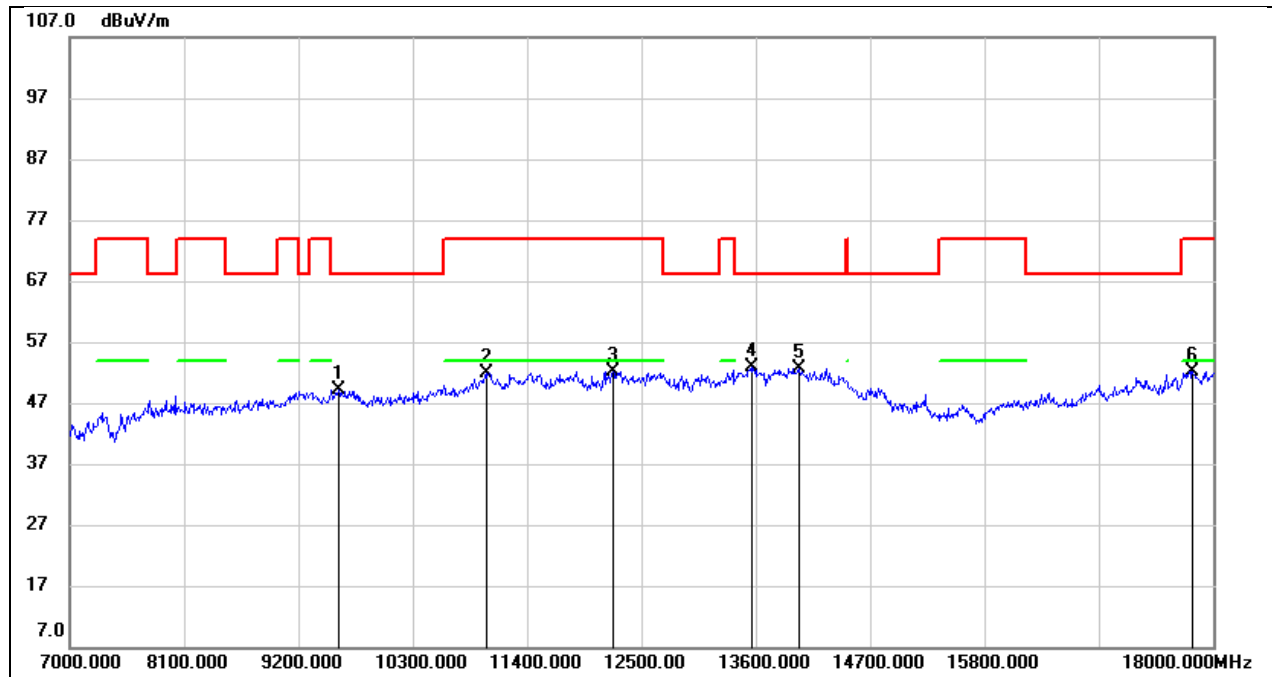


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	36.03	13.19	49.22	68.20	-18.98	peak
2	11004.000	36.40	15.47	51.87	74.00	-22.13	peak
3	12225.000	33.09	19.16	52.25	74.00	-21.75	peak
4	13556.000	30.42	22.53	52.95	68.20	-15.25	peak
5	14018.000	28.87	23.83	52.70	68.20	-15.50	peak
6	17802.000	25.54	26.68	52.22	74.00	-21.78	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 5V

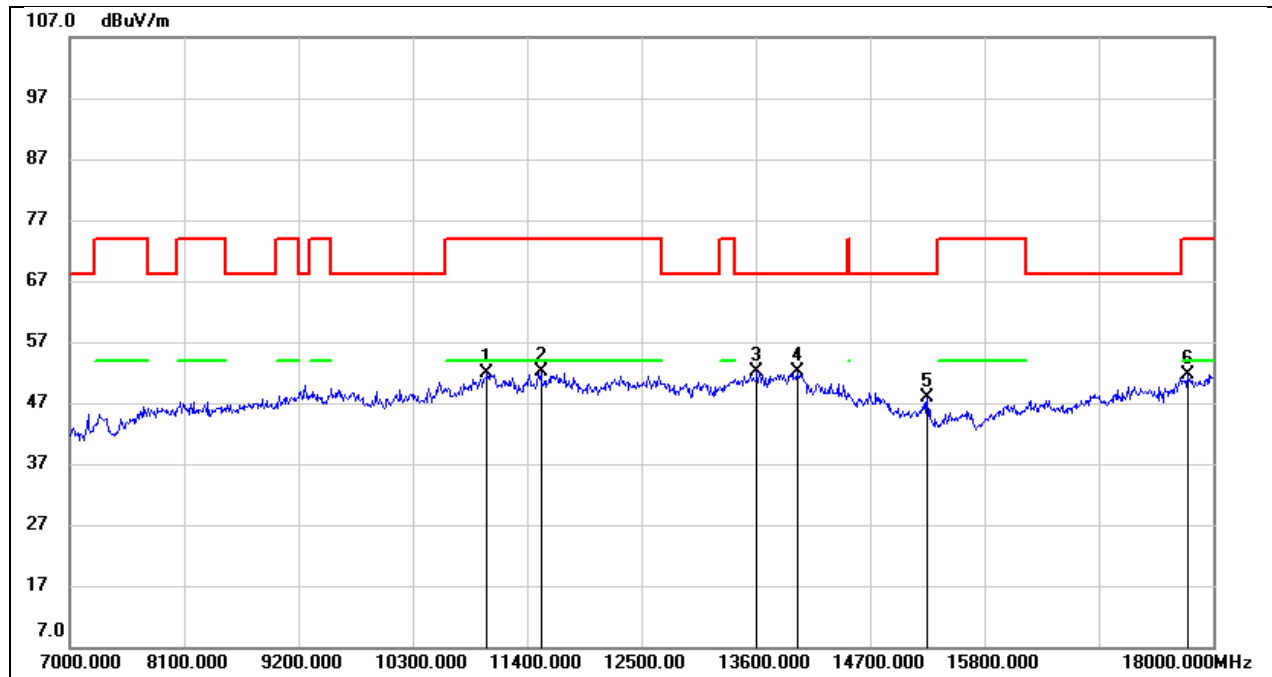


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11015.000	36.40	15.52	51.92	74.00	-22.08	peak
2	11532.000	34.37	17.64	52.01	74.00	-21.99	peak
3	13611.000	29.59	22.63	52.22	68.20	-15.98	peak
4	13996.000	28.35	23.89	52.24	68.20	-15.96	peak
5	15250.000	29.01	18.80	47.81	68.20	-20.39	peak
6	17758.000	25.30	26.31	51.61	74.00	-22.39	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 5V

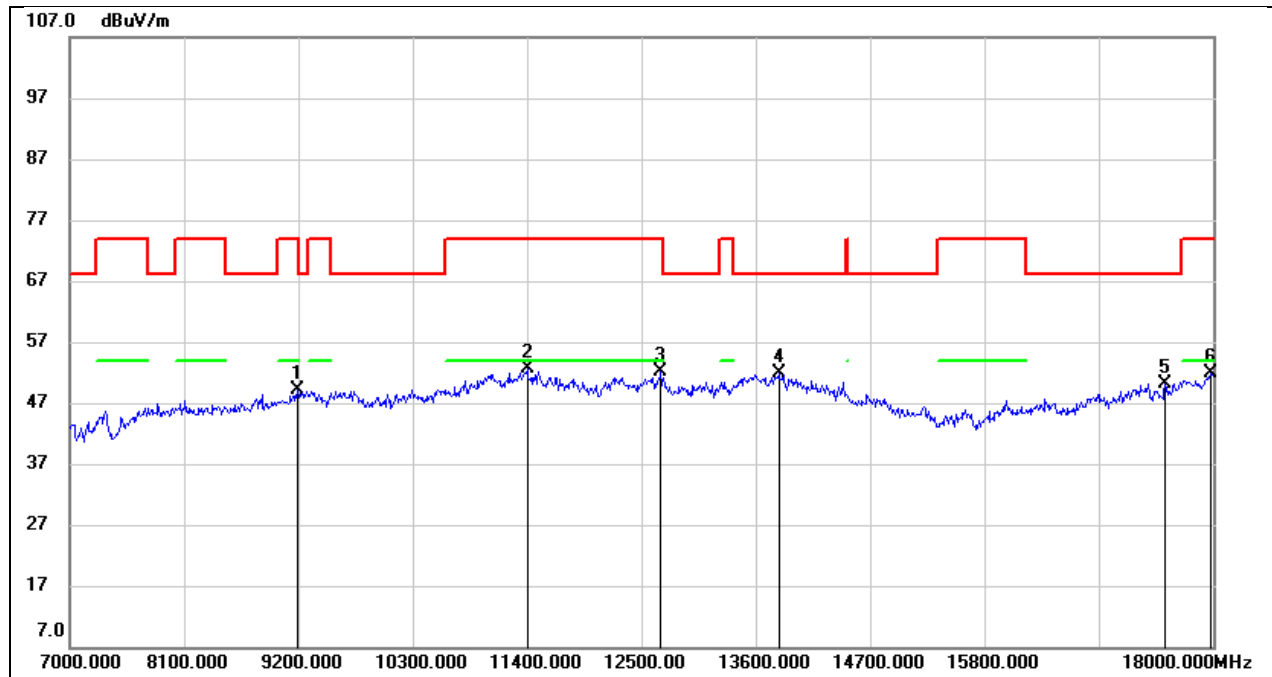


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.88	11.37	49.25	74.00	-24.75	peak
2	11400.000	35.47	17.20	52.67	74.00	-21.33	peak
3	12687.000	31.90	20.17	52.07	74.00	-21.93	peak
4	13820.000	28.74	23.22	51.96	68.20	-16.24	peak
5	17538.000	25.32	24.74	50.06	68.20	-18.14	peak
6	17978.000	23.63	28.31	51.94	74.00	-22.06	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 5V

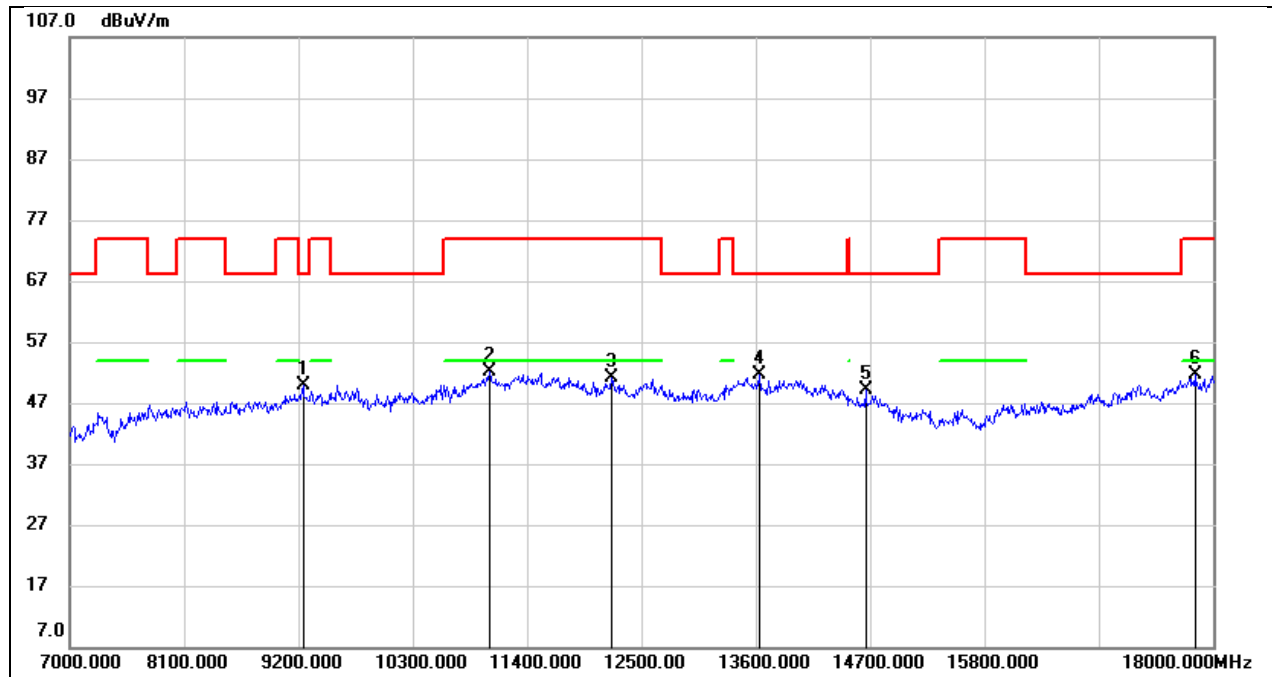


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.29	11.56	49.85	68.20	-18.35	peak
2	11037.000	36.41	15.62	52.03	74.00	-21.97	peak
3	12214.000	32.10	19.13	51.23	74.00	-22.77	peak
4	13633.000	28.84	22.68	51.52	68.20	-16.68	peak
5	14656.000	28.38	20.64	49.02	68.20	-19.18	peak
6	17824.000	24.72	26.88	51.60	74.00	-22.40	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 5V

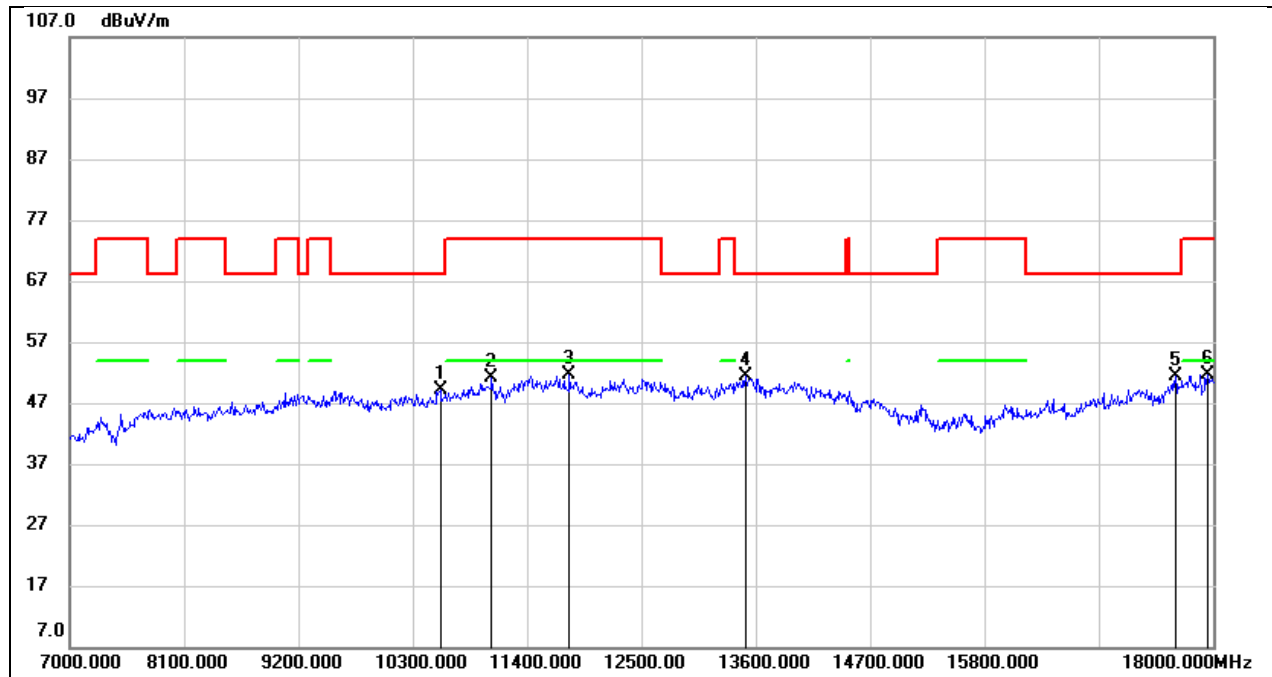


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10564.000	34.90	14.20	49.10	68.20	-19.10	peak
2	11059.000	35.30	15.71	51.01	74.00	-22.99	peak
3	11807.000	33.65	17.95	51.60	74.00	-22.40	peak
4	13501.000	29.01	22.44	51.45	68.20	-16.75	peak
5	17637.000	26.04	25.32	51.36	68.20	-16.84	peak
6	17945.000	23.65	28.01	51.66	74.00	-22.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 5V

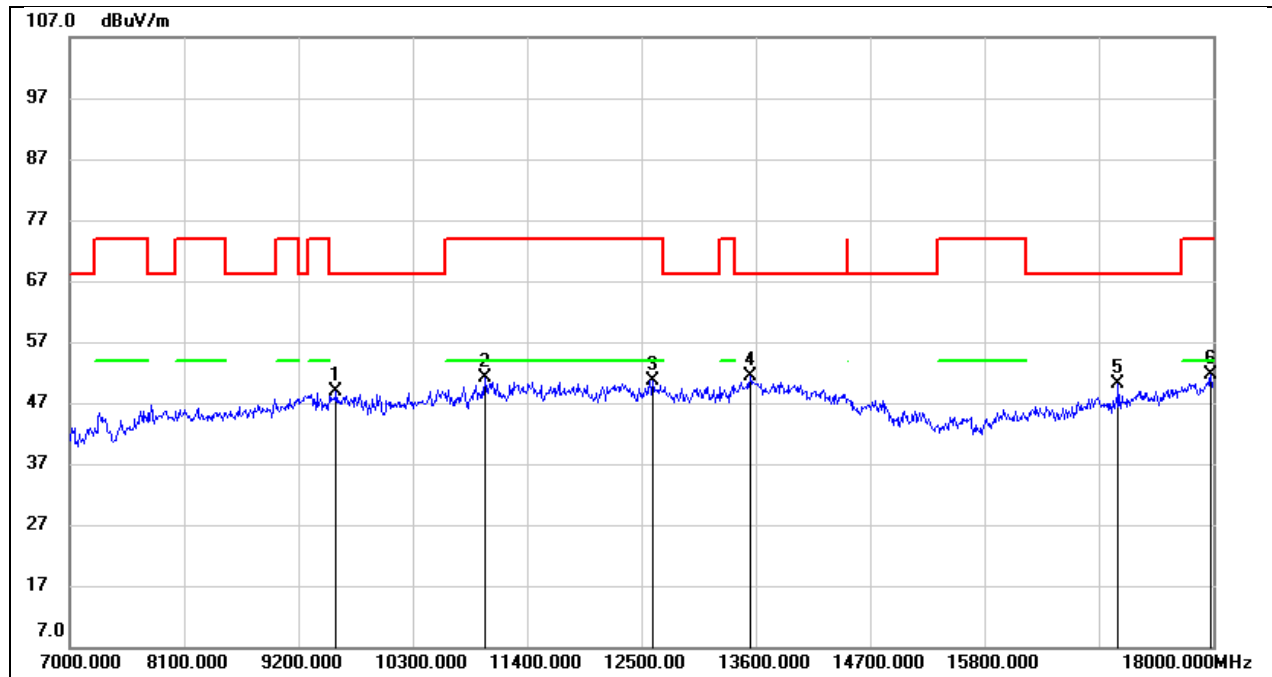


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9563.000	35.73	13.05	48.78	68.20	-19.42	peak
2	10993.000	35.58	15.44	51.02	74.00	-22.98	peak
3	12610.000	30.69	19.92	50.61	74.00	-23.39	peak
4	13545.000	28.97	22.51	51.48	68.20	-16.72	peak
5	17087.000	26.88	23.16	50.04	68.20	-18.16	peak
6	17978.000	23.32	28.31	51.63	74.00	-22.37	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 5V

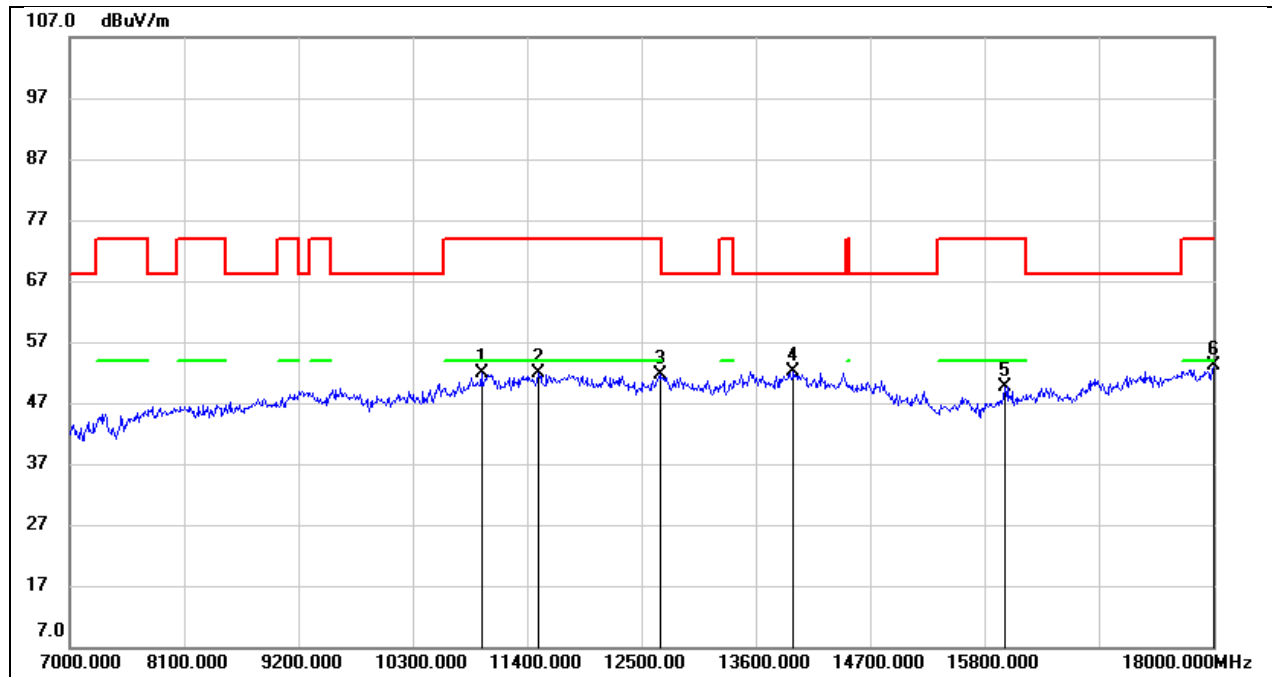


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10960.000	36.55	15.34	51.89	74.00	-22.11	peak
2	11510.000	34.34	17.57	51.91	74.00	-22.09	peak
3	12676.000	31.56	20.14	51.70	74.00	-22.30	peak
4	13963.000	28.38	23.77	52.15	68.20	-16.05	peak
5	15998.000	29.26	20.26	49.52	74.00	-24.48	peak
6	18000.000	24.74	28.51	53.25	74.00	-20.75	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 5V

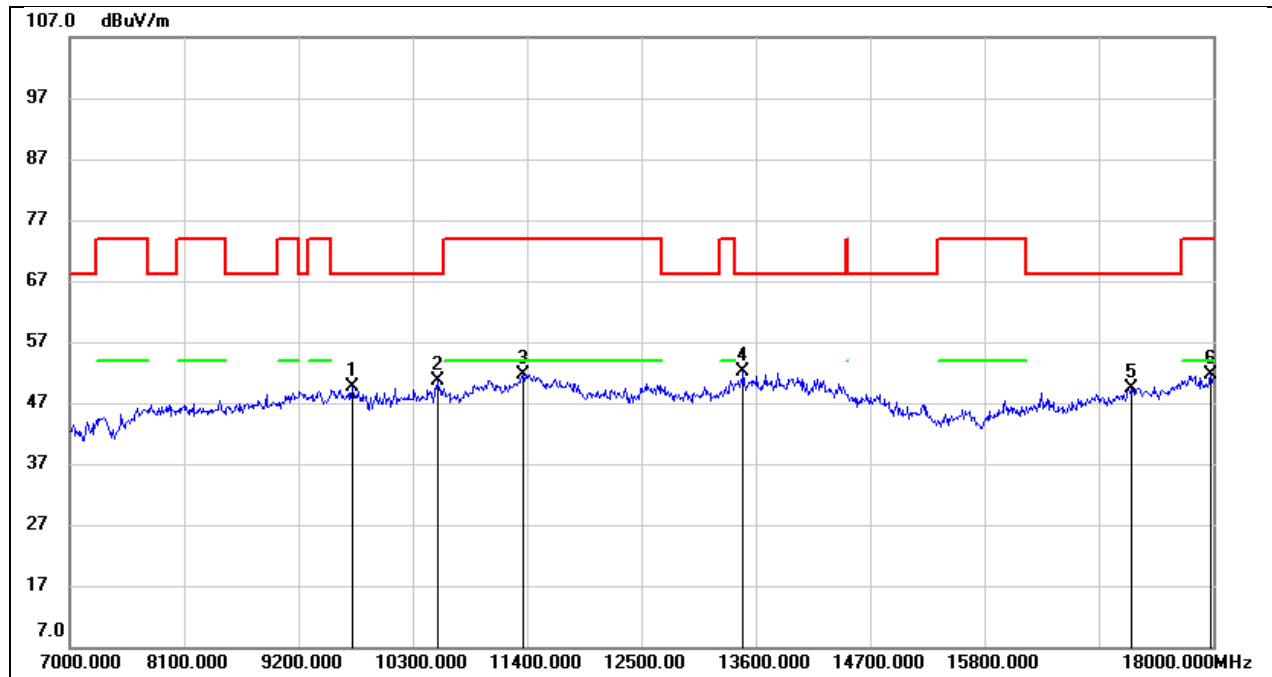


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9717.000	36.08	13.50	49.58	68.20	-18.62	peak
2	10542.000	36.47	14.15	50.62	68.20	-17.58	peak
3	11367.000	34.63	17.05	51.68	74.00	-22.32	peak
4	13479.000	29.73	22.35	52.08	68.20	-16.12	peak
5	17219.000	25.72	23.78	49.50	68.20	-18.70	peak
6	17978.000	23.35	28.31	51.66	74.00	-22.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 5V

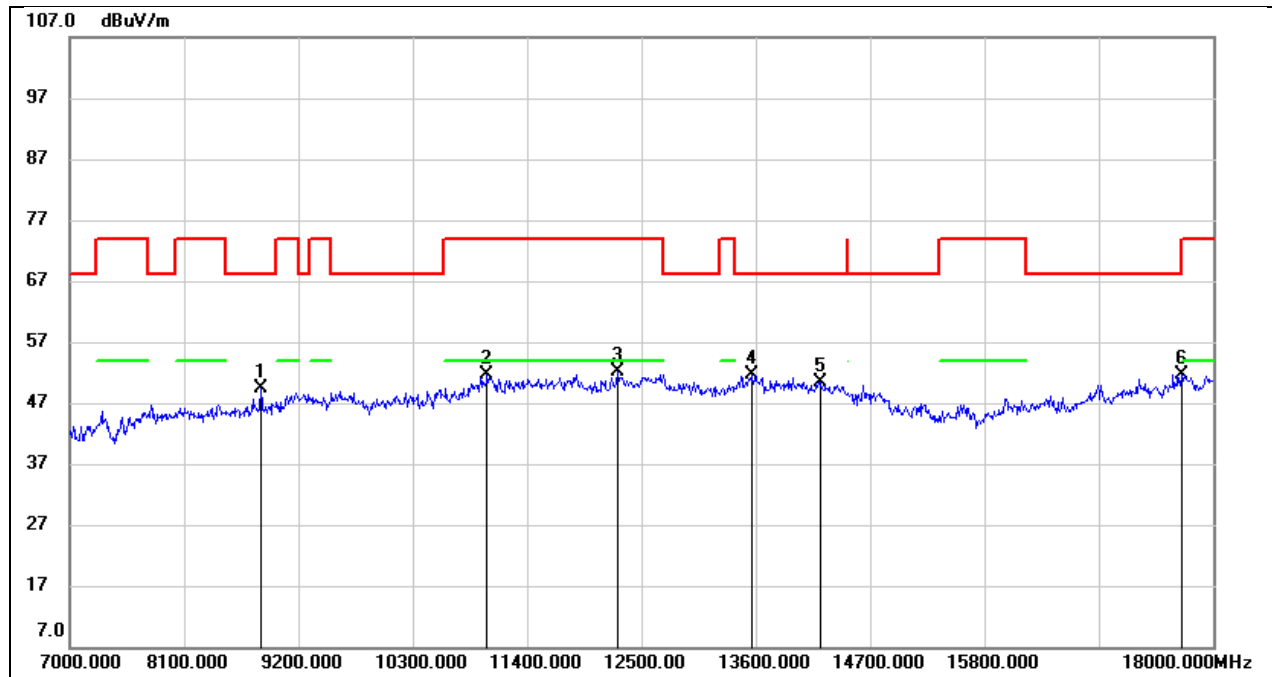


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8837.000	39.59	9.78	49.37	68.20	-18.83	peak
2	11015.000	35.99	15.52	51.51	74.00	-22.49	peak
3	12269.000	32.87	19.27	52.14	74.00	-21.86	peak
4	13567.000	29.01	22.55	51.56	68.20	-16.64	peak
5	14216.000	27.58	22.82	50.40	68.20	-17.80	peak
6	17703.000	25.83	25.86	51.69	74.00	-22.31	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 5V

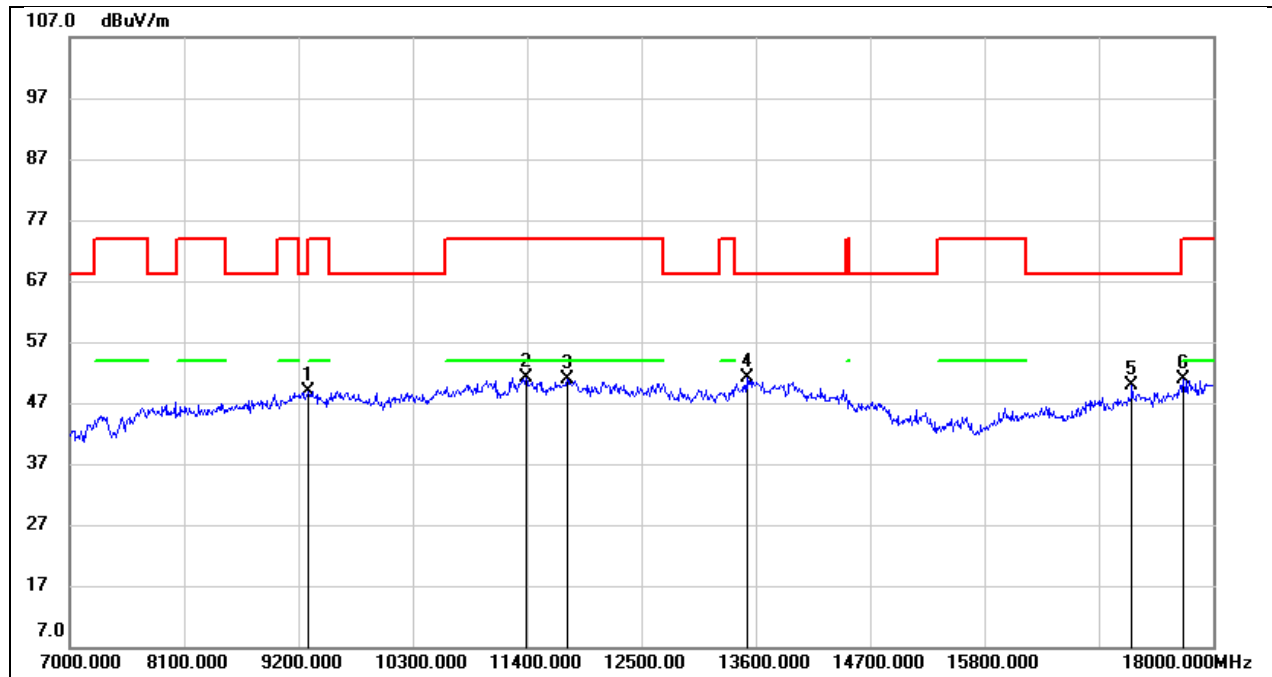


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	37.15	11.68	48.83	68.20	-19.37	peak
2	11389.000	34.01	17.15	51.16	74.00	-22.84	peak
3	11785.000	33.02	17.92	50.94	74.00	-23.06	peak
4	13512.000	28.77	22.46	51.23	68.20	-16.97	peak
5	17219.000	26.19	23.78	49.97	68.20	-18.23	peak
6	17714.000	24.80	25.96	50.76	74.00	-23.24	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 5V

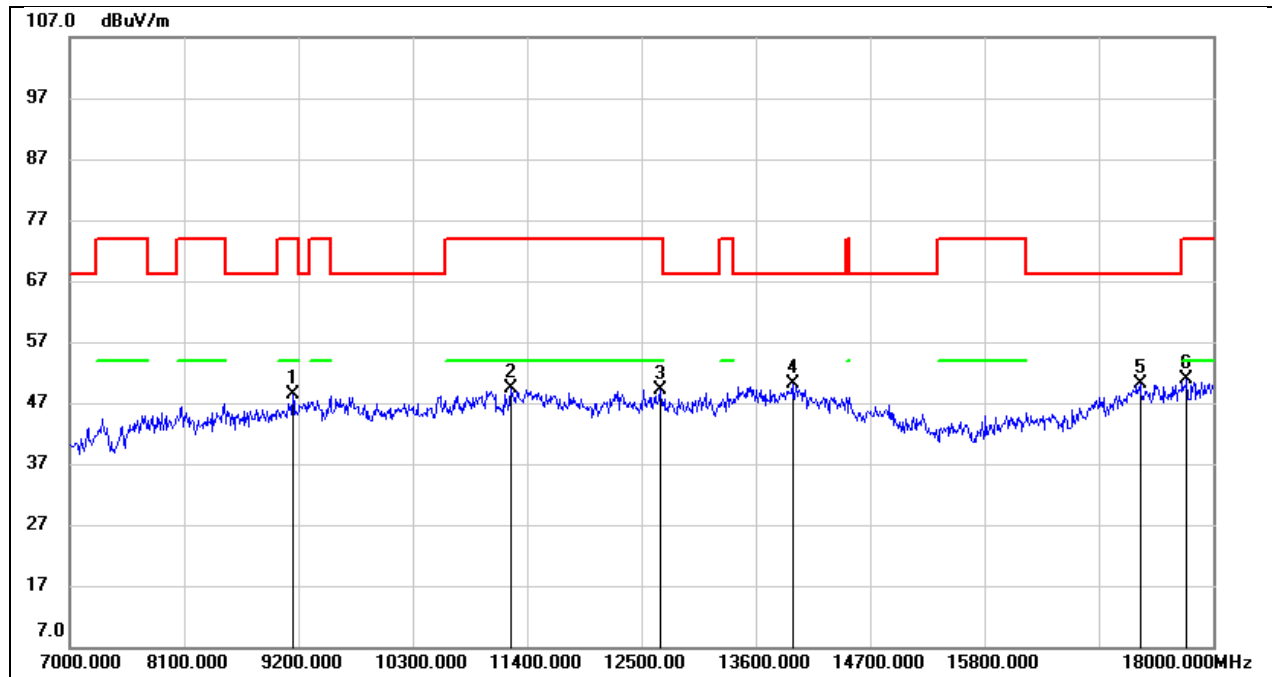


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.09	11.18	48.27	74.00	-25.73	peak
2	11246.000	32.79	16.50	49.29	74.00	-24.71	peak
3	12676.000	28.97	20.14	49.11	74.00	-24.89	peak
4	13952.000	26.44	23.73	50.17	68.20	-18.03	peak
5	17296.000	26.08	24.05	50.13	68.20	-18.07	peak
6	17747.000	24.55	26.23	50.78	74.00	-23.22	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 5V

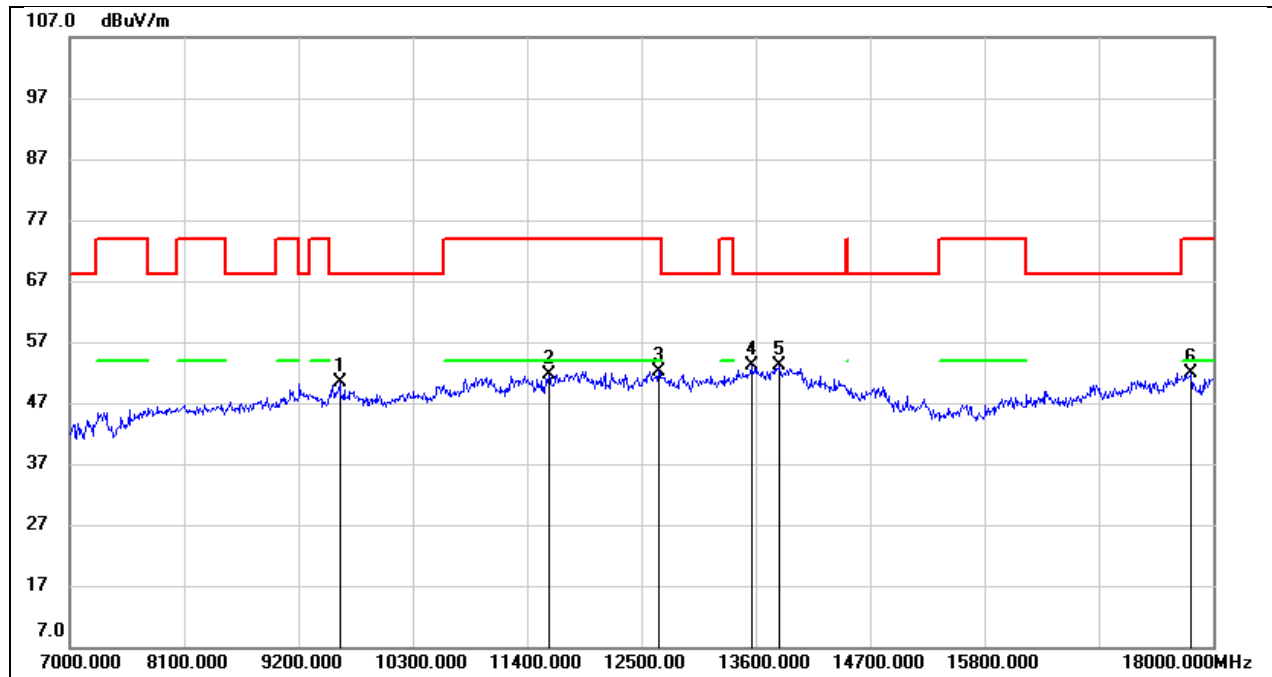


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	37.14	13.26	50.40	68.20	-17.80	peak
2	11609.000	33.87	17.88	51.75	74.00	-22.25	peak
3	12665.000	32.16	20.09	52.25	74.00	-21.75	peak
4	13556.000	30.53	22.53	53.06	68.20	-15.14	peak
5	13831.000	29.82	23.26	53.08	68.20	-15.12	peak
6	17791.000	25.34	26.58	51.92	74.00	-22.08	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 5V

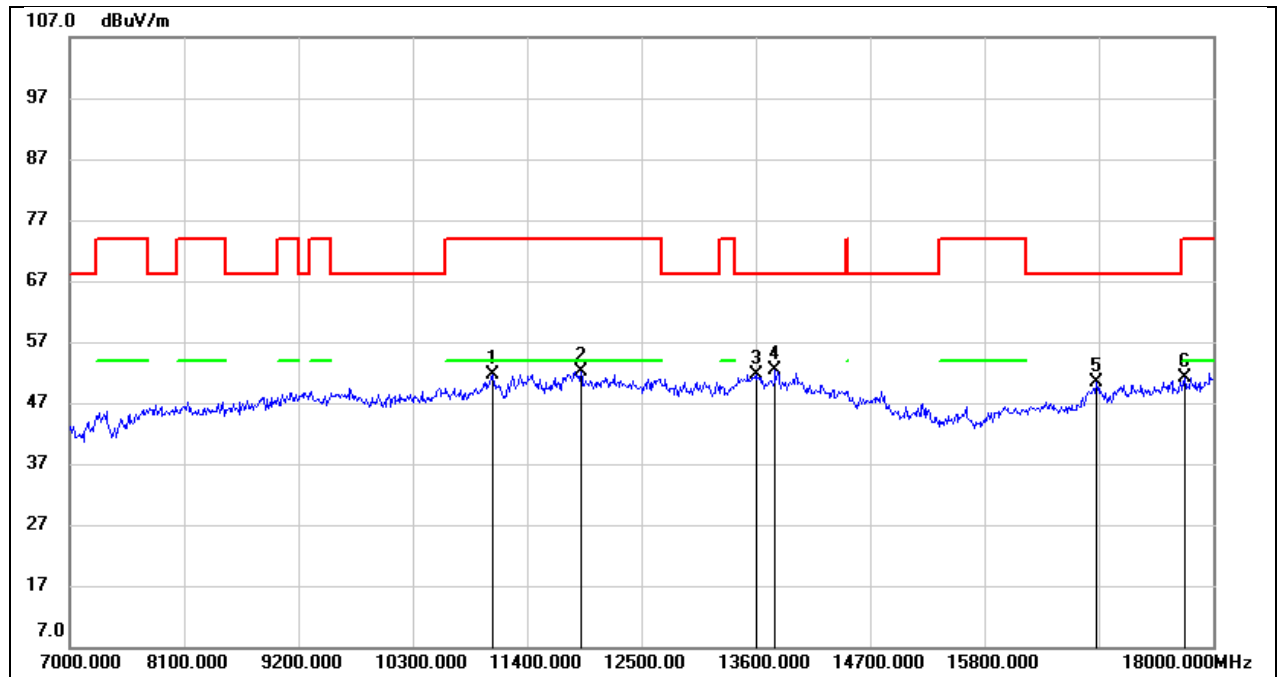


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11070.000	35.93	15.75	51.68	74.00	-22.32	peak
2	11917.000	33.93	18.32	52.25	74.00	-21.75	peak
3	13611.000	29.10	22.63	51.73	68.20	-16.47	peak
4	13787.000	29.38	23.10	52.48	68.20	-15.72	peak
5	16878.000	27.97	22.29	50.26	68.20	-17.94	peak
6	17725.000	25.01	26.03	51.04	74.00	-22.96	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 5V

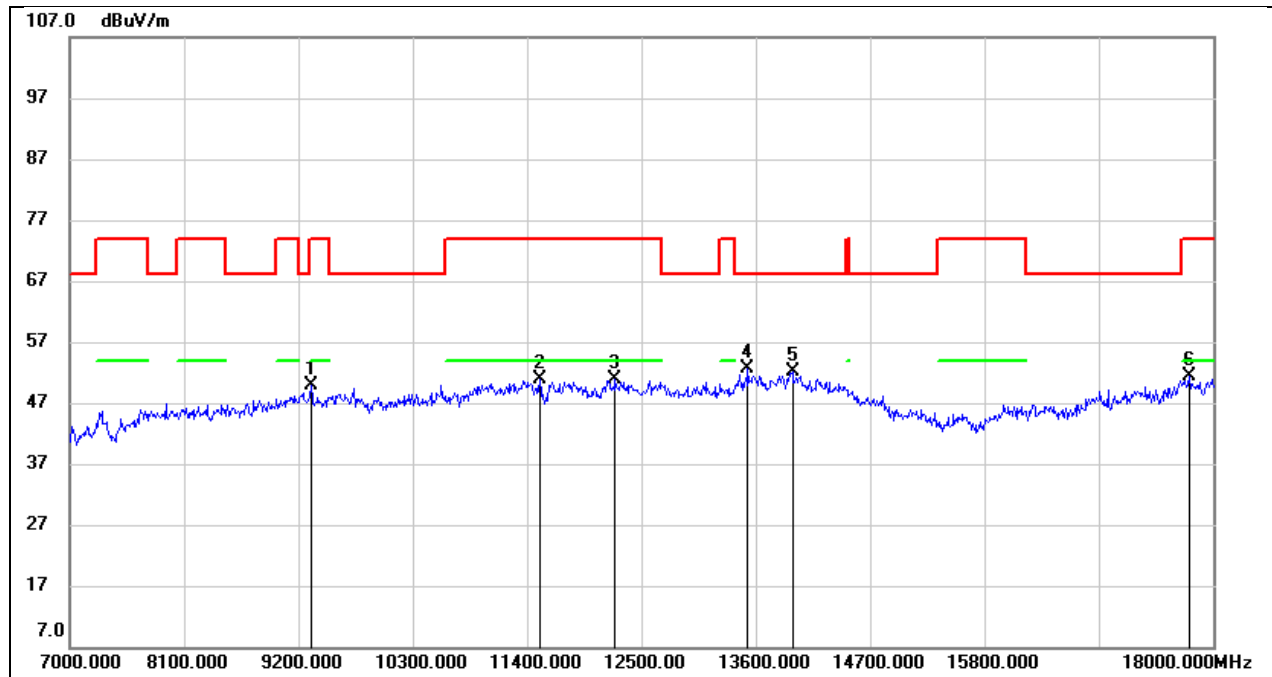


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	38.04	11.79	49.83	74.00	-24.17	peak
2	11521.000	33.28	17.60	50.88	74.00	-23.12	peak
3	12247.000	31.70	19.22	50.92	74.00	-23.08	peak
4	13523.000	30.10	22.48	52.58	68.20	-15.62	peak
5	13952.000	28.49	23.73	52.22	68.20	-15.98	peak
6	17769.000	25.08	26.41	51.49	74.00	-22.51	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 5V

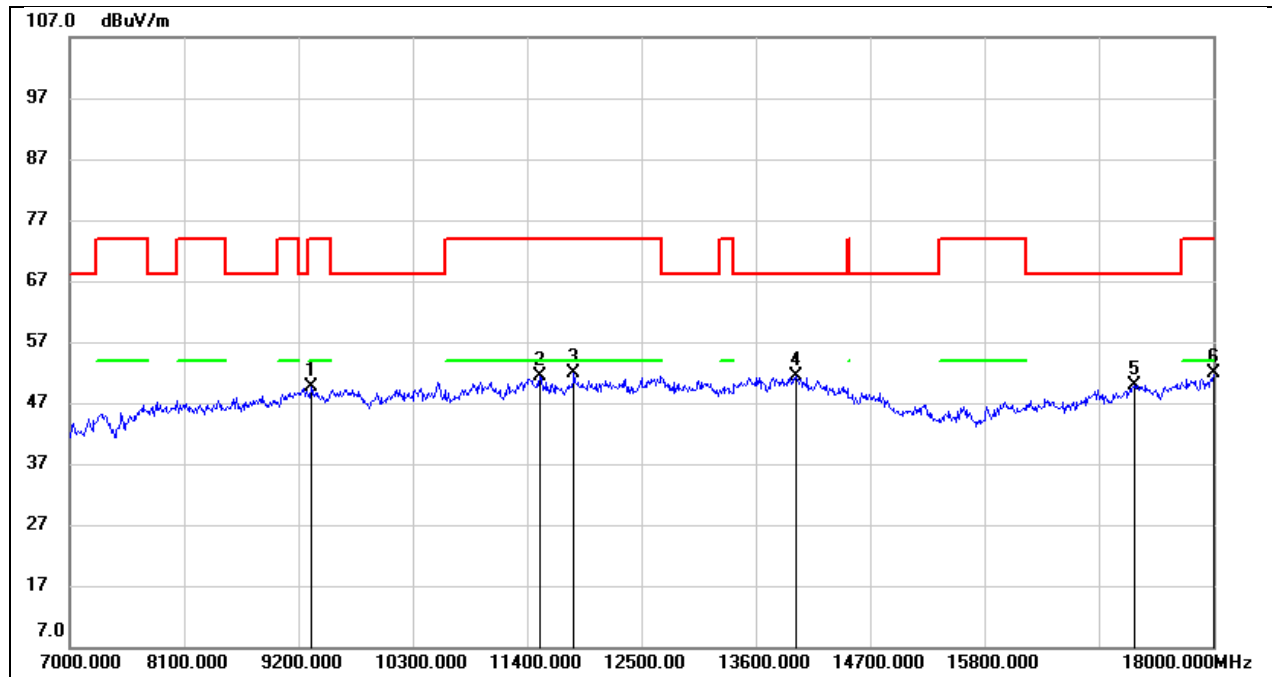


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	37.73	11.79	49.52	74.00	-24.48	peak
2	11521.000	33.68	17.60	51.28	74.00	-22.72	peak
3	11851.000	33.79	18.09	51.88	74.00	-22.12	peak
4	13985.000	27.49	23.85	51.34	68.20	-16.86	peak
5	17241.000	25.93	23.87	49.80	68.20	-18.40	peak
6	18000.000	23.30	28.51	51.81	74.00	-22.19	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 5V

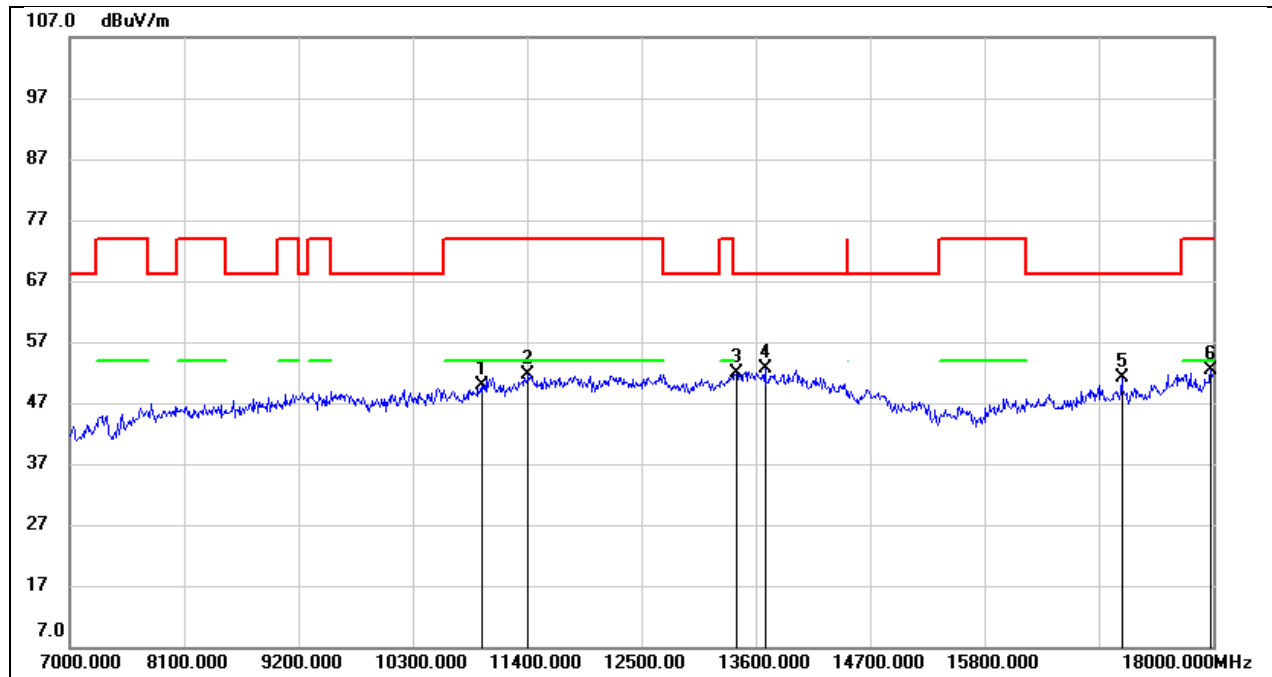


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10960.000	34.50	15.34	49.84	74.00	-24.16	peak
2	11411.000	34.40	17.24	51.64	74.00	-22.36	peak
3	13413.000	29.88	22.09	51.97	68.20	-16.23	peak
4	13688.000	29.69	22.84	52.53	68.20	-15.67	peak
5	17120.000	27.77	23.32	51.09	68.20	-17.11	peak
6	17978.000	24.08	28.31	52.39	74.00	-21.61	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 5V

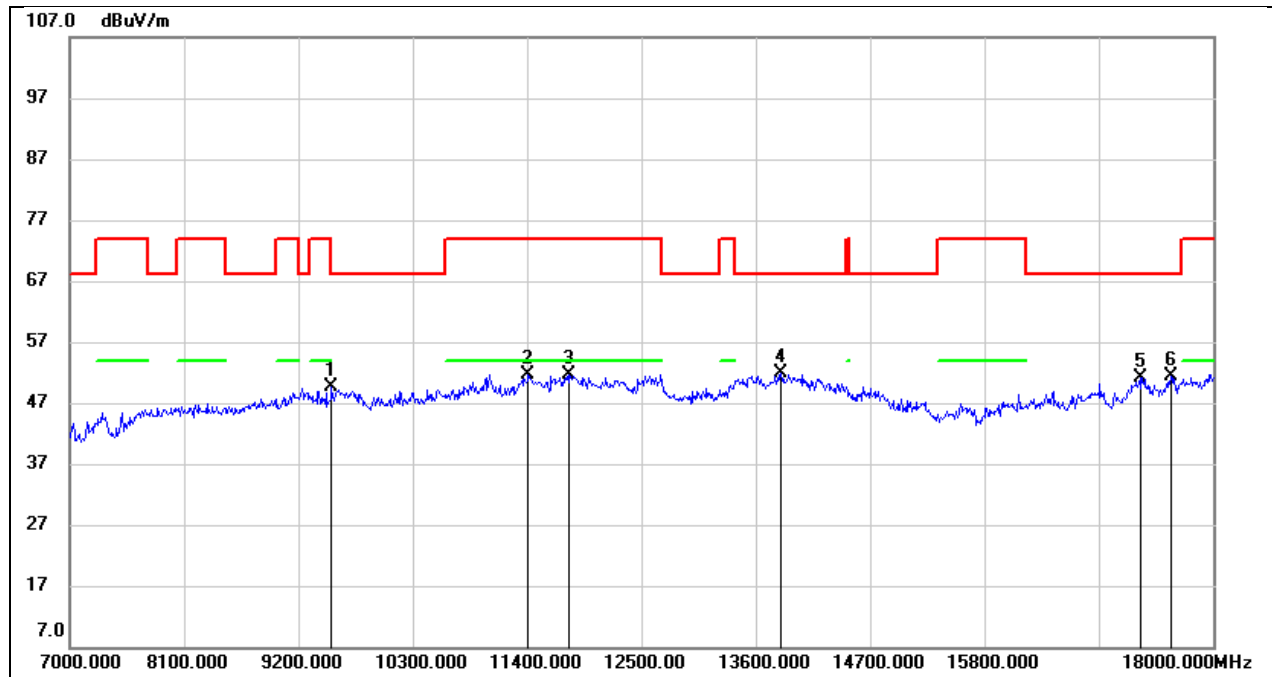


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9519.000	36.88	12.77	49.65	68.20	-18.55	peak
2	11411.000	34.42	17.24	51.66	74.00	-22.34	peak
3	11807.000	33.72	17.95	51.67	74.00	-22.33	peak
4	13842.000	28.51	23.29	51.80	68.20	-16.40	peak
5	17296.000	27.04	24.05	51.09	68.20	-17.11	peak
6	17593.000	26.32	24.98	51.30	68.20	-16.90	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 5V

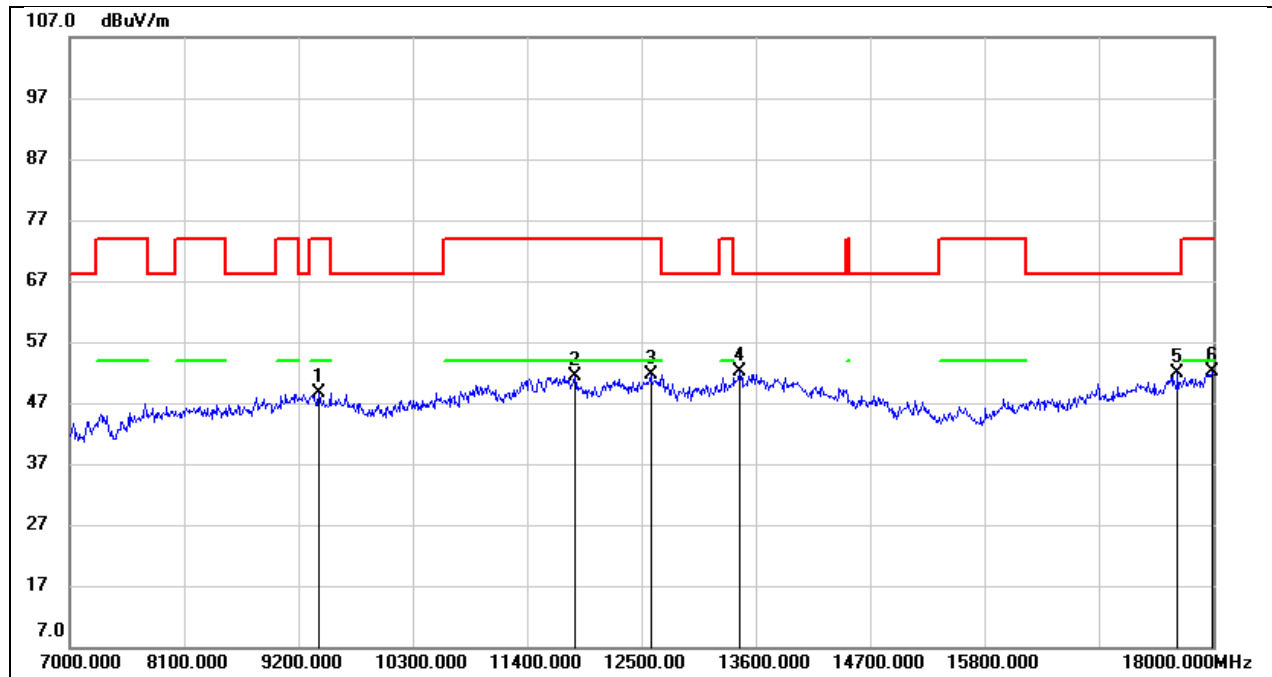


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9398.000	36.64	12.03	48.67	74.00	-25.33	peak
2	11862.000	33.18	18.13	51.31	74.00	-22.69	peak
3	12588.000	31.72	19.87	51.59	74.00	-22.41	peak
4	13446.000	29.89	22.22	52.11	68.20	-16.09	peak
5	17659.000	26.28	25.50	51.78	68.20	-16.42	peak
6	17989.000	23.70	28.40	52.10	74.00	-21.90	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 5V

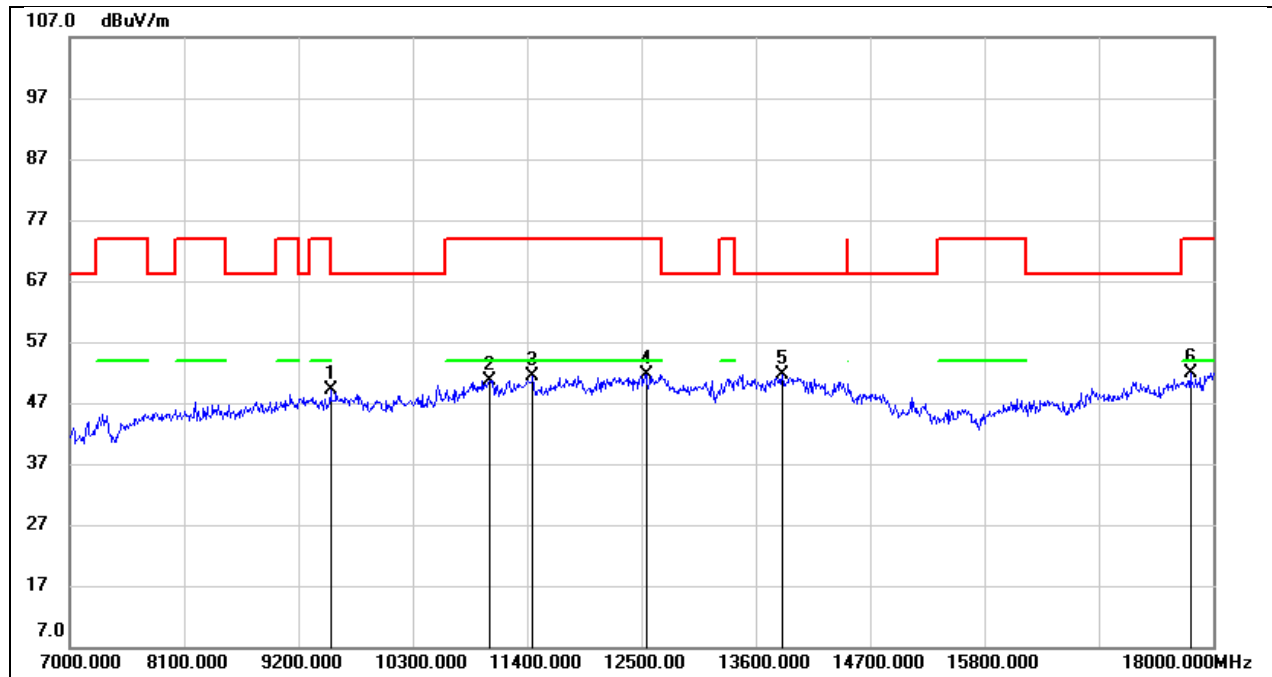


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9508.000	36.31	12.71	49.02	68.20	-19.18	peak
2	11037.000	35.13	15.62	50.75	74.00	-23.25	peak
3	11455.000	34.10	17.38	51.48	74.00	-22.52	peak
4	12544.000	31.80	19.83	51.63	74.00	-22.37	peak
5	13853.000	28.26	23.34	51.60	68.20	-16.60	peak
6	17780.000	25.29	26.50	51.79	74.00	-22.21	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 5V

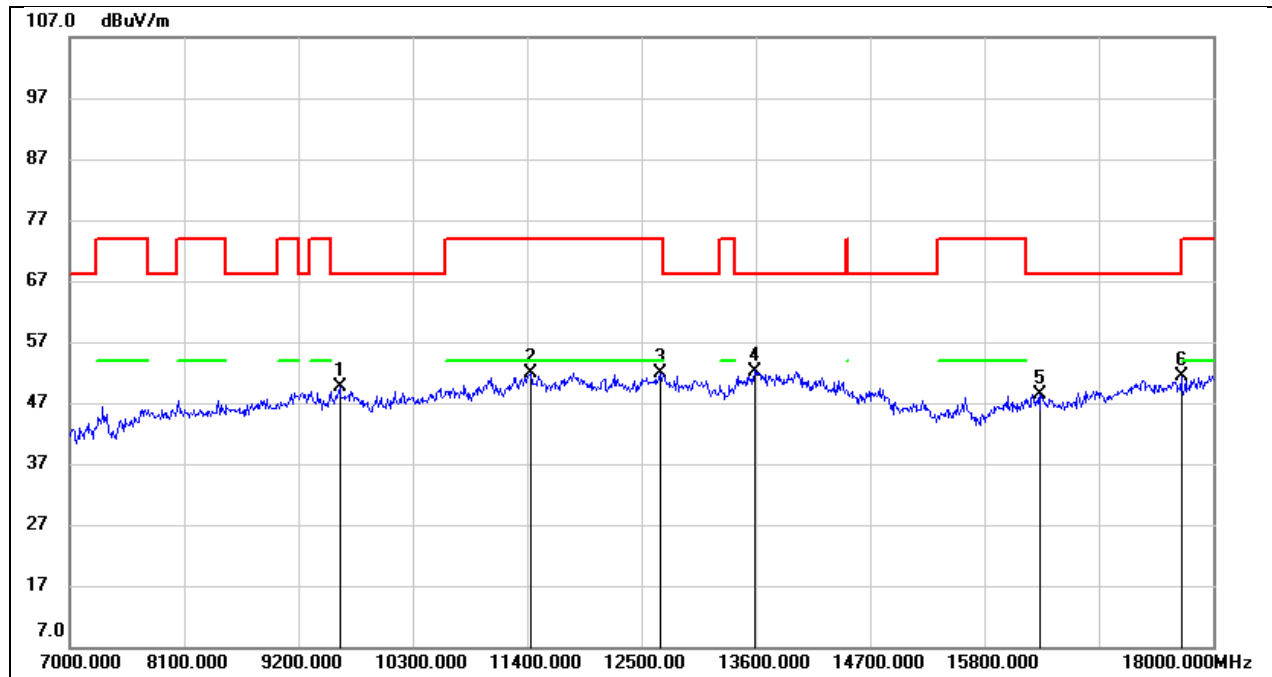


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	36.45	13.26	49.71	68.20	-18.49	peak
2	11433.000	34.52	17.31	51.83	74.00	-22.17	peak
3	12676.000	31.80	20.14	51.94	74.00	-22.06	peak
4	13589.000	29.67	22.58	52.25	68.20	-15.95	peak
5	16339.000	27.04	21.24	48.28	68.20	-19.92	peak
6	17692.000	25.52	25.77	51.29	68.20	-16.91	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 5V

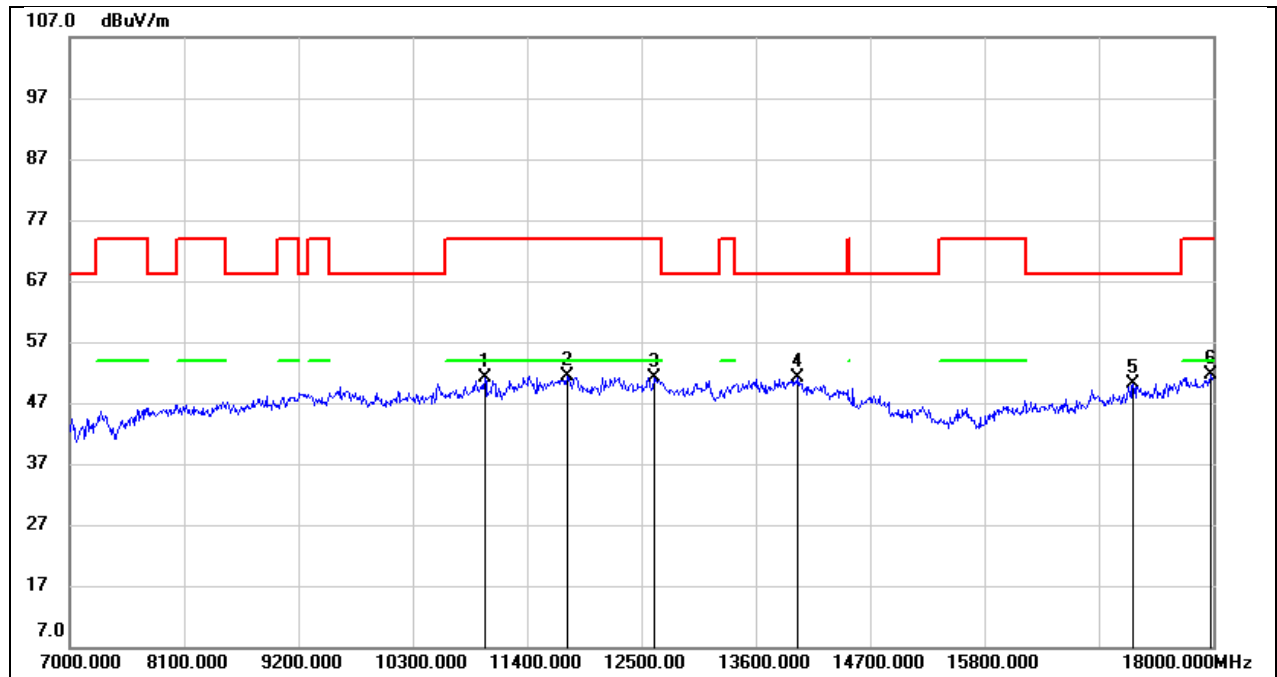


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10993.000	35.73	15.44	51.17	74.00	-22.83	peak
2	11785.000	33.49	17.92	51.41	74.00	-22.59	peak
3	12621.000	31.28	19.94	51.22	74.00	-22.78	peak
4	14007.000	27.29	23.88	51.17	68.20	-17.03	peak
5	17230.000	26.40	23.83	50.23	68.20	-17.97	peak
6	17978.000	23.24	28.31	51.55	74.00	-22.45	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 5V

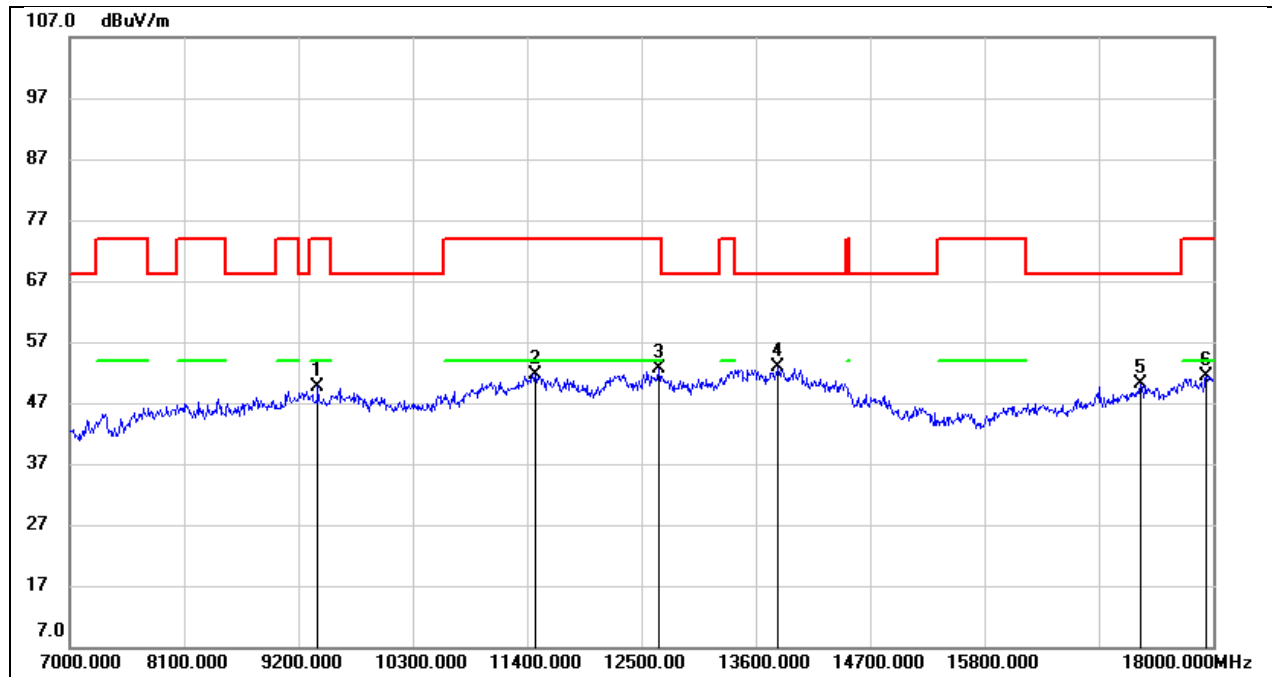


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9387.000	37.76	11.99	49.75	74.00	-24.25	peak
2	11477.000	34.28	17.46	51.74	74.00	-22.26	peak
3	12665.000	32.46	20.09	52.55	74.00	-21.45	peak
4	13809.000	29.65	23.17	52.82	68.20	-15.38	peak
5	17296.000	26.10	24.05	50.15	68.20	-18.05	peak
6	17934.000	23.57	27.90	51.47	74.00	-22.53	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 5V

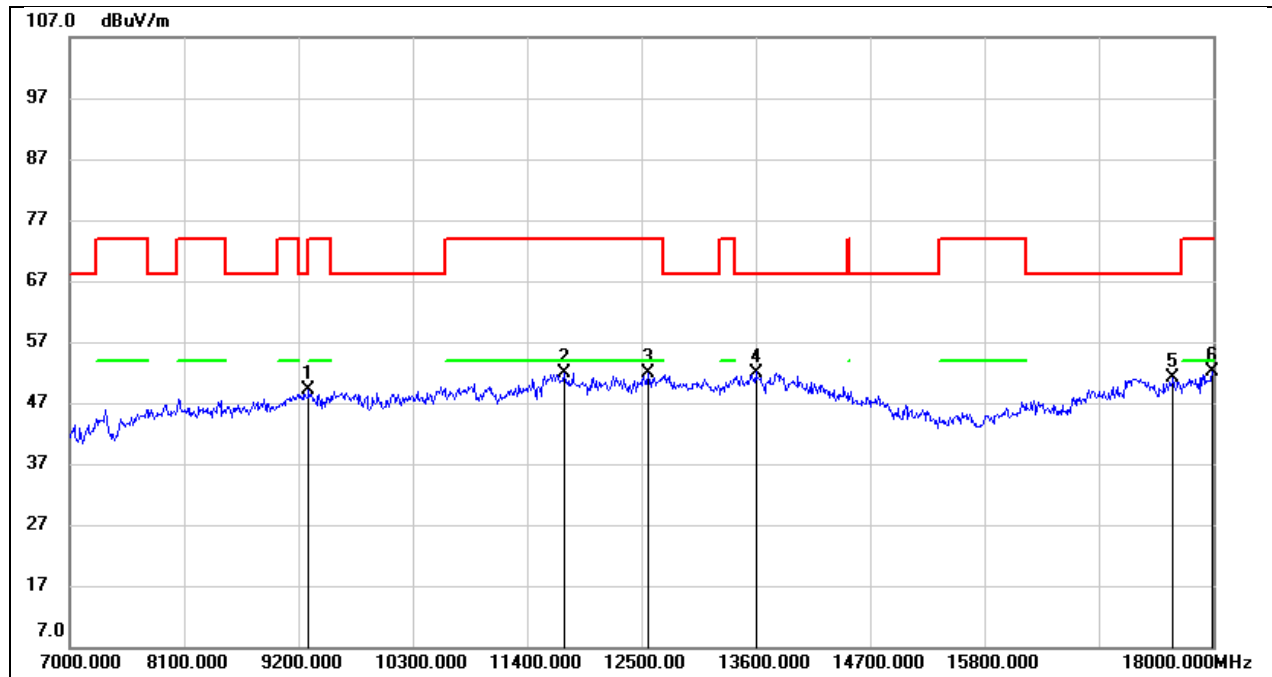


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	37.38	11.72	49.10	68.20	-19.10	peak
2	11752.000	33.99	17.91	51.90	74.00	-22.10	peak
3	12566.000	32.07	19.85	51.92	74.00	-22.08	peak
4	13600.000	29.40	22.60	52.00	68.20	-16.20	peak
5	17615.000	25.90	25.14	51.04	68.20	-17.16	peak
6	17989.000	23.62	28.40	52.02	74.00	-21.98	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 5V

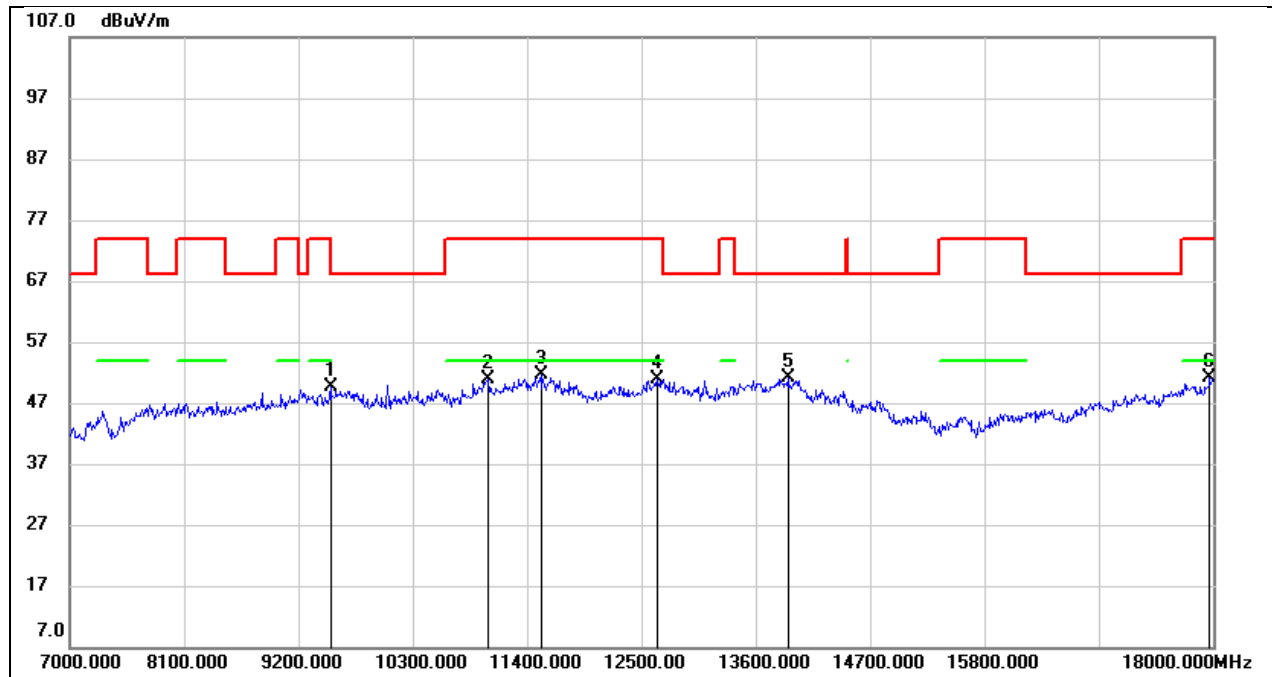


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9508.000	37.01	12.71	49.72	68.20	-18.48	peak
2	11026.000	35.26	15.57	50.83	74.00	-23.17	peak
3	11532.000	34.03	17.64	51.67	74.00	-22.33	peak
4	12654.000	30.80	20.06	50.86	74.00	-23.14	peak
5	13908.000	27.56	23.56	51.12	68.20	-17.08	peak
6	17967.000	22.93	28.21	51.14	74.00	-22.86	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 5V

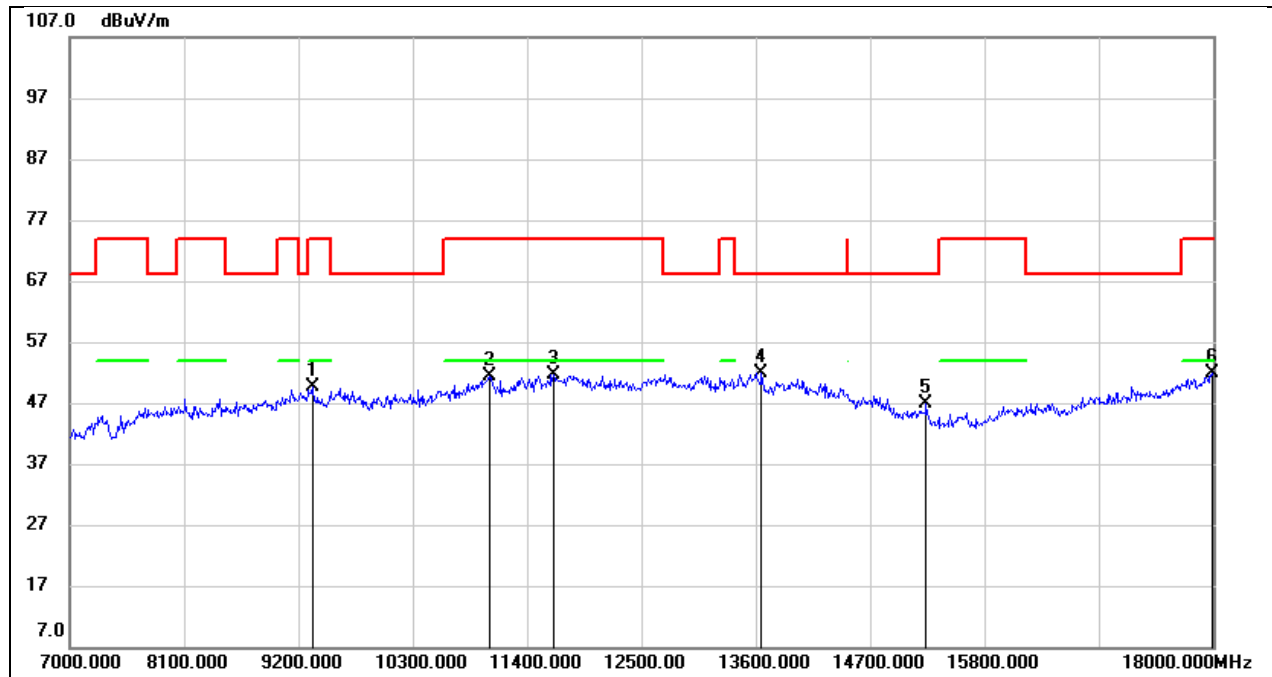


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.75	11.82	49.57	74.00	-24.43	peak
2	11037.000	35.84	15.62	51.46	74.00	-22.54	peak
3	11653.000	33.85	17.88	51.73	74.00	-22.27	peak
4	13655.000	29.13	22.75	51.88	68.20	-16.32	peak
5	15239.000	28.02	18.78	46.80	68.20	-21.40	peak
6	17989.000	23.41	28.40	51.81	74.00	-22.19	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 5V

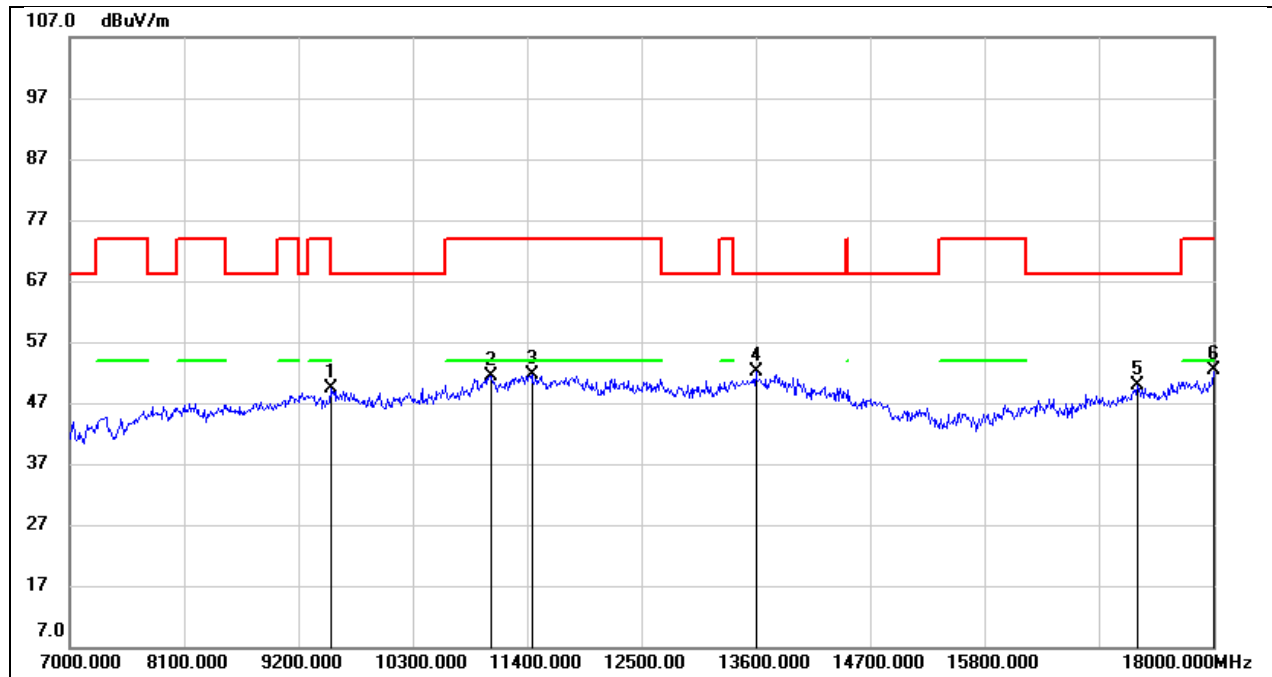


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9508.000	36.72	12.71	49.43	68.20	-18.77	peak
2	11059.000	35.70	15.71	51.41	74.00	-22.59	peak
3	11444.000	34.36	17.35	51.71	74.00	-22.29	peak
4	13600.000	29.43	22.60	52.03	68.20	-16.17	peak
5	17274.000	25.93	23.98	49.91	68.20	-18.29	peak
6	18000.000	23.86	28.51	52.37	74.00	-21.63	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 5V

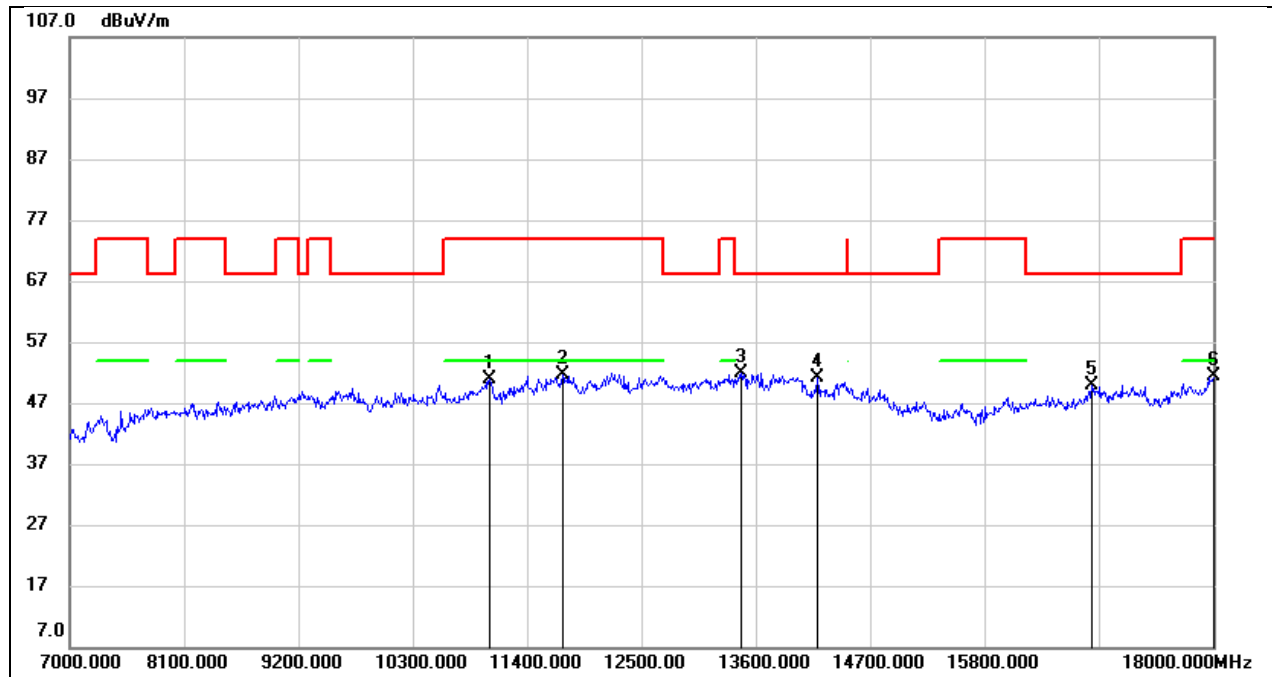


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11037.000	35.18	15.62	50.80	74.00	-23.20	peak
2	11741.000	33.76	17.91	51.67	74.00	-22.33	peak
3	13457.000	29.69	22.27	51.96	68.20	-16.24	peak
4	14194.000	28.21	22.95	51.16	68.20	-17.04	peak
5	16834.000	27.64	22.15	49.79	68.20	-18.41	peak
6	18000.000	22.98	28.51	51.49	74.00	-22.51	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 5V

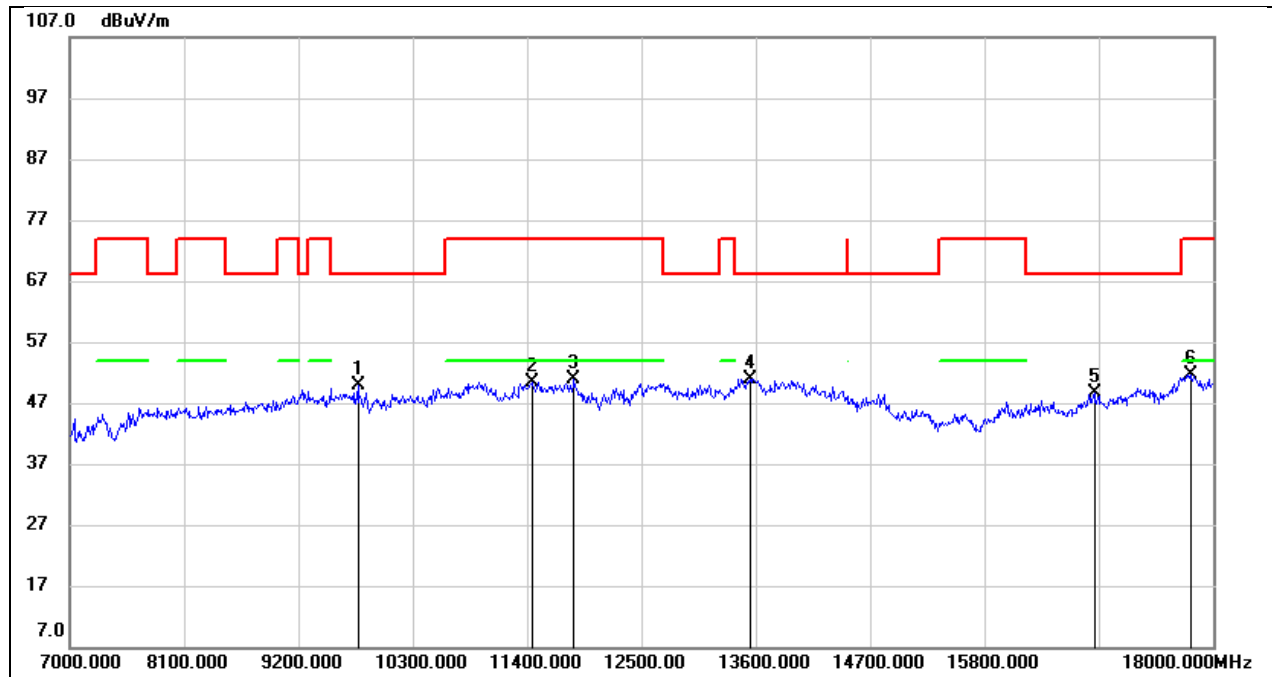


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9772.000	36.22	13.61	49.83	68.20	-18.37	peak
2	11444.000	33.13	17.35	50.48	74.00	-23.52	peak
3	11851.000	32.74	18.09	50.83	74.00	-23.17	peak
4	13545.000	28.34	22.51	50.85	68.20	-17.35	peak
5	16856.000	26.50	22.21	48.71	68.20	-19.49	peak
6	17780.000	25.09	26.50	51.59	74.00	-22.41	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 5V

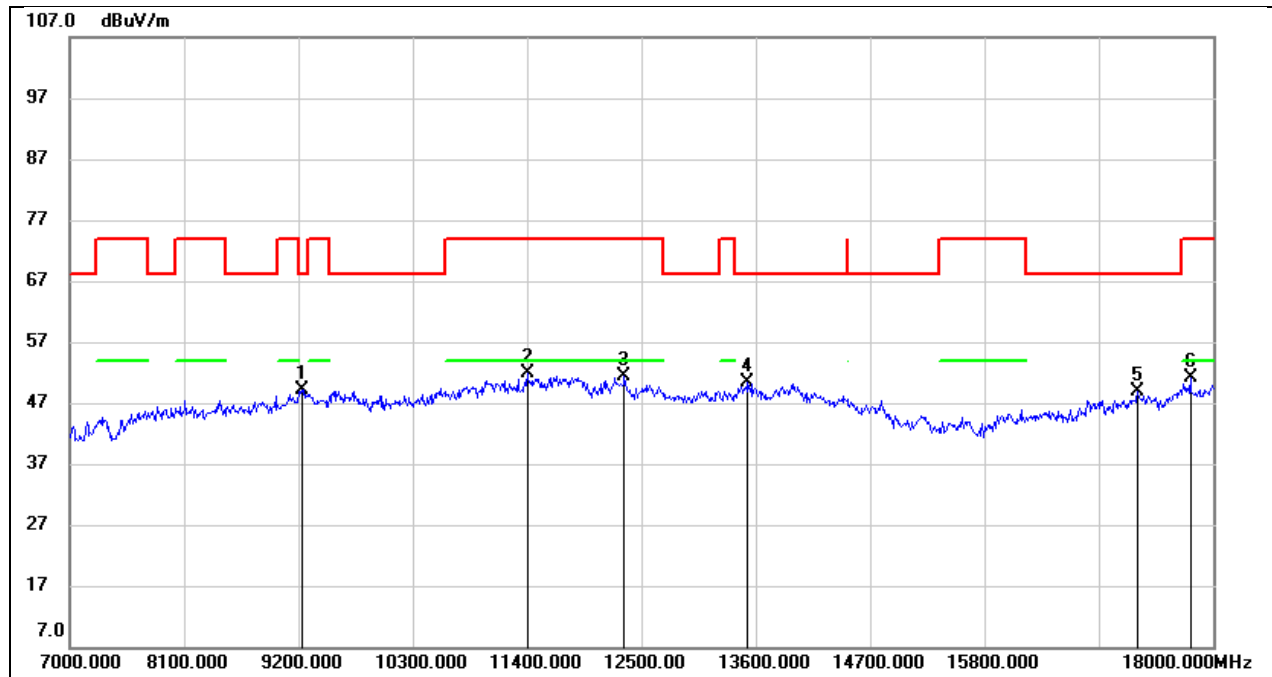


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.70	11.52	49.22	68.20	-18.98	peak
2	11400.000	34.71	17.20	51.91	74.00	-22.09	peak
3	12335.000	31.99	19.46	51.45	74.00	-22.55	peak
4	13523.000	27.78	22.48	50.26	68.20	-17.94	peak
5	17274.000	24.84	23.98	48.82	68.20	-19.38	peak
6	17780.000	24.51	26.50	51.01	74.00	-22.99	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 5V

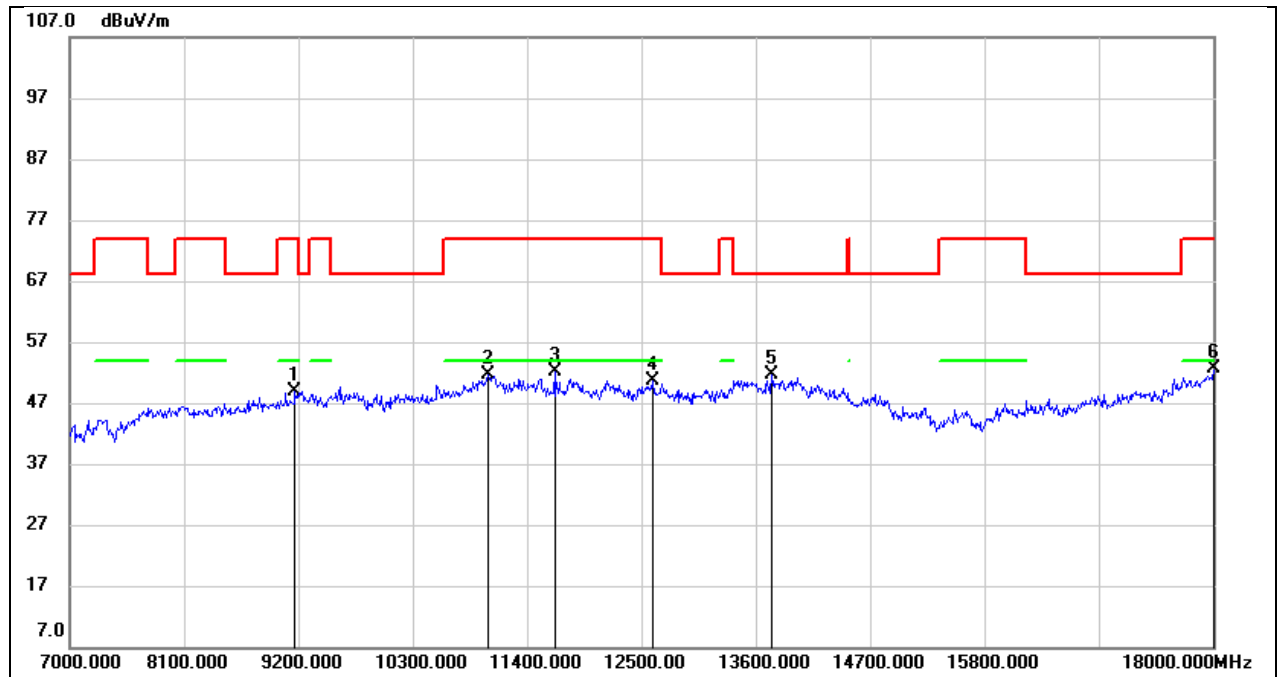


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	37.62	11.28	48.90	74.00	-25.10	peak
2	11026.000	36.08	15.57	51.65	74.00	-22.35	peak
3	11664.000	34.15	17.88	52.03	74.00	-21.97	peak
4	12610.000	30.70	19.92	50.62	74.00	-23.38	peak
5	13754.000	28.61	23.01	51.62	68.20	-16.58	peak
6	18000.000	24.10	28.51	52.61	74.00	-21.39	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 5V

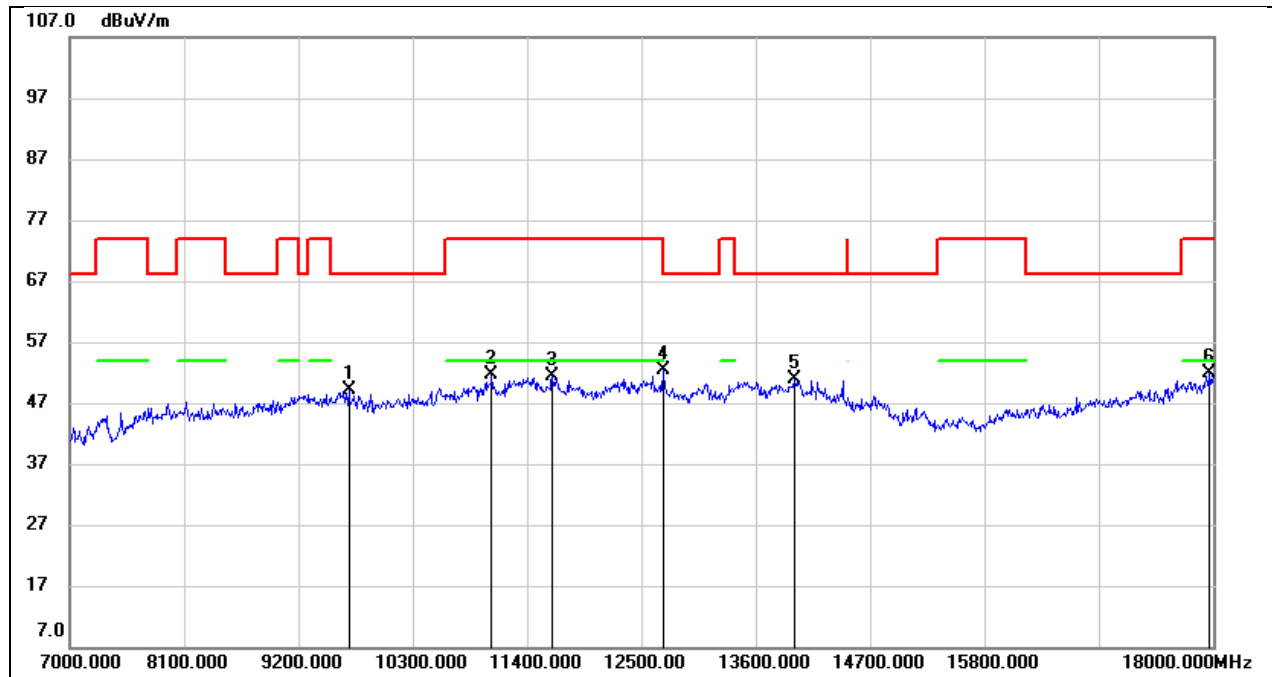


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9684.000	35.70	13.44	49.14	68.20	-19.06	peak
2	11059.000	35.98	15.71	51.69	74.00	-22.31	peak
3	11642.000	33.38	17.88	51.26	74.00	-22.74	peak
4	12709.000	32.03	20.24	52.27	68.20	-15.93	peak
5	13974.000	27.05	23.81	50.86	68.20	-17.34	peak
6	17967.000	23.65	28.21	51.86	74.00	-22.14	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 5V

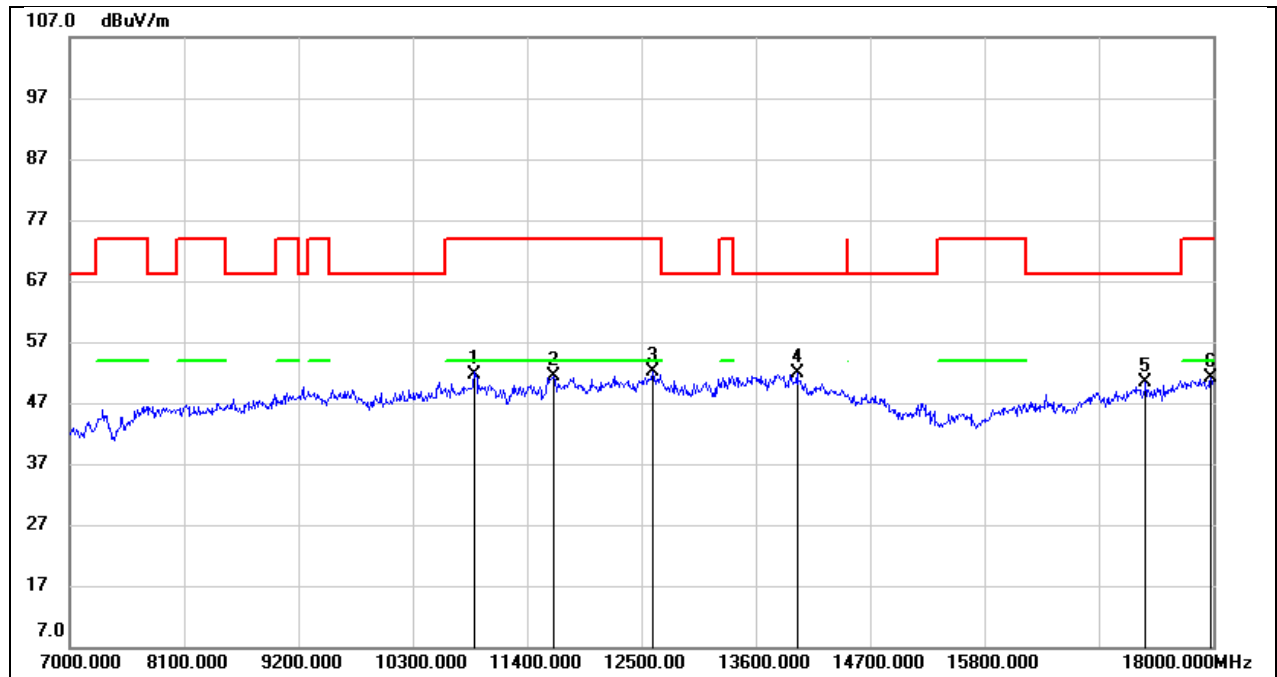


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10894.000	36.44	15.14	51.58	74.00	-22.42	peak
2	11653.000	33.61	17.88	51.49	74.00	-22.51	peak
3	12610.000	32.18	19.92	52.10	74.00	-21.90	peak
4	13996.000	28.04	23.89	51.93	68.20	-16.27	peak
5	17351.000	26.19	24.23	50.42	68.20	-17.78	peak
6	17978.000	22.78	28.31	51.09	74.00	-22.91	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 5V

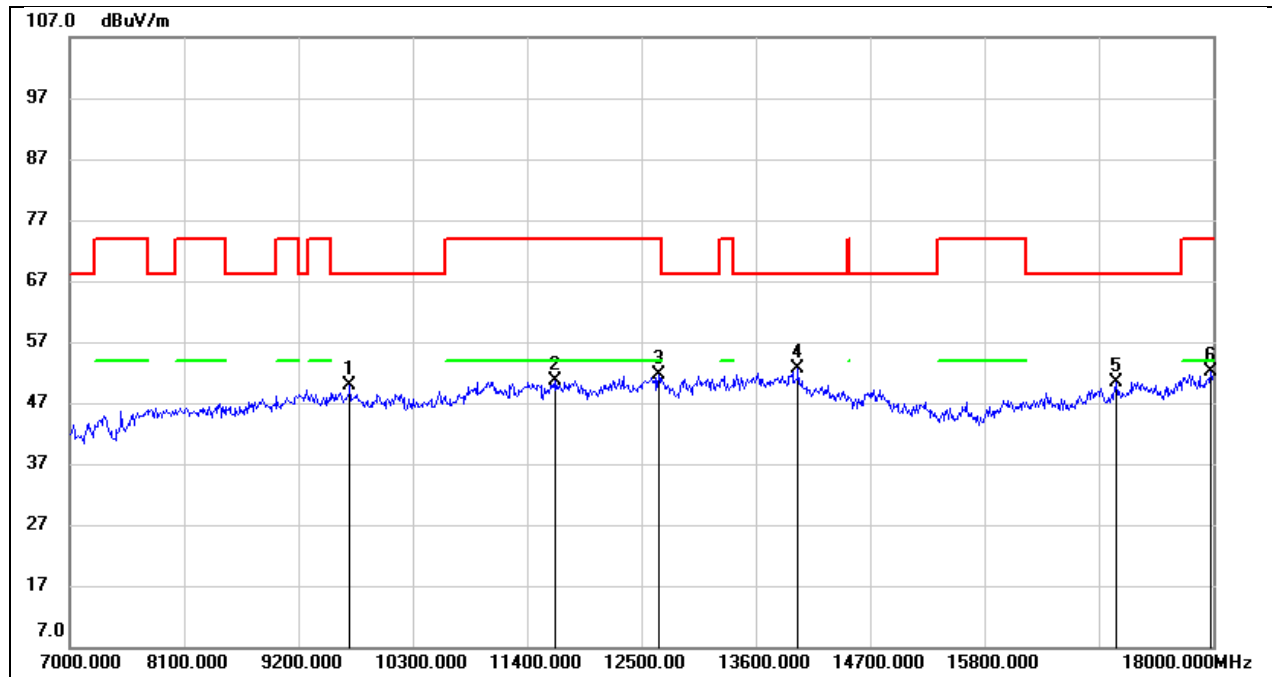


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9695.000	36.32	13.45	49.77	68.20	-18.43	peak
2	11675.000	32.61	17.90	50.51	74.00	-23.49	peak
3	12665.000	31.64	20.09	51.73	74.00	-22.27	peak
4	14007.000	28.83	23.88	52.71	68.20	-15.49	peak
5	17065.000	27.32	23.05	50.37	68.20	-17.83	peak
6	17978.000	23.83	28.31	52.14	74.00	-21.86	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 5V

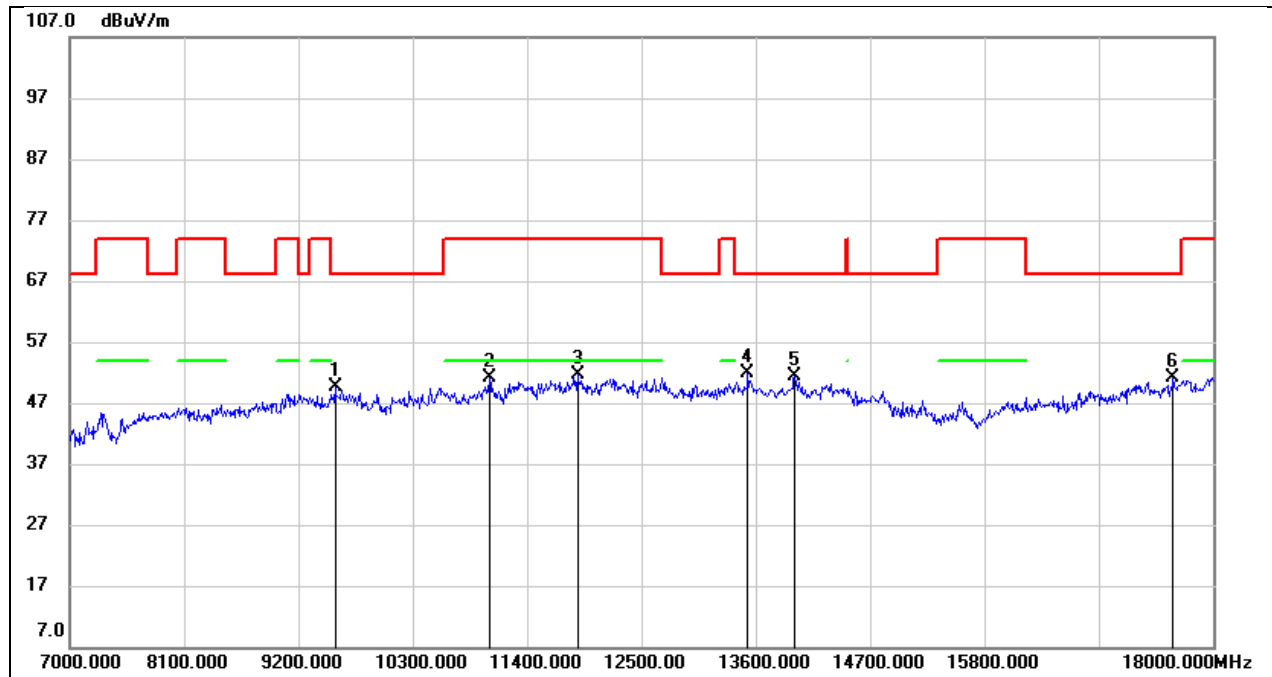


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9552.000	36.54	12.98	49.52	68.20	-18.68	peak
2	11037.000	35.48	15.62	51.10	74.00	-22.90	peak
3	11884.000	33.49	18.20	51.69	74.00	-22.31	peak
4	13523.000	29.31	22.48	51.79	68.20	-16.41	peak
5	13974.000	27.45	23.81	51.26	68.20	-16.94	peak
6	17615.000	26.05	25.14	51.19	68.20	-17.01	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 5V

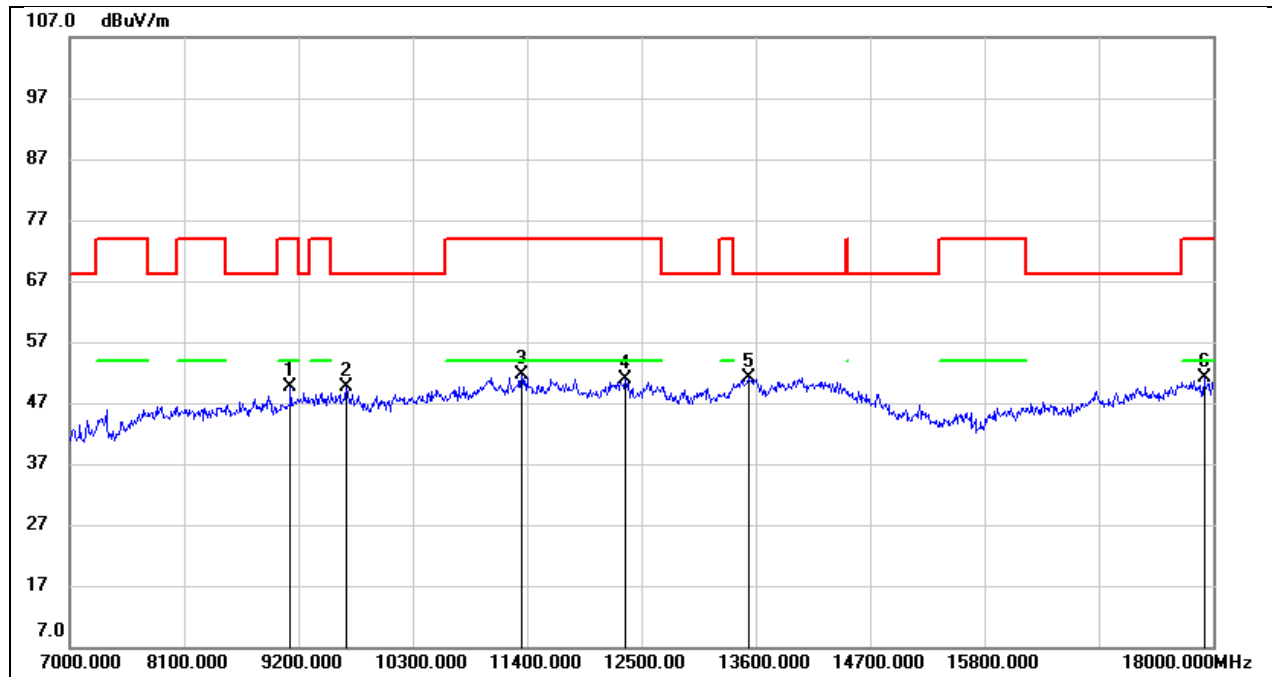


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	38.49	11.09	49.58	74.00	-24.42	peak
2	9662.000	36.35	13.39	49.74	68.20	-18.46	peak
3	11345.000	34.67	16.96	51.63	74.00	-22.37	peak
4	12346.000	31.38	19.50	50.88	74.00	-23.12	peak
5	13534.000	28.73	22.49	51.22	68.20	-16.98	peak
6	17912.000	23.51	27.70	51.21	74.00	-22.79	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 5V

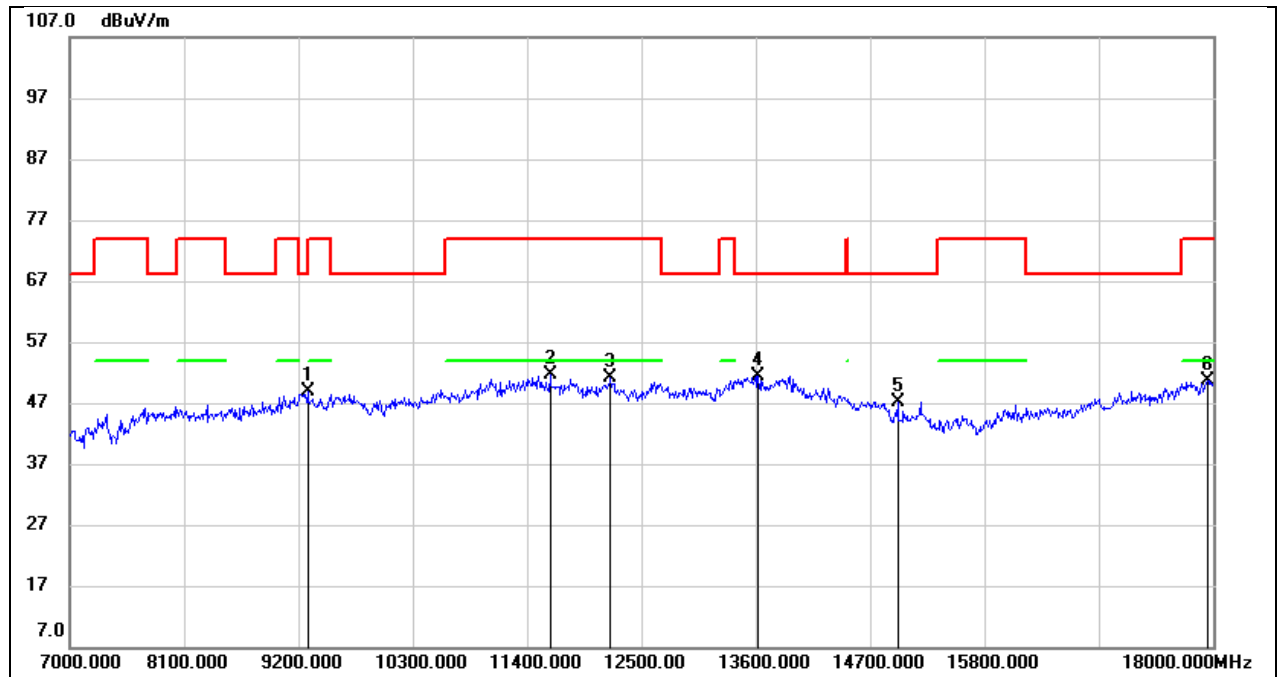


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	37.29	11.68	48.97	68.20	-19.23	peak
2	11620.000	33.76	17.88	51.64	74.00	-22.36	peak
3	12203.000	31.95	19.09	51.04	74.00	-22.96	peak
4	13622.000	28.76	22.66	51.42	68.20	-16.78	peak
5	14964.000	27.87	19.28	47.15	68.20	-21.05	peak
6	17945.000	22.58	28.01	50.59	74.00	-23.41	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 5V

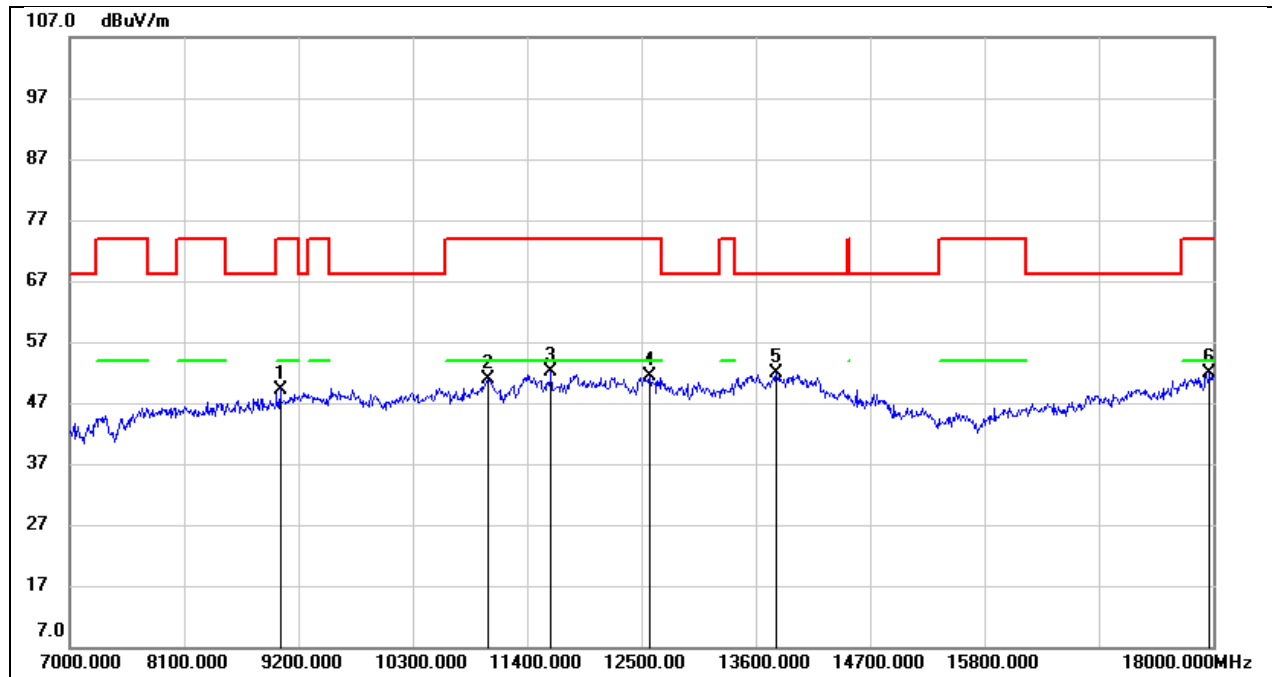


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9024.000	38.59	10.66	49.25	74.00	-24.75	peak
2	11026.000	35.40	15.57	50.97	74.00	-23.03	peak
3	11631.000	34.25	17.88	52.13	74.00	-21.87	peak
4	12577.000	31.39	19.87	51.26	74.00	-22.74	peak
5	13798.000	28.78	23.13	51.91	68.20	-16.29	peak
6	17967.000	23.75	28.21	51.96	74.00	-22.04	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 5V

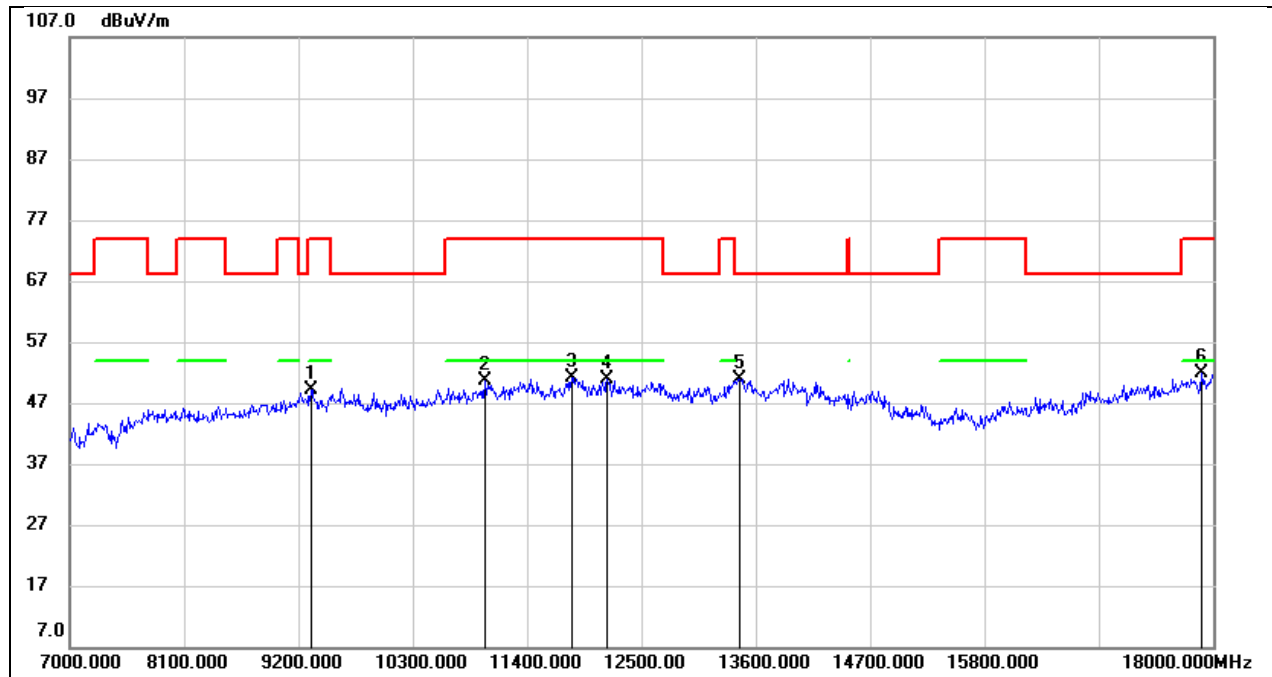


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	37.40	11.79	49.19	74.00	-24.81	peak
2	10993.000	35.23	15.44	50.67	74.00	-23.33	peak
3	11829.000	33.23	18.02	51.25	74.00	-22.75	peak
4	12170.000	31.93	19.01	50.94	74.00	-23.06	peak
5	13446.000	28.73	22.22	50.95	68.20	-17.25	peak
6	17890.000	24.32	27.49	51.81	74.00	-22.19	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 5V

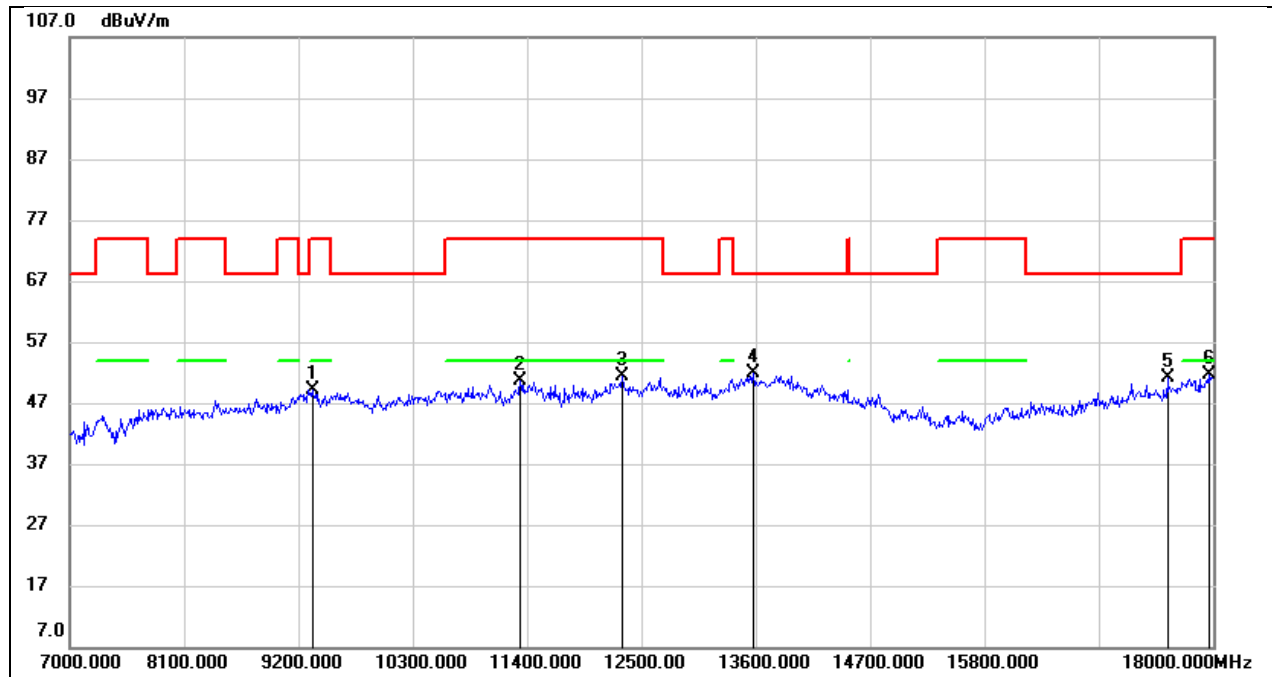


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.36	11.82	49.18	74.00	-24.82	peak
2	11334.000	33.71	16.90	50.61	74.00	-23.39	peak
3	12313.000	31.90	19.40	51.30	74.00	-22.70	peak
4	13578.000	29.23	22.56	51.79	68.20	-16.41	peak
5	17560.000	26.27	24.83	51.10	68.20	-17.10	peak
6	17956.000	23.63	28.10	51.73	74.00	-22.27	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 5V

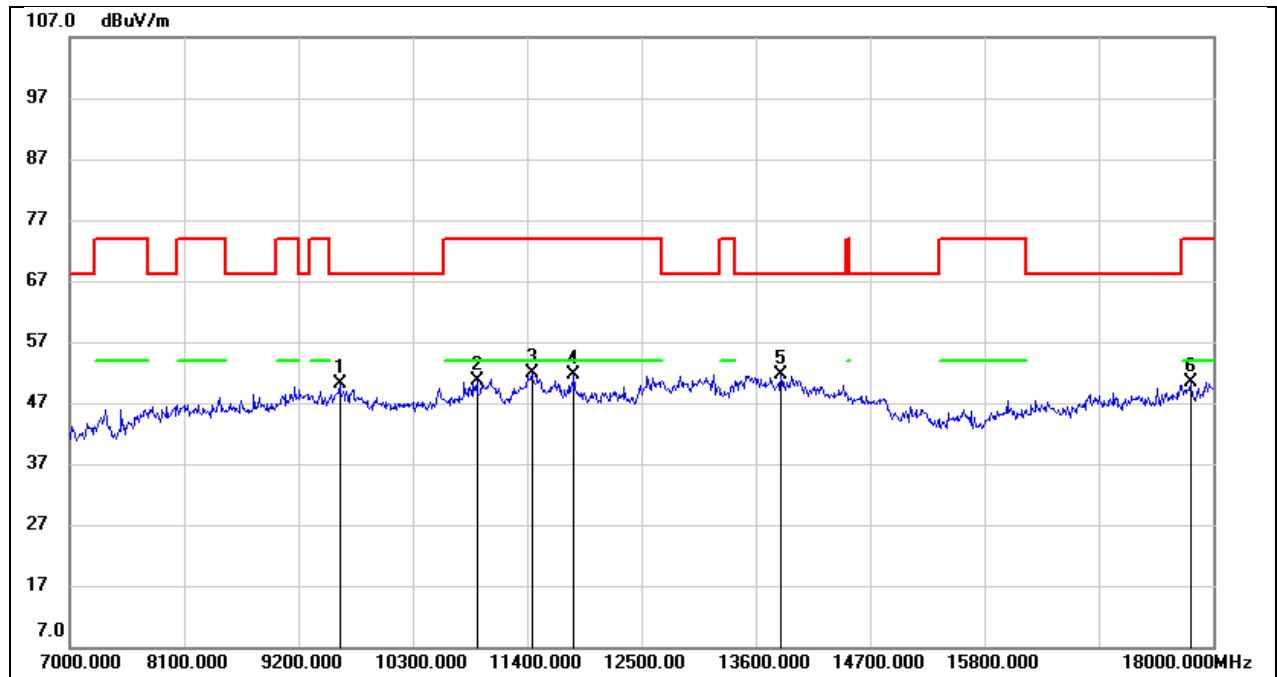

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	36.81	13.26	50.07	68.20	-18.13	peak
2	10916.000	35.50	15.21	50.71	74.00	-23.29	peak
3	11444.000	34.50	17.35	51.85	74.00	-22.15	peak
4	11851.000	33.61	18.09	51.70	74.00	-22.30	peak
5	13842.000	28.36	23.29	51.65	68.20	-16.55	peak
6	17780.000	23.99	26.50	50.49	74.00	-23.51	peak


Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 5V

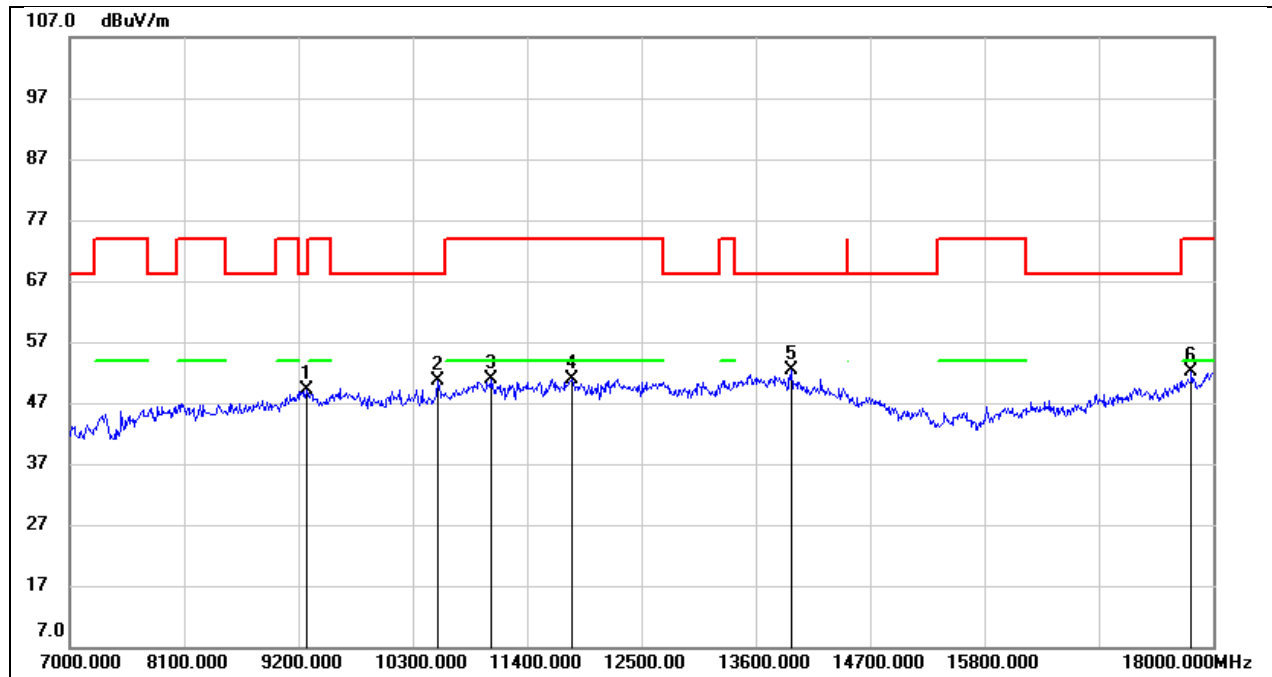

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9277.000	37.41	11.66	49.07	68.20	-19.13	peak
2	10542.000	36.39	14.15	50.54	68.20	-17.66	peak
3	11048.000	35.12	15.66	50.78	74.00	-23.22	peak
4	11829.000	32.97	18.02	50.99	74.00	-23.01	peak
5	13941.000	28.59	23.68	52.27	68.20	-15.93	peak
6	17791.000	25.56	26.58	52.14	74.00	-21.86	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

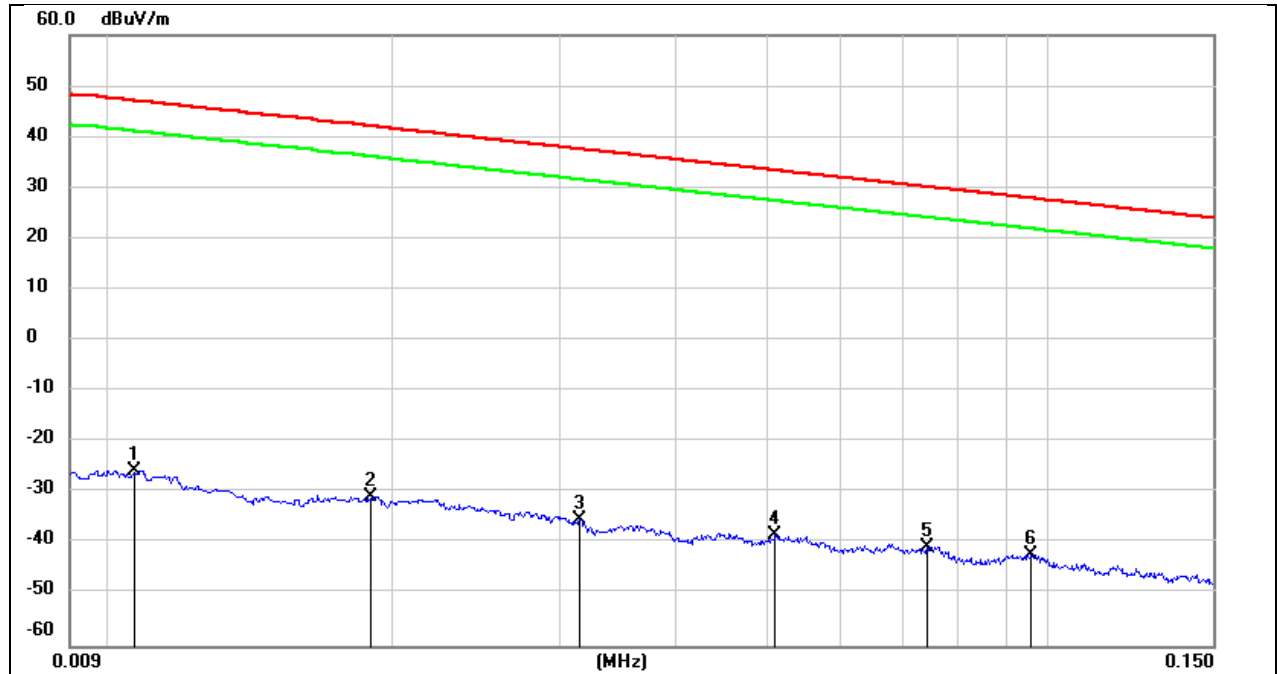


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0106	75.88	-101.39	-25.51	47.09	-77.01	-4.41	-72.60	peak
2	0.0189	70.49	-101.35	-30.86	42.07	-82.36	-9.43	-72.93	peak
3	0.0316	66.24	-101.40	-35.16	37.61	-86.66	-13.89	-72.77	peak
4	0.0509	63.12	-101.48	-38.36	33.47	-89.86	-18.03	-71.83	peak
5	0.0743	61.08	-101.59	-40.51	30.18	-92.01	-21.32	-70.69	peak
6	0.0956	59.63	-101.76	-42.13	27.99	-93.63	-23.51	-70.12	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

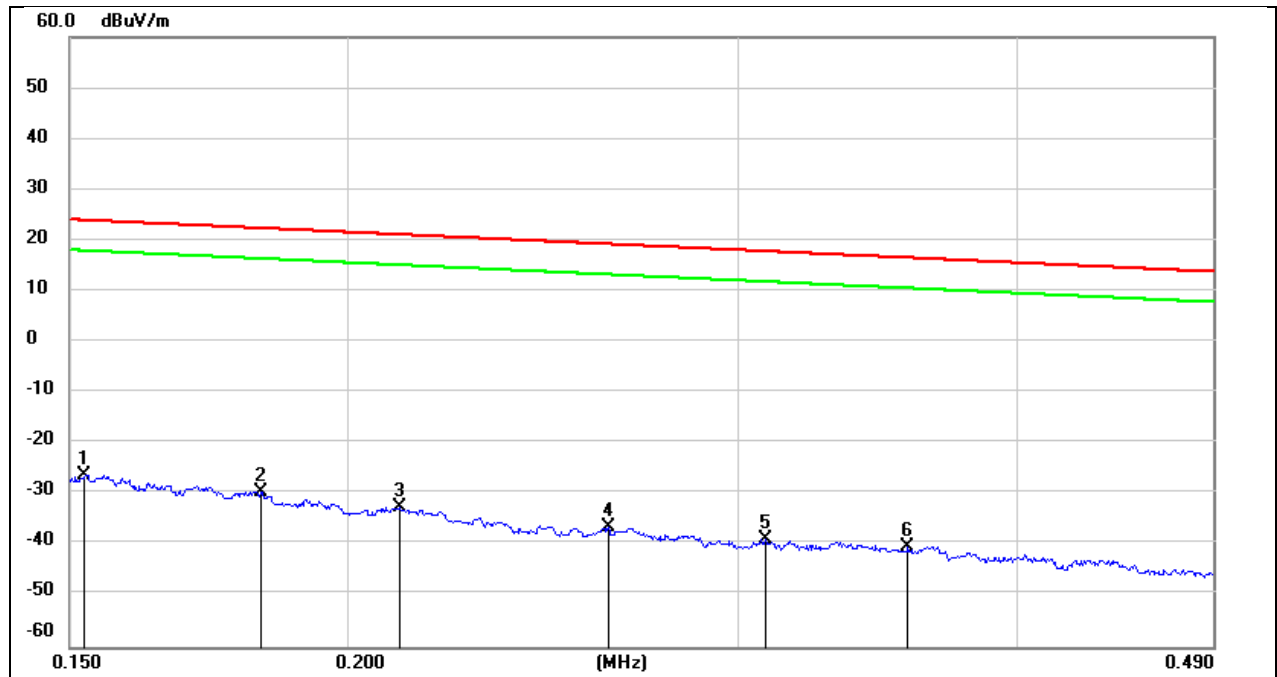

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1524	75.30	-101.63	-26.33	23.94	-77.83	-27.56	-50.27	peak
2	0.1827	72.17	-101.69	-29.52	22.37	-81.02	-29.13	-51.89	peak
3	0.2111	69.05	-101.73	-32.68	21.11	-84.18	-30.39	-53.79	peak
4	0.2620	65.31	-101.81	-36.50	19.24	-88.00	-32.26	-55.74	peak
5	0.3084	62.95	-101.86	-38.91	17.82	-90.41	-33.68	-56.73	peak
6	0.3573	61.58	-101.91	-40.33	16.54	-91.83	-34.96	-56.87	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

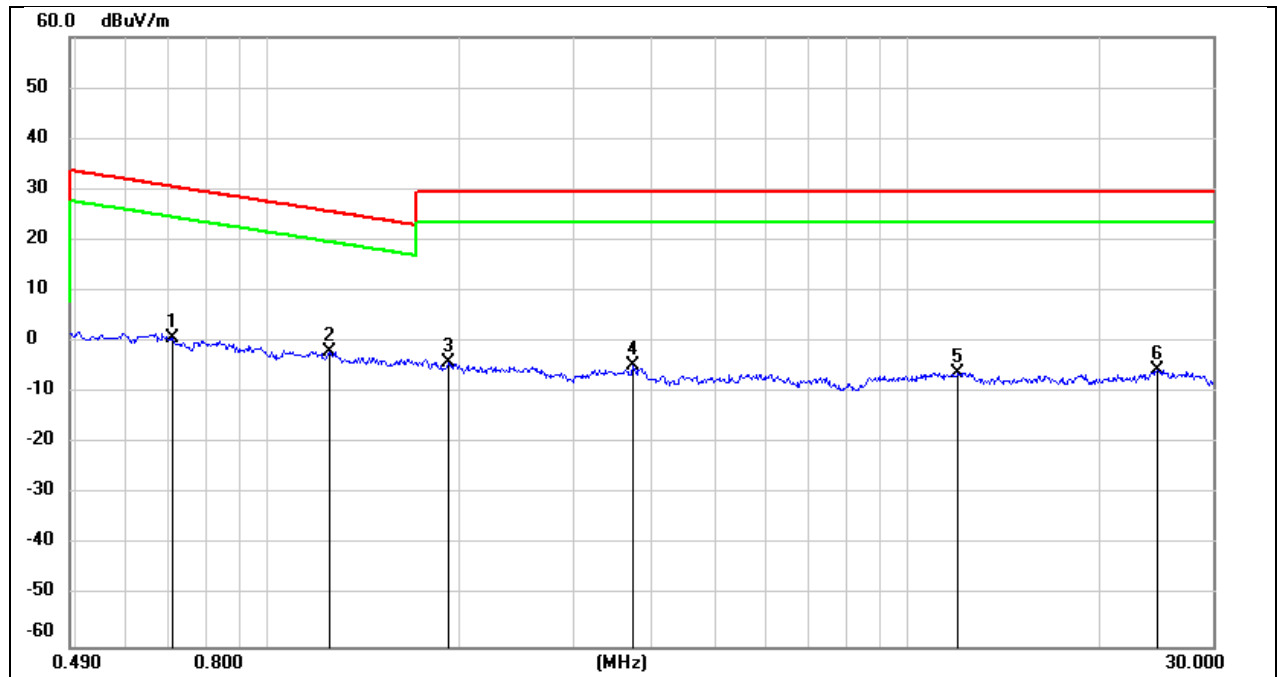

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.7096	62.86	-62.12	0.74	30.58	-50.76	-20.92	-29.84	peak
2	1.2459	60.25	-62.16	-1.91	25.70	-53.41	-25.80	-27.61	peak
3	1.9128	57.73	-61.87	-4.14	29.54	-55.64	-21.96	-33.68	peak
4	3.7100	56.70	-61.41	-4.71	29.54	-56.21	-21.96	-34.25	peak
5	12.0282	54.83	-60.89	-6.06	29.54	-57.56	-21.96	-35.60	peak
6	24.5701	54.94	-60.48	-5.54	29.54	-57.04	-21.96	-35.08	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

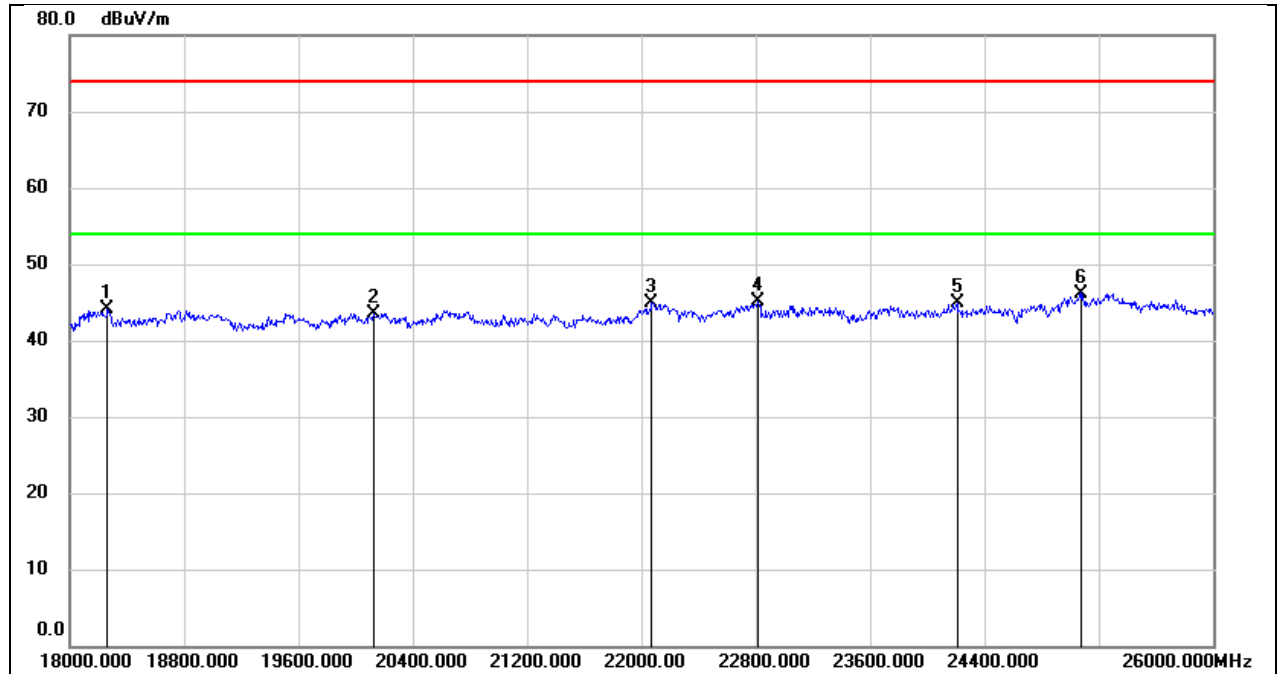

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18264.000	49.65	-5.53	44.12	74.00	-29.88	peak
2	20128.000	49.12	-5.53	43.59	74.00	-30.41	peak
3	22072.000	49.27	-4.41	44.86	74.00	-29.14	peak
4	22816.000	48.66	-3.63	45.03	74.00	-28.97	peak
5	24208.000	47.71	-2.81	44.90	74.00	-29.10	peak
6	25072.000	48.17	-1.97	46.20	74.00	-27.80	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

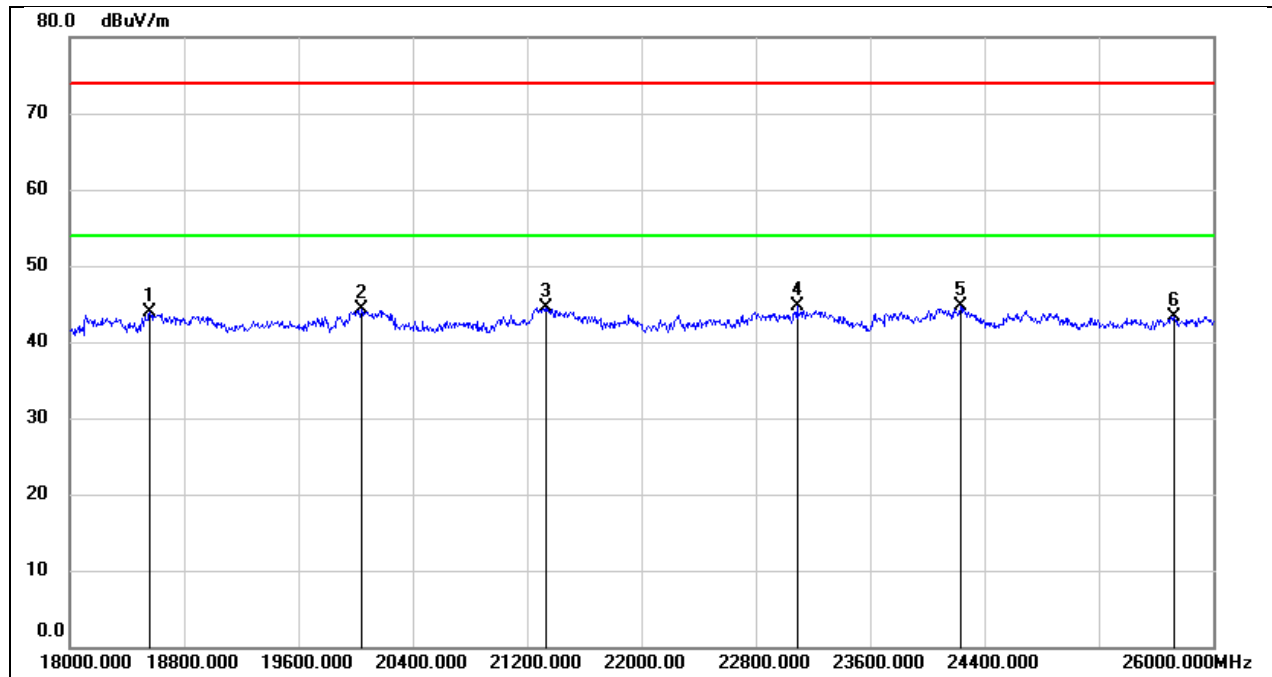

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18560.000	49.14	-5.29	43.85	74.00	-30.15	peak
2	20040.000	49.71	-5.48	44.23	74.00	-29.77	peak
3	21328.000	49.26	-4.74	44.52	74.00	-29.48	peak
4	23088.000	48.02	-3.41	44.61	74.00	-29.39	peak
5	24232.000	47.46	-2.82	44.64	74.00	-29.36	peak
6	25728.000	44.11	-0.72	43.39	74.00	-30.61	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

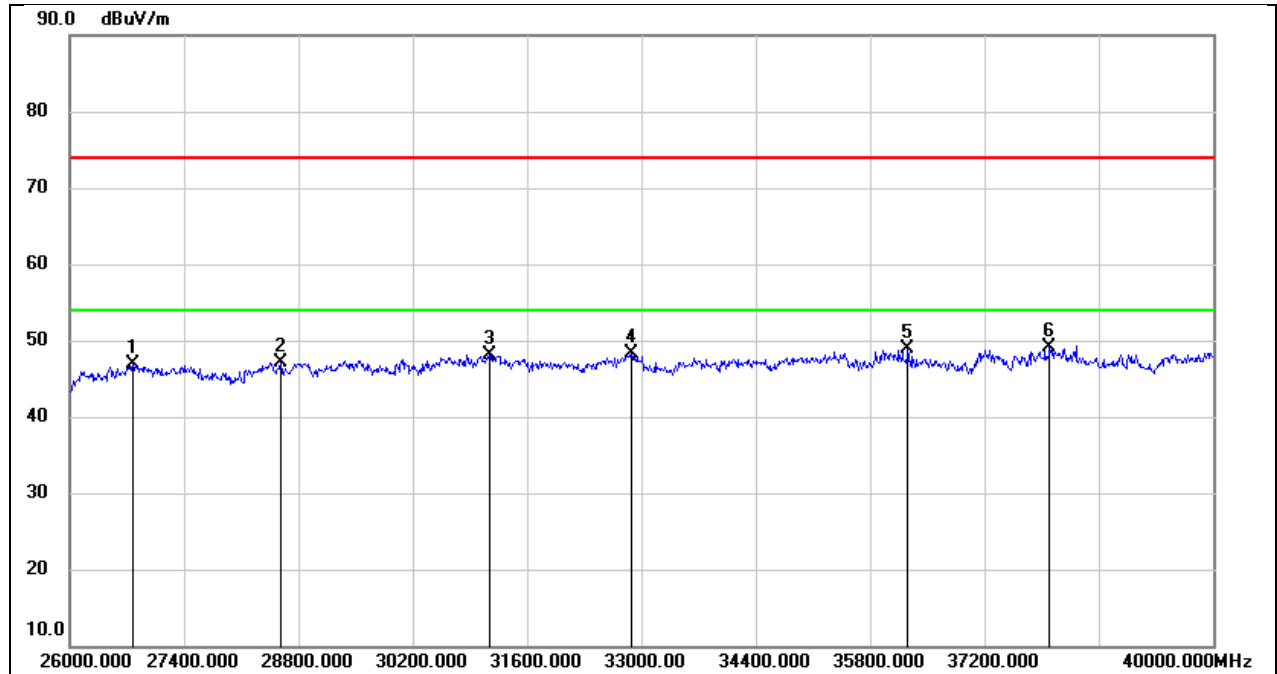

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26770.000	51.70	-4.83	46.87	74.00	-27.13	peak
2	28576.000	49.12	-2.05	47.07	74.00	-26.93	peak
3	31138.000	48.82	-0.77	48.05	74.00	-25.95	peak
4	32874.000	49.24	-0.96	48.28	74.00	-25.72	peak
5	36262.000	45.60	3.28	48.88	74.00	-25.12	peak
6	37998.000	45.83	3.26	49.09	74.00	-24.91	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

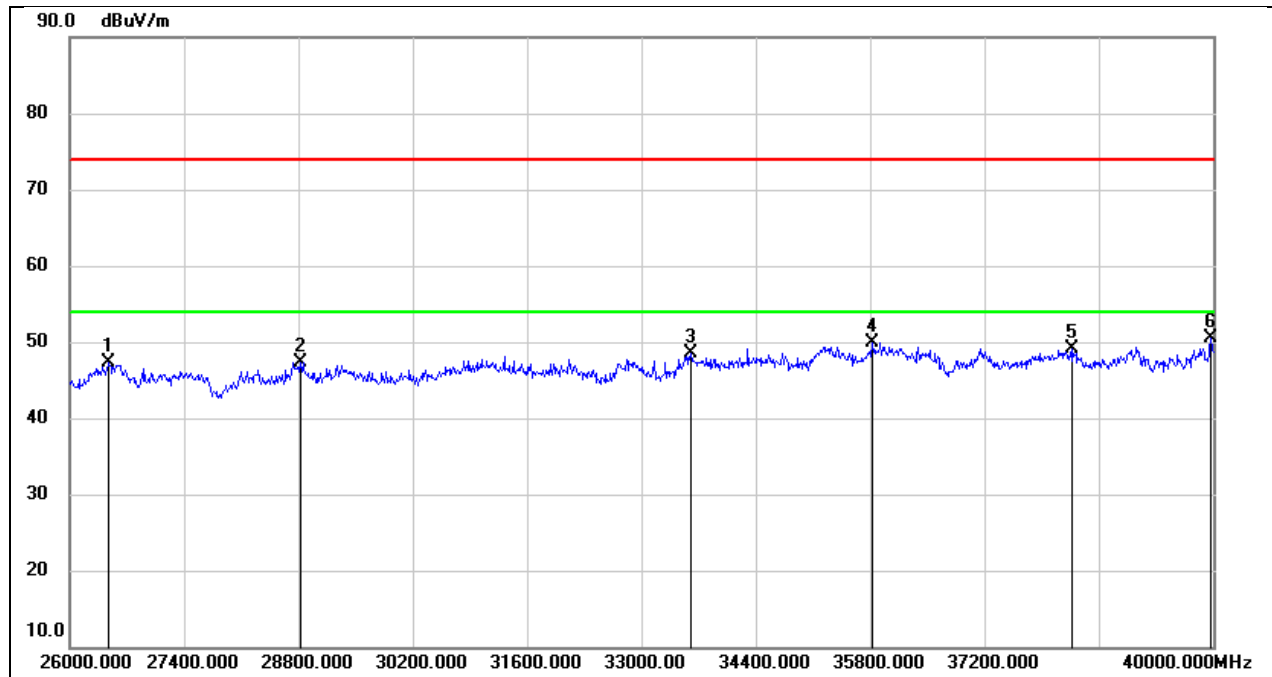

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26476.000	52.03	-4.78	47.25	74.00	-26.75	peak
2	28828.000	48.13	-0.79	47.34	74.00	-26.66	peak
3	33602.000	48.01	0.46	48.47	74.00	-25.53	peak
4	35828.000	46.25	3.67	49.92	74.00	-24.08	peak
5	38278.000	45.32	3.82	49.14	74.00	-24.86	peak
6	39972.000	45.45	5.13	50.58	74.00	-23.42	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

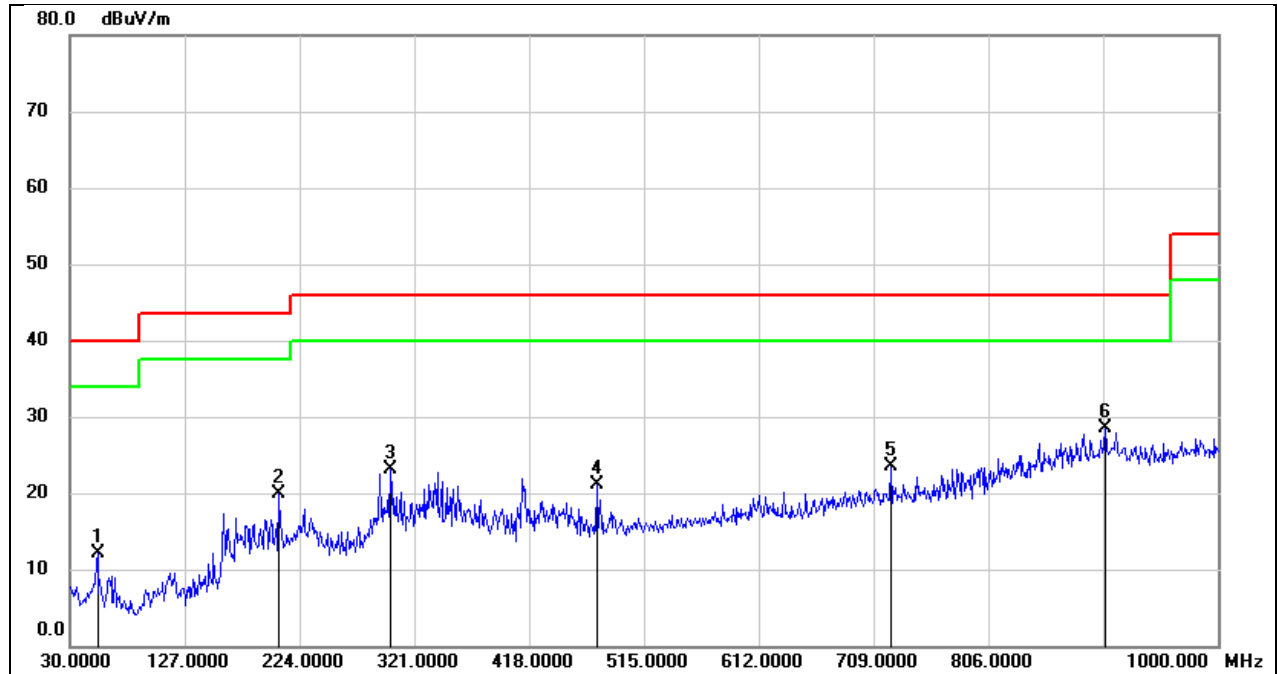

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	53.2800	27.13	-15.03	12.10	40.00	-27.90	QP
2	206.5399	32.40	-12.56	19.84	43.50	-23.66	QP
3	300.6300	34.64	-11.48	23.16	46.00	-22.84	QP
4	475.2300	28.95	-7.91	21.04	46.00	-24.96	QP
5	723.5500	27.46	-3.90	23.56	46.00	-22.44	QP
6	904.9400	28.99	-0.47	28.52	46.00	-17.48	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

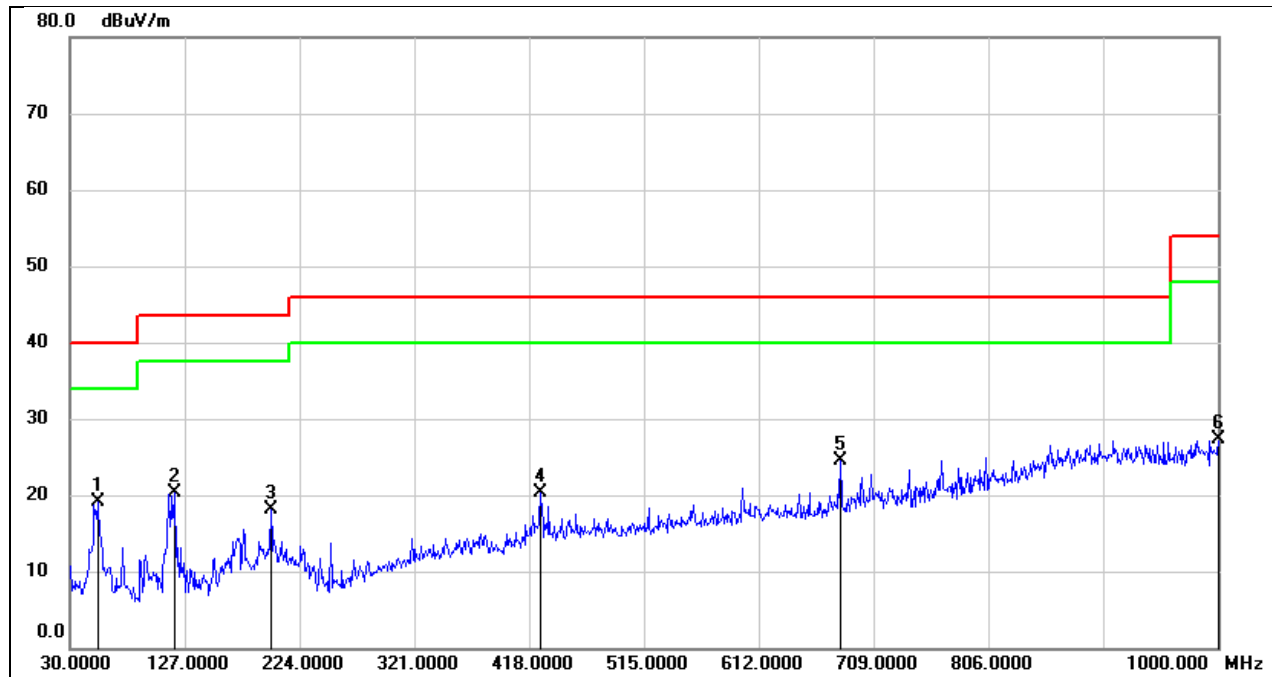

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	53.2800	34.12	-15.03	19.09	40.00	-20.91	QP
2	118.2700	35.16	-14.83	20.33	43.50	-23.17	QP
3	199.7500	30.43	-12.29	18.14	43.50	-25.36	QP
4	427.7000	29.11	-8.79	20.32	46.00	-25.68	QP
5	680.8700	29.15	-4.74	24.41	46.00	-21.59	QP
6	1000.0000	27.45	-0.13	27.32	54.00	-26.68	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

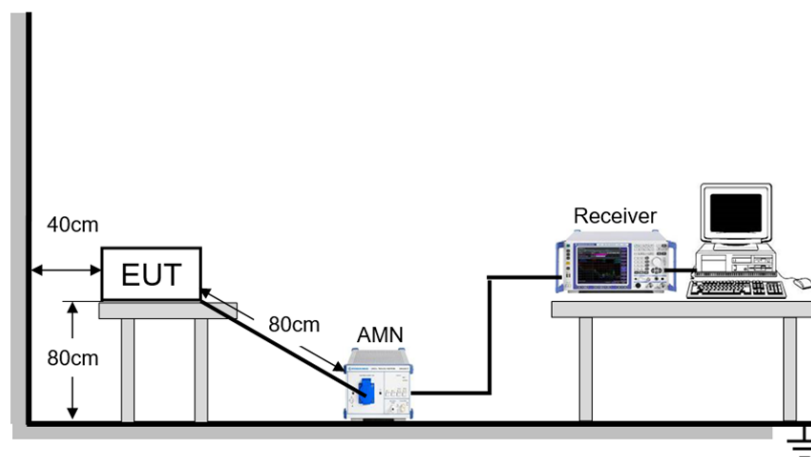

TEST ENVIRONMENT


Temperature	23.7°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz

TEST DATE / ENGINEER

Test Date	August 4, 2025	Test By	Deacon Tan
-----------	----------------	---------	------------

TEST RESULTS

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Line		

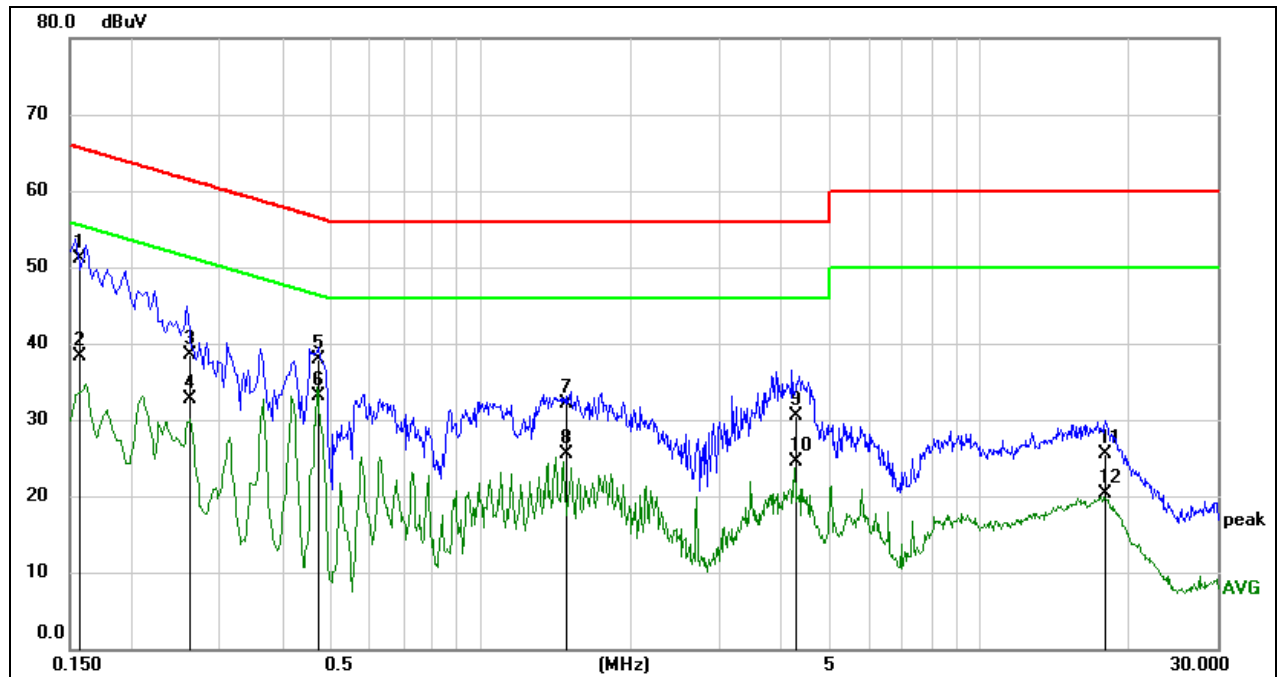


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1576	41.36	9.72	51.08	65.59	-14.51	QP
2	0.1576	28.63	9.72	38.35	55.59	-17.24	AVG
3	0.2621	28.83	9.64	38.47	61.36	-22.89	QP
4	0.2621	23.11	9.64	32.75	51.36	-18.61	AVG
5	0.4754	28.31	9.64	37.95	56.42	-18.47	QP
6	0.4754	23.53	9.64	33.17	46.42	-13.25	AVG
7	1.4883	22.45	9.69	32.14	56.00	-23.86	QP
8	1.4883	15.77	9.69	25.46	46.00	-20.54	AVG
9	4.2581	20.68	9.73	30.41	56.00	-25.59	QP
10	4.2581	14.86	9.73	24.59	46.00	-21.41	AVG
11	17.9156	15.70	9.74	25.44	60.00	-34.56	QP
12	17.9156	10.62	9.74	20.36	50.00	-29.64	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Neutral		

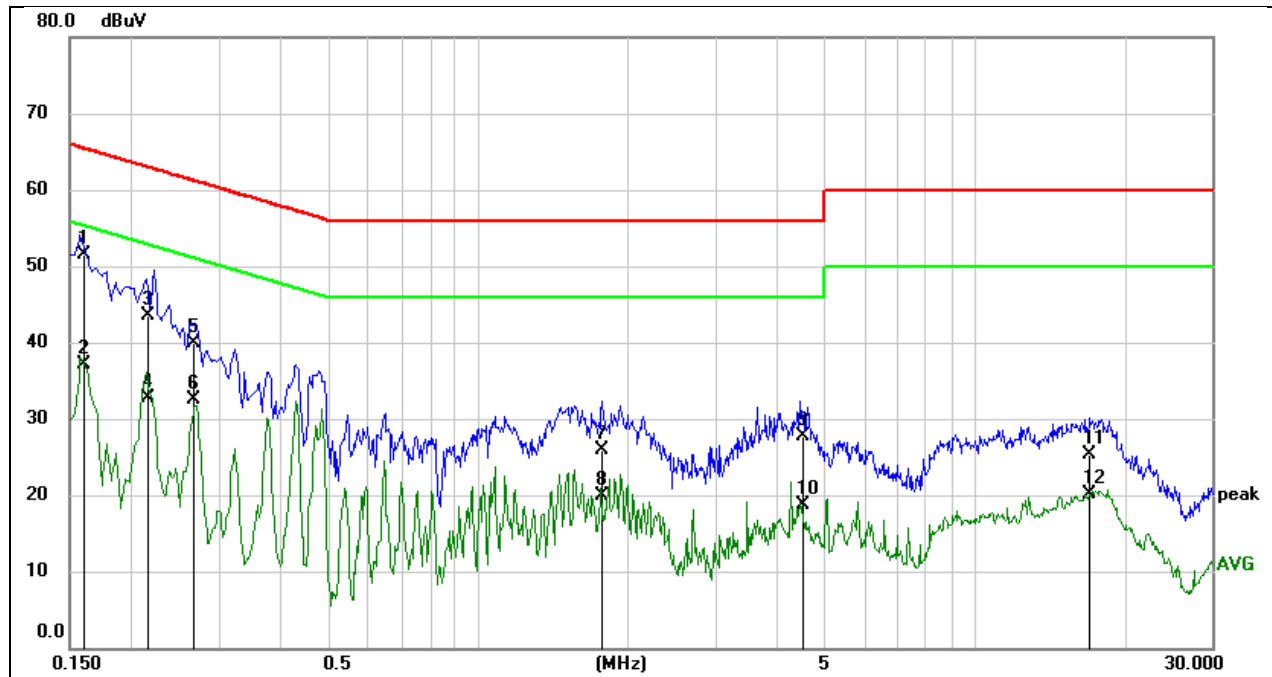

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1609	41.83	9.64	51.47	65.42	-13.95	QP
2	0.1609	27.56	9.64	37.20	55.42	-18.22	AVG
3	0.2171	33.92	9.64	43.56	62.93	-19.37	QP
4	0.2171	23.12	9.64	32.76	52.93	-20.17	AVG
5	0.2690	30.17	9.64	39.81	61.15	-21.34	QP
6	0.2690	22.77	9.64	32.41	51.15	-18.74	AVG
7	1.7896	16.25	9.64	25.89	56.00	-30.11	QP
8	1.7896	10.20	9.64	19.84	46.00	-26.16	AVG
9	4.5114	17.99	9.65	27.64	56.00	-28.36	QP
10	4.5114	8.97	9.65	18.62	46.00	-27.38	AVG
11	17.0743	15.51	9.74	25.25	60.00	-34.75	QP
12	17.0743	10.34	9.74	20.08	50.00	-29.92	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

11.1. APPENDIX A: EMISSION BANDWIDTH


11.1.1. Test Result


Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5180	26.56	5165.80	5192.36	PASS
	Ant2	5180	25.72	5166.28	5192.00	PASS
	Ant1	5200	25.04	5186.80	5211.84	PASS
	Ant2	5200	26.32	5186.80	5213.12	PASS
	Ant1	5240	19.88	5230.00	5249.88	PASS
	Ant2	5240	19.92	5230.00	5249.92	PASS
	Ant1	5260	25.00	5247.24	5272.24	PASS
	Ant2	5260	24.00	5248.20	5272.20	PASS
	Ant1	5280	24.36	5267.68	5292.04	PASS
	Ant2	5280	23.92	5267.60	5291.52	PASS
	Ant1	5320	24.80	5307.92	5332.72	PASS
	Ant2	5320	23.76	5307.44	5331.20	PASS
	Ant1	5500	23.72	5488.48	5512.20	PASS
	Ant2	5500	23.68	5487.80	5511.48	PASS
	Ant1	5580	24.64	5567.00	5591.64	PASS
	Ant2	5580	25.20	5567.16	5592.36	PASS
	Ant1	5700	24.92	5687.04	5711.96	PASS
	Ant2	5700	25.80	5686.88	5712.68	PASS
	Ant1	5720	24.16	5707.60	5731.76	PASS
	Ant2	5720	25.20	5707.08	5732.28	PASS
	Ant1	5720 UNII-2C	17.4	5707.60	5725	PASS
	Ant2	5720 UNII-2C	17.92	5707.08	5725	PASS
	Ant1	5720 UNII-3	6.76	5725	5731.76	PASS
	Ant2	5720 UNII-3	7.28	5725	5732.28	PASS
	Ant1	5745	23.12	5733.60	5756.72	PASS
	Ant2	5745	24.56	5732.28	5756.84	PASS
	Ant1	5785	24.72	5772.44	5797.16	PASS
	Ant2	5785	25.04	5772.60	5797.64	PASS
	Ant1	5825	24.32	5812.68	5837.00	PASS
	Ant2	5825	25.08	5811.84	5836.92	PASS
11N20MIMO	Ant1	5180	25.60	5167.20	5192.80	PASS
	Ant2	5180	23.52	5167.72	5191.24	PASS
	Ant1	5200	25.32	5187.80	5213.12	PASS
	Ant2	5200	24.68	5188.28	5212.96	PASS
	Ant1	5240	20.68	5229.60	5250.28	PASS
	Ant2	5240	20.16	5229.96	5250.12	PASS
	Ant1	5260	26.08	5247.20	5273.28	PASS
	Ant2	5260	24.24	5247.68	5271.92	PASS
	Ant1	5280	26.80	5265.92	5292.72	PASS
	Ant2	5280	25.08	5267.56	5292.64	PASS
	Ant1	5320	26.08	5306.84	5332.92	PASS
	Ant2	5320	24.96	5308.20	5333.16	PASS
	Ant1	5500	24.36	5487.76	5512.12	PASS
	Ant2	5500	24.68	5487.52	5512.20	PASS
	Ant1	5580	24.64	5566.92	5591.56	PASS
	Ant2	5580	23.88	5567.68	5591.56	PASS
	Ant1	5700	24.72	5687.72	5712.44	PASS
	Ant2	5700	26.92	5686.08	5713.00	PASS
	Ant1	5720	25.12	5707.28	5732.40	PASS
	Ant2	5720	24.32	5707.56	5731.88	PASS
	Ant1	5720 UNII-2C	17.72	5707.28	5725	PASS
	Ant2	5720 UNII-2C	17.44	5707.56	5725	PASS

	Ant1	5720 UNII-3	7.4	5725	5732.40	PASS
	Ant2	5720 UNII-3	6.88	5725	5731.88	PASS
	Ant1	5745	24.68	5732.84	5757.52	PASS
	Ant2	5745	25.32	5732.56	5757.88	PASS
	Ant1	5785	24.92	5772.76	5797.68	PASS
	Ant2	5785	26.12	5771.24	5797.36	PASS
	Ant1	5825	25.68	5812.16	5837.84	PASS
	Ant2	5825	24.12	5812.68	5836.80	PASS
11N40MIMO	Ant1	5190	41.20	5169.36	5210.56	PASS
	Ant2	5190	40.24	5170.00	5210.24	PASS
	Ant1	5230	40.96	5209.44	5250.40	PASS
	Ant2	5230	40.48	5209.84	5250.32	PASS
	Ant1	5270	41.04	5249.52	5290.56	PASS
	Ant2	5270	40.32	5249.76	5290.08	PASS
	Ant1	5310	40.88	5289.68	5330.56	PASS
	Ant2	5310	40.56	5289.76	5330.32	PASS
	Ant1	5510	41.04	5489.52	5530.56	PASS
	Ant2	5510	40.40	5489.76	5530.16	PASS
	Ant1	5550	40.96	5529.44	5570.40	PASS
	Ant2	5550	40.40	5529.92	5570.32	PASS
	Ant1	5670	40.96	5649.52	5690.48	PASS
	Ant2	5670	40.32	5649.84	5690.16	PASS
	Ant1	5710	41.20	5689.44	5730.64	PASS
	Ant2	5710	40.56	5689.76	5730.32	PASS
	Ant1	5710 UNII-2C	35.56	5689.44	5725	PASS
	Ant2	5710 UNII-2C	35.24	5689.76	5725	PASS
	Ant1	5710 UNII-3	5.64	5725	5730.64	PASS
	Ant2	5710 UNII-3	5.32	5725	5730.32	PASS
	Ant1	5755	43.44	5734.44	5777.88	PASS
	Ant2	5755	40.64	5734.60	5775.24	PASS
	Ant1	5795	40.88	5774.76	5815.64	PASS
	Ant2	5795	40.56	5774.84	5815.40	PASS
11AC80MIMO	Ant1	5210	80.48	5170.00	5250.48	PASS
	Ant2	5210	80.00	5170.00	5250.00	PASS
	Ant1	5290	80.48	5249.84	5330.32	PASS
	Ant2	5290	79.84	5250.16	5330.00	PASS
	Ant1	5530	80.32	5489.84	5570.16	PASS
	Ant2	5530	80.00	5490.00	5570.00	PASS
	Ant1	5610	80.48	5569.68	5650.16	PASS
	Ant2	5610	80.00	5570.00	5650.00	PASS
	Ant1	5690	80.32	5649.84	5730.16	PASS
	Ant2	5690	80.16	5650.00	5730.16	PASS
	Ant1	5690 UNII-2C	75.16	5649.84	5725	PASS
	Ant2	5690 UNII-2C	75	5650.00	5725	PASS
	Ant1	5690 UNII-3	5.16	5725	5730.16	PASS
	Ant2	5690 UNII-3	5.16	5725	5730.16	PASS
	Ant1	5775	80.80	5734.68	5815.48	PASS
	Ant2	5775	80.16	5735.00	5815.16	PASS
11AX20MIMO	Ant1	5180	21.84	5169.04	5190.88	PASS
	Ant2	5180	21.60	5169.28	5190.88	PASS
	Ant1	5200	21.92	5189.00	5210.92	PASS
	Ant2	5200	24.08	5187.04	5211.12	PASS
	Ant1	5240	20.00	5229.96	5249.96	PASS
	Ant2	5240	20.00	5229.96	5249.96	PASS
	Ant1	5260	22.04	5248.68	5270.72	PASS
	Ant2	5260	21.64	5249.32	5270.96	PASS
	Ant1	5280	21.92	5269.08	5291.00	PASS
	Ant2	5280	22.12	5269.08	5291.20	PASS
	Ant1	5320	21.80	5308.96	5330.76	PASS
	Ant2	5320	21.96	5308.96	5330.92	PASS


	Ant1	5500	22.28	5488.64	5510.92	PASS
	Ant2	5500	21.64	5488.92	5510.56	PASS
	Ant1	5580	22.28	5568.96	5591.24	PASS
	Ant2	5580	21.24	5569.40	5590.64	PASS
	Ant1	5700	21.88	5688.64	5710.52	PASS
	Ant2	5700	22.16	5688.96	5711.12	PASS
	Ant1	5720	23.36	5708.88	5732.24	PASS
	Ant2	5720	21.56	5709.36	5730.92	PASS
	Ant1	5720 UNII-2C	16.12	5708.88	5725	PASS
	Ant2	5720 UNII-2C	15.64	5709.36	5725	PASS
	Ant1	5720 UNII-3	7.24	5725	5732.24	PASS
	Ant2	5720 UNII-3	5.92	5725	5730.92	PASS
	Ant1	5745	21.72	5734.32	5756.04	PASS
	Ant2	5745	21.60	5733.92	5755.52	PASS
	Ant1	5785	21.88	5774.20	5796.08	PASS
	Ant2	5785	22.12	5773.44	5795.56	PASS
	Ant1	5825	22.20	5814.24	5836.44	PASS
	Ant2	5825	22.48	5814.16	5836.64	PASS
11AX40MIMO	Ant1	5190	39.84	5170.16	5210.00	PASS
	Ant2	5190	39.84	5170.08	5209.92	PASS
	Ant1	5230	39.84	5210.08	5249.92	PASS
	Ant2	5230	39.92	5210.08	5250.00	PASS
	Ant1	5270	39.92	5250.08	5290.00	PASS
	Ant2	5270	39.76	5250.08	5289.84	PASS
	Ant1	5310	40.00	5290.00	5330.00	PASS
	Ant2	5310	39.84	5290.16	5330.00	PASS
	Ant1	5510	39.92	5490.00	5529.92	PASS
	Ant2	5510	39.92	5490.08	5530.00	PASS
	Ant1	5550	39.84	5530.08	5569.92	PASS
	Ant2	5550	40.00	5530.00	5570.00	PASS
	Ant1	5670	39.92	5650.08	5690.00	PASS
	Ant2	5670	39.84	5650.08	5689.92	PASS
	Ant1	5710	39.92	5690.08	5730.00	PASS
	Ant2	5710	39.84	5690.08	5729.92	PASS
	Ant1	5710 UNII-2C	34.92	5690.08	5725	PASS
	Ant2	5710 UNII-2C	34.92	5690.08	5725	PASS
	Ant1	5710 UNII-3	5	5725	5730.00	PASS
	Ant2	5710 UNII-3	4.92	5725	5729.92	PASS
11AX80MIMO	Ant1	5755	39.84	5735.08	5774.92	PASS
	Ant2	5755	39.84	5735.08	5774.92	PASS
	Ant1	5795	39.92	5775.00	5814.92	PASS
	Ant2	5795	39.84	5775.08	5814.92	PASS
	Ant1	5210	80.64	5169.68	5250.32	PASS
	Ant2	5210	80.80	5169.68	5250.48	PASS
	Ant1	5290	80.48	5249.84	5330.32	PASS
	Ant2	5290	80.80	5249.84	5330.64	PASS
	Ant1	5530	80.80	5489.68	5570.48	PASS
	Ant2	5530	80.64	5489.68	5570.32	PASS
	Ant1	5610	80.80	5569.68	5650.48	PASS
	Ant2	5610	80.64	5569.68	5650.32	PASS
	Ant1	5690	80.80	5649.68	5730.48	PASS
	Ant2	5690	80.64	5649.68	5730.32	PASS
	Ant1	5690 UNII-2C	75.32	5649.68	5725	PASS
	Ant2	5690 UNII-2C	75.32	5649.68	5725	PASS
	Ant1	5690 UNII-3	5.48	5725	5730.48	PASS
	Ant2	5690 UNII-3	5.32	5725	5730.32	PASS
	Ant1	5775	80.80	5734.68	5815.48	PASS
	Ant2	5775	80.64	5734.68	5815.32	PASS

11.1.2. Test Graphs

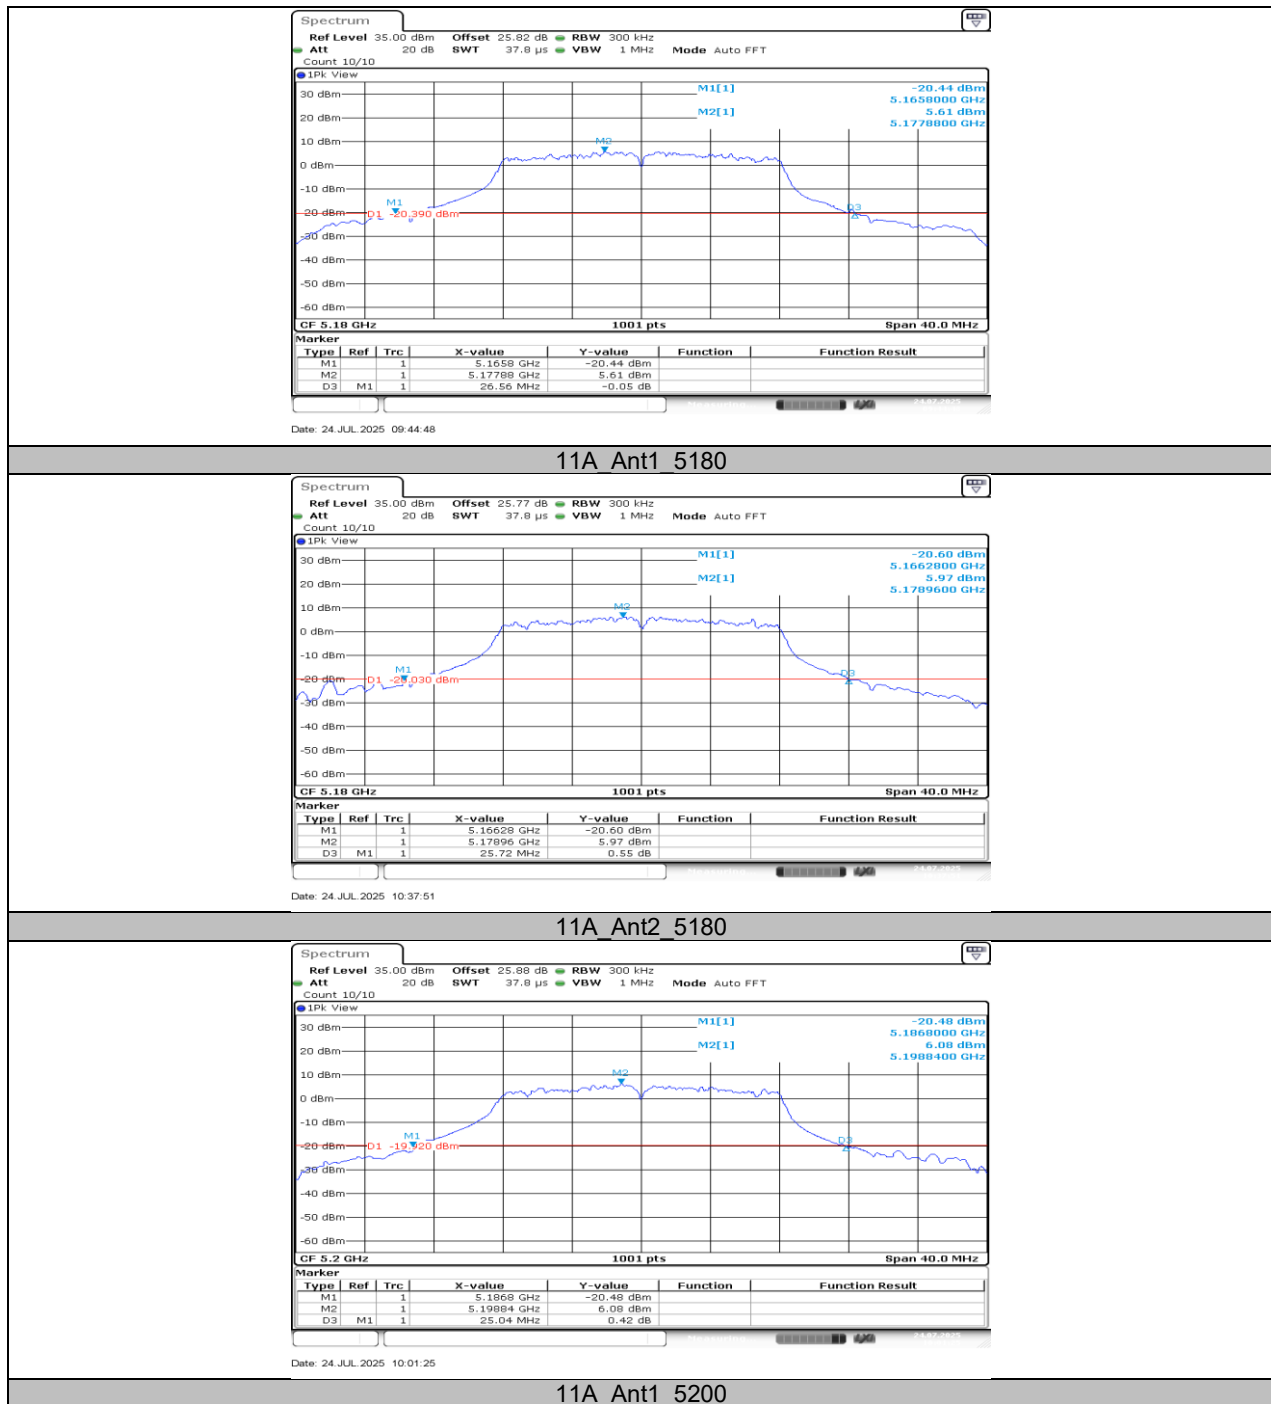


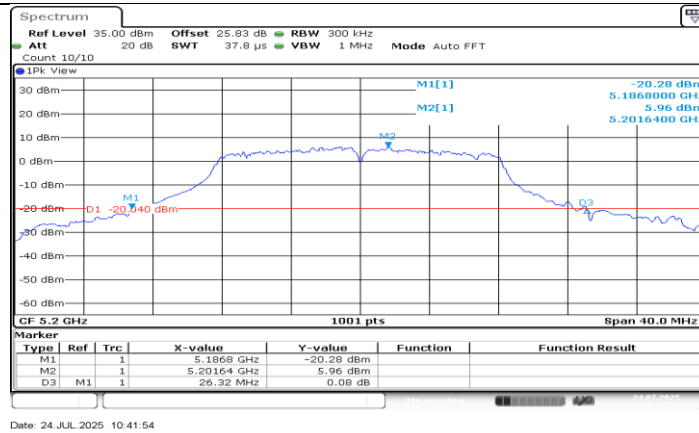


11A_Ant2_5200

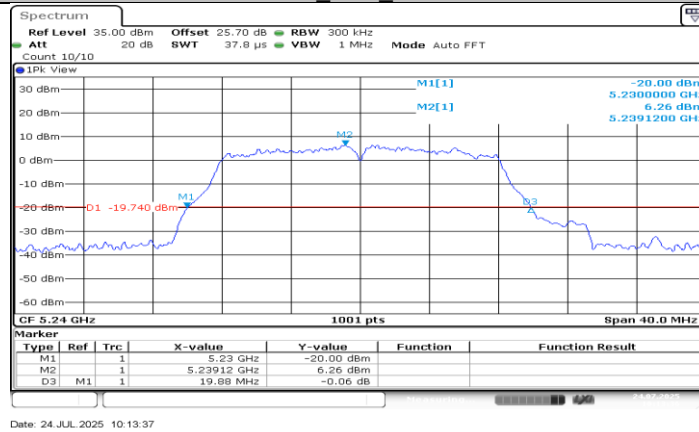


11A_Ant1_5240

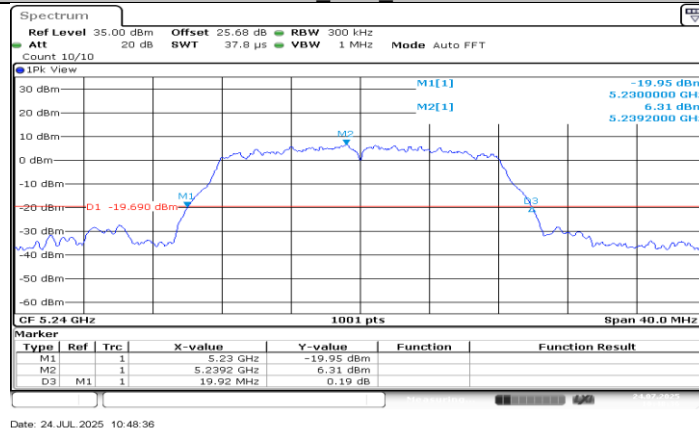


11A_Ant2_5240

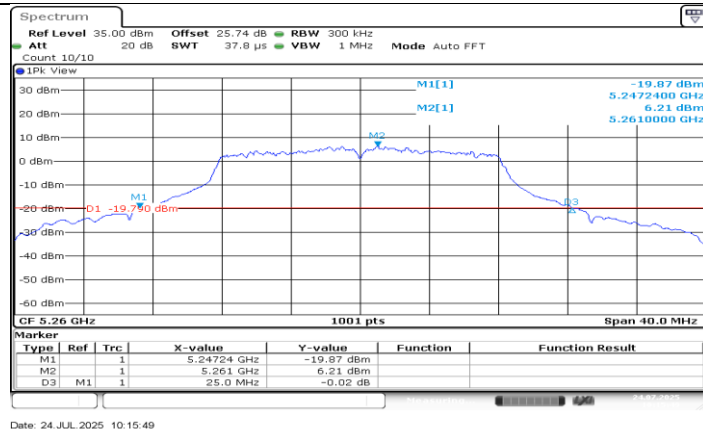


11A_Ant1_5260

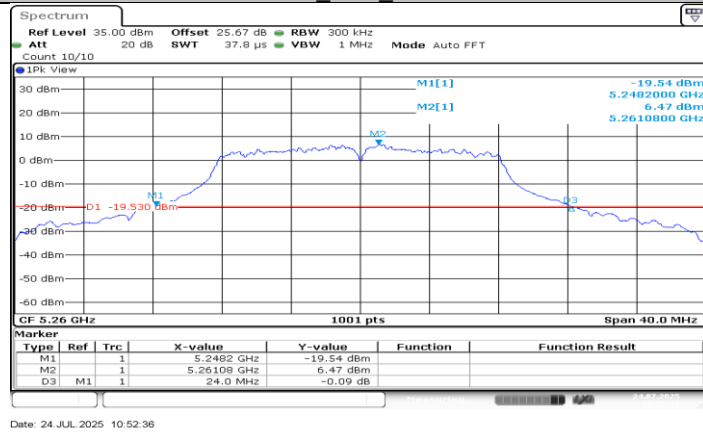


11A_Ant2_5260

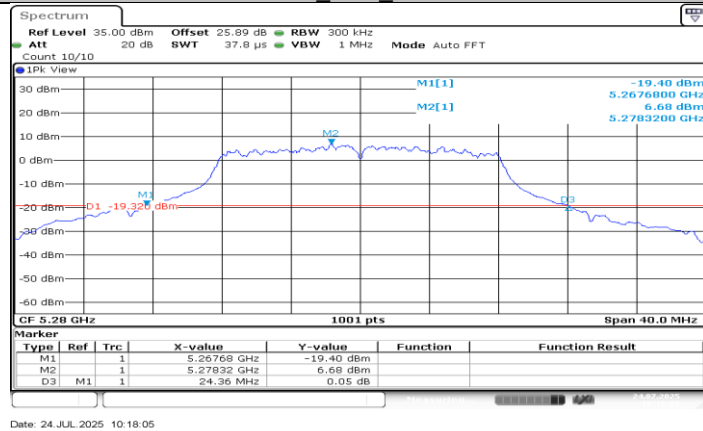


11A_Ant1_5280

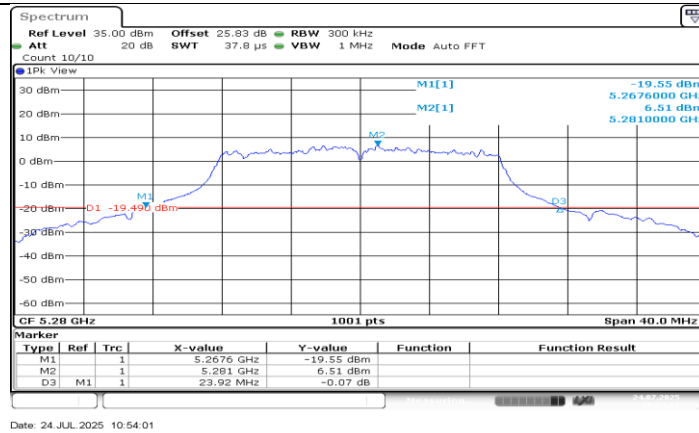


11A_Ant2_5280

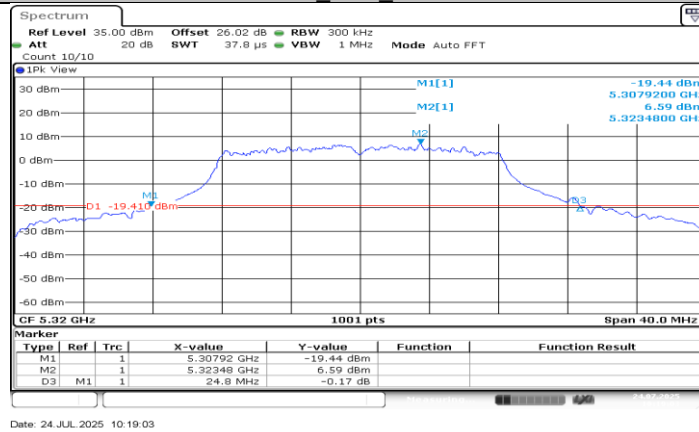


11A_Ant1_5320

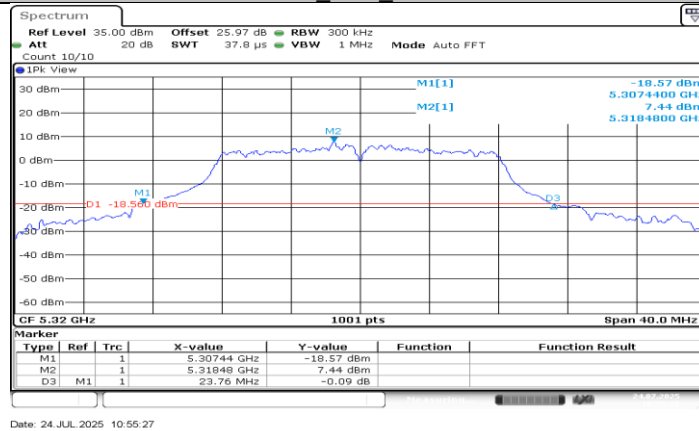


11A_Ant2_5320

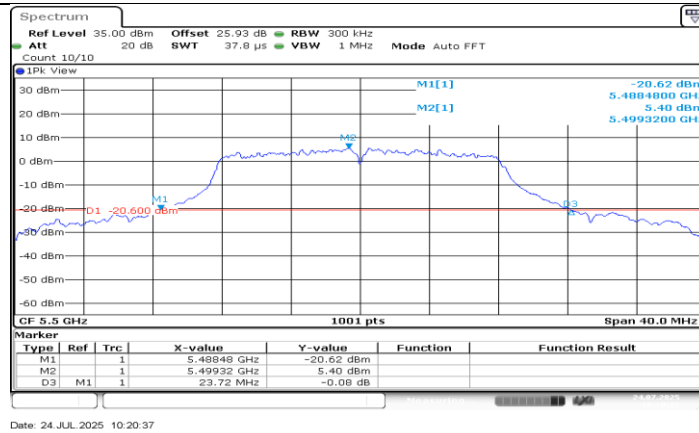


11A_Ant1_5500

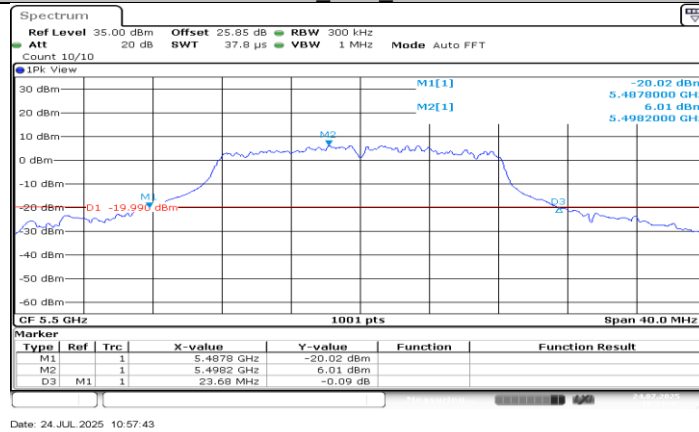


11A_Ant2_5500

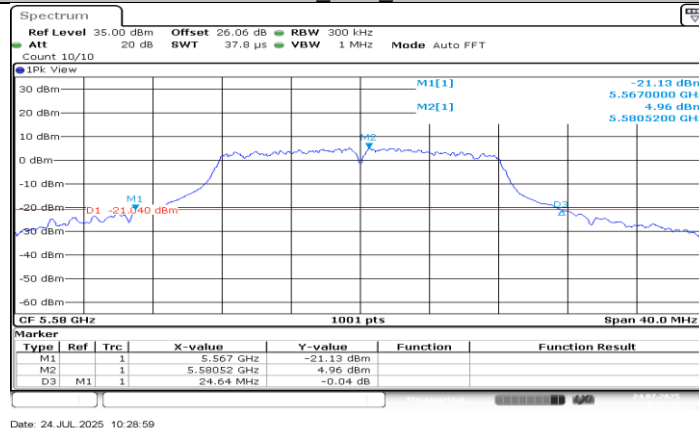


11A_Ant1_5580

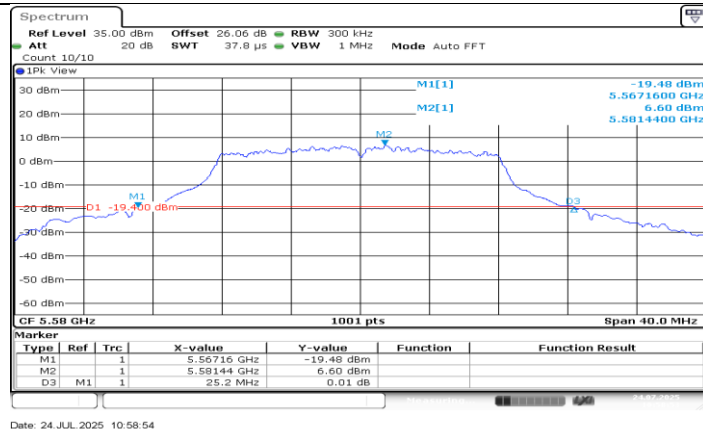


11A_Ant2_5580

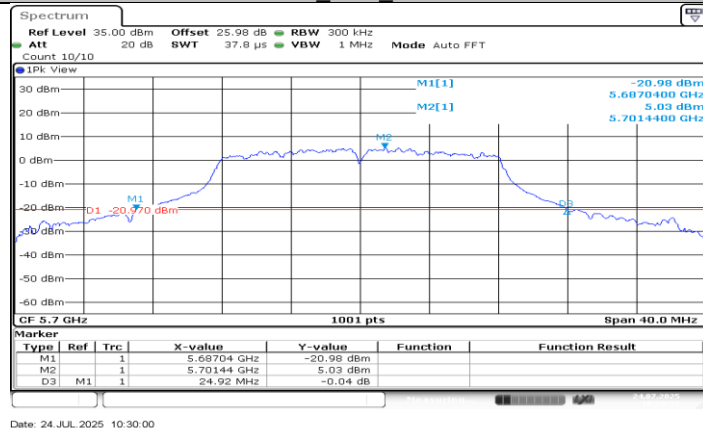


11A_Ant1_5700

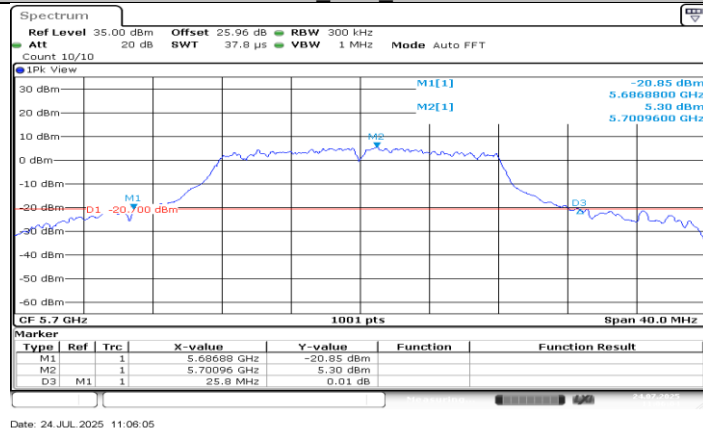


11A_Ant2_5700

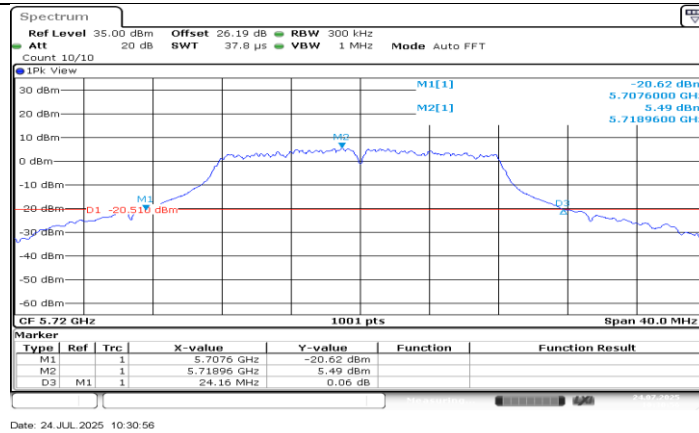


11A_Ant1_5720

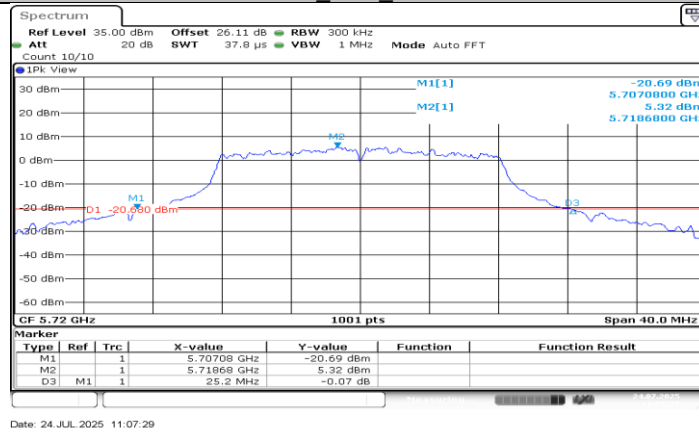


11A_Ant2_5720

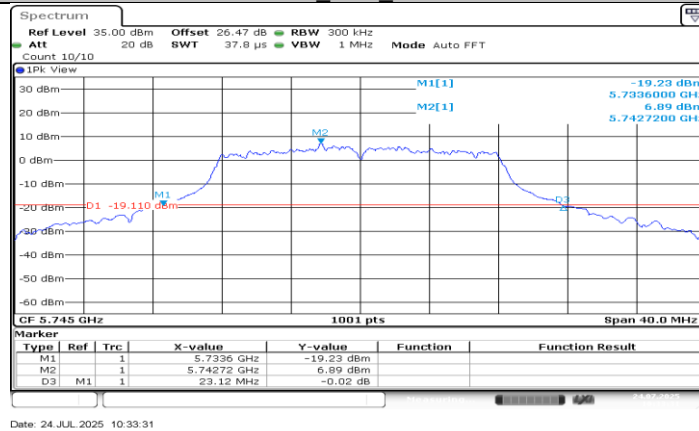


11A_Ant1_5745

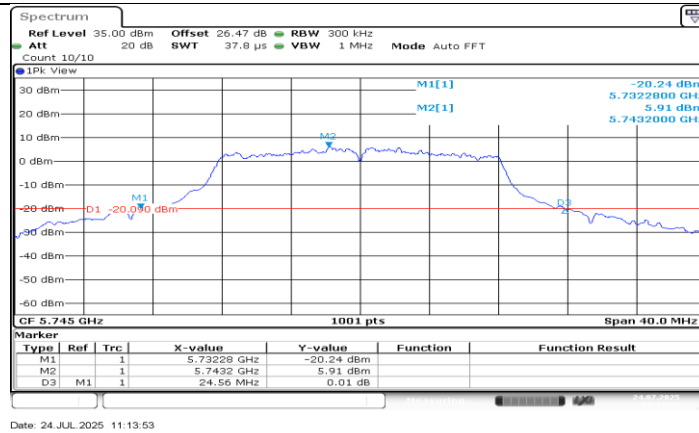


11A_Ant2_5745

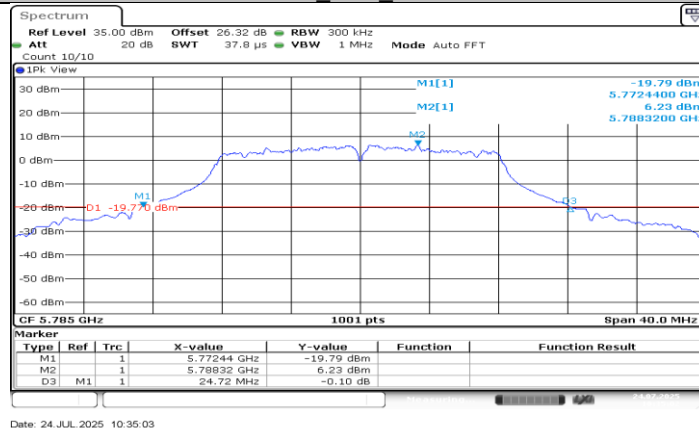


11A_Ant1_5785

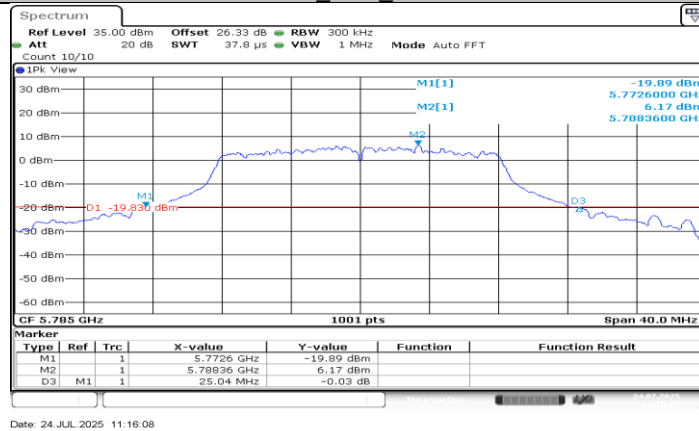


11A_Ant2_5785

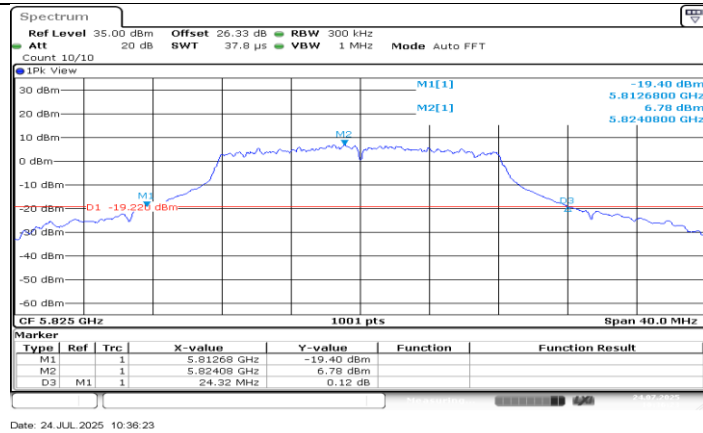


11A_Ant1_5825

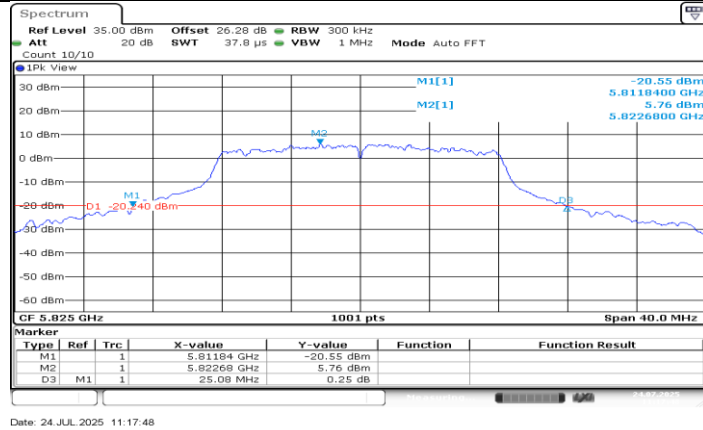


11A_Ant2_5825

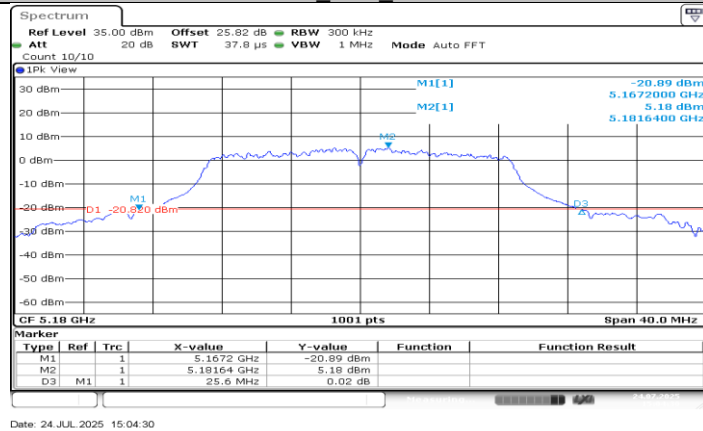


11N20MIMO_Ant1_5180

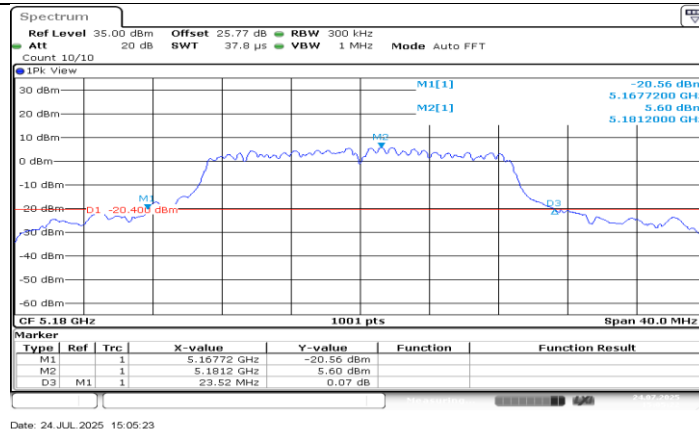


11N20MIMO_Ant2_5180

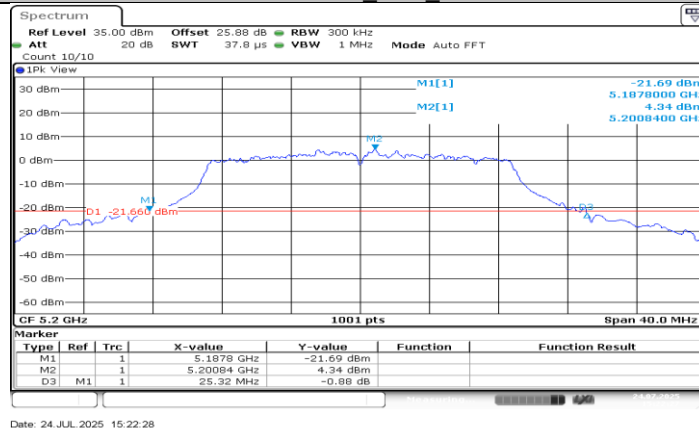


11N20MIMO_Ant1_5200

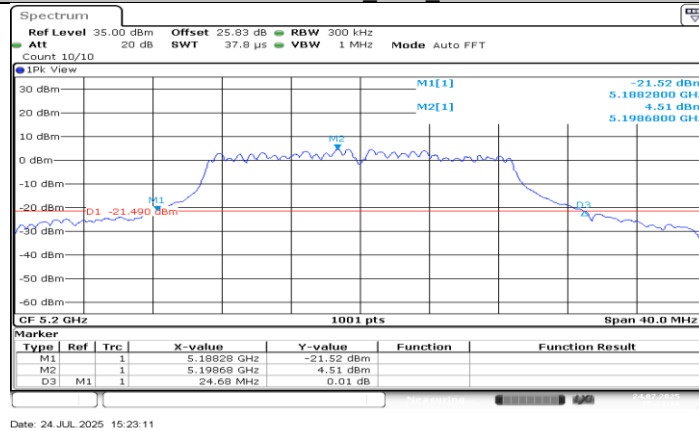


11N20MIMO_Ant2_5200

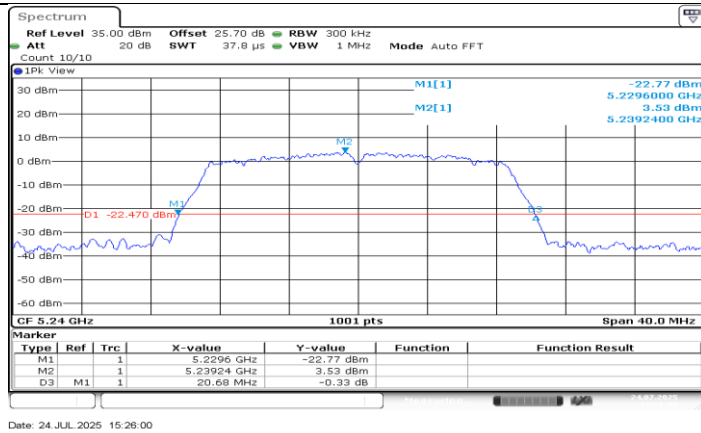


11N20MIMO_Ant1_5240

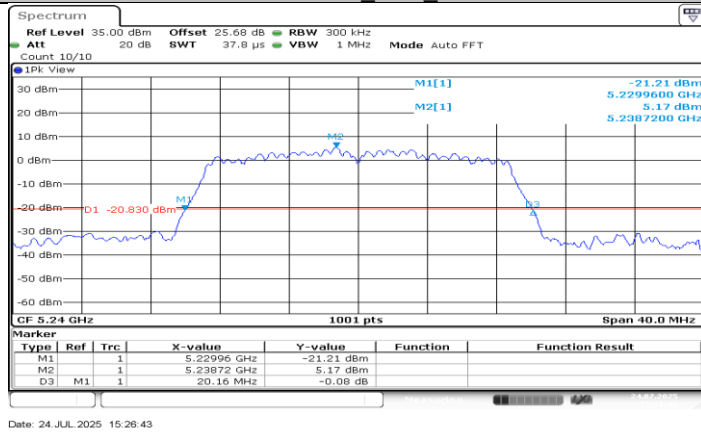


11N20MIMO_Ant2_5240

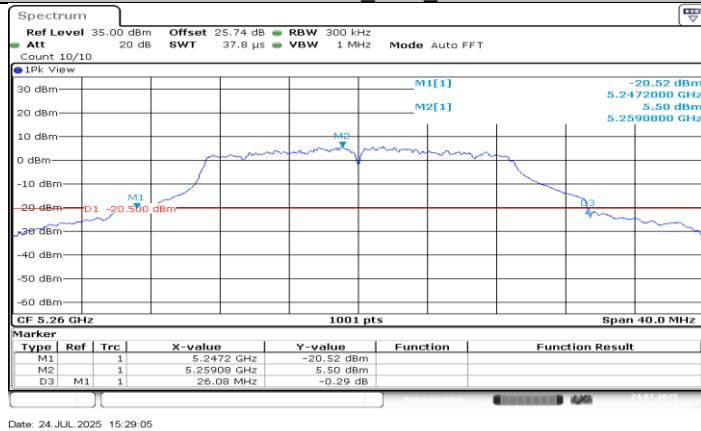


11N20MIMO_Ant1_5260

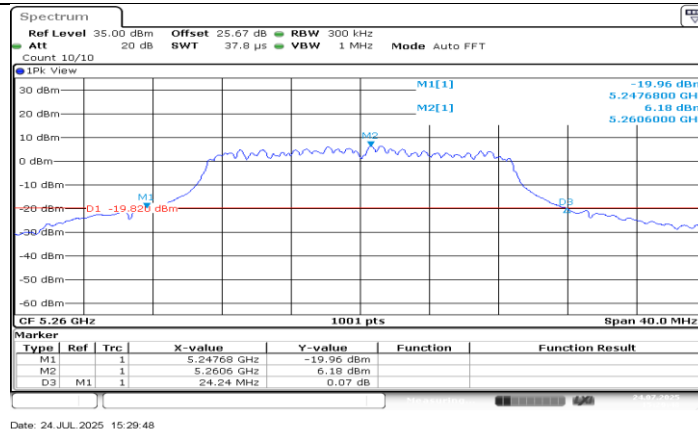


11N20MIMO_Ant2_5260

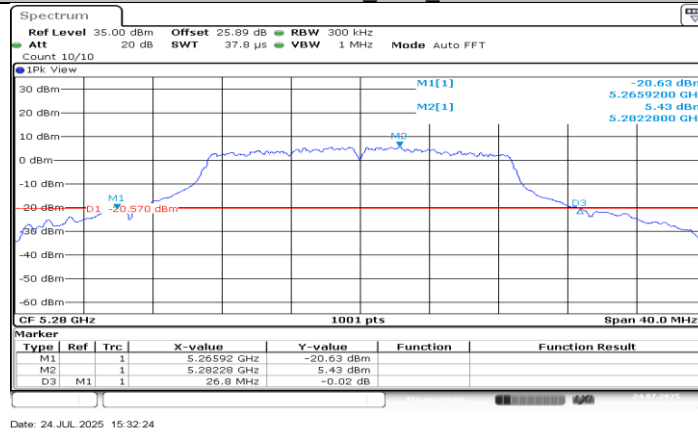


11N20MIMO_Ant1_5280

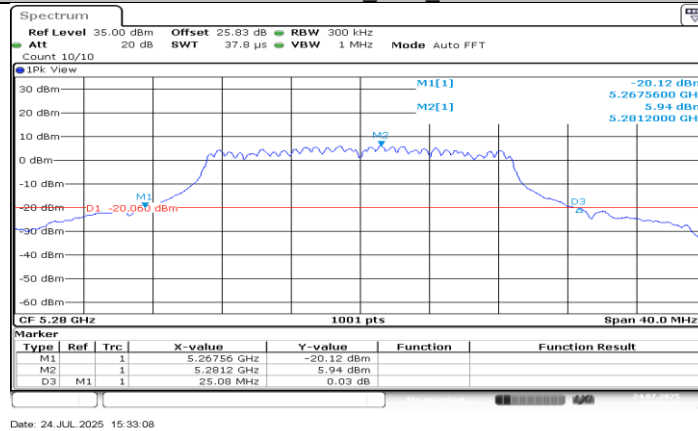


11N20MIMO_Ant2_5280

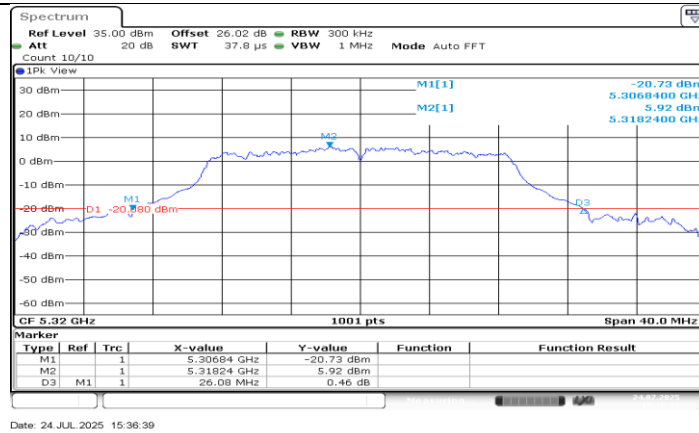


11N20MIMO_Ant1_5320

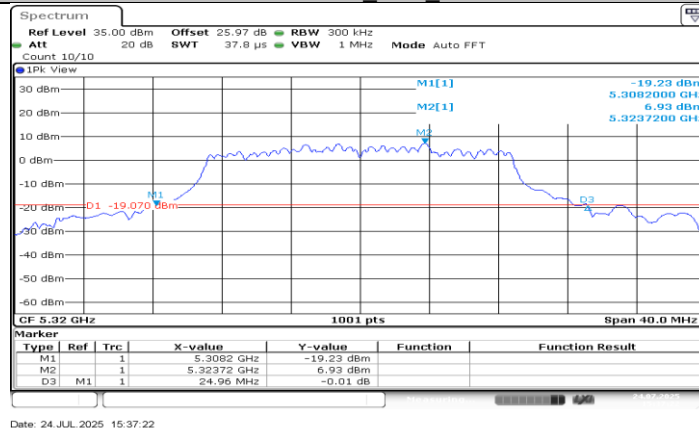


11N20MIMO_Ant2_5320

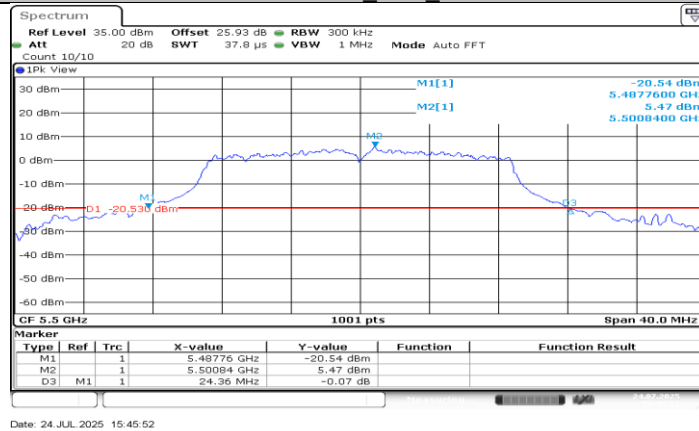


11N20MIMO_Ant1_5500

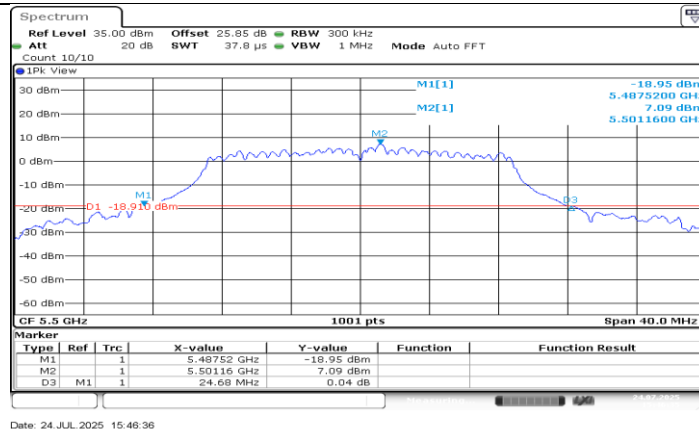


11N20MIMO_Ant2_5500

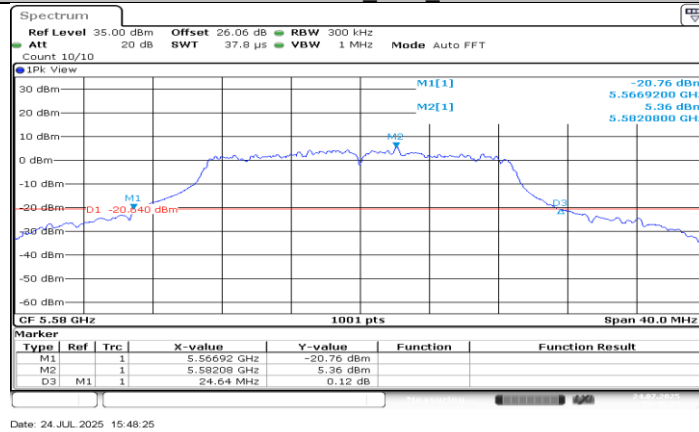


11N20MIMO_Ant1_5580

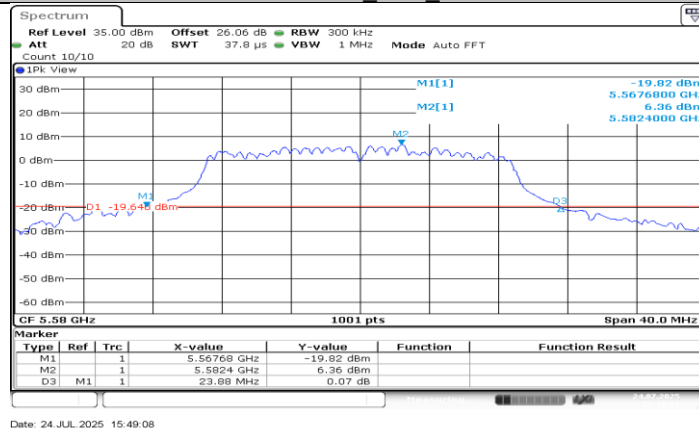


11N20MIMO_Ant2_5580

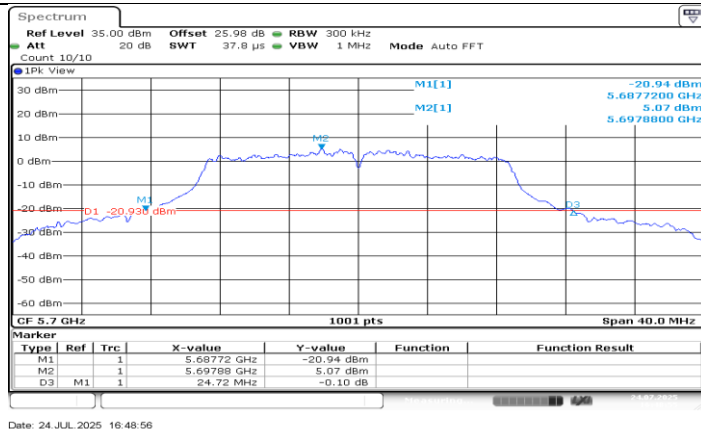


11N20MIMO_Ant1_5700

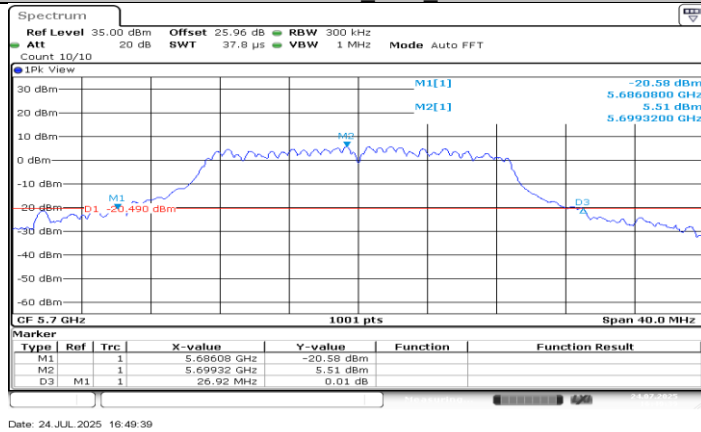


11N20MIMO_Ant2_5700

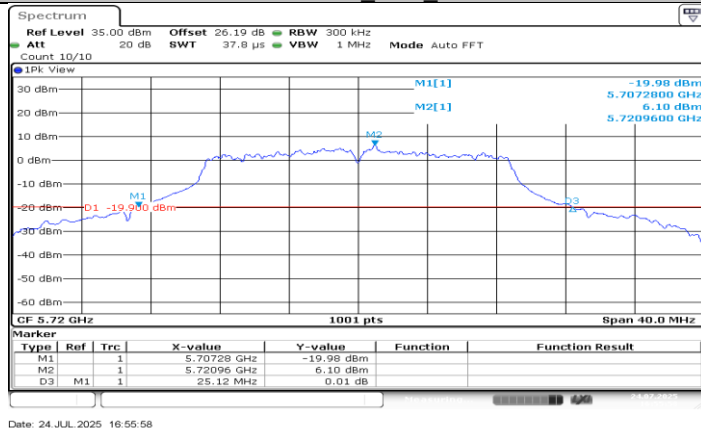


11N20MIMO_Ant1_5720

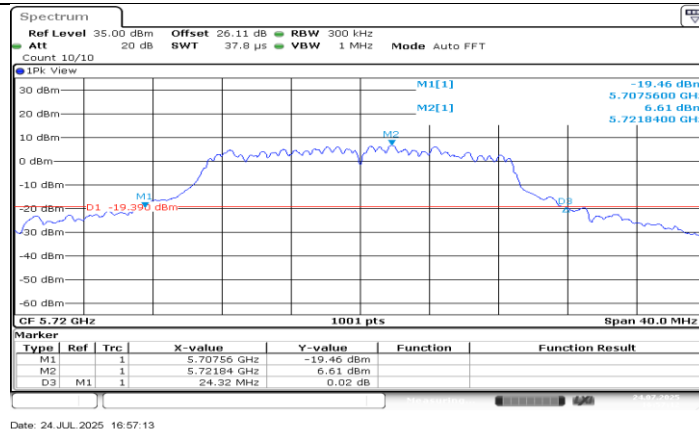

11N20MIMO_Ant2_5720

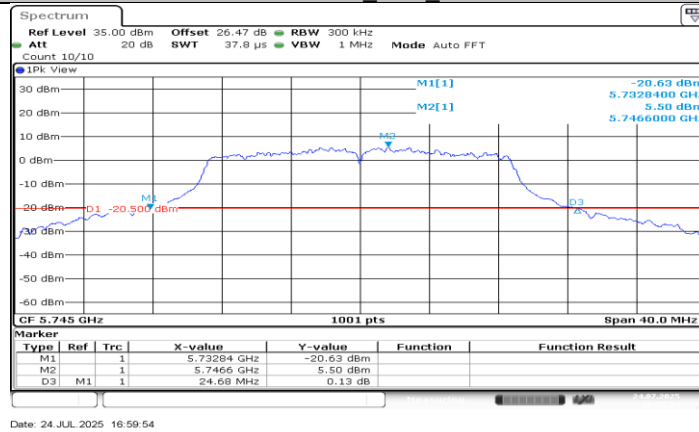

11N20MIMO_Ant1_5745

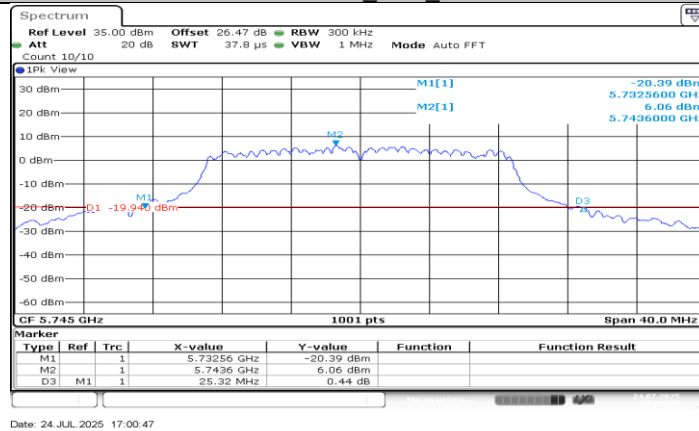

11N20MIMO_Ant2_5745