




Plot 34:

Test Date	2025-06-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.073
SAR 1g (W/Kg)	0.143
ConvF	1.67
Relative permittivity	42.12
Conductivity (S/m)	0.92

Maximum location: X=24.00, Y=47.00 ; SAR Peak: 0.31 W/kg

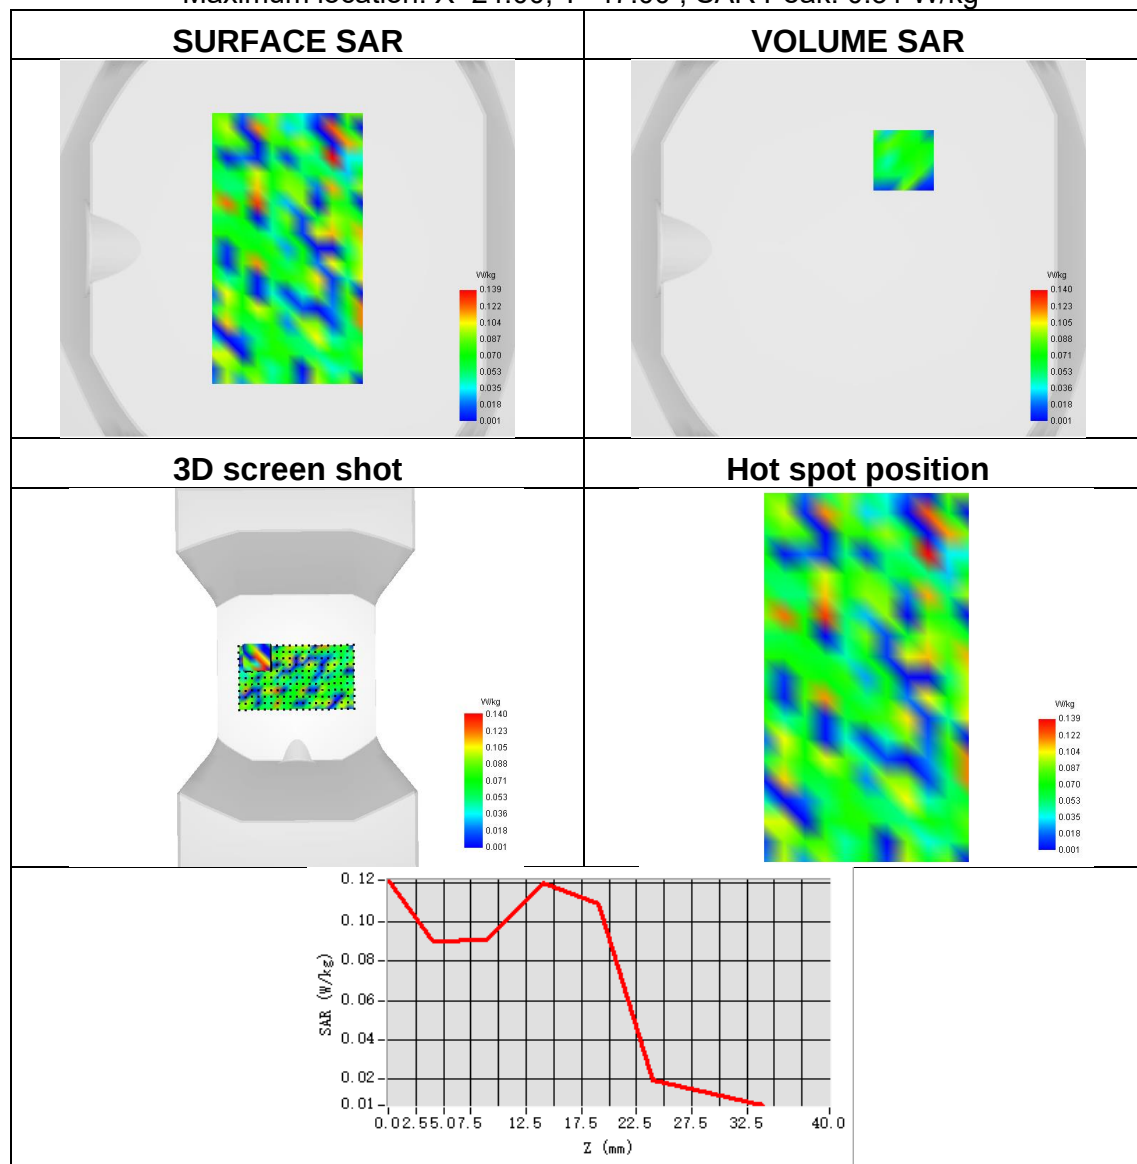




Plot 35:

Test Date	2025-06-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 26
Signal	LTE FDD
Frequency	819
SAR 10g (W/Kg)	0.069
SAR 1g (W/Kg)	0.171
ConvF	1.72
Relative permittivity	41.01
Conductivity (S/m)	0.89

Maximum location: X=-32.00, Y=-50.00 ; SAR Peak: 0.36 W/kg

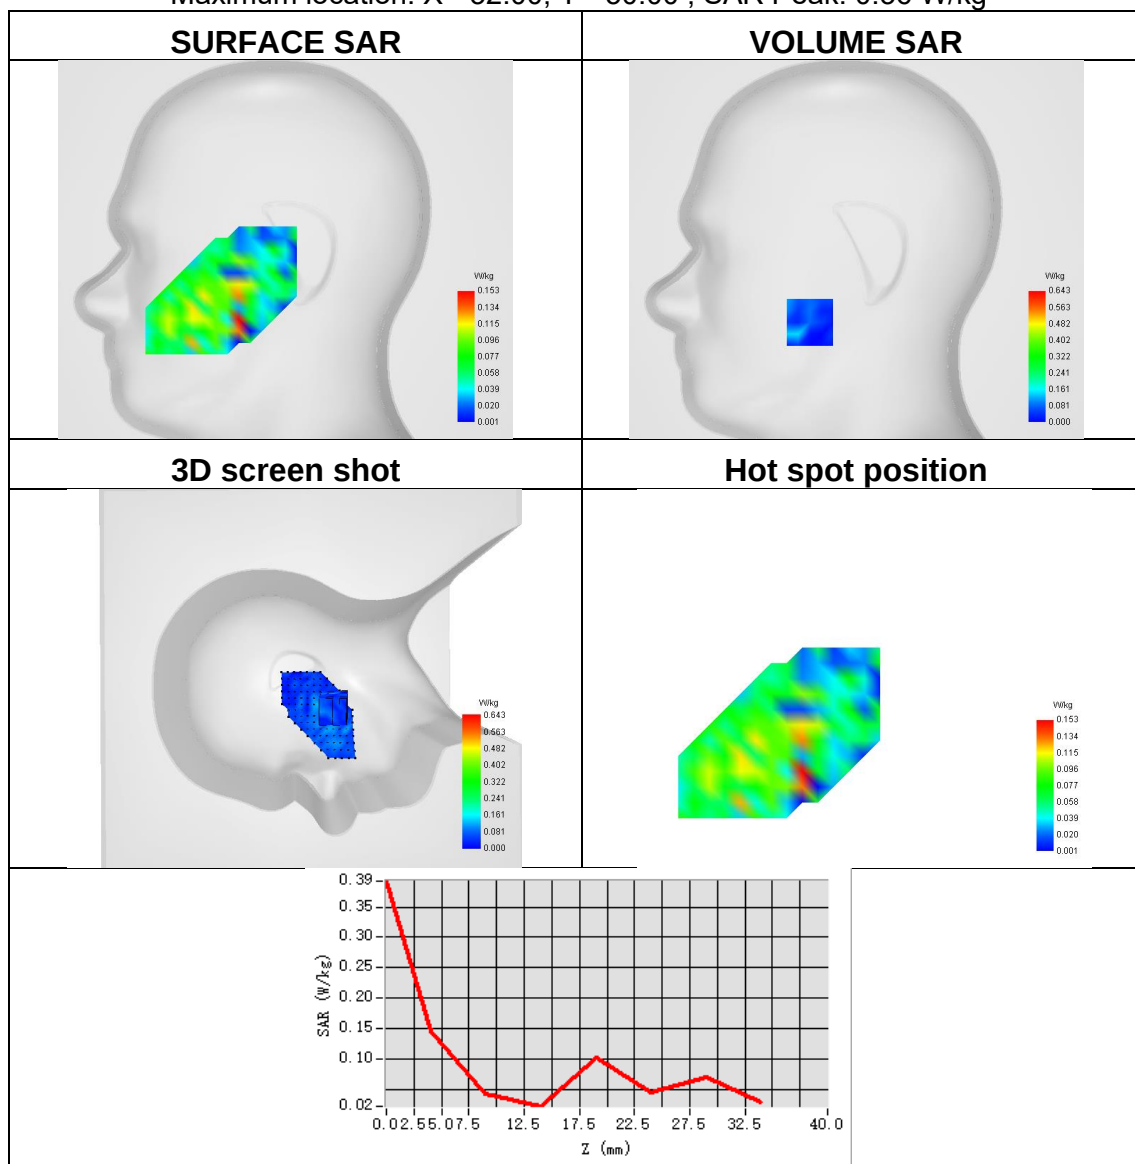




Plot 36:

Test Date	2025-06-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 26
Signal	LTE FDD
Frequency	819
SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.288
ConvF	1.72
Relative permittivity	41.01
Conductivity (S/m)	0.89

Maximum location: X=15.00, Y=-10.00 ; SAR Peak: 0.67 W/kg

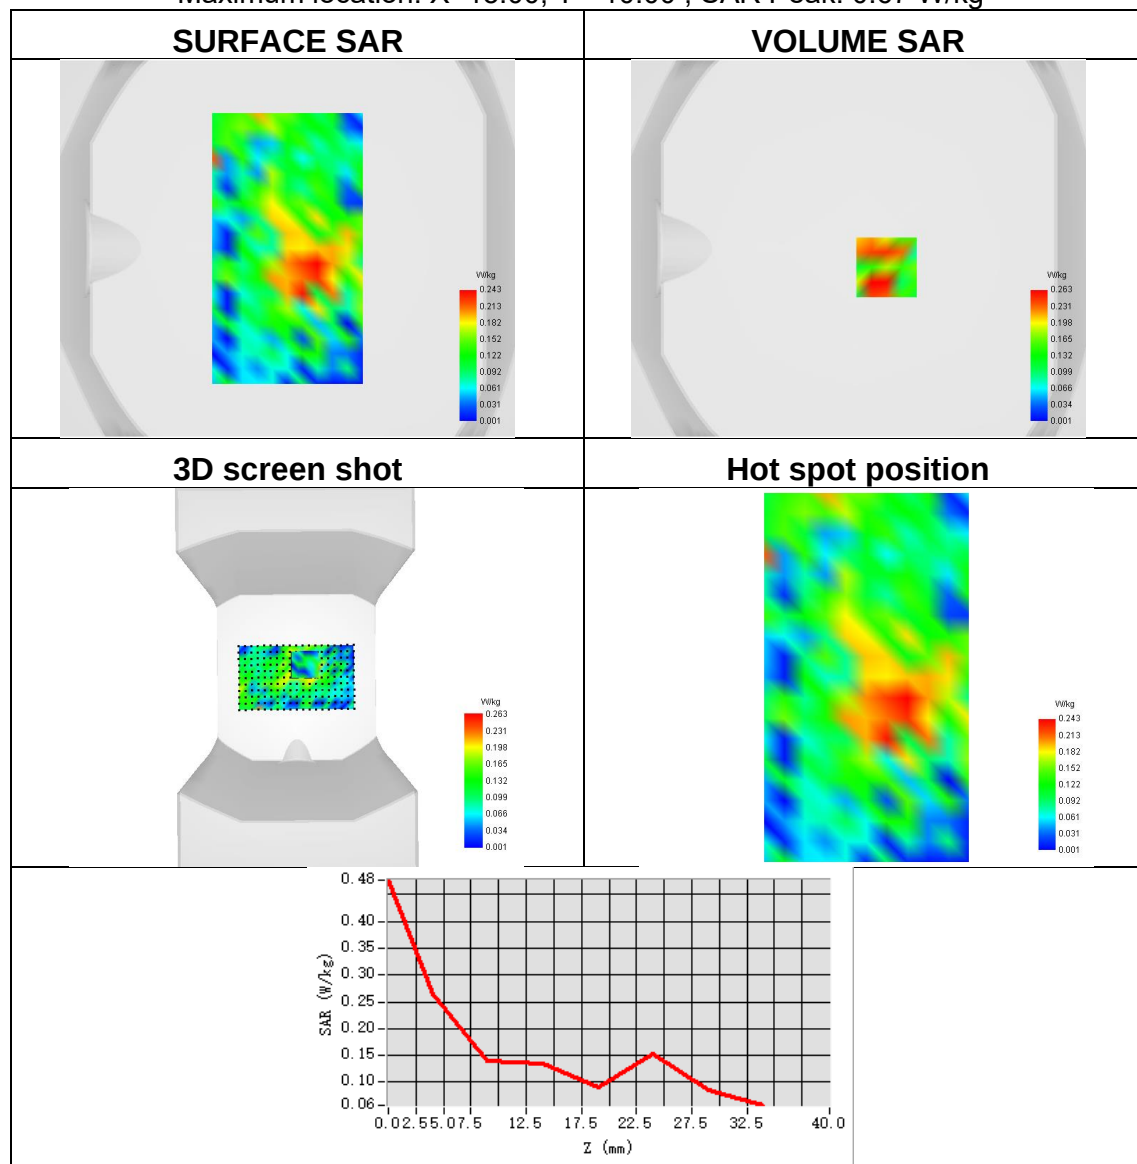




Plot 37:

Test Date	2025-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.081
SAR 1g (W/Kg)	0.261
ConvF	2.37
Relative permittivity	39.91
Conductivity (S/m)	1.98

Maximum location: X=-7.00, Y=8.00 ; SAR Peak: 1.01 W/kg

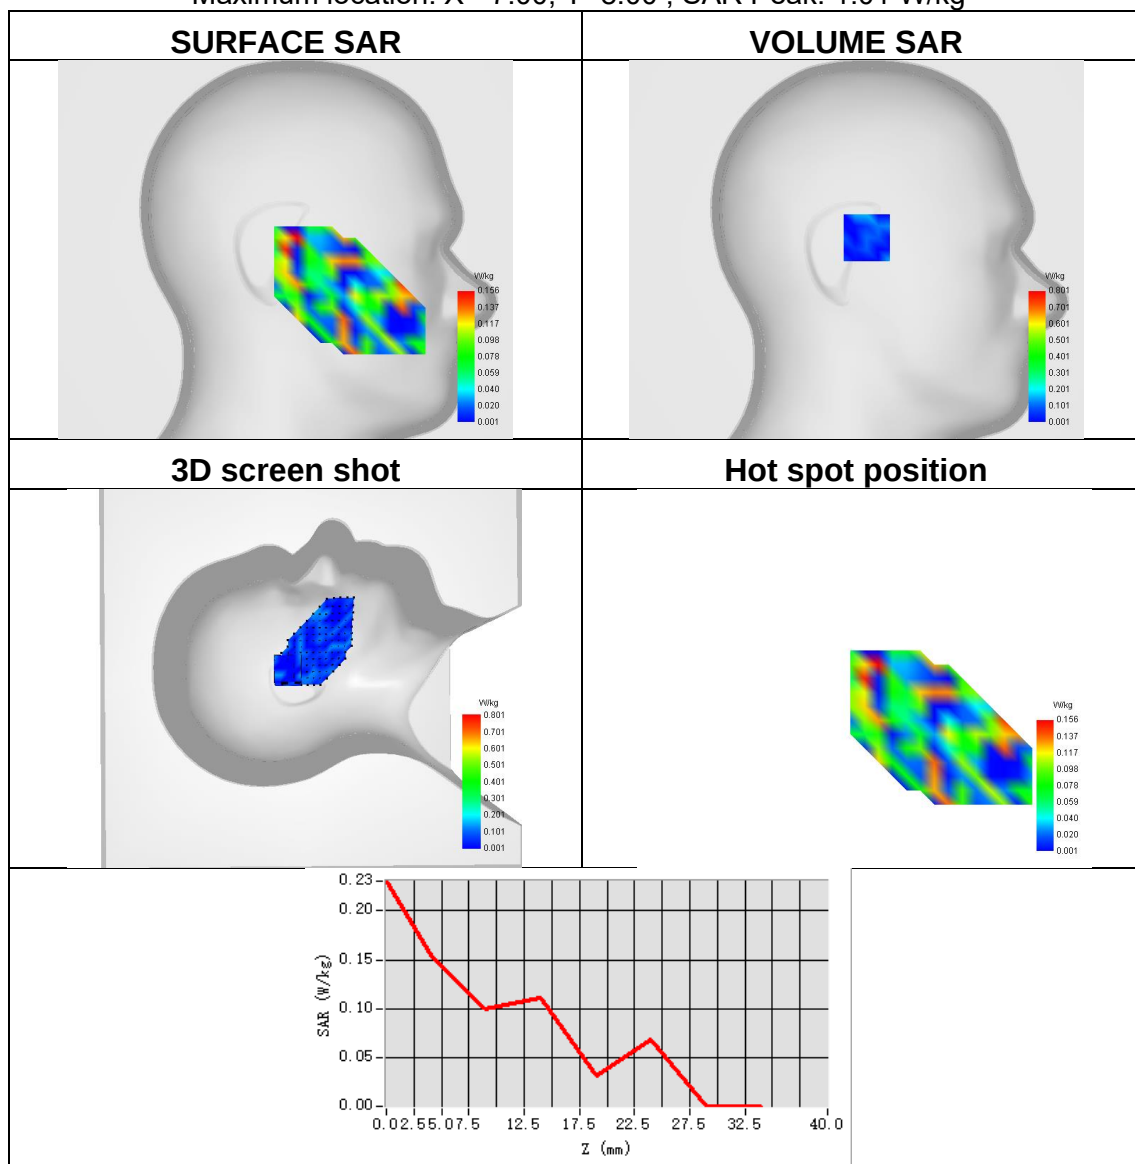




Plot 38:

Test Date	2025-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.275
SAR 1g (W/Kg)	0.620
ConvF	2.37
Relative permittivity	39.91
Conductivity (S/m)	1.98


Maximum location: X=16.00, Y=-1.00 ; SAR Peak: 1.14 W/kg

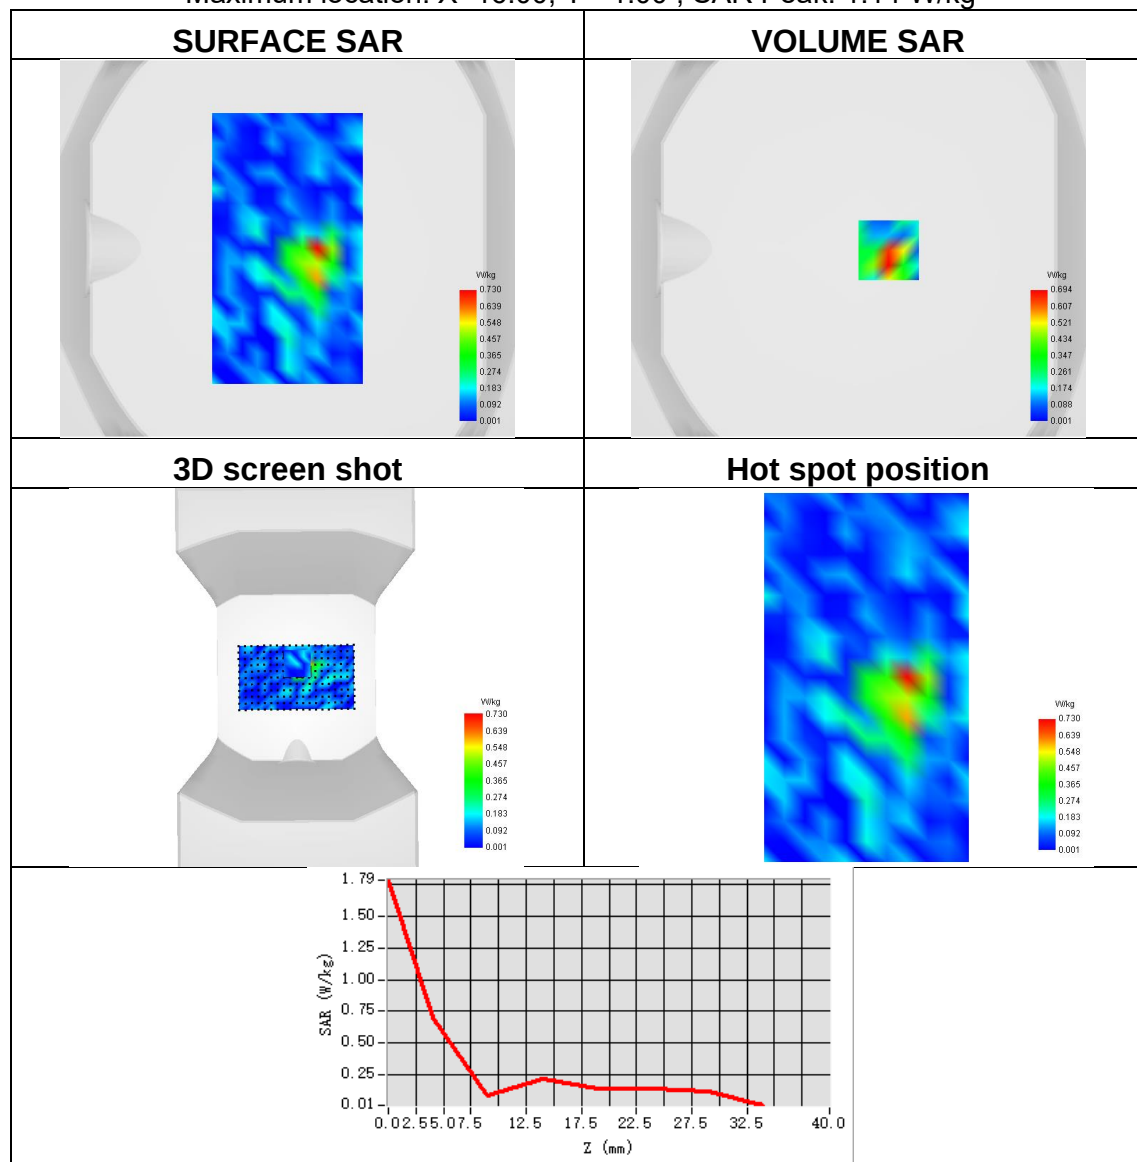

Plot 39:

Test Date	2025-06-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 41
Signal	LTE TDD
Frequency	2506
SAR 10g (W/Kg)	0.067
SAR 1g (W/Kg)	0.144
ConvF	2.37
Relative permittivity	38.96
Conductivity (S/m)	2.02

Maximum location: X=-40.00, Y=-14.00 ; SAR Peak: 0.32 W/kg

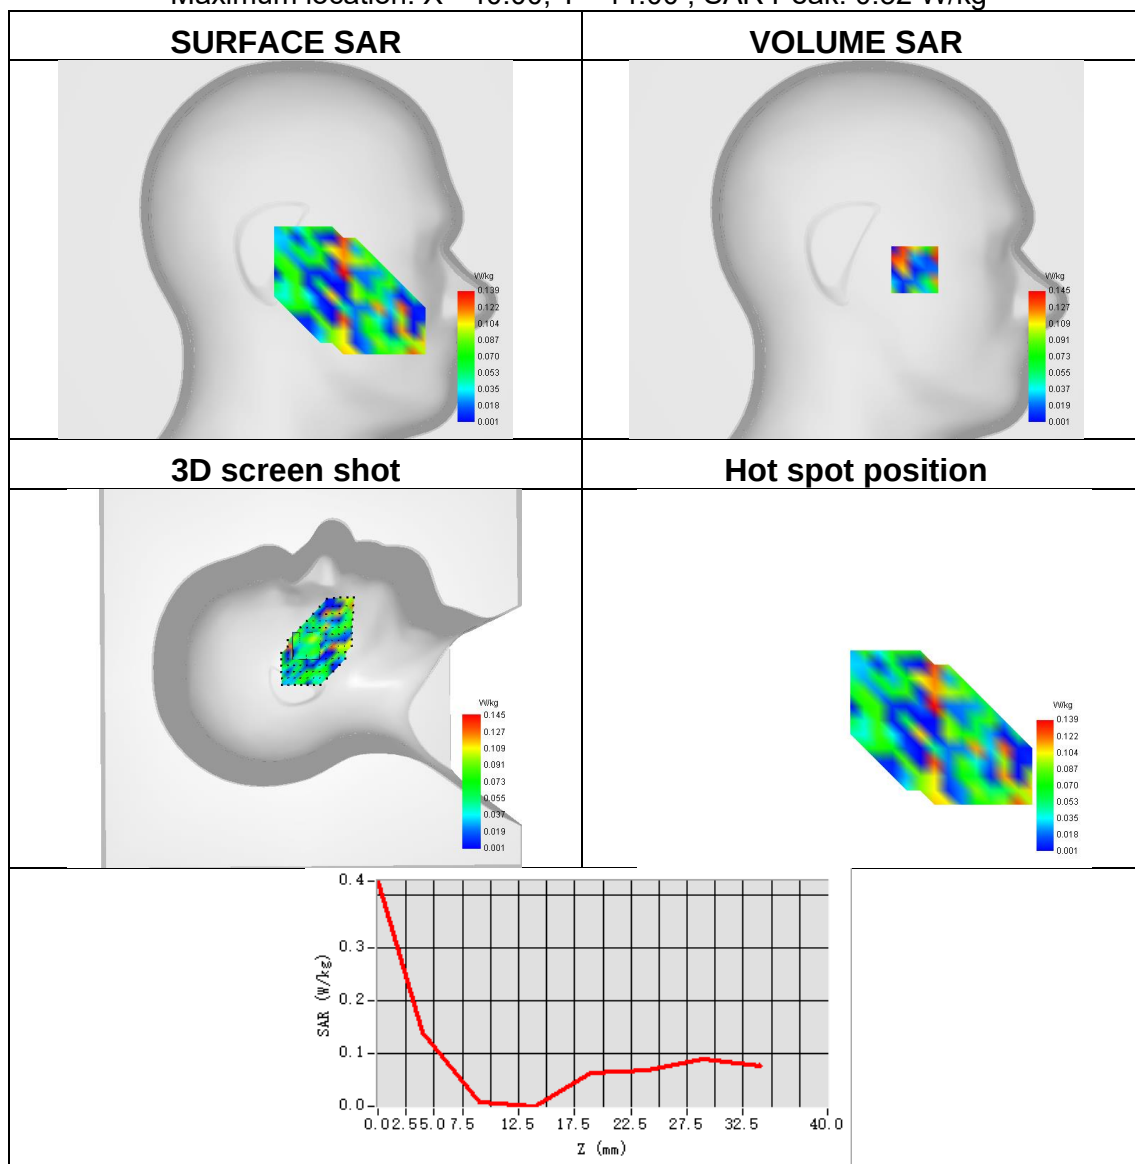




Plot 40:

Test Date	2025-06-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2506
SAR 10g (W/Kg)	0.273
SAR 1g (W/Kg)	0.573
ConvF	2.37
Relative permittivity	38.96
Conductivity (S/m)	2.02

Maximum location: X=17.00, Y=-7.00 ; SAR Peak: 1.14 W/kg

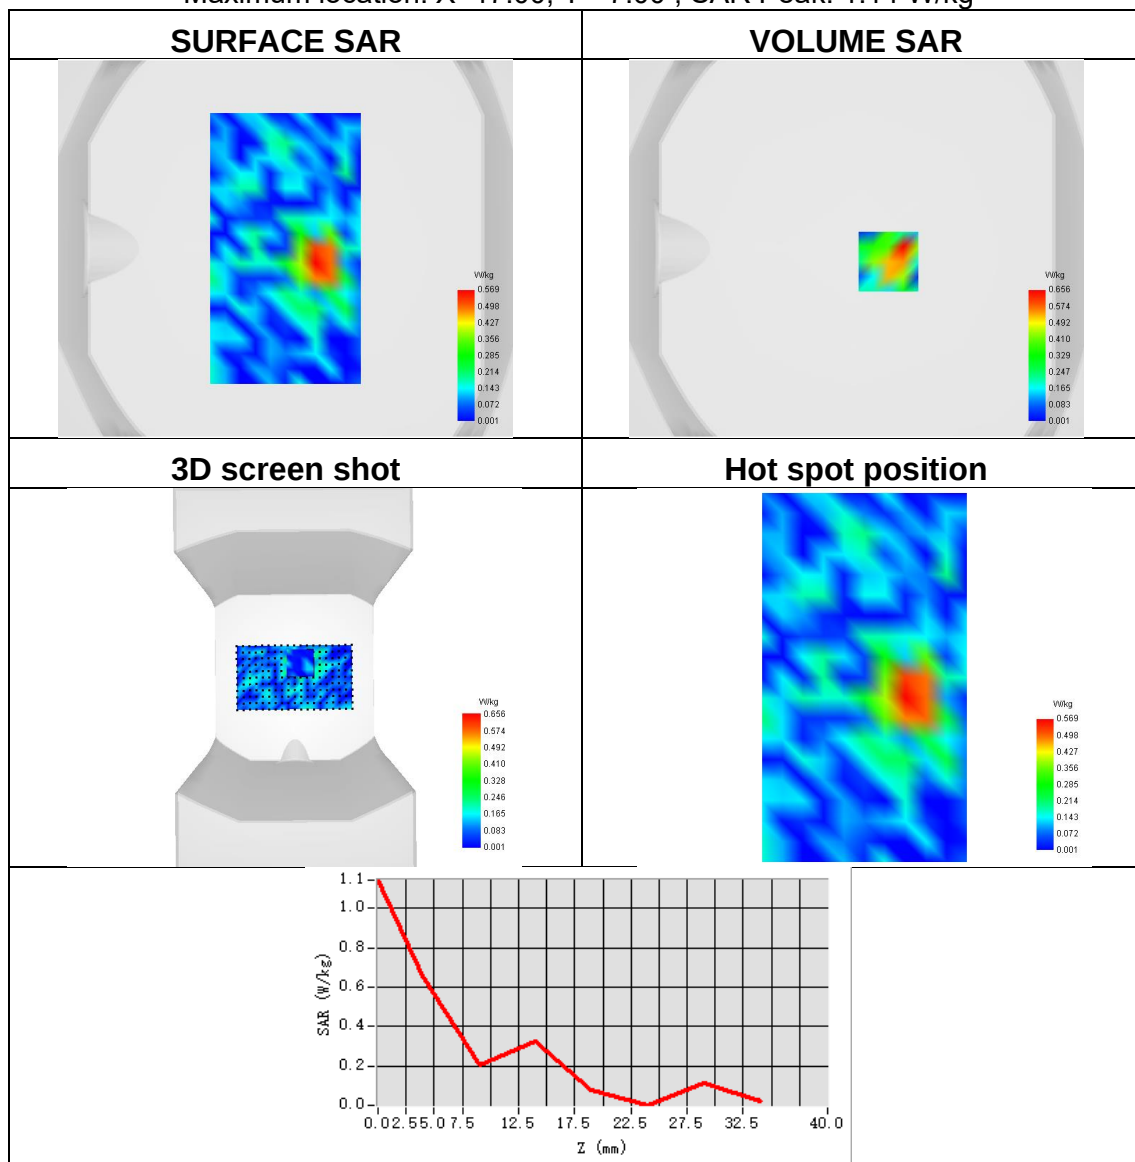




Plot 41:

Test Date	2025-06-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	848.8
SAR 10g (W/Kg)	0.627
SAR 1g (W/Kg)	1.244
ConvF	1.72
Relative permittivity	42.29
Conductivity (S/m)	0.91

Maximum location: X=7.00, Y=-23.00 ; SAR Peak: 2.82 W/kg

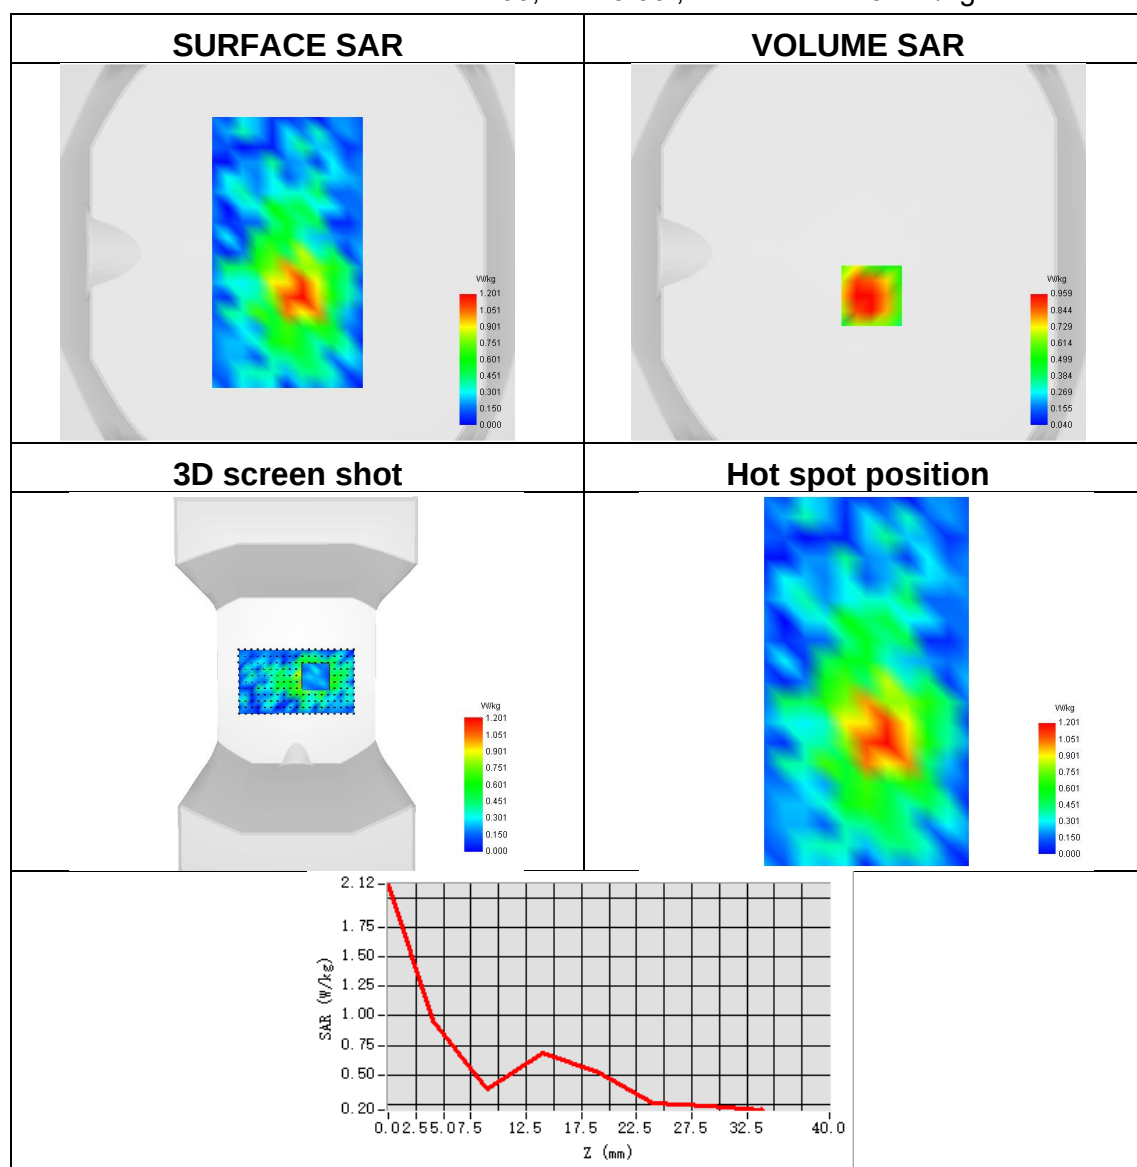




Plot 42:

Test Date	2025-06-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1850.2
SAR 10g (W/Kg)	0.990
SAR 1g (W/Kg)	2.462
ConvF	2.20
Relative permittivity	40.65
Conductivity (S/m)	1.41

Maximum location: X=8.00, Y=-9.00 ; SAR Peak: 6.29 W/kg

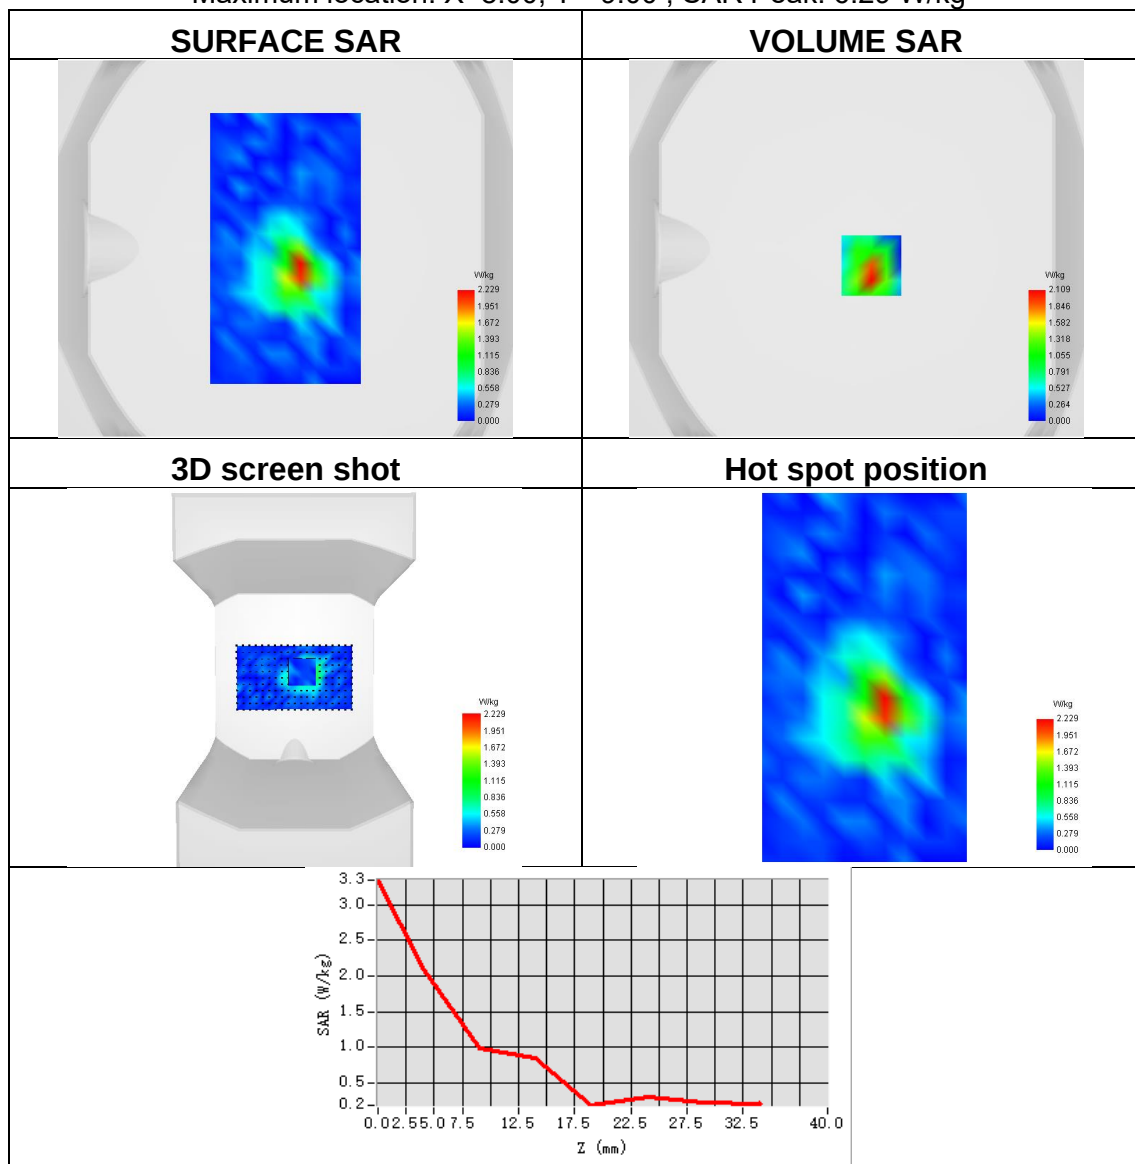




Plot 43:

Test Date	2025-06-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	Band 2 (1900)
Signal	HSDPA
Frequency	1880
SAR 10g (W/Kg)	1.366
SAR 1g (W/Kg)	2.987
ConvF	2.20
Relative permittivity	40.65
Conductivity (S/m)	1.41

Maximum location: X=-8.00, Y=9.00 ; SAR Peak: 5.40 W/kg

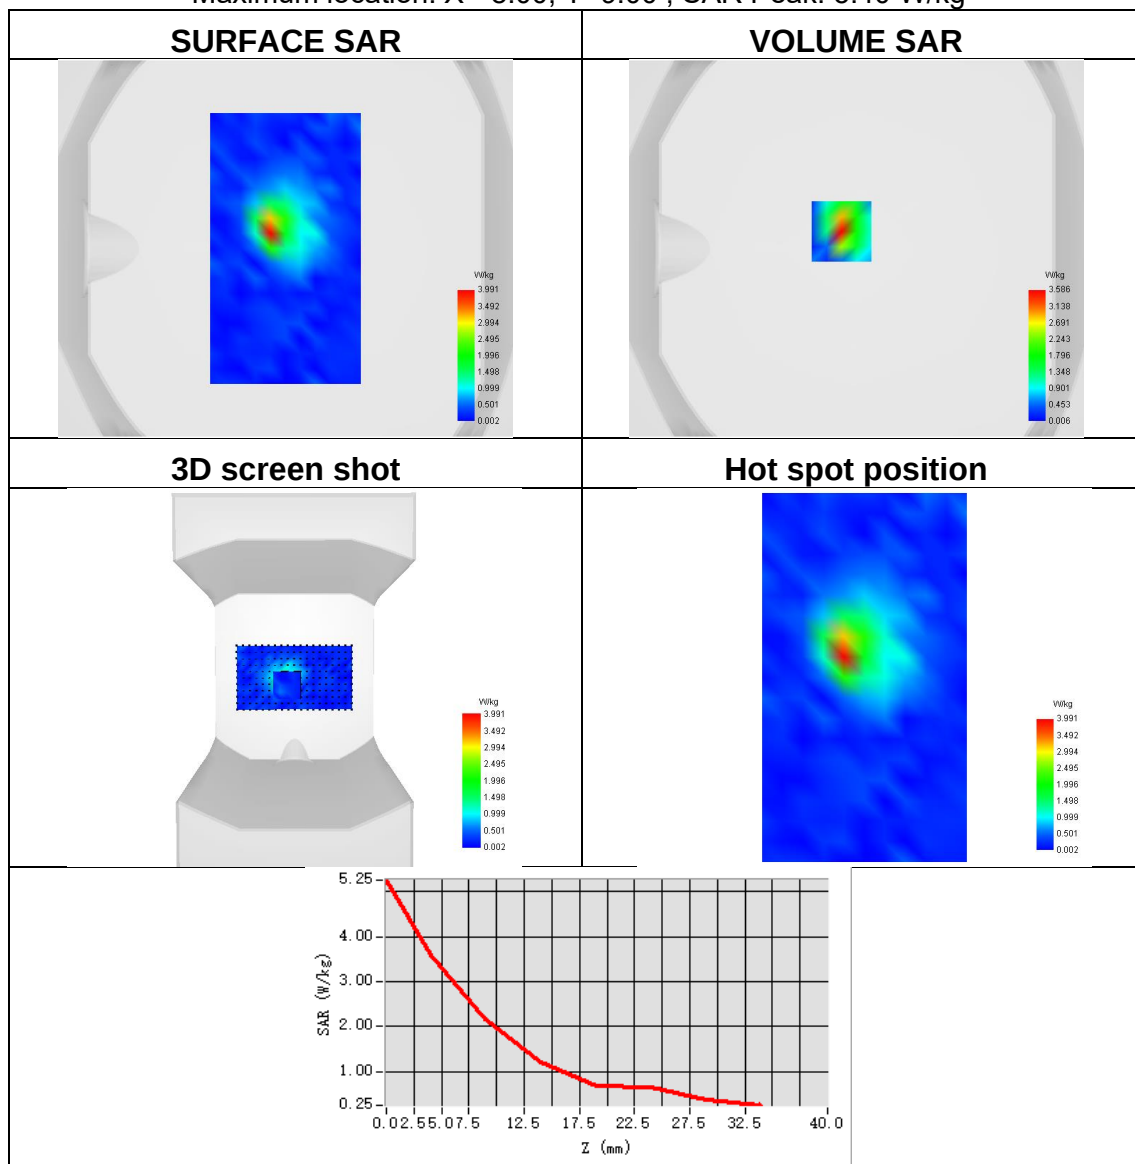




Plot 44:

Test Date	2025-06-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	Band 4 (1700)
Signal	HSDPA
Frequency	1752.4
SAR 10g (W/Kg)	0.734
SAR 1g (W/Kg)	1.497
ConvF	1.92
Relative permittivity	41.16
Conductivity (S/m)	1.36

Maximum location: X=0.00, Y=0.00 ; SAR Peak: 2.87 W/kg

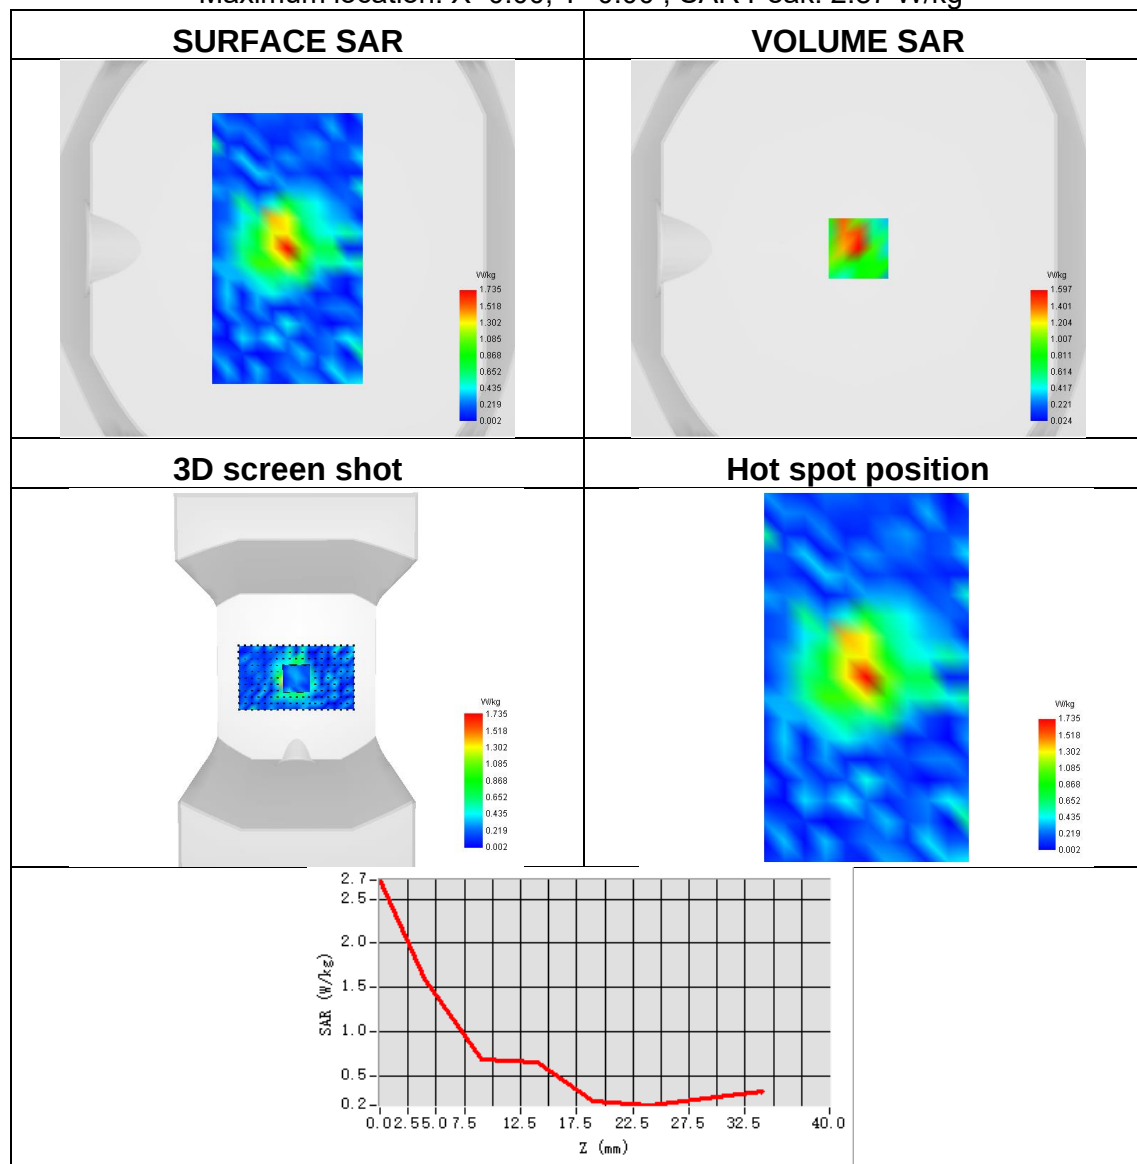




Plot 45:

Test Date	2025-06-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.677
SAR 1g (W/Kg)	1.191
ConvF	1.72
Relative permittivity	42.29
Conductivity (S/m)	0.91

Maximum location: X=9.00, Y=-33.00 ; SAR Peak: 2.01 W/kg

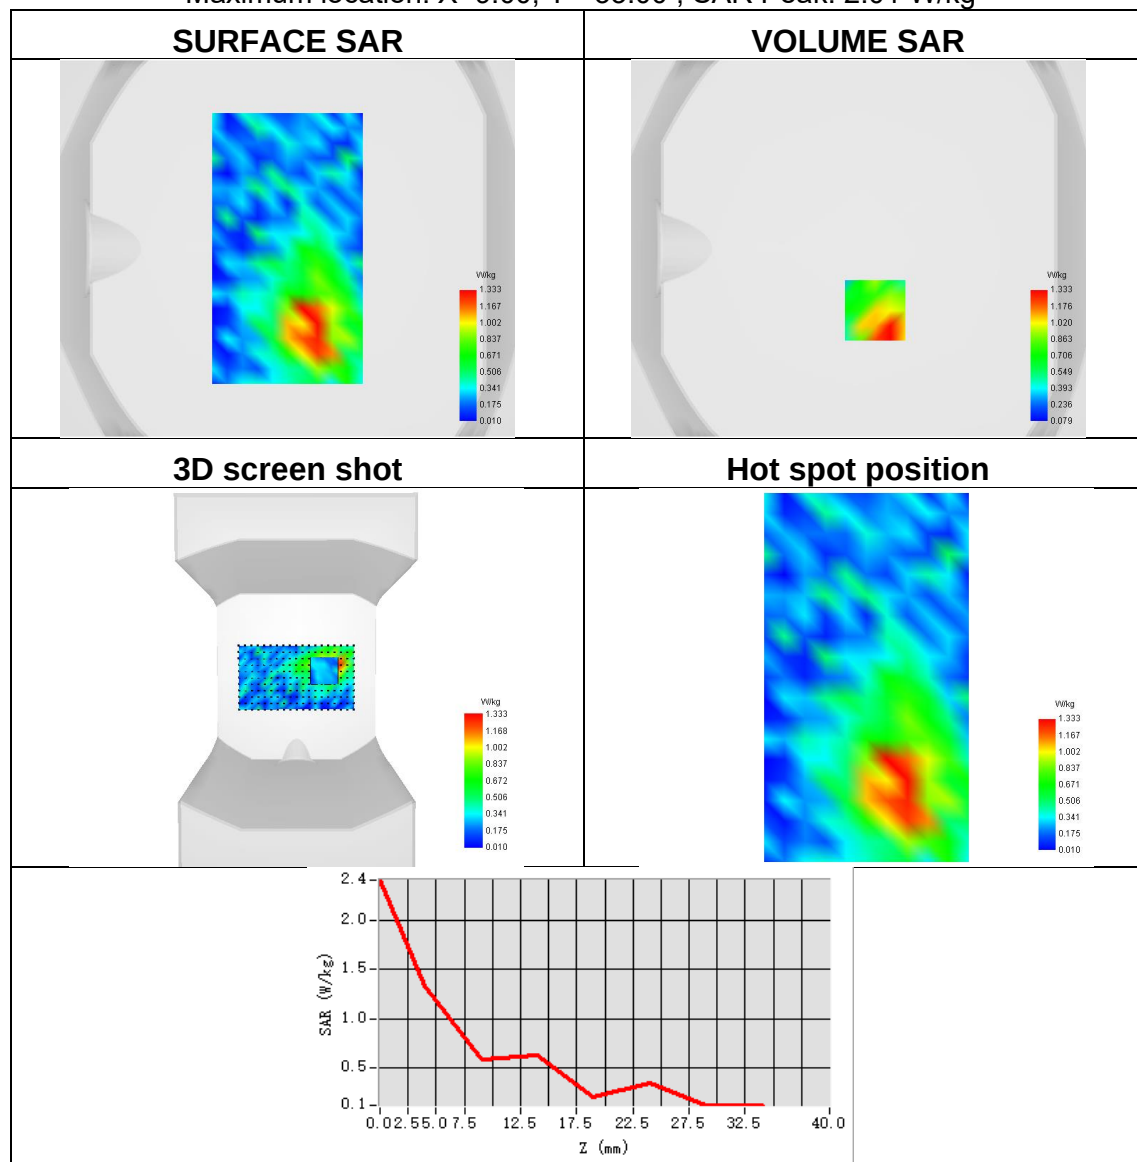




Plot 46:

Test Date	2025-06-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM
Signal	IEEE 802.11b
Frequency	2412
SAR 10g (W/Kg)	0.267
SAR 1g (W/Kg)	0.557
ConvF	2.33
Relative permittivity	39.59
Conductivity (S/m)	1.82

Maximum location: X=8.00, Y=-16.00 ; SAR Peak: 1.53 W/kg

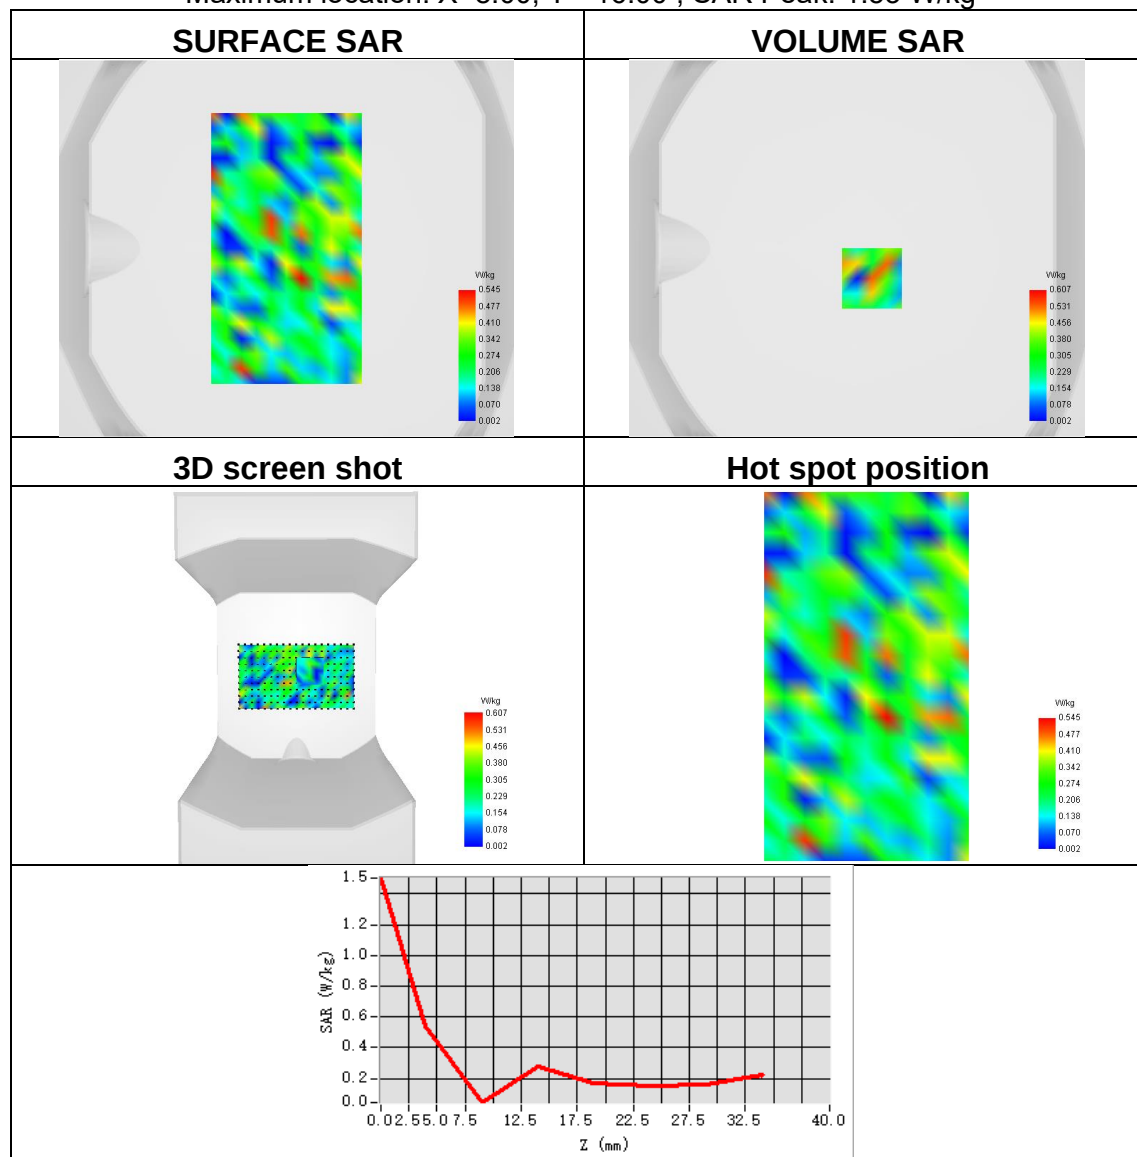




Plot 47:

Test Date	2025-06-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5200
SAR 10g (W/Kg)	0.361
SAR 1g (W/Kg)	0.712
ConvF	1.99
Relative permittivity	36.66
Conductivity (S/m)	4.60

Maximum location: X=-16.00, Y=-48.00 ; SAR Peak: 3.31 W/kg

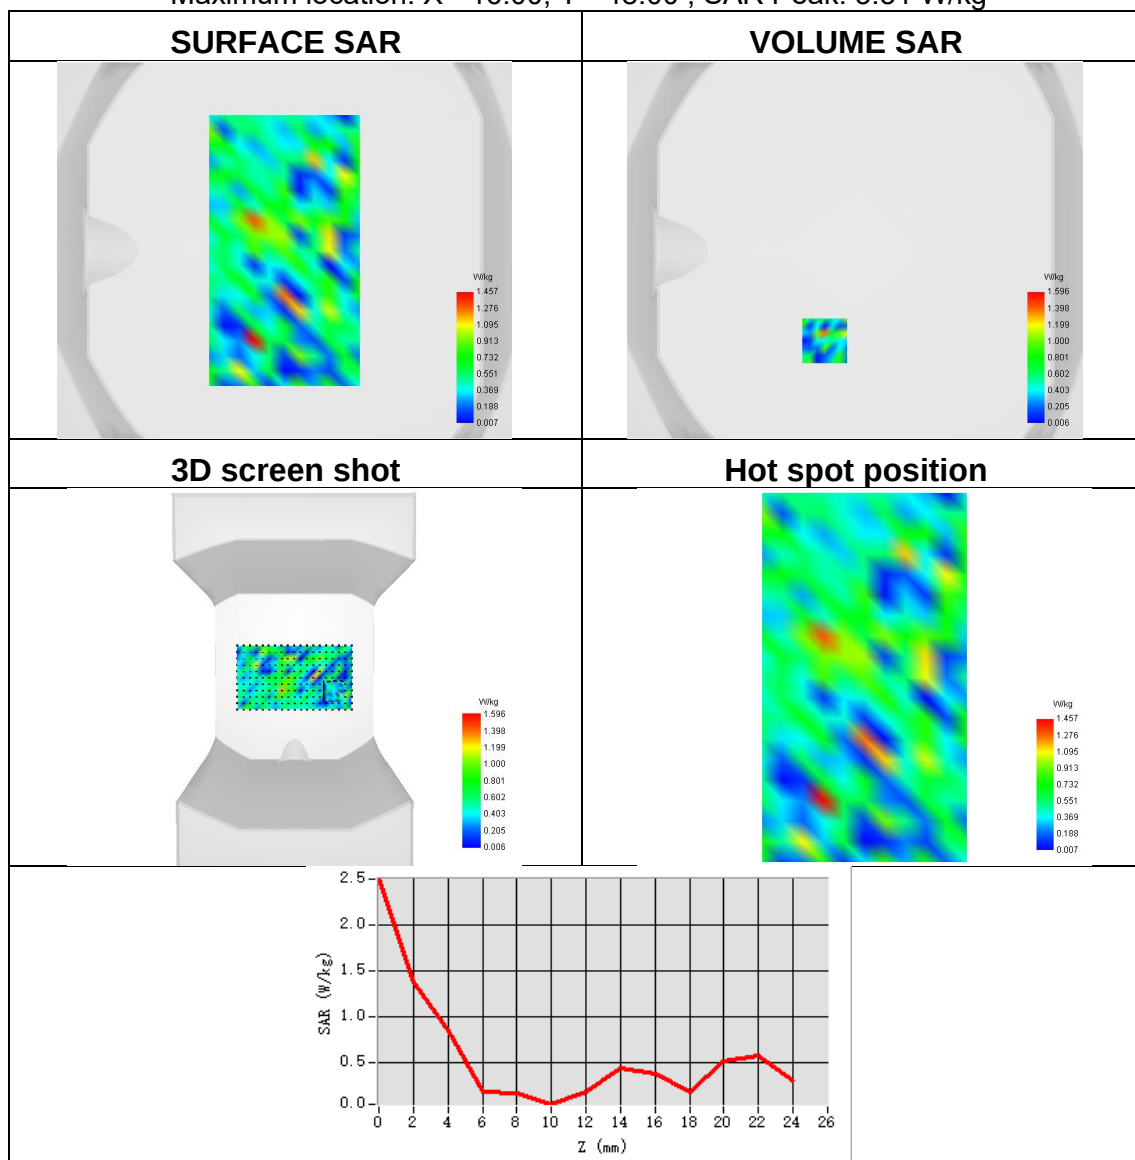




Plot 48:

Test Date	2025-06-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2a
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.356
SAR 1g (W/Kg)	0.699
ConvF	1.87
Relative permittivity	36.35
Conductivity (S/m)	4.88

Maximum location: X=0.00, Y=48.00 ; SAR Peak: 4.20 W/kg

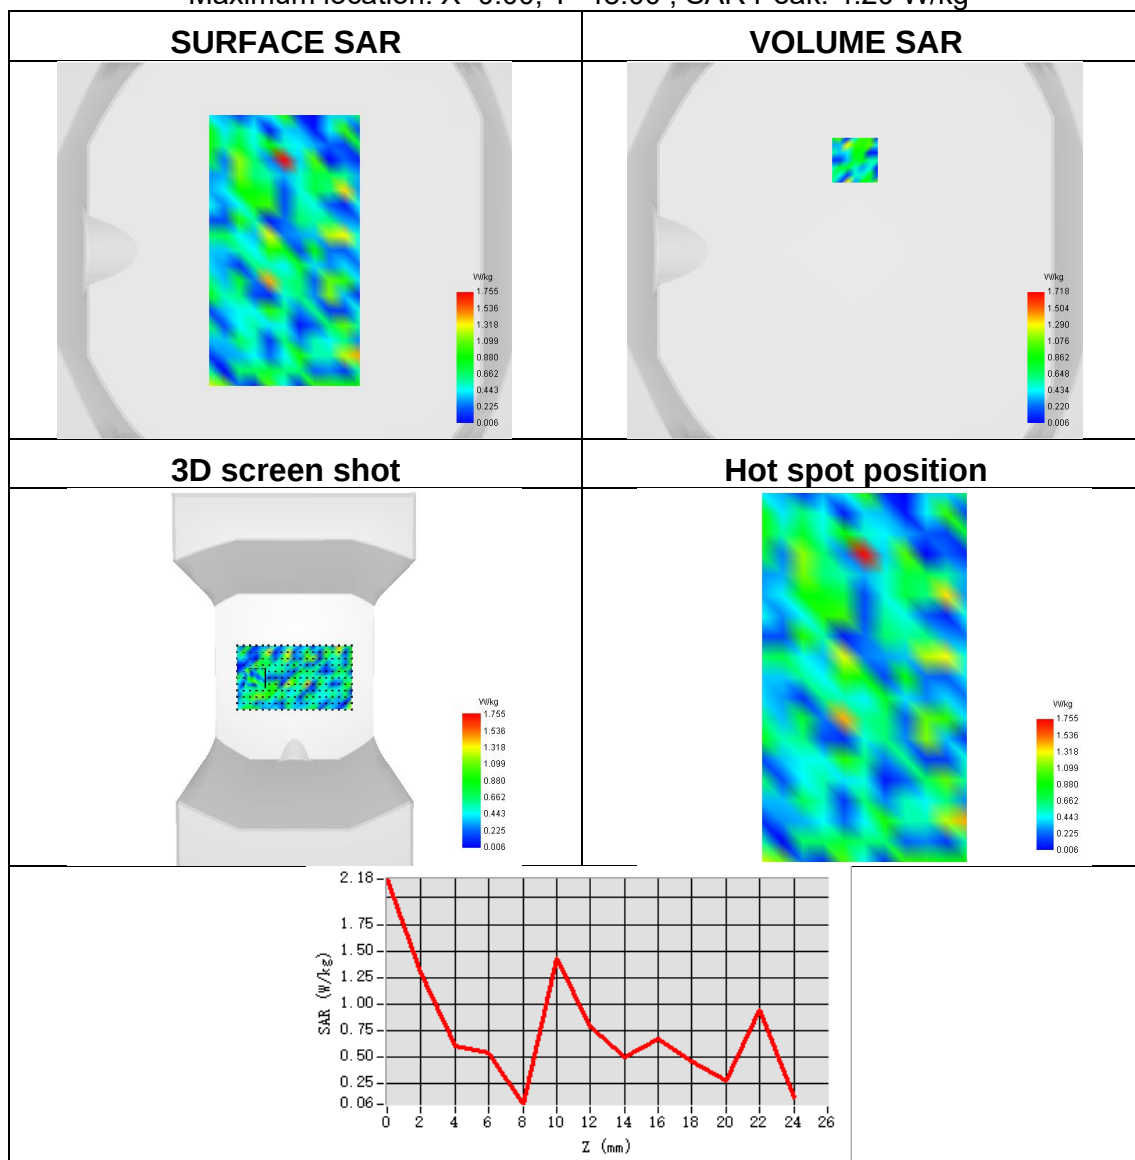




Plot 49:

Test Date	2025-06-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.362
SAR 1g (W/Kg)	0.922
ConvF	1.87
Relative permittivity	36.49
Conductivity (S/m)	5.05

Maximum location: X=8.00, Y=-48.00 ; SAR Peak: 5.41 W/kg

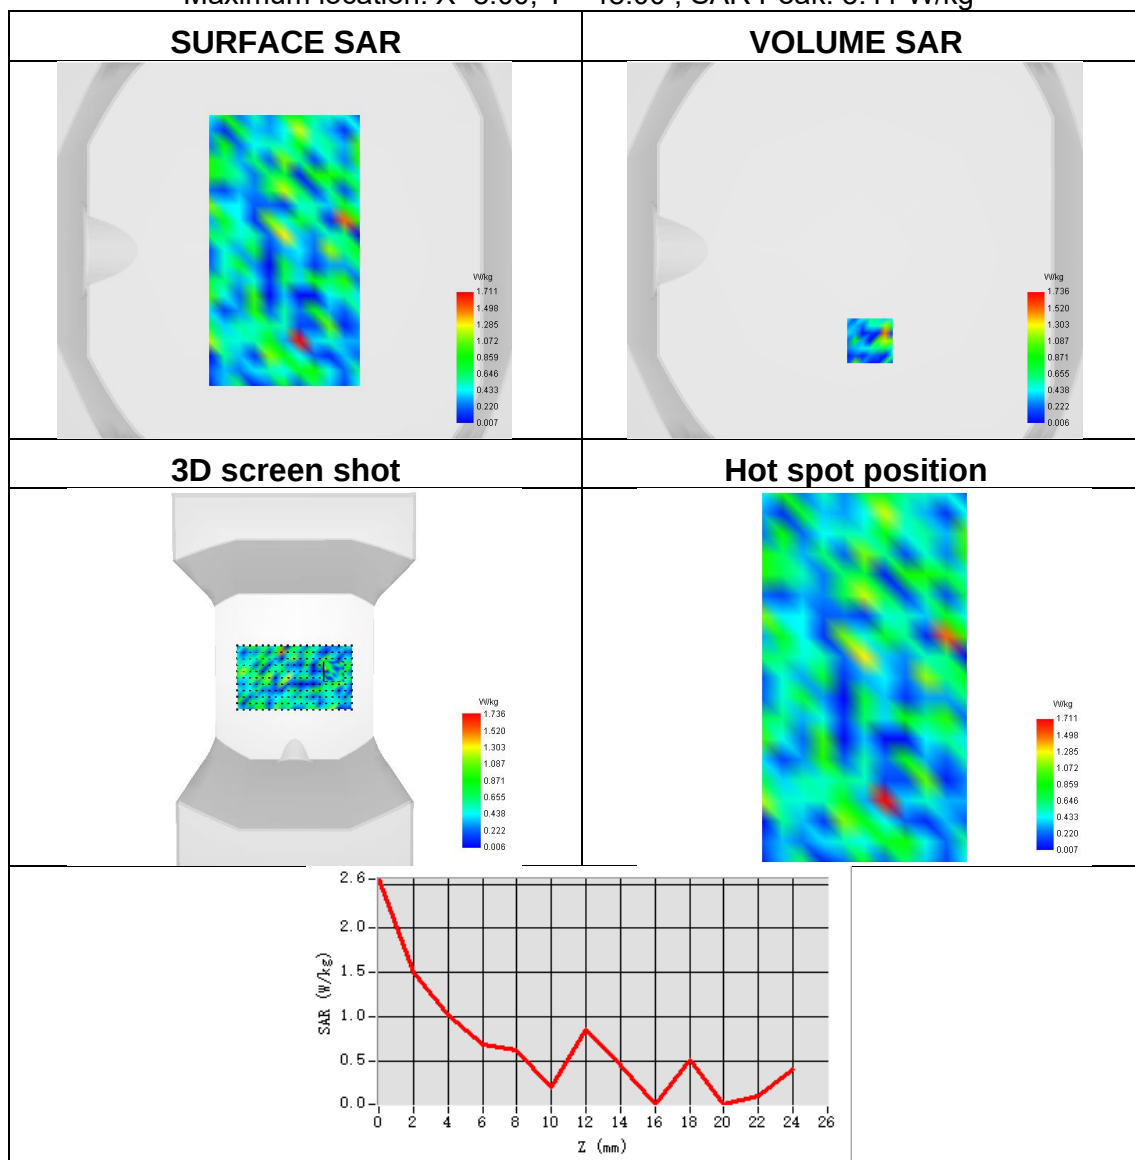




Plot 50:

Test Date	2025-06-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.414
SAR 1g (W/Kg)	0.767
ConvF	1.70
Relative permittivity	35.48
Conductivity (S/m)	5.23

Maximum location: X=0.00, Y=-48.00 ; SAR Peak: 6.39 W/kg

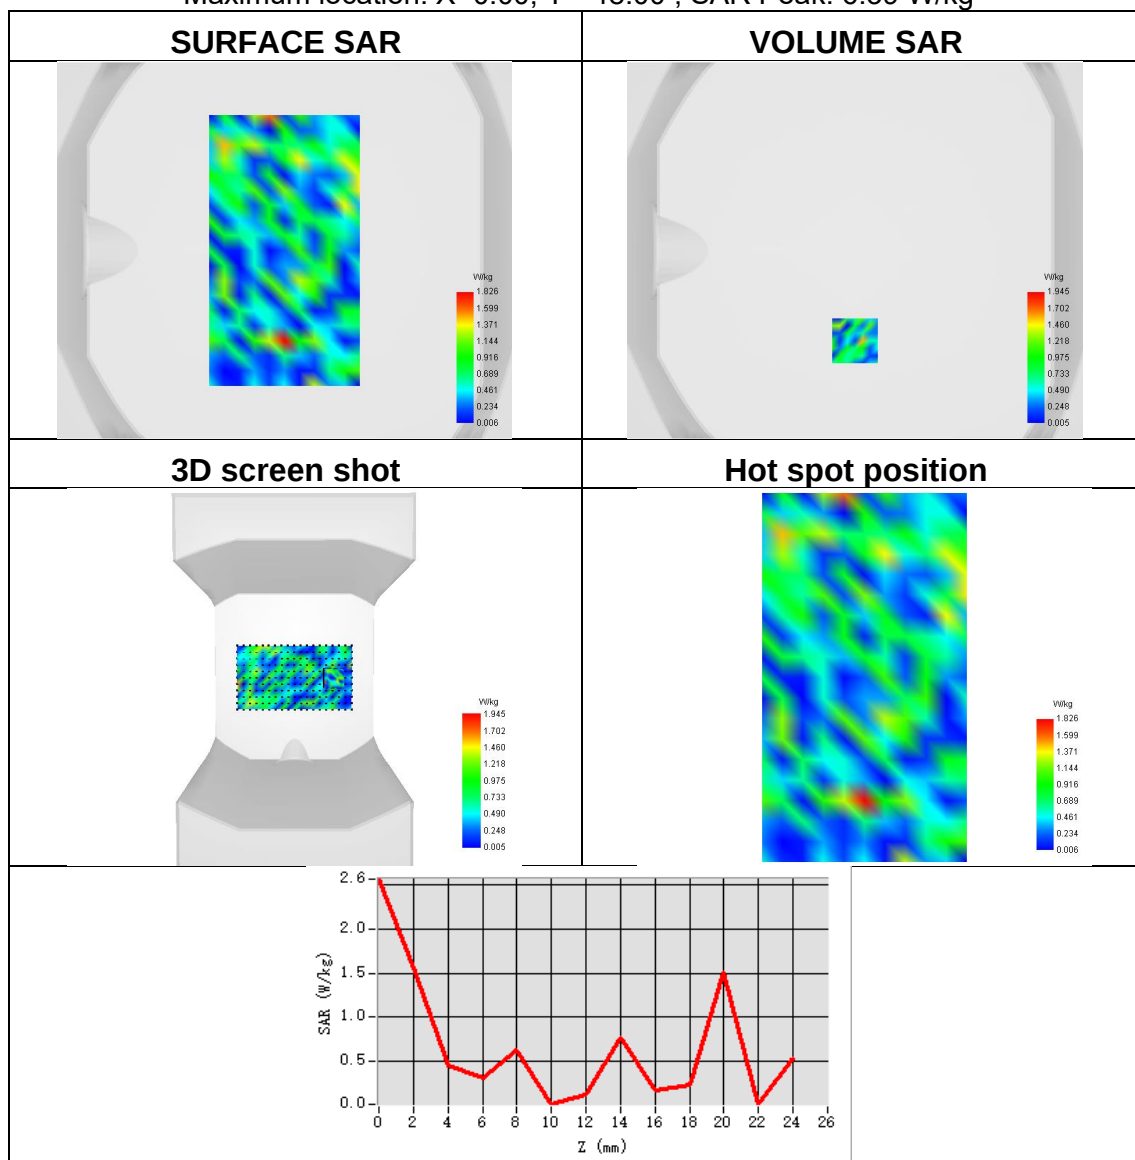




Plot 51:

Test Date	2025-06-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	1.170
SAR 1g (W/Kg)	2.372
ConvF	2.20
Relative permittivity	40.65
Conductivity (S/m)	1.41

Maximum location: X=-1.00, Y=-9.00 ; SAR Peak: 4.05 W/kg

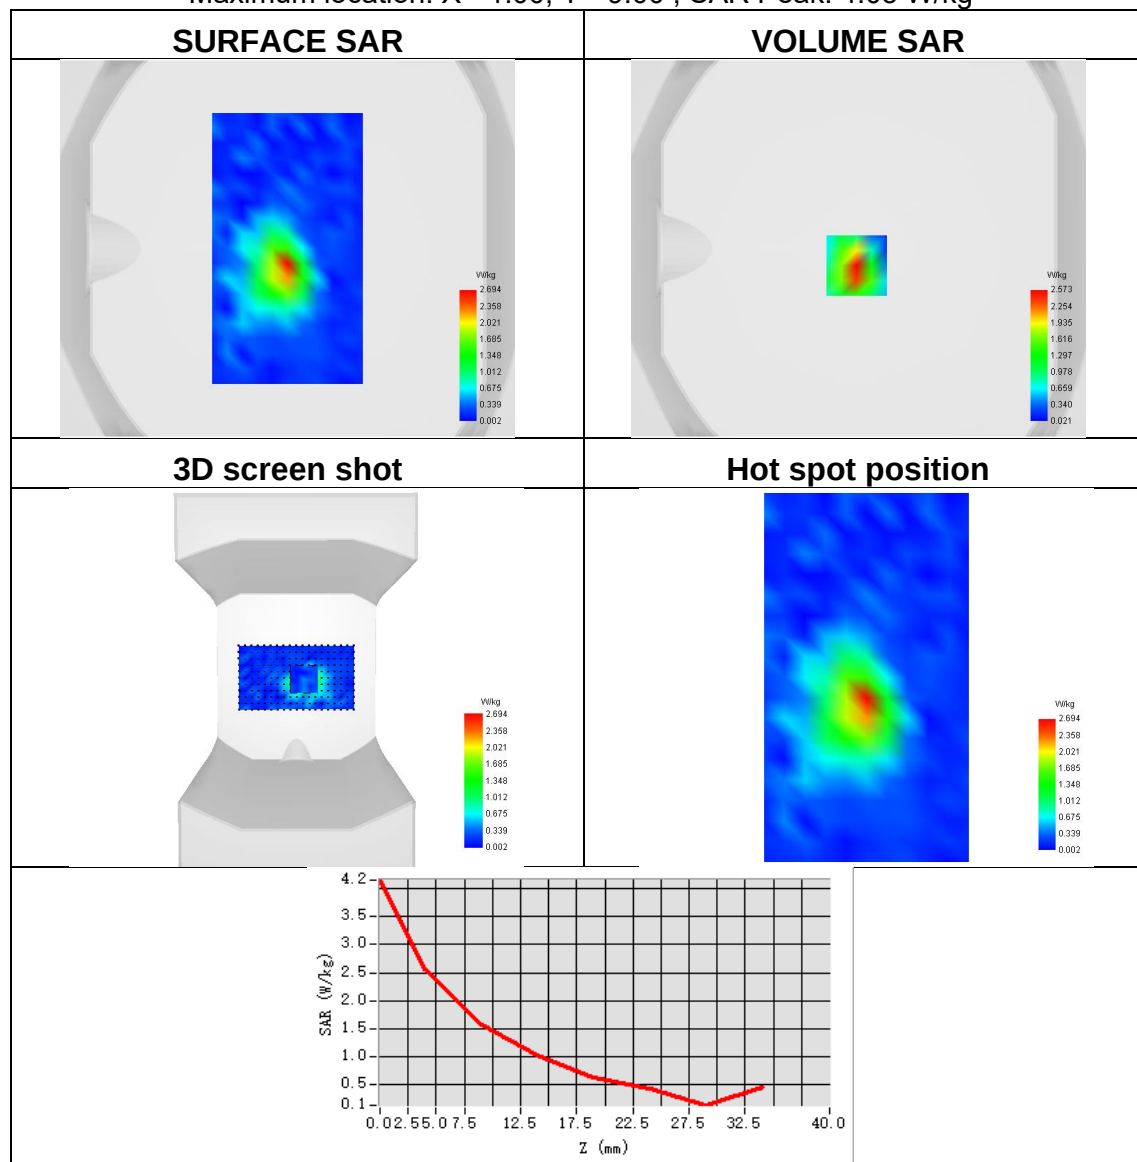




Plot 52:

Test Date	2025-06-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1732.5
SAR 10g (W/Kg)	0.705
SAR 1g (W/Kg)	1.283
ConvF	1.92
Relative permittivity	41.16
Conductivity (S/m)	1.36

Maximum location: X=-7.00, Y=-6.00 ; SAR Peak: 2.53 W/kg

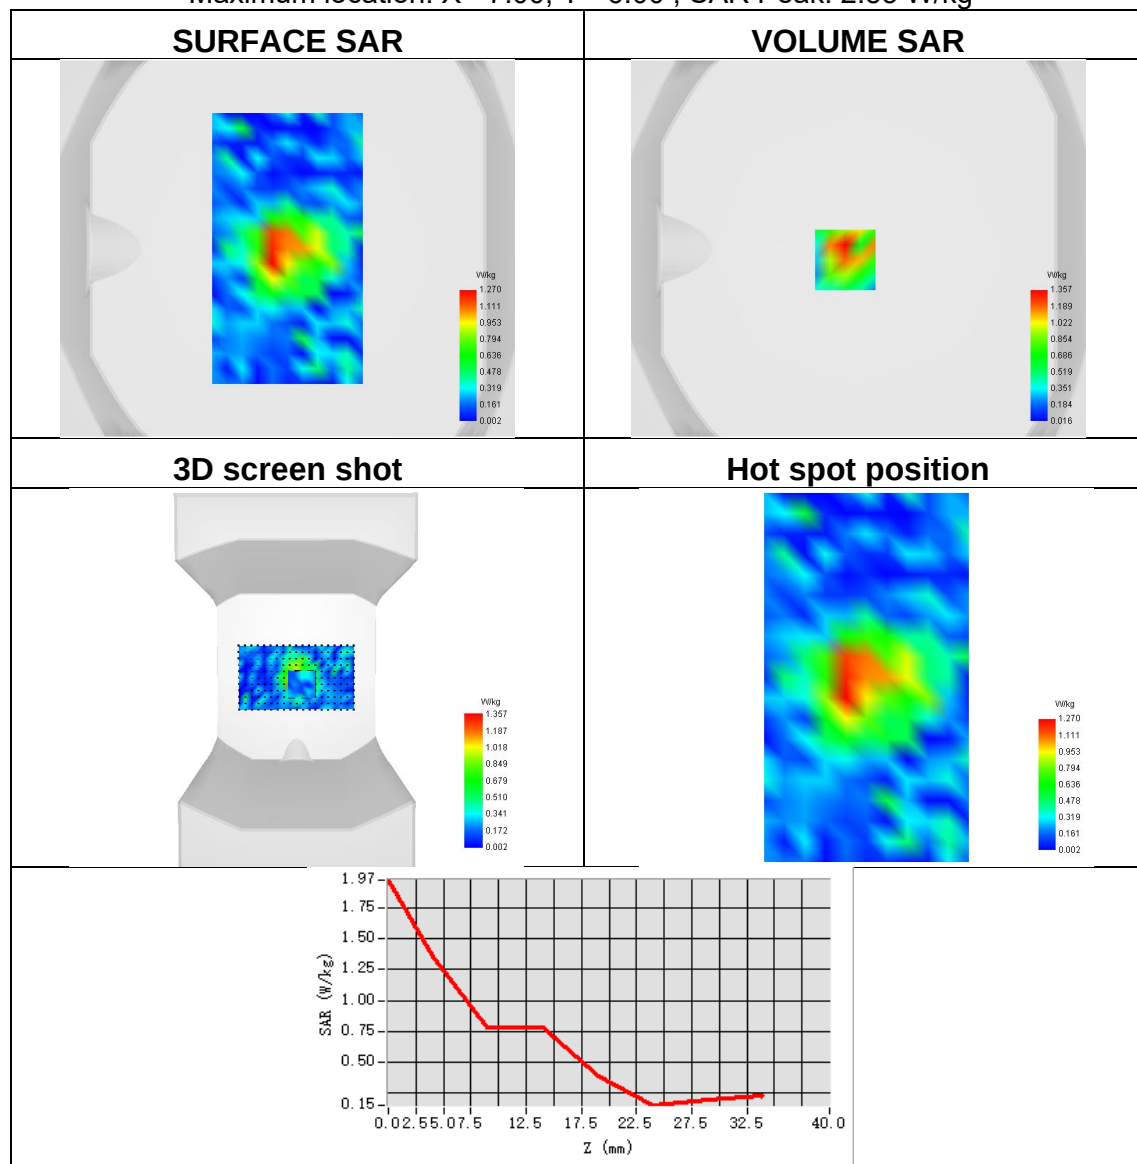




Plot 53:

Test Date	2025-06-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.877
SAR 1g (W/Kg)	1.367
ConvF	1.72
Relative permittivity	41.01
Conductivity (S/m)	0.89

Maximum location: X=5.00, Y=-17.00 ; SAR Peak: 2.19 W/kg

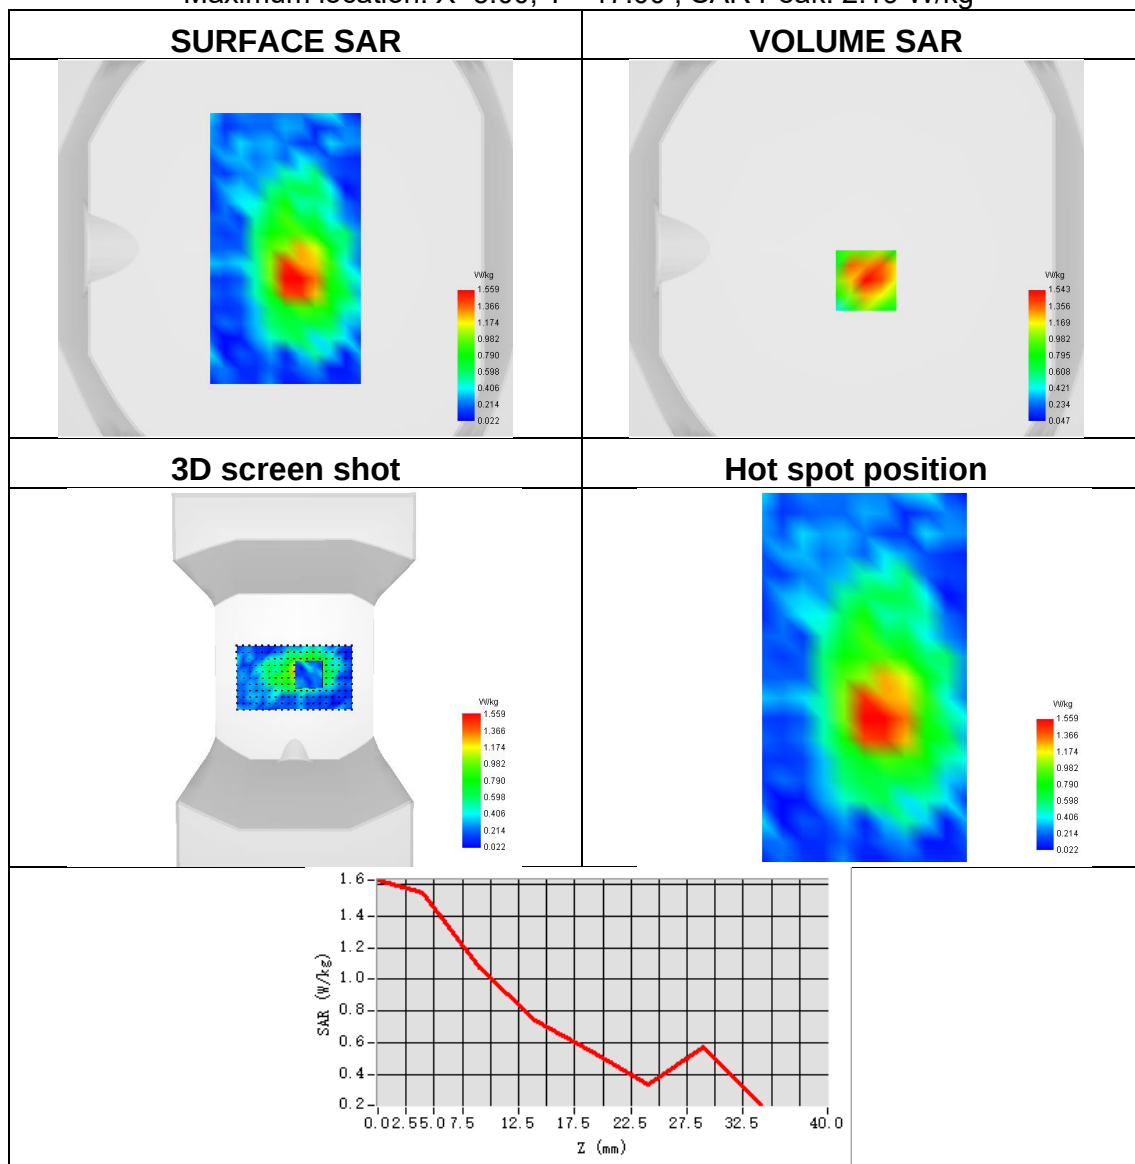




Plot 54:

Test Date	2025-06-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.940
SAR 1g (W/Kg)	2.174
ConvF	2.37
Relative permittivity	38.96
Conductivity (S/m)	2.02

Maximum location: X=17.00, Y=-8.00 ; SAR Peak: 4.19 W/kg

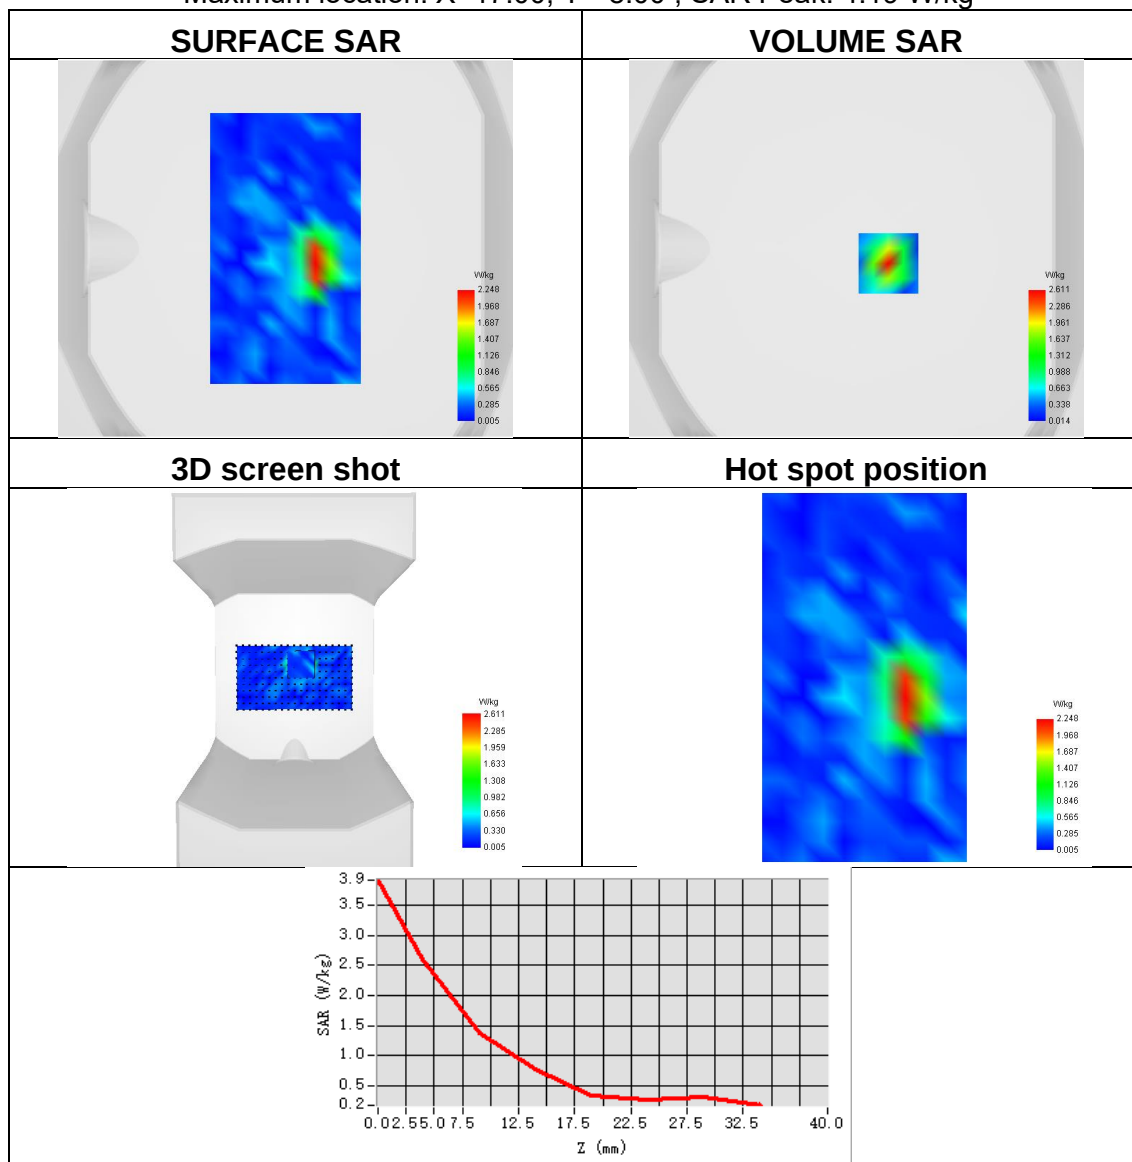




Plot 55:

Test Date	2025-06-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	707.5
SAR 10g (W/Kg)	0.544
SAR 1g (W/Kg)	0.990
ConvF	1.37
Relative permittivity	42.12
Conductivity (S/m)	0.92

Maximum location: X=8.00, Y=-12.00 ; SAR Peak: 1.56 W/kg

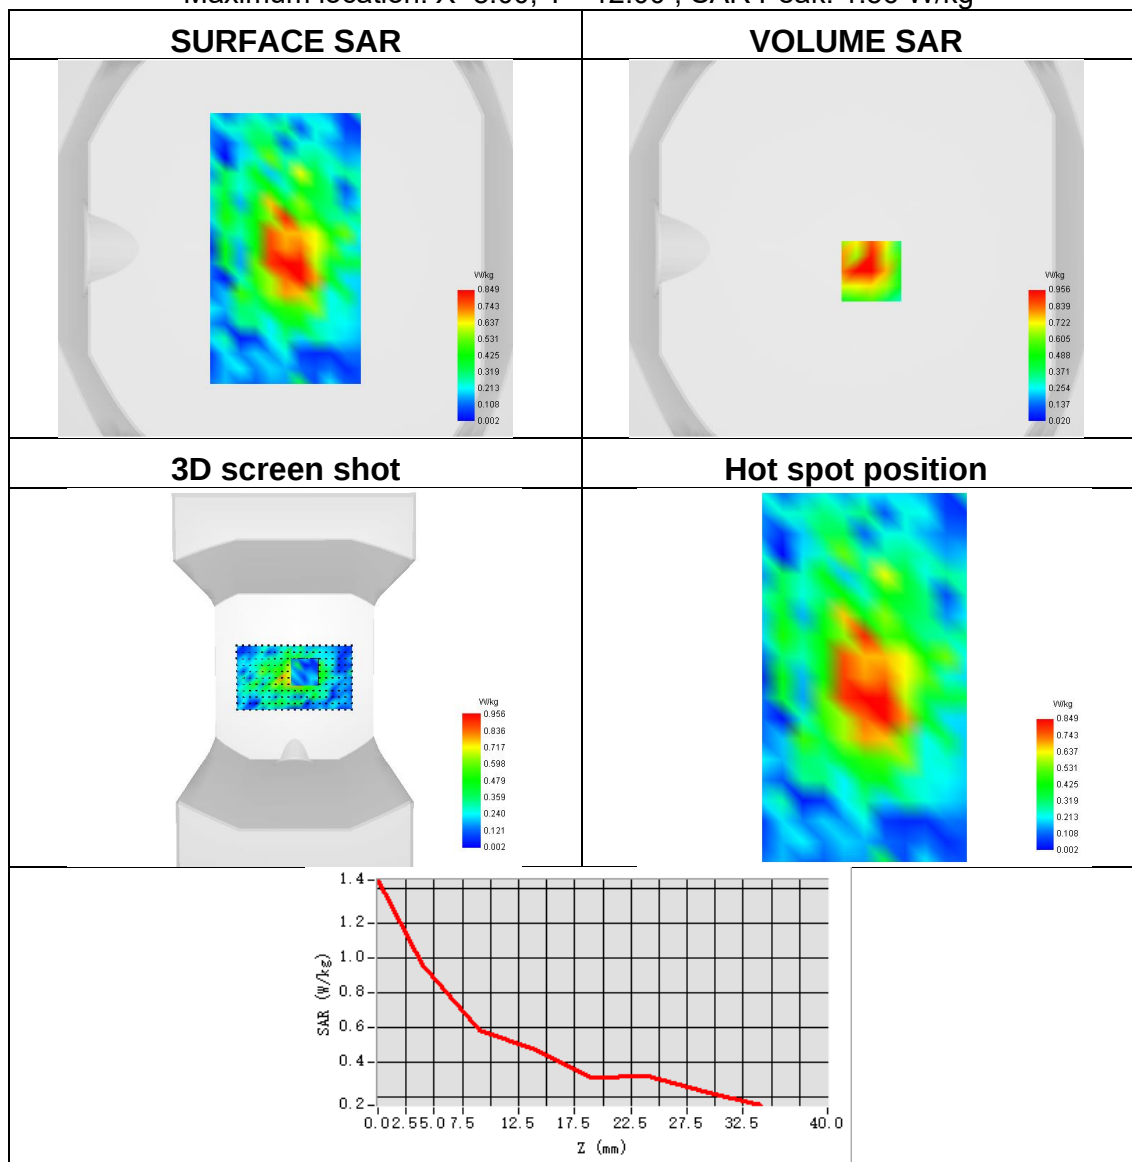




Plot 56:

Test Date	2025-06-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.496
SAR 1g (W/Kg)	0.995
ConvF	1.67
Relative permittivity	42.14
Conductivity (S/m)	0.86

Maximum location: X=-1.00, Y=0.00 ; SAR Peak: 1.95 W/kg

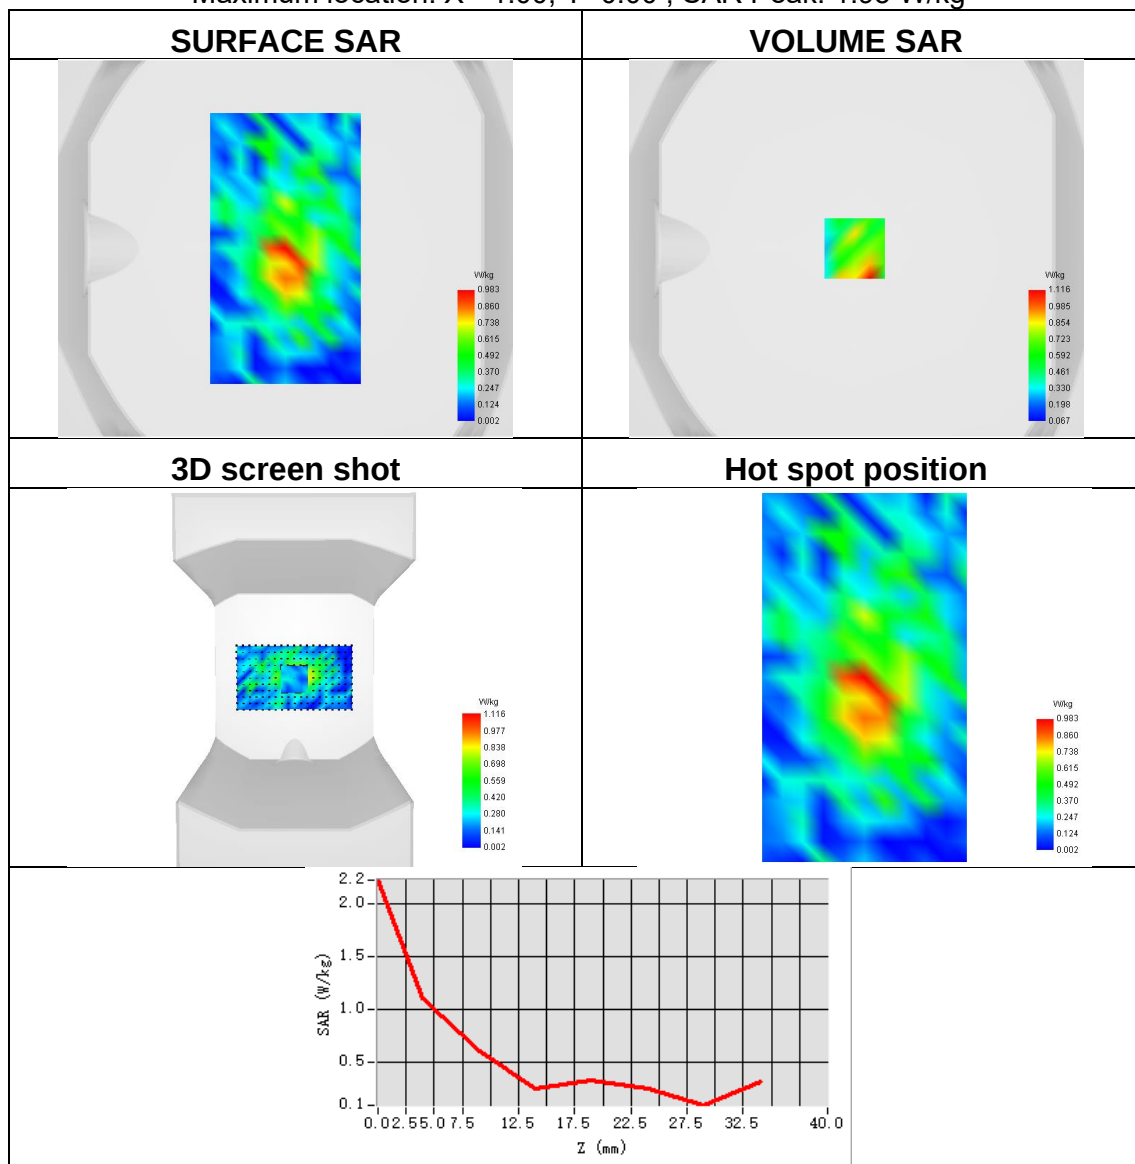




Plot 57:

Test Date	2025-06-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.573
SAR 1g (W/Kg)	1.150
ConvF	1.67
Relative permittivity	42.12
Conductivity (S/m)	0.92

Maximum location: X=0.00, Y=-16.00 ; SAR Peak: 2.01 W/kg

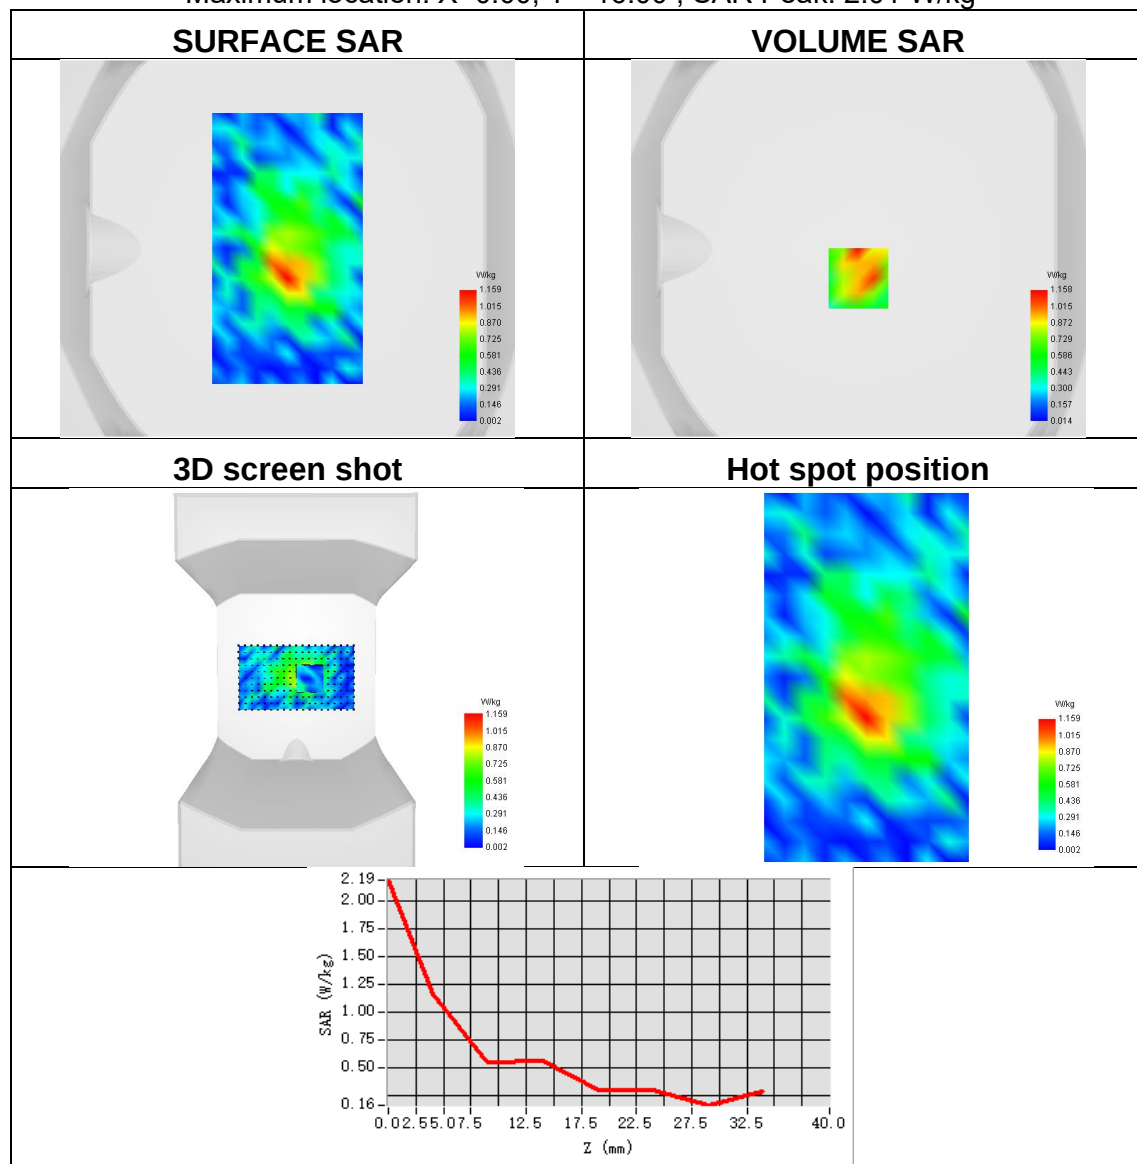




Plot 58:

Test Date	2025-06-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 26
Signal	LTE FDD
Frequency	819
SAR 10g (W/Kg)	0.721
SAR 1g (W/Kg)	1.300
ConvF	1.72
Relative permittivity	41.01
Conductivity (S/m)	0.89

Maximum location: X=8.00, Y=-26.00 ; SAR Peak: 2.25 W/kg

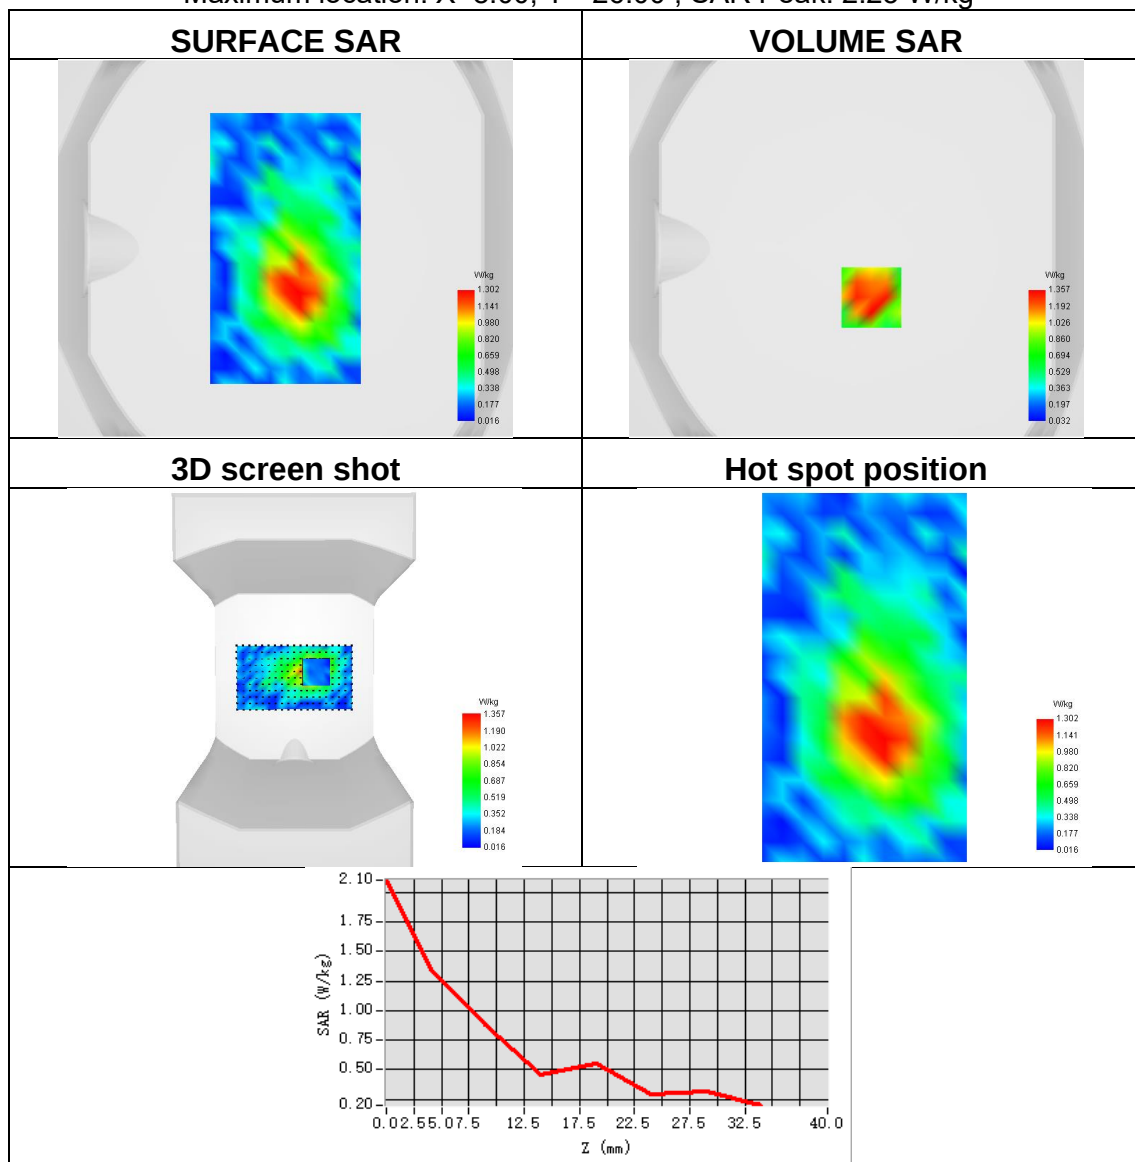




Plot 59:

Test Date	2025-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.564
SAR 1g (W/Kg)	1.468
ConvF	2.37
Relative permittivity	39.91
Conductivity (S/m)	1.98

Maximum location: X=21.00, Y=-9.00 ; SAR Peak: 2.96 W/kg

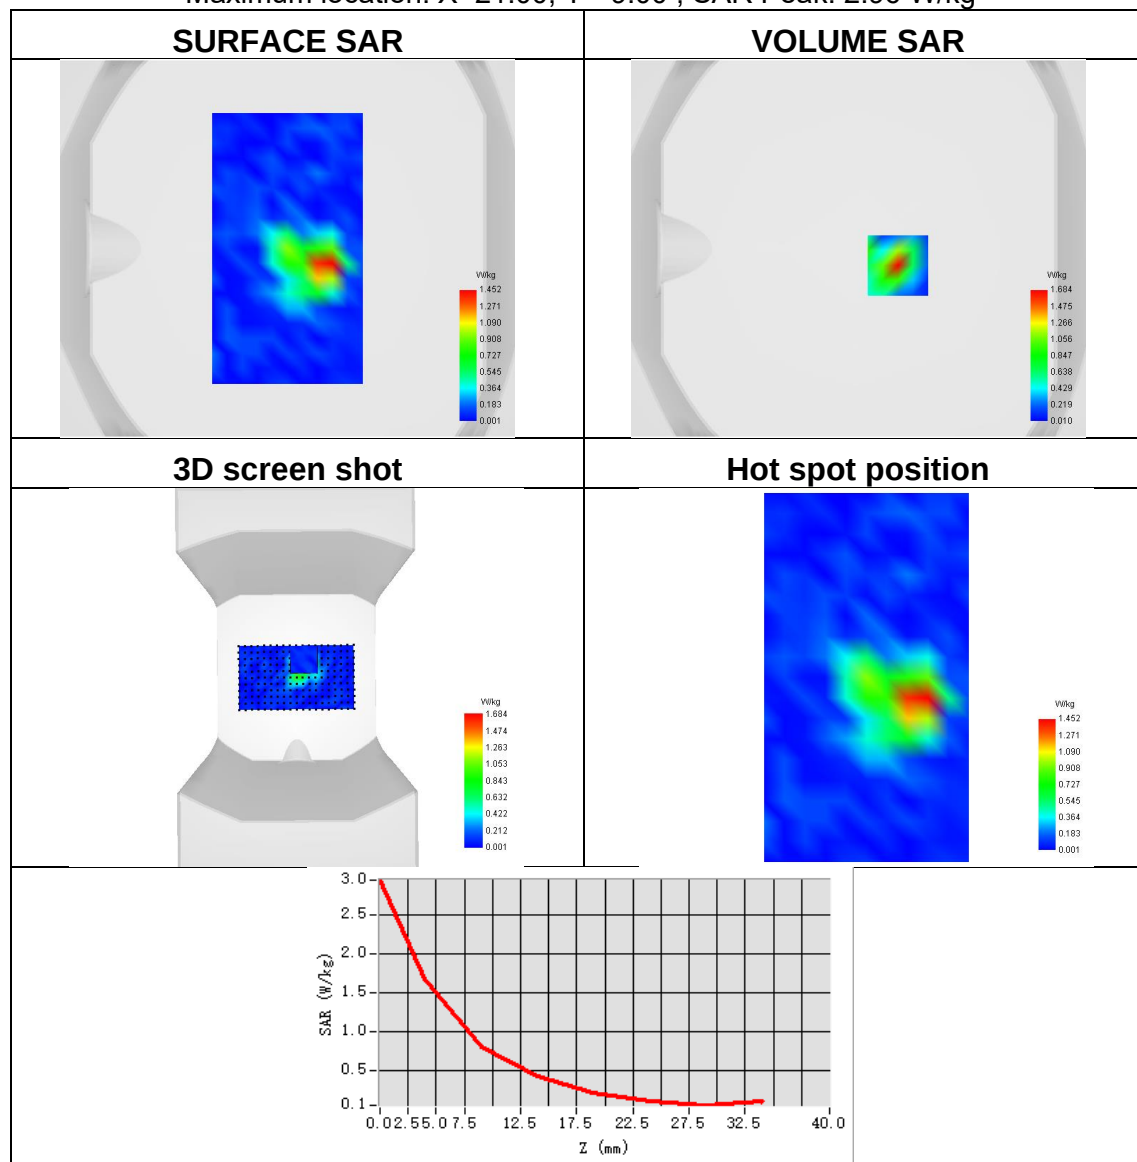




Plot 60:

Test Date	2025-06-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2506
SAR 10g (W/Kg)	0.556
SAR 1g (W/Kg)	1.466
ConvF	2.37
Relative permittivity	38.96
Conductivity (S/m)	2.02

Maximum location: X=22.00, Y=-8.00 ; SAR Peak: 3.36 W/kg

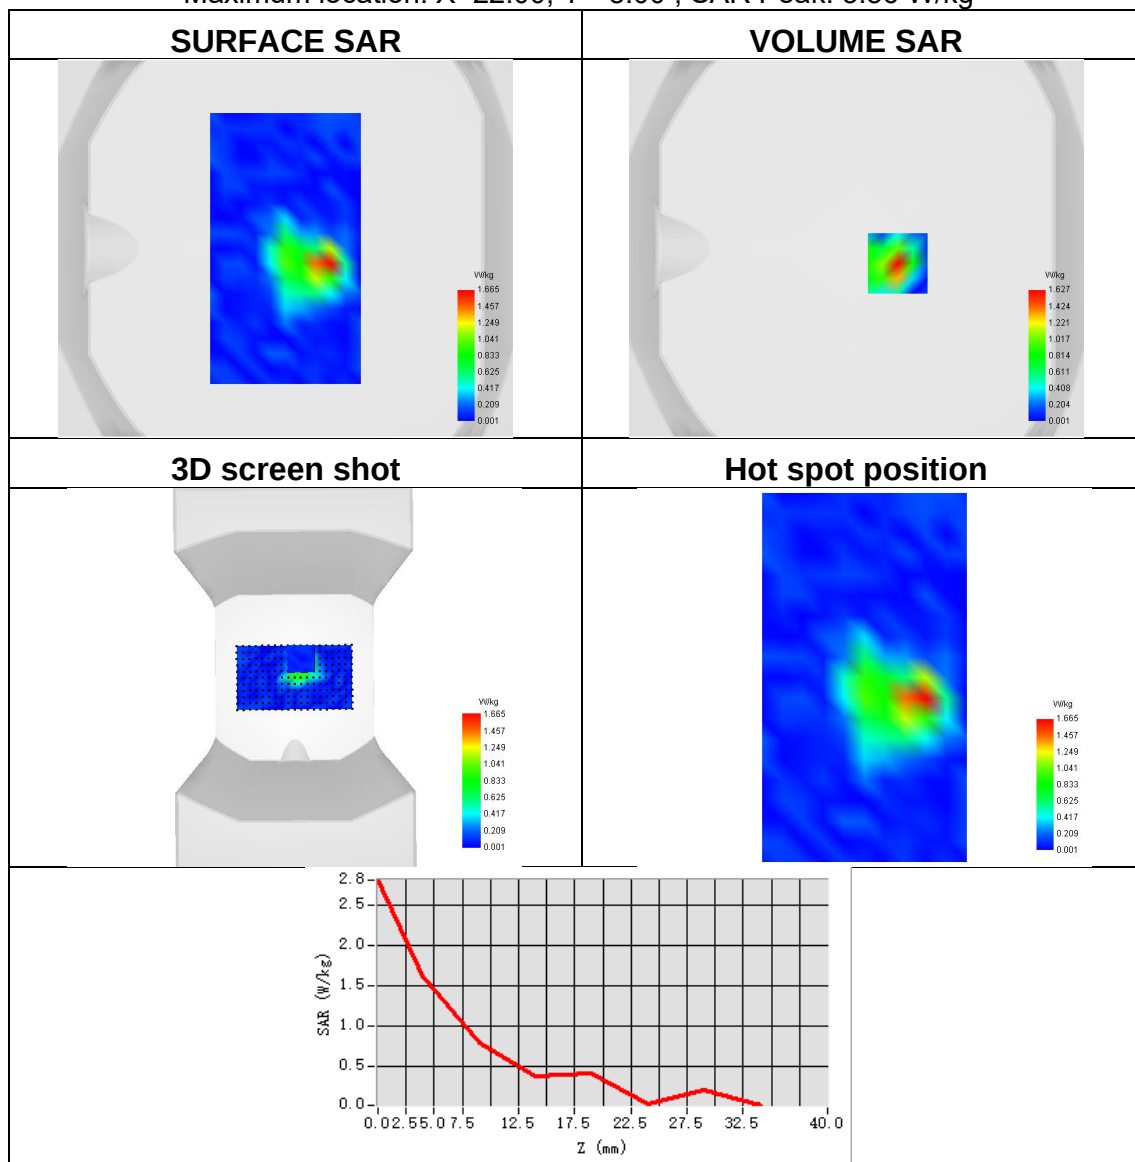



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※